



SIMATS
ENGINEERING



SIMATS
Saveetha Institute of Medical And Technical Sciences
(Declared as Deemed to be University under Section 3 of UGC Act 1956)

CSA0905 JAVA PROGRAMMING – C02-AT2

Karanya. S

192421309

1.

```
import java.util.*;

public class Main {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        Patient patient = new Patient();
        Doctor doctor = new Doctor();
        Appointment appointment = new Appointment();

        while (true) {
            System.out.println("1. Register Patient\n2. Register Doctor\n3. Register Appointment\n4. Display All\n5. Exit");
            int choice = scanner.nextInt();

            switch (choice) {
                case 1:
                    patient.setName(scanner.next());
                    patient.setAge(scanner.nextInt());
                    patient.setGender(scanner.next());
                    patient.setAddress(scanner.next());
                    patient.save();
                    break;
                case 2:
                    doctor.setName(scanner.next());
                    doctor.setSpecialty(scanner.next());
                    doctor.setExperience(scanner.nextInt());
                    doctor.setSalary(scanner.nextInt());
                    doctor.setLicense(scanner.next());
                    doctor.save();
                    break;
                case 3:
                    appointment.setPatientId(scanner.nextInt());
                    appointment.setDoctorId(scanner.nextInt());
                    appointment.setDate(scanner.next());
                    appointment.setTime(scanner.next());
                    appointment.setStatus(scanner.next());
                    appointment.save();
                    break;
                case 4:
                    Patient.printAll();
                    Doctor.printAll();
                    Appointment.printAll();
                    break;
                case 5:
                    System.out.println("Exiting...");
                    return;
            }
        }
    }
}
```

```
import java.util.*;

public class Main {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        Patient patient = new Patient();
        Doctor doctor = new Doctor();
        Appointment appointment = new Appointment();

        while (true) {
            System.out.println("1. Register Patient\n2. Register Doctor\n3. Register Appointment\n4. Display All\n5. Exit");
            int choice = scanner.nextInt();



            switch (choice) {
                case 1:
                    patient.setName(scanner.next());
                    patient.setAge(scanner.nextInt());
                    patient.setGender(scanner.next());
                    patient.setAddress(scanner.next());
                    patient.save();
                    break;
                case 2:
                    doctor.setName(scanner.next());
                    doctor.setSpecialty(scanner.next());
                    doctor.setExperience(scanner.nextInt());
                    doctor.setSalary(scanner.nextInt());
                    doctor.setLicense(scanner.next());
                    doctor.save();
                    break;
                case 3:
                    appointment.setPatientId(scanner.nextInt());
                    appointment.setDoctorId(scanner.nextInt());
                    appointment.setDate(scanner.next());
                    appointment.setTime(scanner.next());
                    appointment.setStatus(scanner.next());
                    appointment.save();
                    break;
                case 4:
                    Patient.printAll();
                    Doctor.printAll();
                    Appointment.printAll();
                    break;
                case 5:
                    System.out.println("Exiting...");
                    return;
            }
        }
    }
}
```

```
import java.util.*;

public class Main {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        Patient patient = new Patient();
        Doctor doctor = new Doctor();
        Appointment appointment = new Appointment();

        while (true) {
            System.out.println("1. Register Patient\n2. Register Doctor\n3. Register Appointment\n4. Display All\n5. Exit");
            int choice = scanner.nextInt();

            switch (choice) {
                case 1:
                    patient.setName(scanner.next());
                    patient.setAge(scanner.nextInt());
                    patient.setGender(scanner.next());
                    patient.setAddress(scanner.next());
                    patient.save();
                    break;
                case 2:
                    doctor.setName(scanner.next());
                    doctor.setSpecialty(scanner.next());
                    doctor.setExperience(scanner.nextInt());
                    doctor.setSalary(scanner.nextInt());
                    doctor.setLicense(scanner.next());
                    doctor.save();
                    break;
                case 3:
                    appointment.setPatientId(scanner.nextInt());
                    appointment.setDoctorId(scanner.nextInt());
                    appointment.setDate(scanner.next());
                    appointment.setTime(scanner.next());
                    appointment.setStatus(scanner.next());
                    appointment.save();
                    break;
                case 4:
                    Patient.printAll();
                    Doctor.printAll();
                    Appointment.printAll();
                    break;
                case 5:
                    System.out.println("Exiting...");
                    return;
            }
        }
    }
}
```

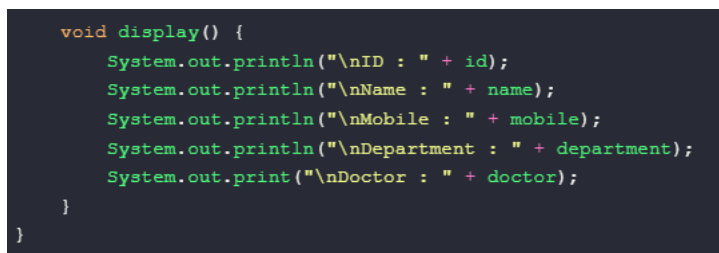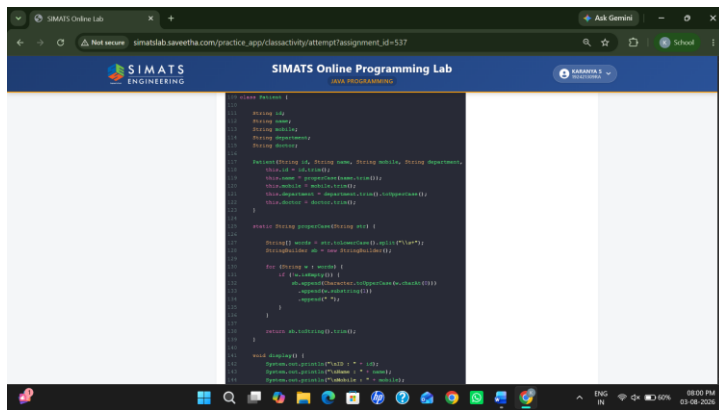

2.

