Basic Computer Datapath

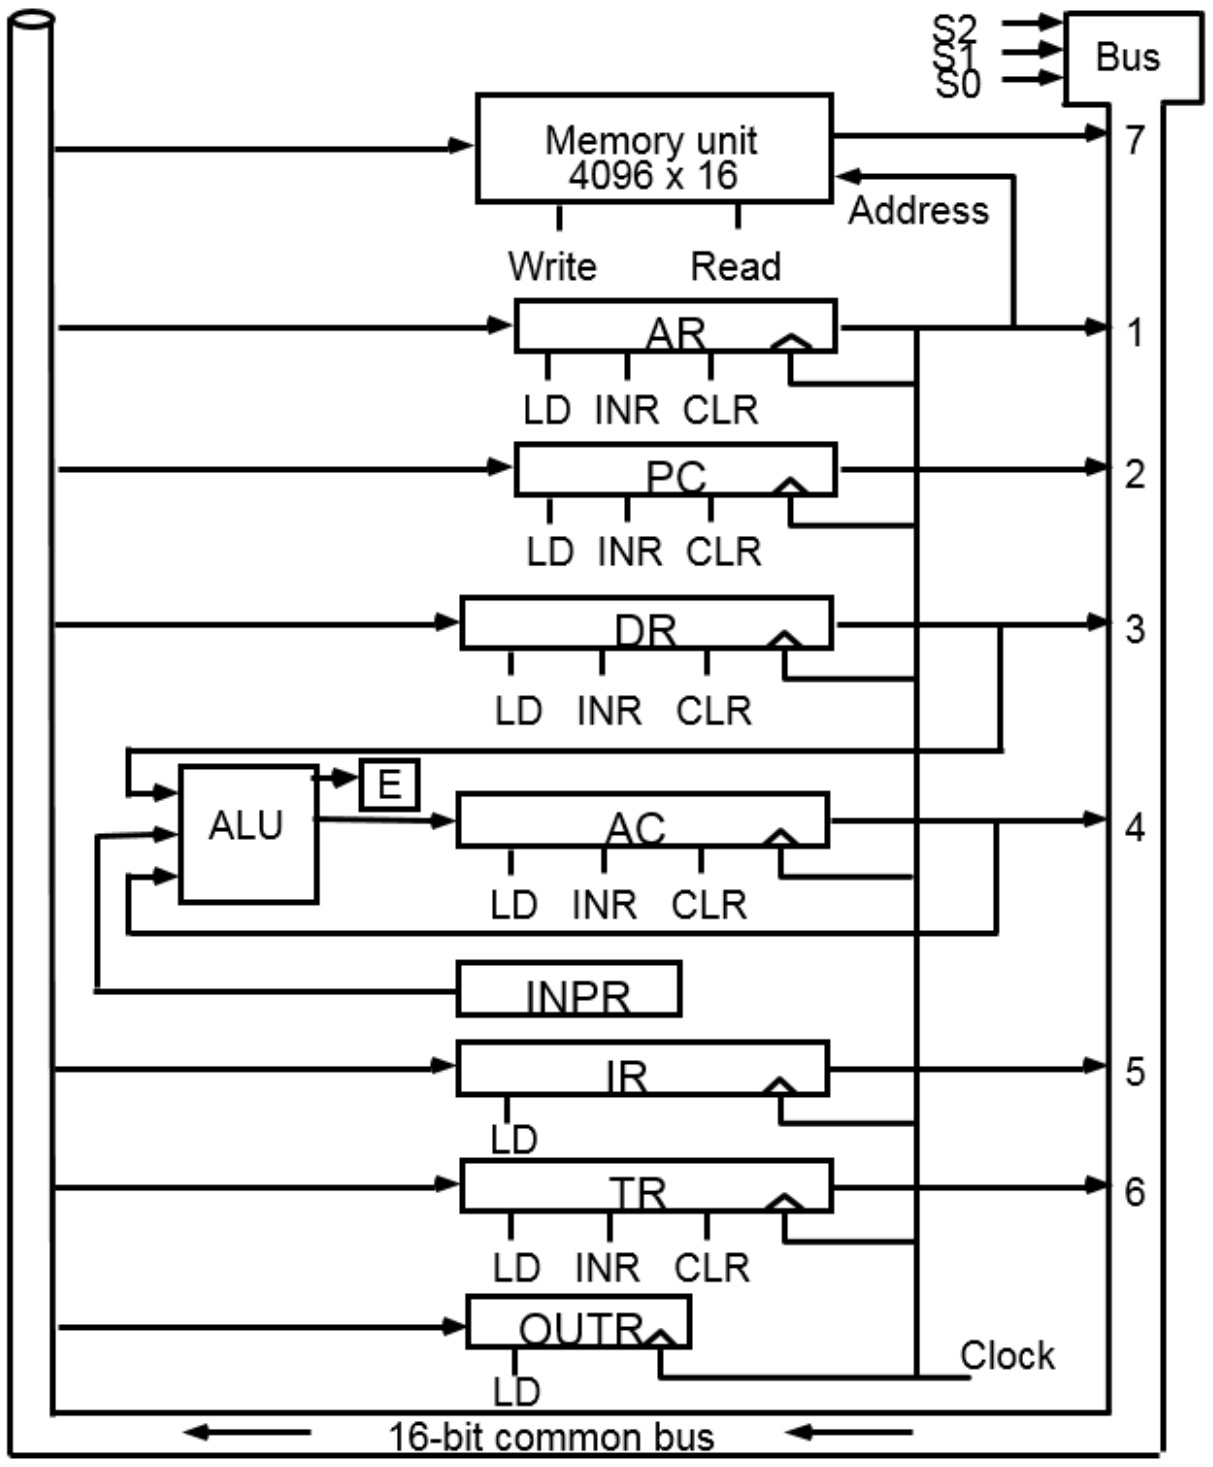

Basic Computer Components

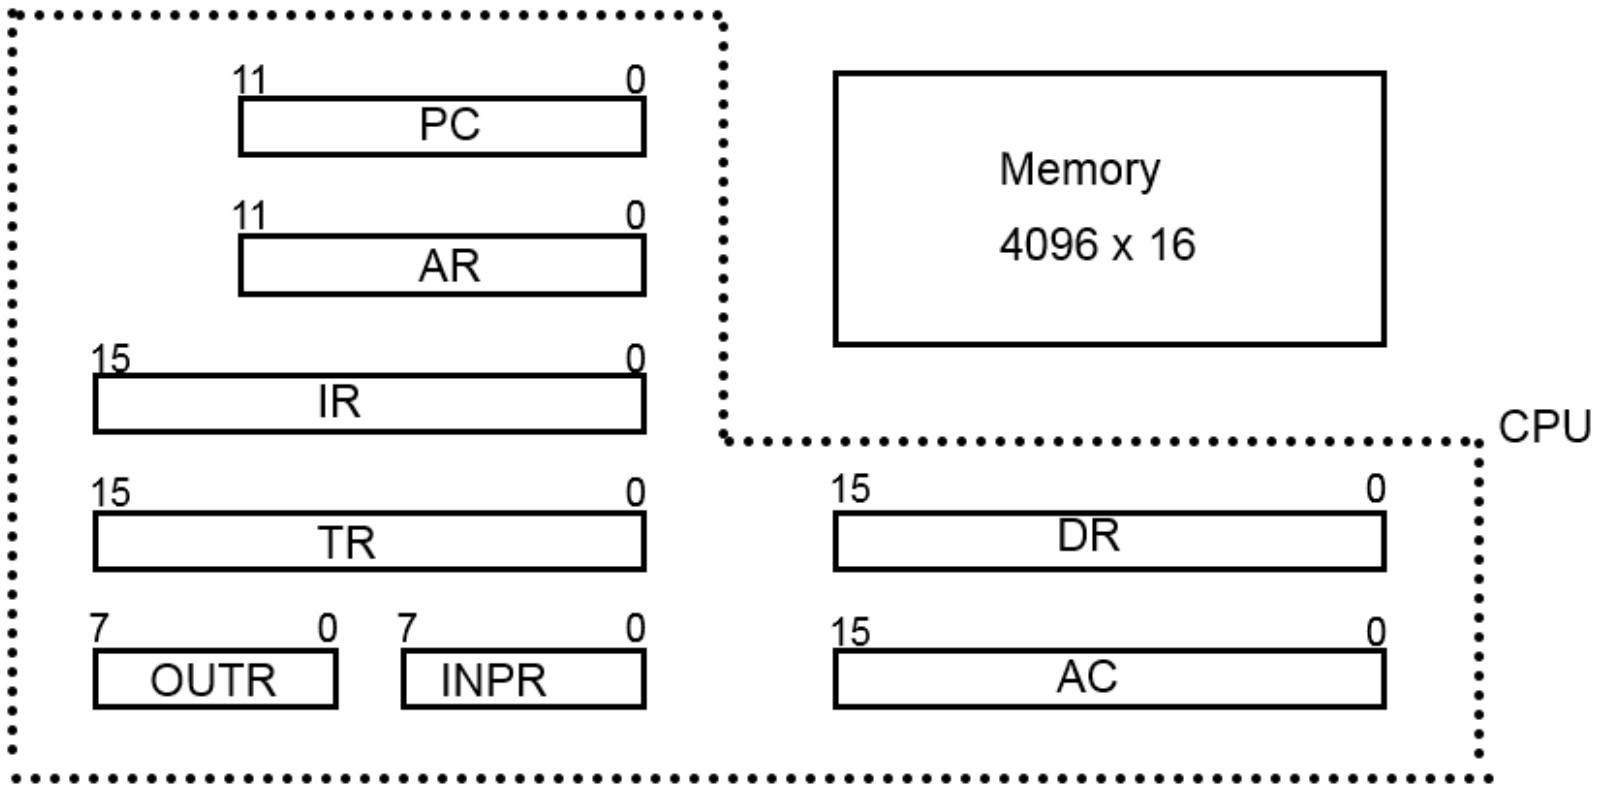

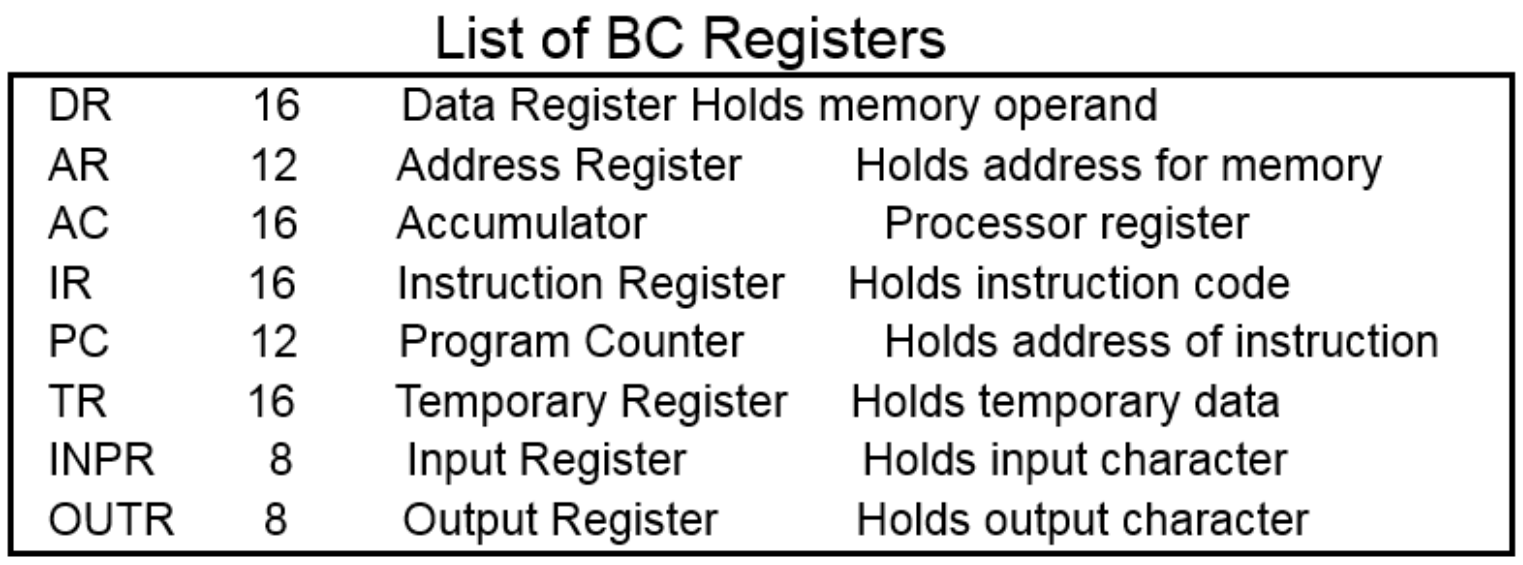

List of BC Registers

DR	16	Data Register	Holds memory operand
AR	12	Address Register	Holds address for memory
AC	16	Accumulator	Processor register
IR	16	Instruction Register	Holds instruction code
PC	12	Program Counter	Holds address of instruction
TR	16	Temporary Register	Holds temporary data
INPR	8	Input Register	Holds input character
OUTR	8	Output Register	Holds output character

Basic Computer Instruction Format

- Instructions should be stored in memory
- Instructions and micro-operations
- Parts of instructions
- Type of instruction (Opcode)
- Address or immediate
- Addressing Mode

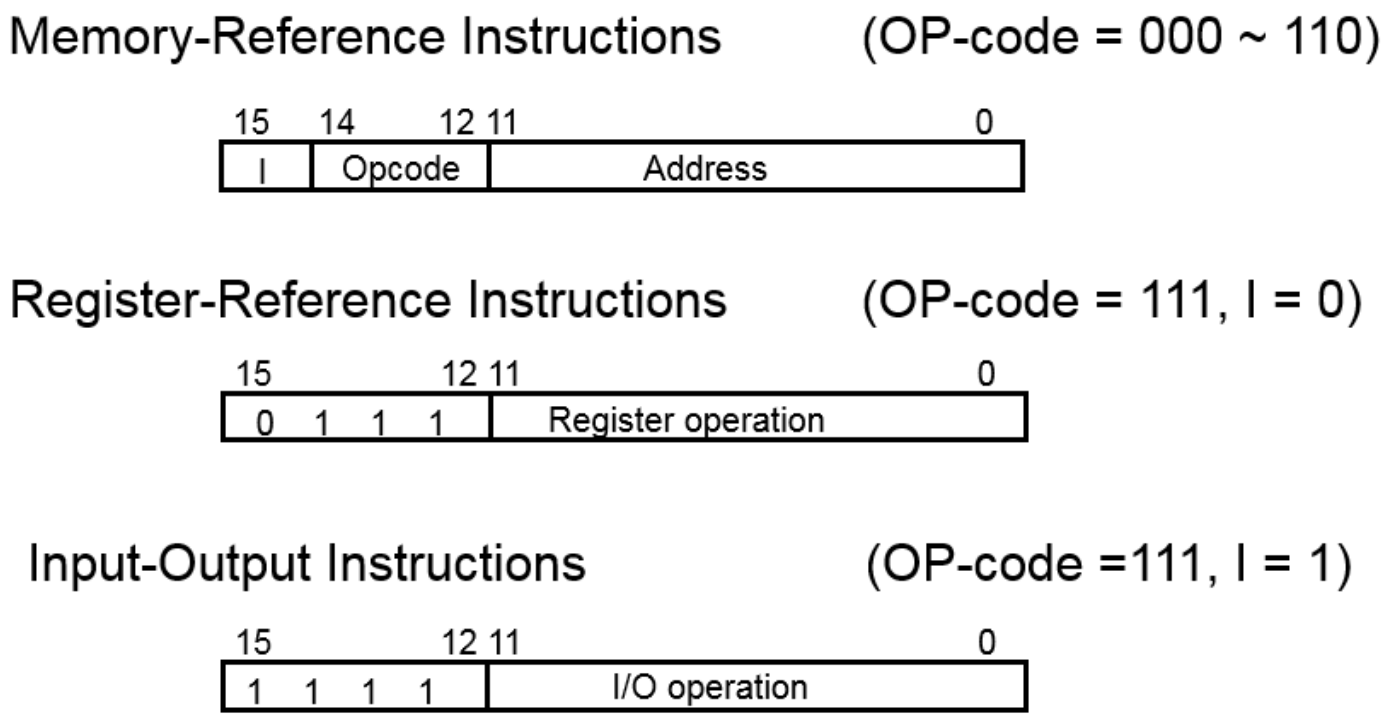

Basic computer ISA

- Art of ISA (Trade-off between completeness, performance, instruction memory size, complexity and …)

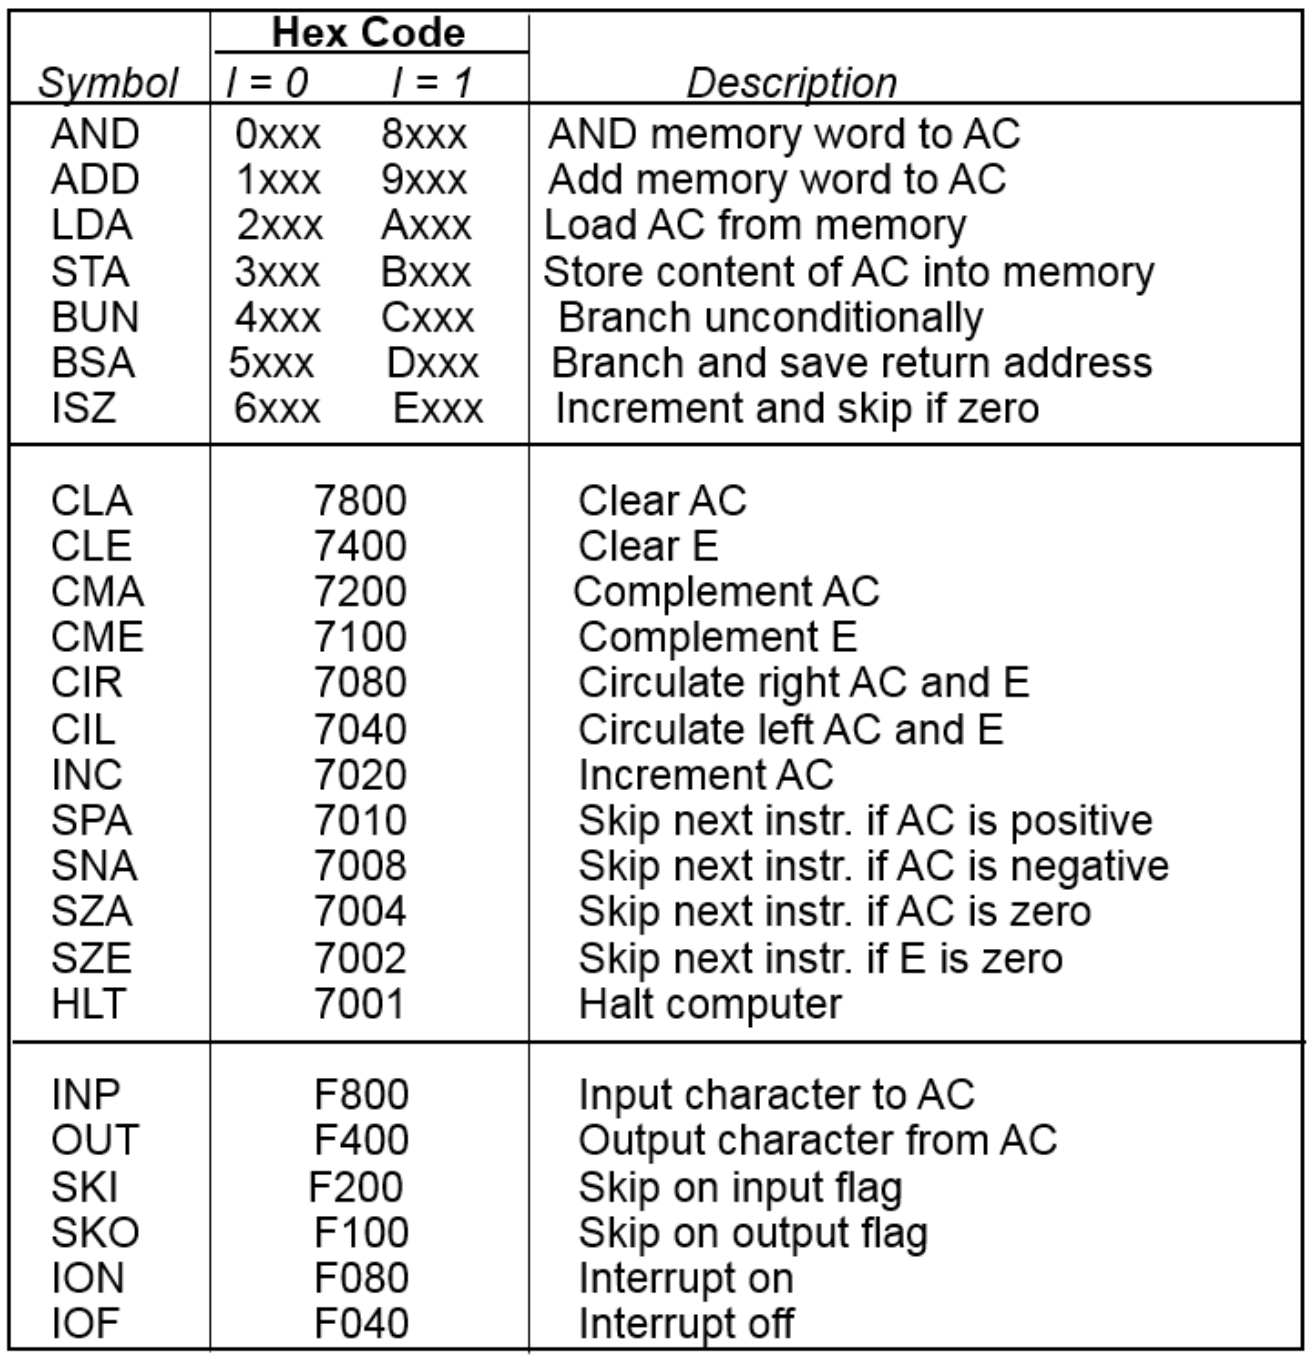

	Hex Code		
Symbol	*I = 0*	*I = 1*	*Description*
AND	0xxx	8xxx	AND memory word to AC
ADD	1xxx	9xxx	Add memory word to AC
LDA	2xxx	Axxx	Load AC from memory
STA	3xxx	Bxxx	Store content of AC into memory
BUN	4xxx	Cxxx	Branch unconditionally
BSA	5xxx	Dxxx	Branch and save return address
ISZ	6xxx	Exxx	Increment and skip if zero
CLA	7800		Clear AC
CLE	7400		Clear E
CMA	7200		Complement AC
CME	7100		Complement E
CIR	7080		Circulate right AC and E
CIL	7040		Circulate left AC and E
INC	7020		Increment AC
SPA	7010		Skip next instr. if AC is positive
SNA	7008		Skip next instr. if AC is negative
SZA	7004		Skip next instr. if AC is zero
SZE	7002		Skip next instr. if E is zero
HLT	7001		Halt computer
INP	F800		Input character to AC
OUT	F400		Output character from AC
SKI	F200		Skip on input flag
SKO	F100		Skip on output flag
ION	F080		Interrupt on
IOF	F040		Interrupt off

Control Unit

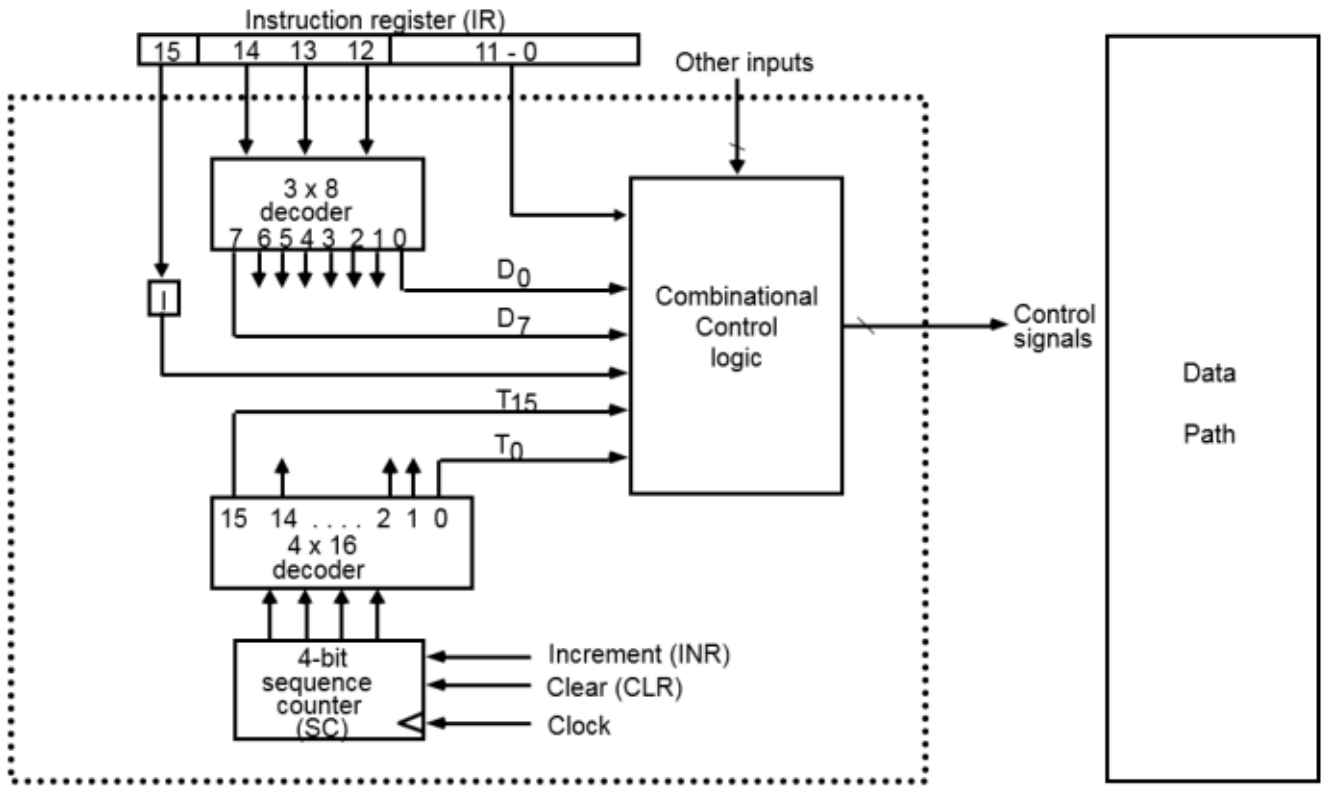

Instruction Execution

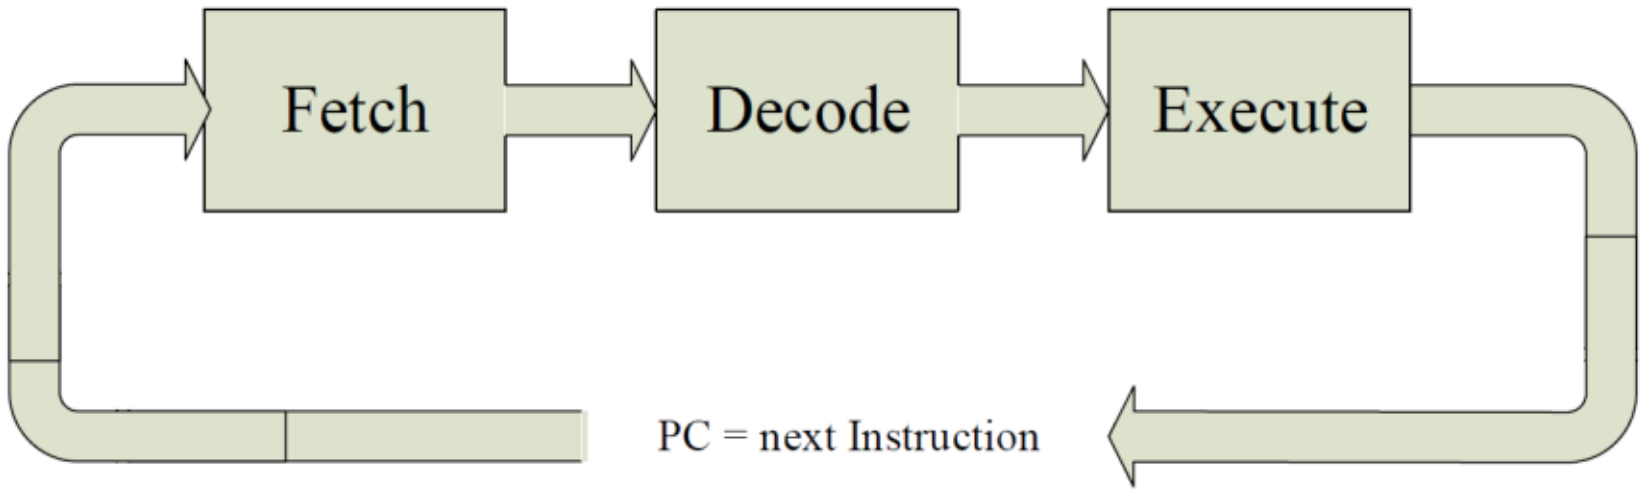

Basic Computer State machine

D'_7IT_3:	AR ← M[AR]
$D'_7I'T_3$:	Nothing
$D_7I'T_3$:	Execute a register-reference instr.
D_7IT_3:	Execute an input-output instr.

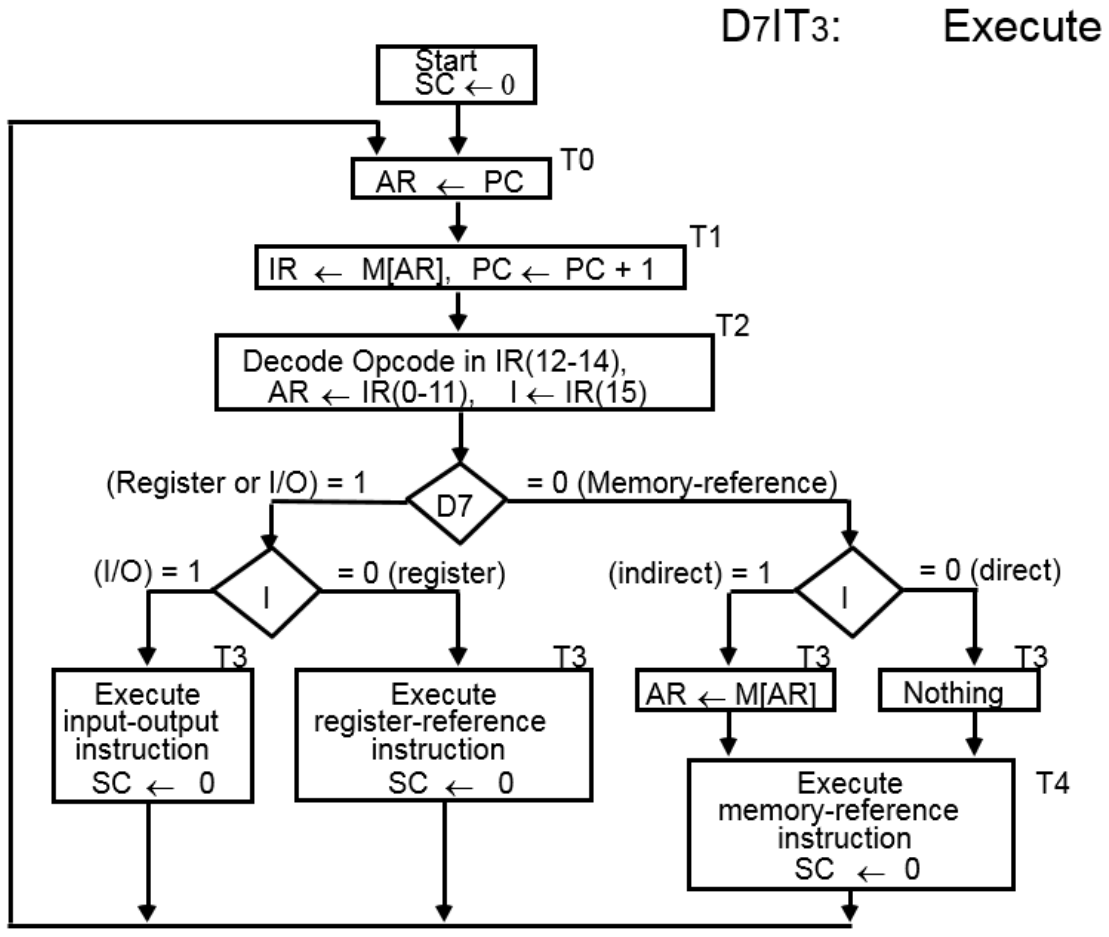

Execute of Memory Instructions

Symbol	Operation Decoder	Symbolic Description
AND	D_0	$AC \leftarrow AC \wedge M[AR]$
ADD	D_1	$AC \leftarrow AC + M[AR],\ E \leftarrow C_{out}$
LDA	D_2	$AC \leftarrow M[AR]$
STA	D_3	$M[AR] \leftarrow AC$
BUN	D_4	$PC \leftarrow AR$
BSA	D_5	$M[AR] \leftarrow PC,\ PC \leftarrow AR + 1$
ISZ	D_6	$M[AR] \leftarrow M[AR] + 1$, if $M[AR] + 1 = 0$ then $PC \leftarrow PC+1$

- The effective address of the instruction is in AR and was placed there during timing signal T_2 when I = 0, or during timing signal T_3 when I = 1
- Memory cycle is assumed to be short enough to complete in a CPU cycle
- The execution of MR instruction starts with T_4

AND to AC

D_0T_4: $DR \leftarrow M[AR]$ Read operand

D_0T_5: $AC \leftarrow AC \wedge DR,\ SC \leftarrow 0$ AND with AC

ADD to AC

D_1T_4: $DR \leftarrow M[AR]$ Read operand

D_1T_5: $AC \leftarrow AC + DR,\ E \leftarrow C_{out},\ SC \leftarrow 0$ Add to AC and store carry in E

LDA: Load to AC

D_2T_4: $DR \leftarrow M[AR]$

D_2T_5: $AC \leftarrow DR,\ SC \leftarrow 0$

STA: Store AC

D_3T_4: $M[AR] \leftarrow AC,\ SC \leftarrow 0$

BUN: Branch Unconditionally

D_4T_4: $PC \leftarrow AR,\ SC \leftarrow 0$

BSA: Branch and Save Return Address

$M[AR] \leftarrow PC,\ PC \leftarrow AR + 1$

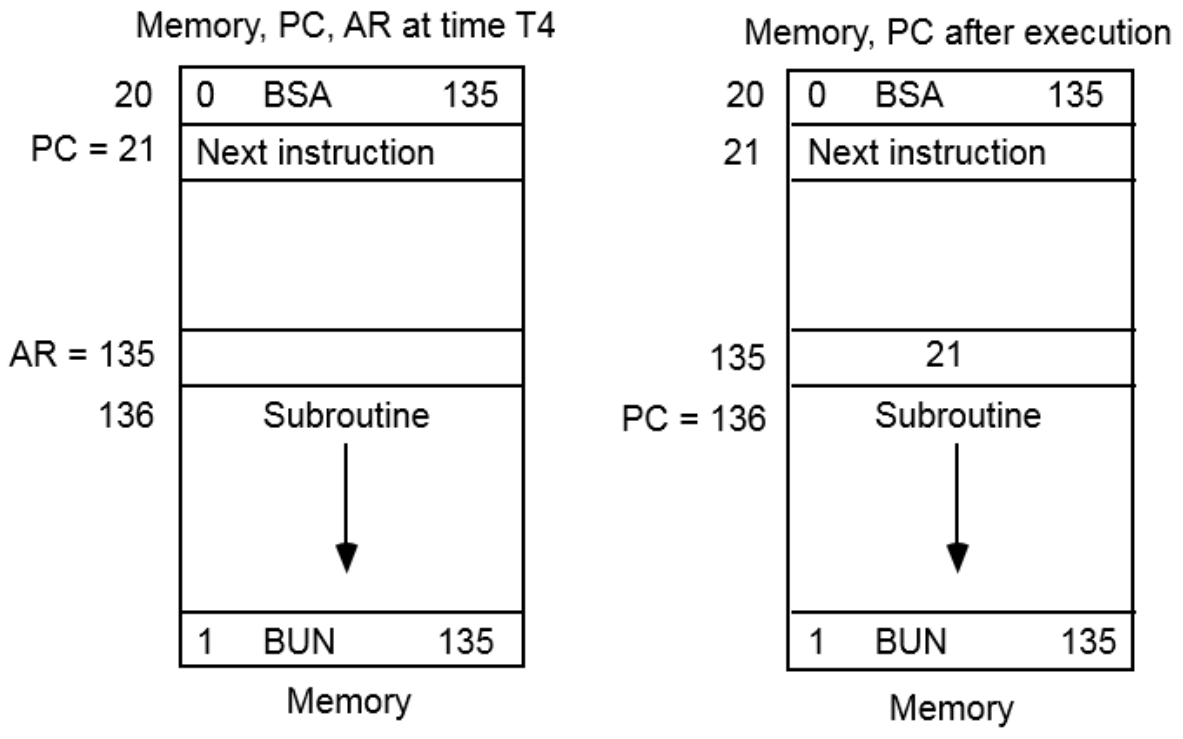

BSA:

D_5T_4: $M[AR] \leftarrow PC,\ AR \leftarrow AR + 1$

D_5T_5: $PC \leftarrow AR,\ SC \leftarrow 0$

ISZ: Increment and Skip-if-Zero

D_6T_4: $DR \leftarrow M[AR]$

D_6T_5: $DR \leftarrow DR + 1$

D_6T_4: $M[AR] \leftarrow DR$, if $(DR = 0)$ then $(PC \leftarrow PC + 1)$, $SC \leftarrow 0$

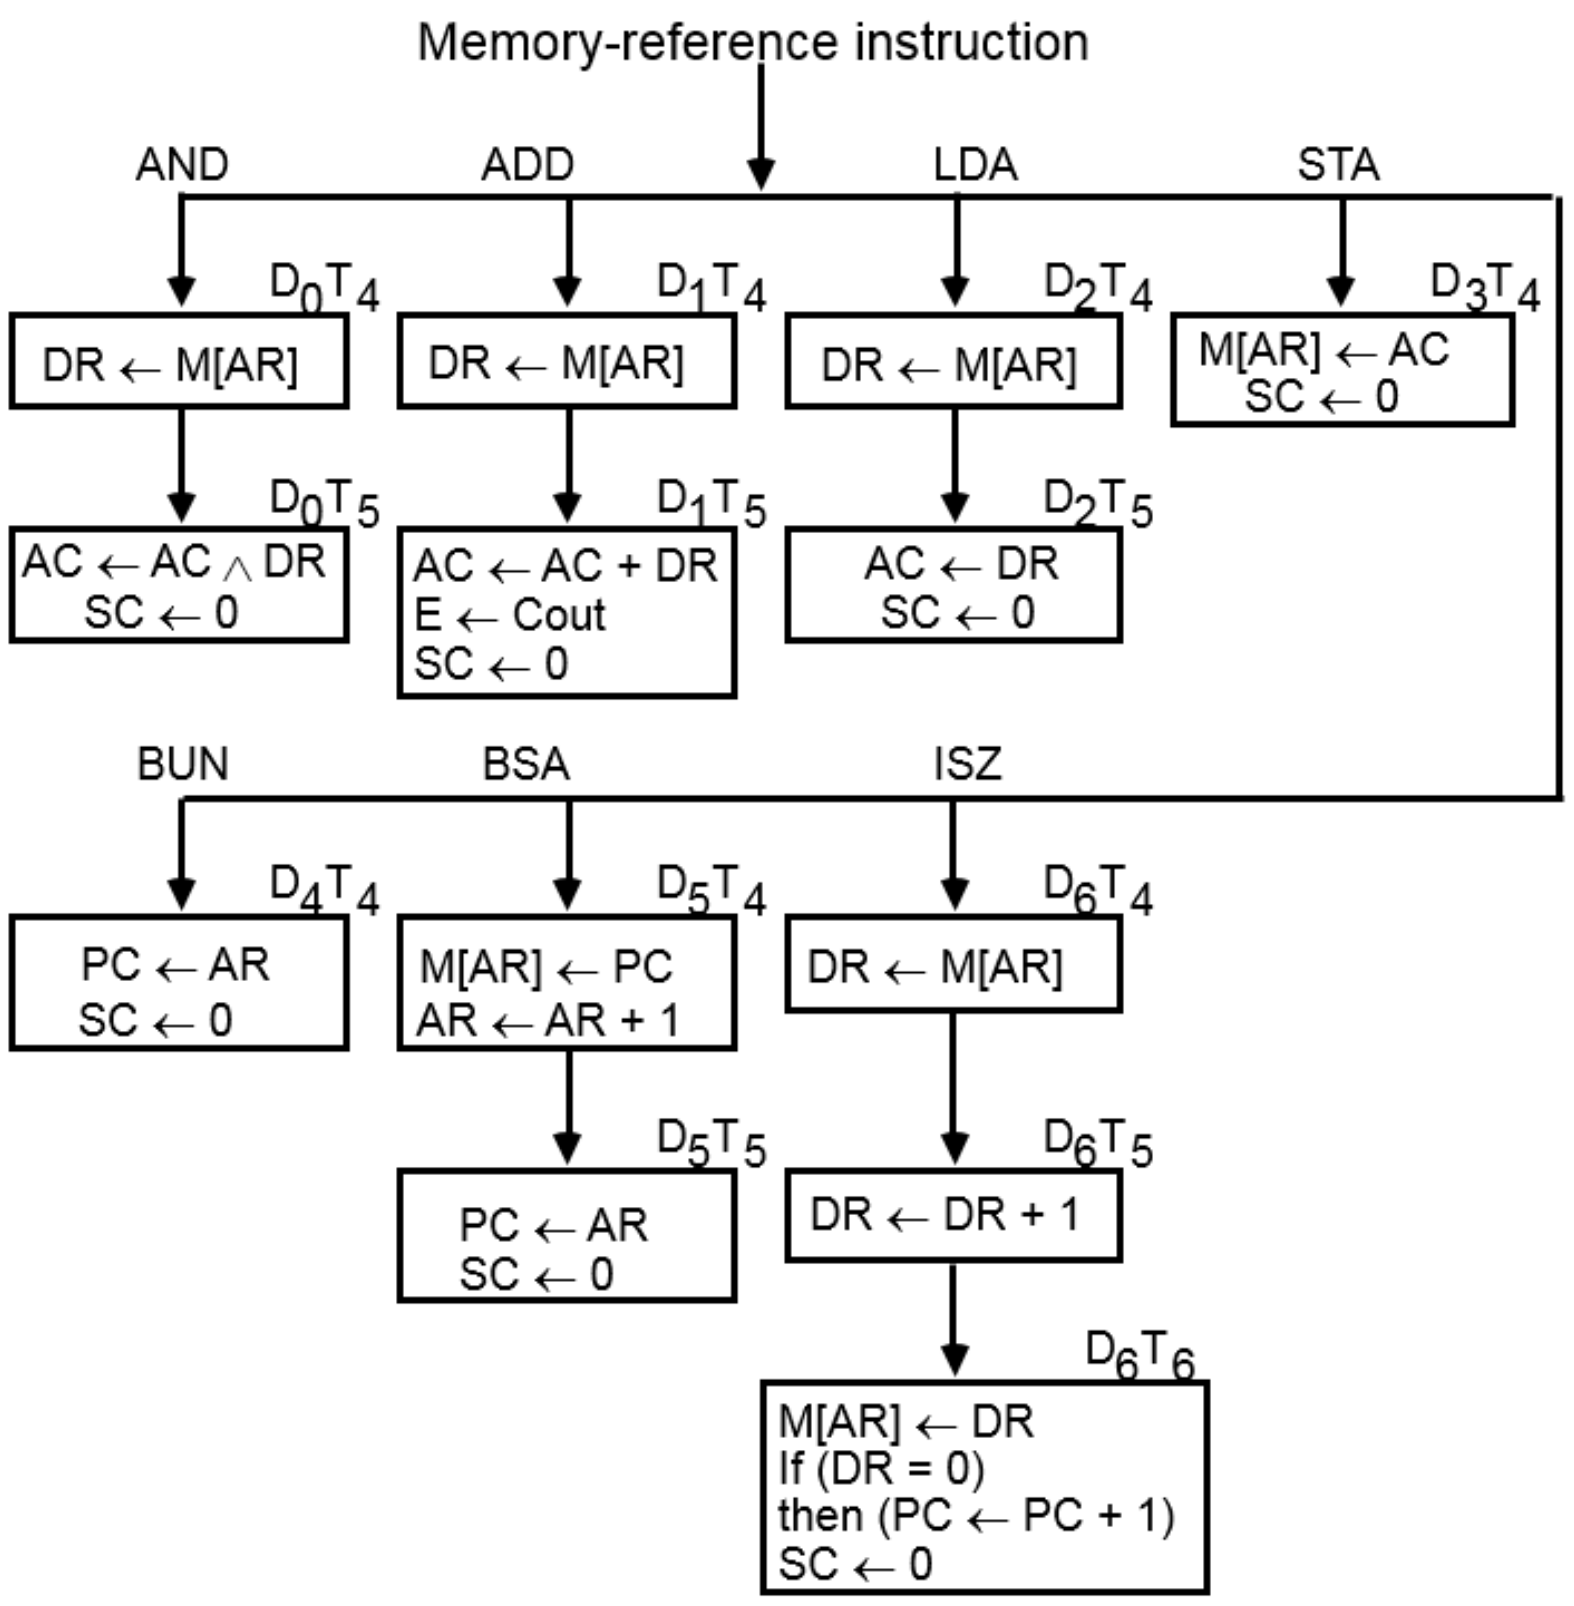

Register Instructions

Register Reference Instructions are identified when

- $D_7 = 1$, $I = 0$
- Register Ref. Instr. is specified in $b_0 \sim b_{11}$ of IR
- Execution starts with timing signal T_3

$r = D_7 I'T_3$ => Register Reference Instruction
$B_i = IR(i)$, i=0,1,2,...,11

	r:	SC ← 0
CLA	rB_{11}:	AC ← 0
CLE	rB_{10}:	E ← 0
CMA	rB_9:	AC ← AC’
CME	rB_8:	E ← E’
CIR	rB_7:	AC ← shr AC, AC(15) ← E, E ← AC(0)
CIL	rB_6:	AC ← shl AC, AC(0) ← E, E ← AC(15)
INC	rB_5:	AC ← AC + 1
SPA	rB_4:	if (AC(15) = 0) then (PC ← PC+1)
SNA	rB_3:	if (AC(15) = 1) then (PC ← PC+1)
SZA	rB_2:	if (AC = 0) then (PC ← PC+1)
SZE	rB_1:	if (E = 0) then (PC ← PC+1)
HLT	rB_0:	S ← 0 (S is a start-stop flip-flop)