Network Manager Release Notes

Version 2.5

IQGeo, NINE Hills Road, Cambridge, CB2 1GE, United Kingdom.

Telephone: +44 (0) 1223 606655. Website: https://www.iqgeo.com/.

Contents

1: Introduction ... 3
1.1 Intended Audience ... 3
2: Installation ... 4
2.1 Prerequisites ... 4
2.2 Installing the Software ... 4
2.3 Creating a New Database ... 4
2.4 Upgrading an Existing Database ... 5
3: End-user GUI Changes ... 6
3.1 Cutting Cables ... 6
3.1.1 Cutting a Cable ... 6
3.1.2 Cutting the Cable and Reconnecting ... 7
3.2 Listing Design Objects by System ... 8
3.3 Replacing a Structure ... 11
3.4 Removing a Structure ... 13
3.5 Confirmation of Redrawing the Bounds of the Design ... 14
3.6 Splice Instruction Report ... 15
4: Administrator GUI Changes ... 16
4.1 Configuration Settings > Import Formats ... 16
4.2 Configuration Settings > Advanced Settings Tab ... 17
4.3 Roles Configuration ... 17
5: Data Model Changes ... 18
6: Tools ... 19
7: Upgrading ... 20
7.1 Upgrading Your Database ... 20

1: Introduction

This document provides a summary of the major changes in this release of Network Manager for Telecoms.

1.1 Intended Audience

This document is intended for Administrators and Developers with a detailed technical knowledge of IQGeo Platform and utilities.

2: Installation

The following changes relate to installation and upgrade.

2.1 Prerequisites

Component	Version	Comments
IQGeo Platform	6.5	Mandatory
IQGeo Workflow Module	6.5	Mandatory
IQGeo Anywhere	6.5 (or higher)	Optional

All components must include any released patches.

2.2 Installing the Software

1. Uncompress the software download and copy the **comms** folder into:

   ```
   <myWorld_install_dir>/WebApps/myworldapp/modules
   ```

2. Download the module's JavaScript dependencies:

   ```
   myw_product fetch node_modules
   ```

3. Rebuild your JavaScript bundles:

   ```
   myw_product build applications
   ```

2.3 Creating a New Database

If you do not already have an IQGeo database, or that database does not yet have the Network Manager tables installed, you will need to:

- Install the Network Manager tables.
- Configure the network object types for your installation.

These processes are covered in detail in the *Installation and Configuration Guide*.

2.4 Upgrading an Existing Database

If you already have a Network Manager database from a previous release, you will need to:

- Upgrade your database.
- Perhaps perform some post-upgrade configuration changes.

These processes are covered in detail in *Upgrading* on page 20.

3: End-user GUI Changes

The following changes have been made to the end-user GUI.

3.1 Cutting Cables

The system supports the following functions:

- Cutting a cable i.e. just creating two parts, keeping connectivity at far ends.

> This is only allowed if there are no circuits.

- Cutting and reconnecting i.e. cutting the cable and then reconnecting all fibers, whilst maintaining circuits.

You can cut a cable at any type of point structure, for example, a manhole, however, you can only cut a cable if it has **A** and **Z** or **In** and **Out** nodes.

3.1.1 Cutting a Cable

If you hover the cursor over the node of the cable you wish cut, and click the right mouse button to display a list of options.

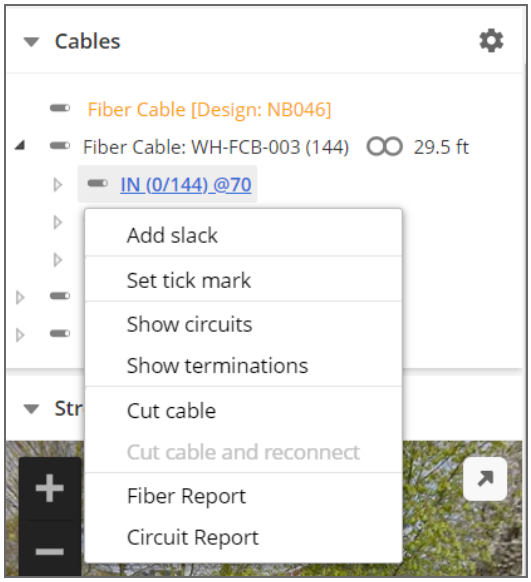

Figure 3-1: Cable Options - Cut cable

Select the **Cut cable** option.

> The **Cut Cable** option is disabled if the cable has circuits.

3.1.2 Cutting the Cable and Reconnecting

The **Cut cable and Reconnect** option is enabled if a Splice Closure is the main object shown in the **Details** pane. You can use an existing splice closure in the structure or add a new one.

1. Navigate to the **Cables** tree and right click the cable required to display the list of options.

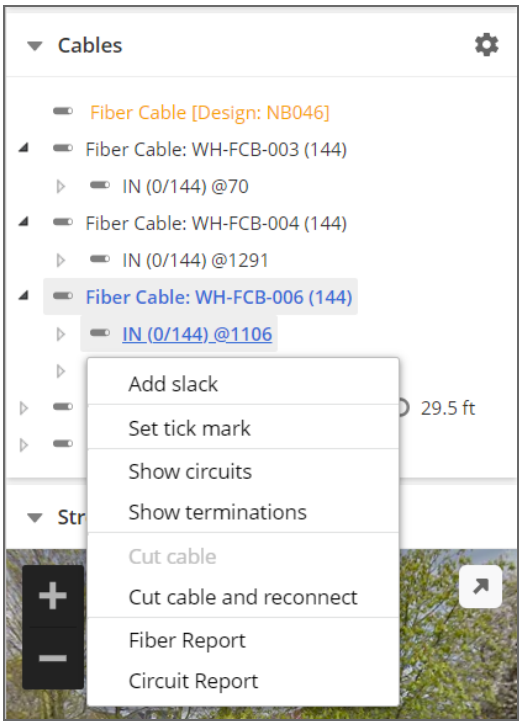

Figure 3-2: Cables Area - Cut cable and reconnect

2. Select **Cut cable and reconnect**.

- If you have cut the cable at the **In** node, the cable is cut at the structure. The old cable includes everything that comes up to the old structure and the new cable includes everything that leaves the structure.
- If you have cut the cable at the **Out** node, the old cable includes everything that leaves the structure and the new cable includes everything that is coming into the structure.

3.2 Listing Design Objects by System

You can view **all** changes in a design.

In the **Design** toolbar, click the **Select objects** icon.

Select **System** from the drop down list.

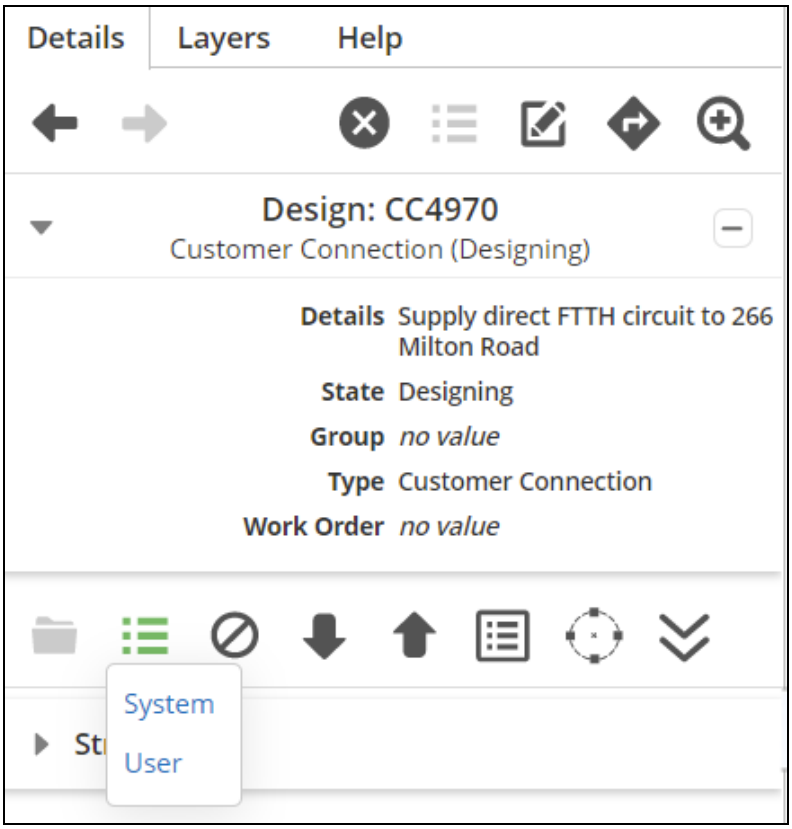

Figure 3-3: Select Objects - System

The **Changes Filter** dialog opens.

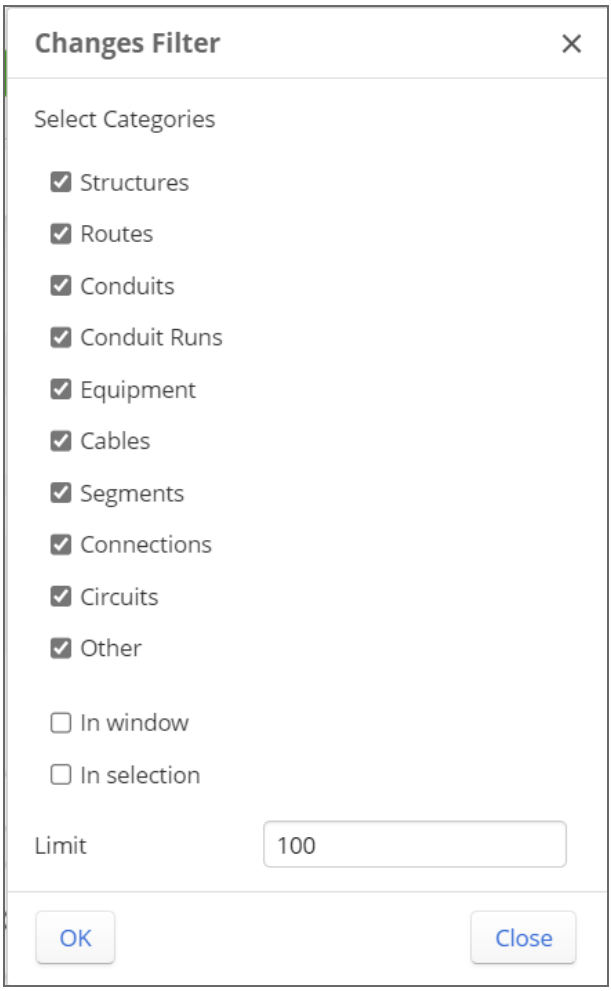

Figure 3-4: Changes Filter Dialog

This dialog enables you to filter which system changes are shown for the design, using a combination of the following:

- List of categories. You can enable or disable the check boxes beside each category, to include or exclude the changes for each category type that you wish to view.
- **In window** and **In selection** check boxes. Only changes in the design within the window or selected polygon will be shown.
- **Limit** - No more than a certain number of changes will be shown.

> You can alter the number of changes to be shown if required, however, the number cannot exceed the maximum limit which is set in the *Configuration* application.

When you click **OK** on the **Changes Filter** dialog, the list of objects in the **Details** panel then shows only those that have been enabled in the dialog.

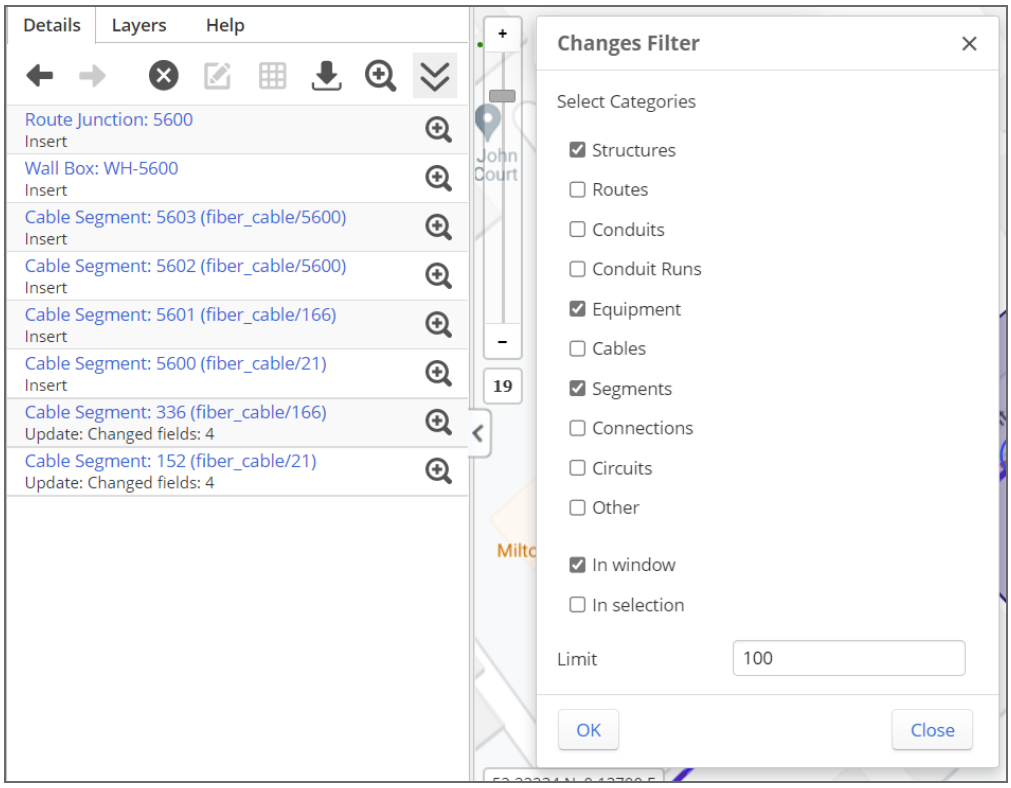

Figure 3-5: Details Pane Lists Filtered Object

The dialog remains open so that you can change the filter categories if required.

You can click and drag the dialog around the screen so that you can view the map behind it.

3.3 Replacing a Structure

Field conditions sometimes require different structures to those that were designed originally.

You can select an existing structure and replace it with an alternative structure, for example, a pedestal to handholes or vice versa. The structures may have active connections, however, connectivity is retained when structures are switched.

Office users may need to replace existing structures so that they can update the database to match what field users have verified.

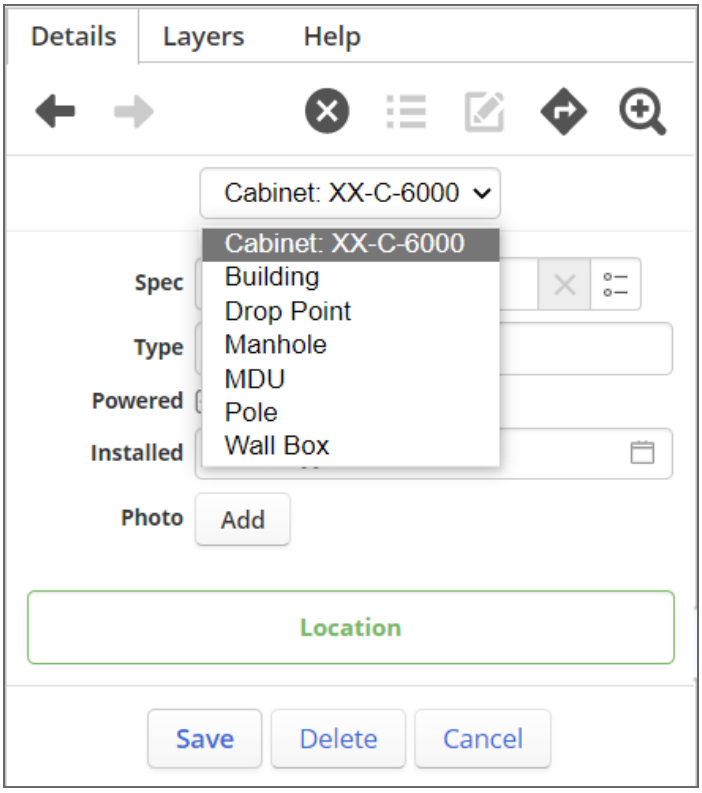

Figure 3-6: List of Structure Types

Once you have selected the alternative structure, the fields in the feature editor change to reflect the type of structure you have selected.

On saving, the following dialog is then displayed, so that you can confirm that you wish to replace the current structure with a different one.

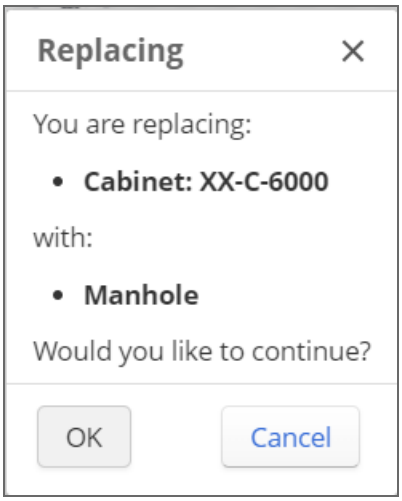

Figure 3-7: Replace Structure Dialog

Once you have clicked OK, you can see both on the map and in the feature editor, that the current structure has been replaced and that the corresponding details have also been replaced accordingly. The replacement structure name, features, cable structures and routes are all updated. The Schematic is also updated, along with the system and user changes.

If you need to revert the structure to the original structure type, you just need to replace it as described above.

3.4 Removing a Structure

When you attempt to remove a structure, if there is any equipment belonging to the structure, it is listed in the delete dialog.

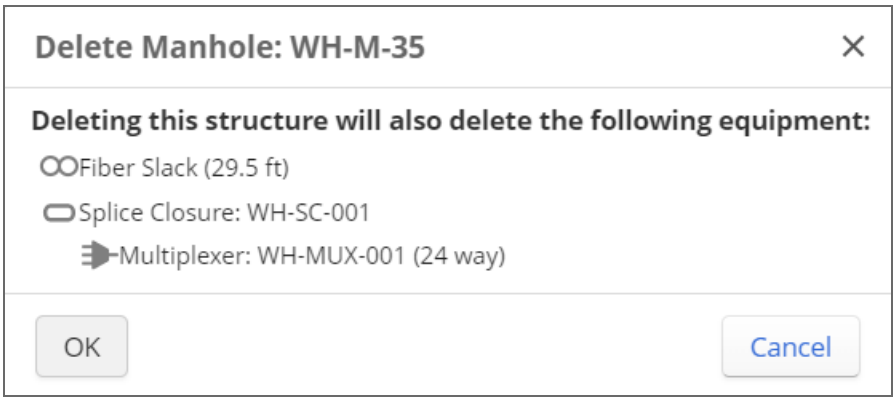

Figure 3-8: Delete Structure Dialog

The list of associated equipment serves as a warning, to flag that if you delete the structure, all associated equipment and its connectivity, will also be deleted.

> As an alternative to deleting the structure and its equipment, you can, instead, change it to a different structure type so that you do not lose all the equipment.
>
> To do this, firstly click **Cancel** on the dialog to close the dialog. Please refer to Replacing a Structure.

3.5 Confirmation of Redrawing the Bounds of the Design

When you select the **Redraw Bounds** button on the **Design Toolbar**, the following confirmation dialog is now displayed.

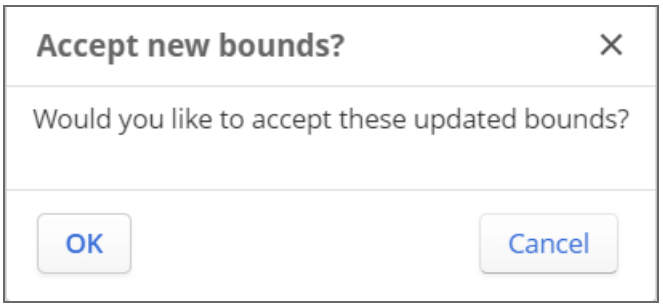

Figure 3-9: Accept new bounds? Dialog

The dialog enables you to either select (**OK** button) or decline the bounds (**Cancel** button).

Once you have decided to proceed with selecting the bounds by clicking the **OK** button, the design area polygon is updated to encompass all the objects that make up the design.

3.6 Splice Instruction Report

The Splice Instruction Report lists, for each cable, the connections to be made on each fiber. This allows splicers to work cable by cable, in the order of their choosing.

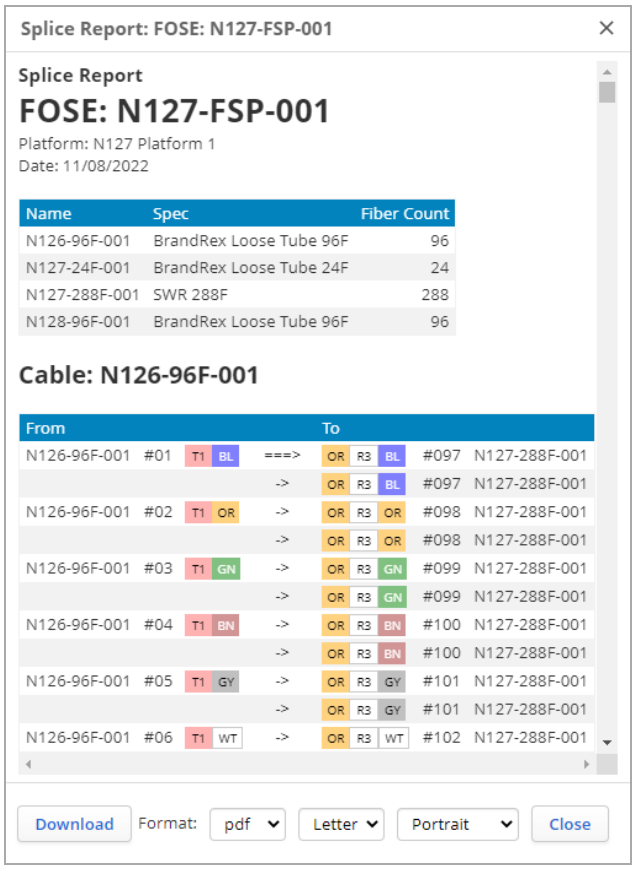

Splice Report: FOSE: N127-FSP-001

Splice Report

FOSE: N127-FSP-001

Platform: N127 Platform 1
Date: 11/08/2022

Name	Spec	Fiber Count
N126-96F-001	BrandRex Loose Tube 96F	96
N127-24F-001	BrandRex Loose Tube 24F	24
N127-288F-001	SWR 288F	288
N128-96F-001	BrandRex Loose Tube 96F	96

Cable: N126-96F-001

From					To				
N126-96F-001	#01	T1	BL	===>	OR	R3	BL	#097	N127-288F-001
				->	OR	R3	BL	#097	N127-288F-001
N126-96F-001	#02	T1	OR	->	OR	R3	OR	#098	N127-288F-001
				->	OR	R3	OR	#098	N127-288F-001
N126-96F-001	#03	T1	GN	->	OR	R3	GN	#099	N127-288F-001
				->	OR	R3	GN	#099	N127-288F-001
N126-96F-001	#04	T1	BN	->	OR	R3	BN	#100	N127-288F-001
				->	OR	R3	BN	#100	N127-288F-001
N126-96F-001	#05	T1	GY	->	OR	R3	GY	#101	N127-288F-001
				->	OR	R3	GY	#101	N127-288F-001
N126-96F-001	#06	T1	WT	->	OR	R3	WT	#102	N127-288F-001

Download Format: pdf Letter Portrait Close

Figure 3-10: Splice Instruction Report

4: Administrator GUI Changes

The following changes have been made to the Administrator GUI.

4.1 Configuration Settings > Import Formats

The **Filter** column provides an optional filter expression for selecting source feature records. The format is as for feature filters described in: *Platform Installation and Configuration Guide > Configuration > Using the Configuration Pages > Defining Platform Features > Defining Additional Properties > Filter Expressions*.

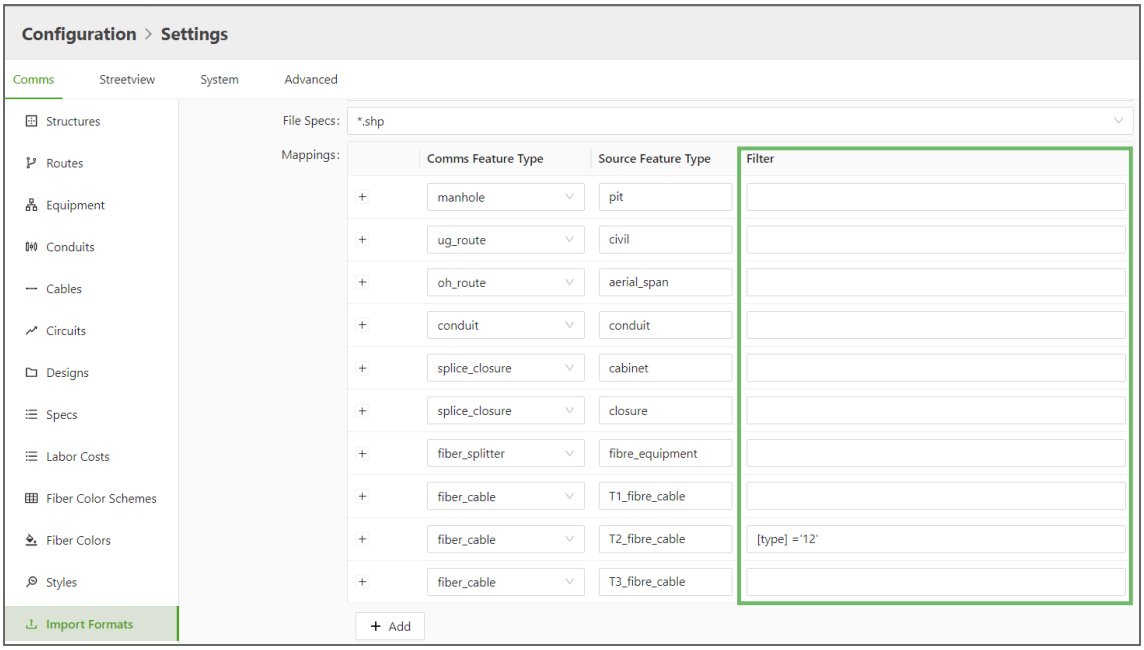

Figure 4-1: Configuration > Settings > Import Formats Area

Once you have added and saved an entry in the **Filter** column, it is added to the `mywcom.import_config.<source>` setting in the **Settings > Advanced** tab.

4.2 Configuration Settings > Advanced Settings Tab

Setting	Description	Example
mywcom.systemChangesLimit	The Show System Changes UI has an input to limit the number of results. A configurable, maximum limit can be set so that the system is not overwhelmed. The configured maximum limit value is honored, regardless of the input value.	1000

4.3 Roles Configuration

The `Comms: View All Designs` role has been added. Users who have this role will be able to view all designs, however, they will not be assigned Admin rights and do not belong to any group.

5: Data Model Changes

The following change has been made to the Data Model.

A new right has been provided, in order to view designs.

```
{
"mywcom.viewAllDeltas": {
"description": "Can view all designs"
}
}
```

6: Tools

No changes have been made to the Tools in this release.

7: Upgrading

This section provides an overview of the upgrade process for this release.

7.1 Upgrading Your Database

To upgrade from the previous release of Network Manager:

1. Apply all IQGeo Platform upgrades:

   ```
   myw_db <db_name> upgrade core 650
   ```

2. Apply the Network Manager upgrade:

   ```
   myw_db <db_name> upgrade comms 6525
   ```

3. Perform the post upgrade actions listed below.

Copyright © 2022, IQGeo UK Ltd. IQGeo is a registered ® trademark. All Rights Reserved. You may not reproduce this document in whole or in part without permission in writing from IQGeo at the following address:

IQGeo UK Ltd.

NINE Hills Road

Cambridge, CB2 1GE

United Kingdom

Tel: +44 (0) 1223 606655

E-mail: support@iqgeo.com

WWW: https://www.iqgeo.com/

All contents of this document are subject to change without notice and do not represent a commitment on the part of IQGeo. Reasonable effort is made to ensure the accuracy of the information contained in the document. However, due to on-going product improvements and revisions, IQGeo and its subsidiaries do not warrant the accuracy of this information and cannot accept responsibility for errors or omissions that may be contained in this document.

Information in this document is provided in connection with IQGeo products. No license, express or implied to any intellectual property rights is granted by this document.

IQGeo encourages all users of its products to procure all necessary intellectual property licenses required to implement any concepts or applications and does not condone or encourage any intellectual property infringement and disclaims any responsibility related thereto. These intellectual property licenses may differ from country to country and it is the responsibility of those who develop the concepts or applications to be aware of and comply with different national license requirements.

Windows® is a registered trademark of Microsoft Corporation in the United States and/or other countries. The other names of actual companies and products mentioned herein are the trademarks of their respective owners.