

Exp. No. 24

Write a LEX program to print all HTML tags in the input file.

Input Source Program: (sample.html)

```
<html>
<body>
<h1>My First Heading</h1>
<p>My first paragraph.</p>
</body>
</html>
```

Program: (html.l)

```
%{
int tags;
%}
%%
"<"[^>]*> { tags++; printf("%s \n", yytext); }
.|\\n { }
%%
int yywrap(void) {
return 1; }
int main(void)
{
FILE *f;
char file[10];
printf("Enter File Name : ");
scanf("%s",file);
f = fopen(file,"r");
yyin = f;
yylex();
printf("\n Number of html tags: %d",tags);
fclose(yyin);
}
```

Output:

```
G:\lex>flex html.l
```

```
G:\lex>gcc lex.yy.c
```

G:\lex>a.exe

Enter File Name : sample.html

<html>

<body>

<h1>


</h1>

<p>

</p>

</body>

</html>

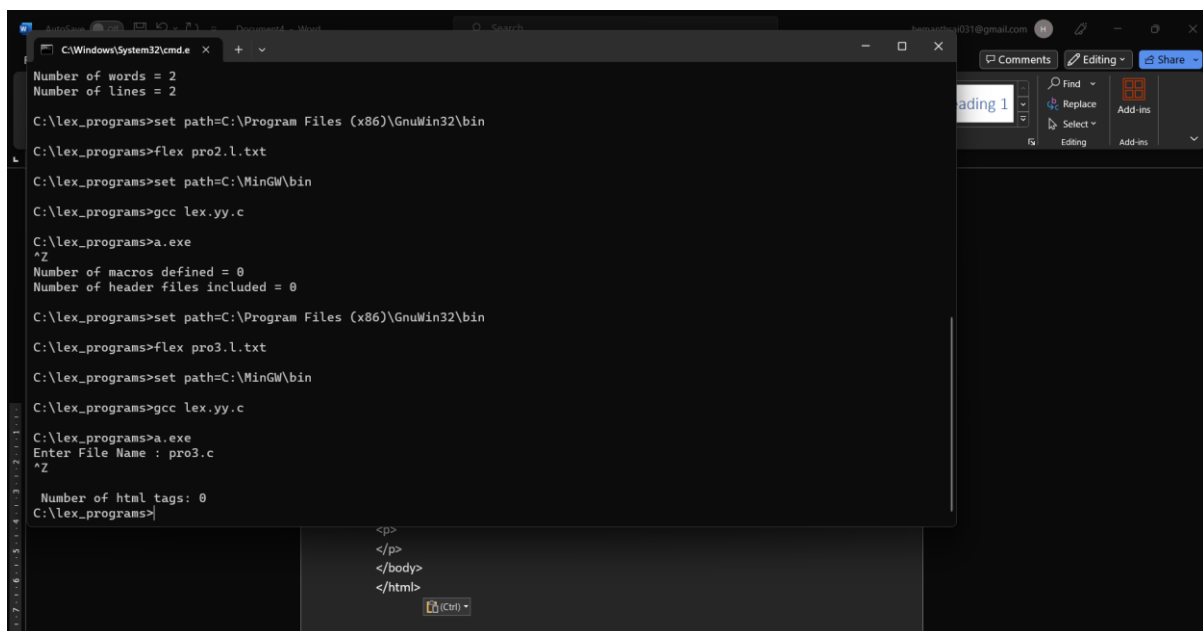

The screenshot shows a Windows command prompt window with the following commands and output:

```
C:\lex_programs>set path=C:\Program Files (x86)\GnuWin32\bin
C:\lex_programs>flex pro2.l.txt
C:\lex_programs>set path=C:\MinGW\bin
C:\lex_programs>gcc lex.yy.c
C:\lex_programs>a.exe
^Z
Number of macros defined = 0
Number of header files included = 0

C:\lex_programs>set path=C:\Program Files (x86)\GnuWin32\bin
C:\lex_programs>flex pro3.l.txt
C:\lex_programs>set path=C:\MinGW\bin
C:\lex_programs>gcc lex.yy.c
C:\lex_programs>a.exe
Enter File Name : pro3.c
^Z

Number of html tags: 0
C:\lex_programs>
```

Below the command prompt, a text editor window displays the following HTML code:

```
<p>
</p>
</body>
</html>
```