

Exp. No. 23

Write a LEX program to count the number of Macros defined and header files included in the C program.

Input Source Program: (sample.c)

```
#define PI 3.14
#include<stdio.h>
#include<conio.h>
void main()
{

    int a,b,c = 30;
    printf("hello");
}
```

Program: (count_macro.l)

```
%{
int nmacro, nheader;
}%
%%
^#define { nmacro++; }
^#include { nheader++; }
.|\\n { }
%%
int yywrap(void) {
return 1;
}
int main(int argc, char *argv[]) {
yyin = fopen(argv[1], "r");
yylex();
printf("Number of macros defined = %d\\n", nmacro);
printf("Number of header files included = %d\\n", nheader);
fclose(yyin);
}
```

Output:

G:\lex>flex count_macro.l


G:\lex>gcc lex.yy.c

G:\lex>a.exe sample.c

Number of macros defined = 1

Number of header files included = 2

G:\lex>

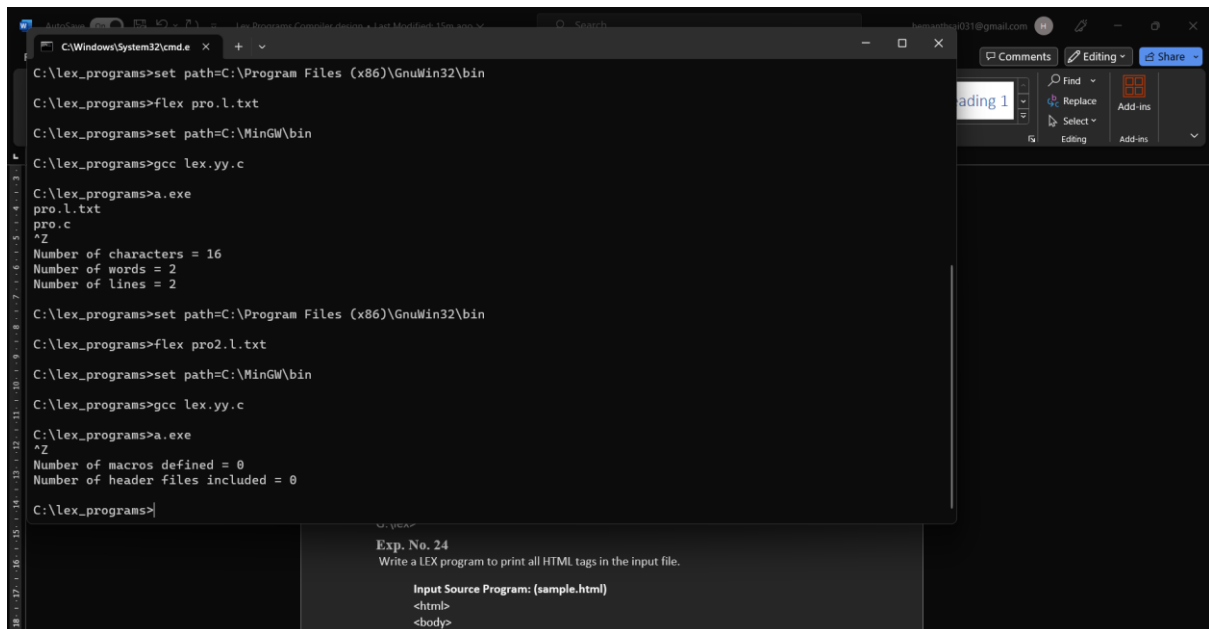

```
C:\Windows\System32\cmd.exe
C:\lex_programs>set path=C:\Program Files (x86)\GnuWin32\bin
C:\lex_programs>flex pro.l.txt
C:\lex_programs>set path=C:\MinGW\bin
C:\lex_programs>gcc lex.yy.c
C:\lex_programs>a.exe
pro.l.txt
pro.c
^Z
Number of characters = 16
Number of words = 2
Number of lines = 2
C:\lex_programs>set path=C:\Program Files (x86)\GnuWin32\bin
C:\lex_programs>flex pro2.l.txt
C:\lex_programs>set path=C:\MinGW\bin
C:\lex_programs>gcc lex.yy.c
C:\lex_programs>a.exe
^Z
Number of macros defined = 0
Number of header files included = 0
C:\lex_programs>
```

Exp. No. 24
Write a LEX program to print all HTML tags in the input file.

Input Source Program: (sample.html)

```
<html>
<body>
```