Name: V Sunil Kumar

Reg.No:192425292

3. Scenario: You are working on a project that involves analyzing a dataset containing information

about houses in a neighborhood. The dataset is stored in a CSV file, and you have imported it into a

NumPy array named house_data. Each row of the array represents a house, and the columns

contain various features such as the number of bedrooms, square footage, and sale price.

Question: Using NumPy arrays and operations, how would you find the average sale price of houses with more than four bedrooms in the neighborhood?

Code;

```
import numpy as np

house_data = np.array([

  [3, 1200, 200000],

  [5, 1800, 350000],

  [4, 1500, 250000],

  [6, 2200, 450000],

  [5, 2000, 400000]

])

houses = house_data[house_data[:, 0] > 4]

avg = np.mean(houses[:, 2])
```

print("Average sale price:", avg)

input;
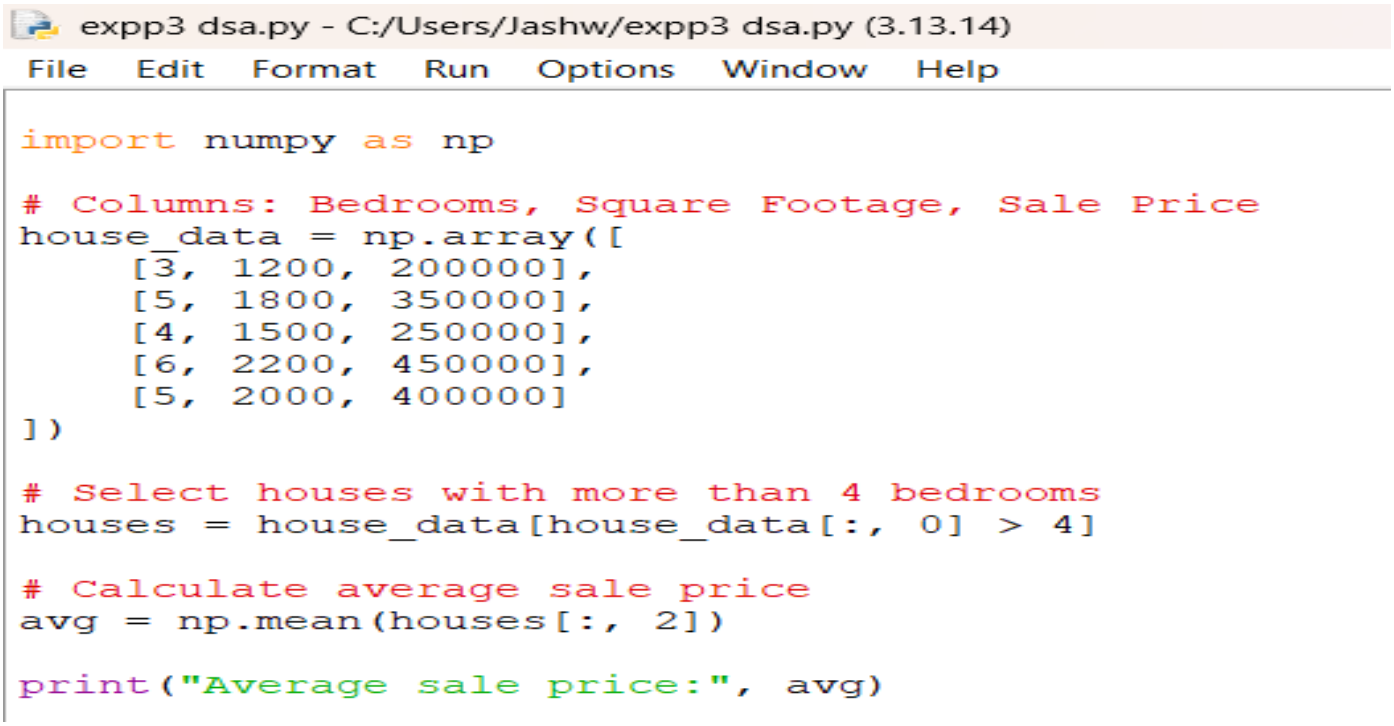
Average sale price: 400000