

# MPI Parallelized Gaussian Process Regression for Efficient Frequency Interpolation for VWT-IE-Solver

Aiden Incheol Jung


Department of Electric and Computer Engineering  
University of Illinois Urbana-Champaign

*incheol3@illinois.edu*

November 6, 2025

- VWT-IE-Solver harnesses capability of efficient angular interpolation based on Principal Component Analysis (PCA).
- To extend this ability into the frequency axis, we employed a Gaussian Process Regression (GPR) with a Variance Minimizing Adaptive Sampler (VMAS).
- Running simulations on each new sample is “embarrassingly parallel,” allowing Message Passing Interface (MPI) protocol for parallel computing.
- We summarize Parallelized Gaussian Process employing PCA (PGP-PCA) allowing efficient monostatic farfield computation for both frequency and angular sweep.

# Theory: PCA

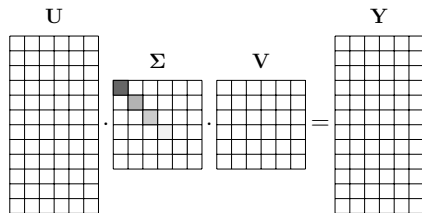

Truncation based on  $\Sigma$




Figure: Matrix compression via PCA

- PCA is a representative technique for matrix dimension reduction.
- Singular Value Decomposition (SVD) is used for matrix analysis.

$$\mathbf{U}_{N \times S} \mathbf{\Sigma}_{S \times S} \mathbf{V}_{S \times M}^T = \mathbf{Y}_{N \times M}$$

- $\mathbf{Z} := \mathbf{U}\mathbf{\Sigma}$  is defined as coefficients, whereas  $\mathbf{V}^T$  functions as **basis**.
- Based on  $\Sigma$ , insignificant values are truncated:

$$\mathbf{V}' = \mathbf{V}[:, k] \quad \text{where, } \Sigma[k]/\Sigma[0] < \epsilon$$

- The matrix is then reconstructed:  $\mathbf{Y} = \mathbf{Z}'\mathbf{V}'^T$

# Theory: GPR

- GPR is a widely-used technique for a surrogate modelling.
- For given training set  $\mathcal{D} = \{(\mathbf{x}_n, \mathbf{y}_n = f(\mathbf{x}_n))\}_{n=1}^N$ , where  $f$  refers to an expensive function that we aim to build a surrogate model for, the goal is to predict  $\mathbf{y}_* = f(\mathbf{x}_*)$  where  $\mathbf{x}_*$  is in testing set.

$$\begin{pmatrix} \mathbf{y} \\ \mathbf{y}_* \end{pmatrix} \sim \left( \begin{pmatrix} \boldsymbol{\mu} \\ \boldsymbol{\mu}_* \end{pmatrix}, \begin{pmatrix} \mathbf{K} & \mathbf{K}_* \\ \mathbf{K}_*^T & \mathbf{K}_{**} \end{pmatrix} \right)$$

- Kernel functions are used to model covariance between sampling points. It is the kernel function parameters that are trained for the given training data.

$$k(\mathbf{X}, \mathbf{X}) = \mathbf{K}, \quad k(\mathbf{X}, \mathbf{X}_*) = \mathbf{K}_*, \quad k(\mathbf{X}_*, \mathbf{X}_*) = \mathbf{K}_{**}$$

- The conditional posterior mean is analytically known as:

$$\begin{aligned} p(\mathbf{y}_* | \mathbf{X}_*, \mathbf{X}, \mathbf{y}) &= \mathcal{N}(\hat{\boldsymbol{\mu}}_*, \hat{\mathbf{K}}_{**}) \\ \hat{\boldsymbol{\mu}}_* &= \boldsymbol{\mu}(\mathbf{X}_*) + \mathbf{K}_*^T \mathbf{K}^{-1} (\mathbf{y} - \boldsymbol{\mu}(\mathbf{X})) \\ \hat{\mathbf{K}}_{**} &= \mathbf{K}_{**} - \mathbf{K}_*^T \mathbf{K}^{-1} \mathbf{K}_* \end{aligned}$$


# Theory: VMAS

- For GPR model to attain high accuracy, the training samples must effectively represent the behavior of the complete data.
- With expensive objective function such as a full-wave solver, samples are demanded to be small yet still highly representative.
- **Adaptive sampling** is one of the most popular way to enable this: it iteratively selects new samples, gradually revealing the data behavior.
- Considering  $K$  number of basis and  $\text{Var}_k$  being the variance from  $k$ th GPR, integrated variance can be calculated as:

$$\text{Var} = \sum_{k=1}^K \Sigma_k \text{Var}_k, \quad E = \text{Var} / \sum_{k=1}^K \Sigma_k$$

where  $E$  is referred to as the prediction energy fraction.

- VMAS selects frequencies with the largest variance:  $f_{\text{next}} = \arg \max [\text{Var}(f)]$

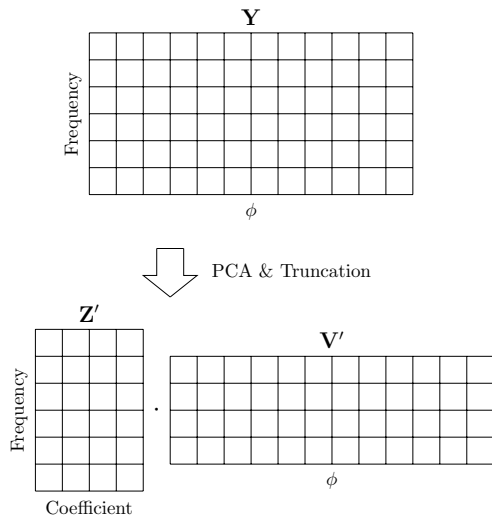

- Data of interest is 2D: [frequency, input angle].
- Direct prediction of the dataset is expensive and ineffective.
- PCA is employed to reduce the dataset, where the GPR model predicts the coefficient  $Z'$ .
- This **Reduced Basis** approach is also incorporated with **VMAS**, thus minimizing computational load while maintaining accuracy.

**Figure:** PCA to compress prediction target fo GPR

## Demonstration 1: pre-computed farfields from PRIME aircraft

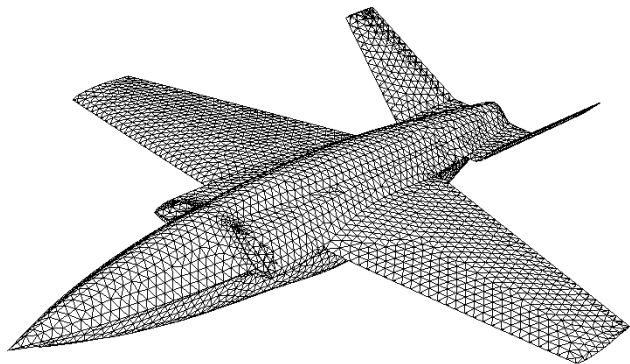


Figure: A schematic view of PRIME aircraft

- $\theta = 90$  DEG
- $\phi \in [0, 180]$  DEG
- $f \in [9.5, 10.5]$  GHz
- Material: PEC
- Final  $\#f$ : 9
- RMSE: 0.00065

# Demonstration 1: pre-computed farfields from PRIME aircraft

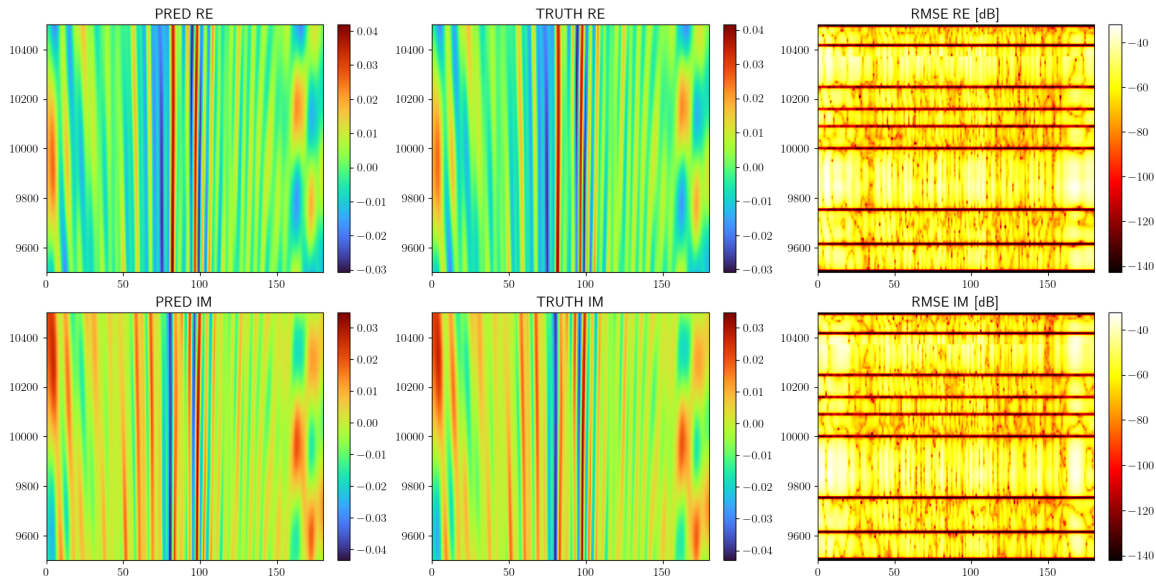


Figure: Prediction vs. Ground truth of monostatic farfields on PRIME aircraft



## Demonstration 2: on-fly simulation on a composite rounded cylinder

Mesh  
DB: bottom\_ext\_current.silo  
Cycle: 0  
Var: mesh


Mesh  
DB: bottom\_int\_current.silo  
Cycle: 0  
Var: mesh

Mesh  
DB: middle\_ext\_current.silo  
Cycle: 0  
Var: mesh

Mesh  
DB: middle\_int\_current.silo  
Cycle: 0  
Var: mesh

Mesh  
DB: top\_ext\_current.silo  
Cycle: 0  
Var: mesh


Mesh  
DB: top\_int\_current.silo  
Cycle: 0  
Var: mesh

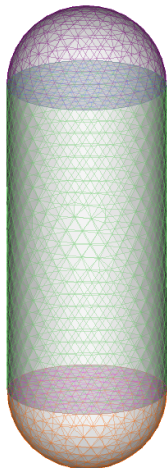

- $\theta \in [0, 180]$  DEG
- $\phi = 0$  DEG
- $f \in [100, 500]$  MHz
- Material: Composite
  - top: dielectric
  - middle: PEC hollow cylinder
  - bottom: IBC
- # Unknowns: 13,792
- Final #f: **N/A**
- RMSE: **N/A**

**Figure:** A schematic view of a composite rounded cylinder

## Demonstration 2: on-fly simulation on a composite rounded cylinder

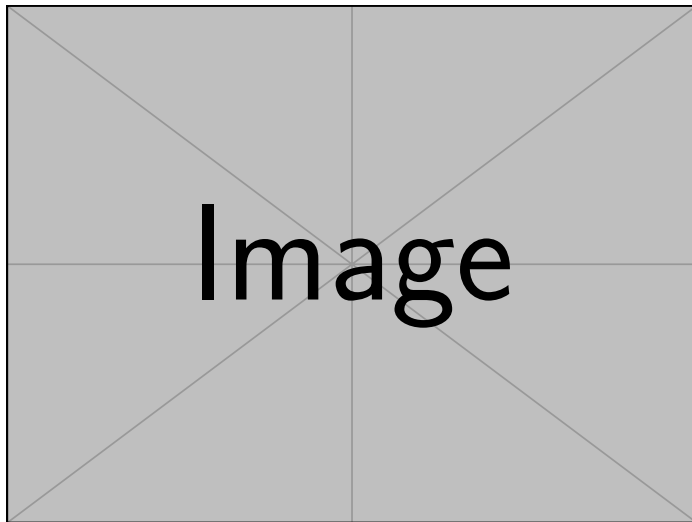

**Figure:** Prediction vs. Ground truth of monostatic farfields on composite rounded cylinder

# Parallel GPR: workflow

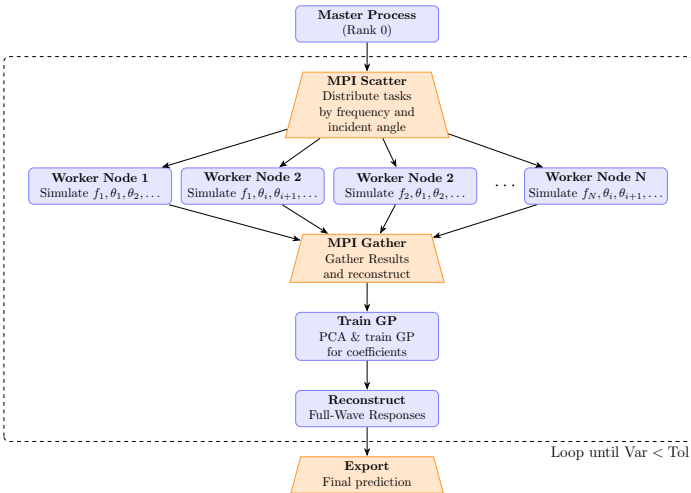


Figure: Workflow

- Master-worker pattern is used.
- Initial frequency samples are generated and distributed.
- Each worker node runs simulation.
- Simulation results are gathered in master node in which post-processed
- This loops until the normalized prediction energy is smaller than tolerance.
- When loop, master node samples the next frequencies to scatter across computing nodes.
- When terminates, master node exports the final prediction.

# Parallel GPR: task chunking


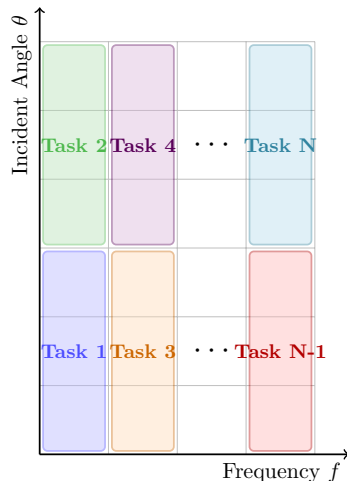


Figure: Workflow

- VWT-IE-Solver is a frequency-domain (FD) solver, naturally being embarrassingly parallel per frequency.
- In the sense of adaptive sampling, smaller number of added samples is encouraged to gradually reveal the data behavior.
- In general cluster environment, number of computing nodes are expected to be large.
- To grant the full computational capability, Each task is not only divided along the frequency axis but also the angular axis such that the number of tasks matches the number of nodes even when using a small number of added samples.

# Demonstration 3: composite rounded cylinder

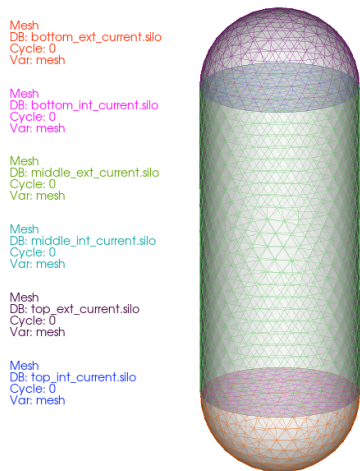

**Figure:** A schematic view of composite rounded cylinder

## Simulation Settings

- $\theta \in [0, 180]$  DEG
- $\phi = 0$  DEG
- $f \in [200, 400]$  MHz
- Material: Composite
  - top: dielectric
  - middle: PEC hollow cylinder
  - bottom: IBC
- # Unknowns: 13,792

## Results


- Final #f: N/A
- RMSE: N/A
- Total Time: N/A

## System Info

- CPU: Intel(R) Xeon(R) W-3375
- CORE: 76

## Demonstration 3: PRIME aircraft

# Demonstration 4: PRIME aircraft

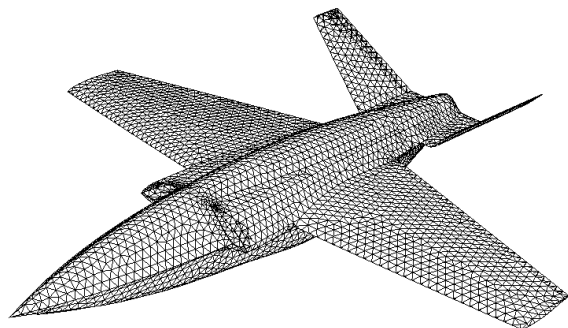

**Figure:** A schematic view of PRIME aircraft

## Simulation Settings

- $\theta = 90$  DEG
- $\phi \in [0, 180]$  DEG
- $f \in [10, 15]$  GHz
- Material: PEC
- # Unknowns: 36,708

## Results

- Final # $f$ : 28
- RMSE: 0.00099
- Total Time:

## System Info

- CPU: Intel(R) Xeon(R) W-3375
- CORE: 76
- MEM: 500 GB

## Demonstration 4: PRIME aircraft

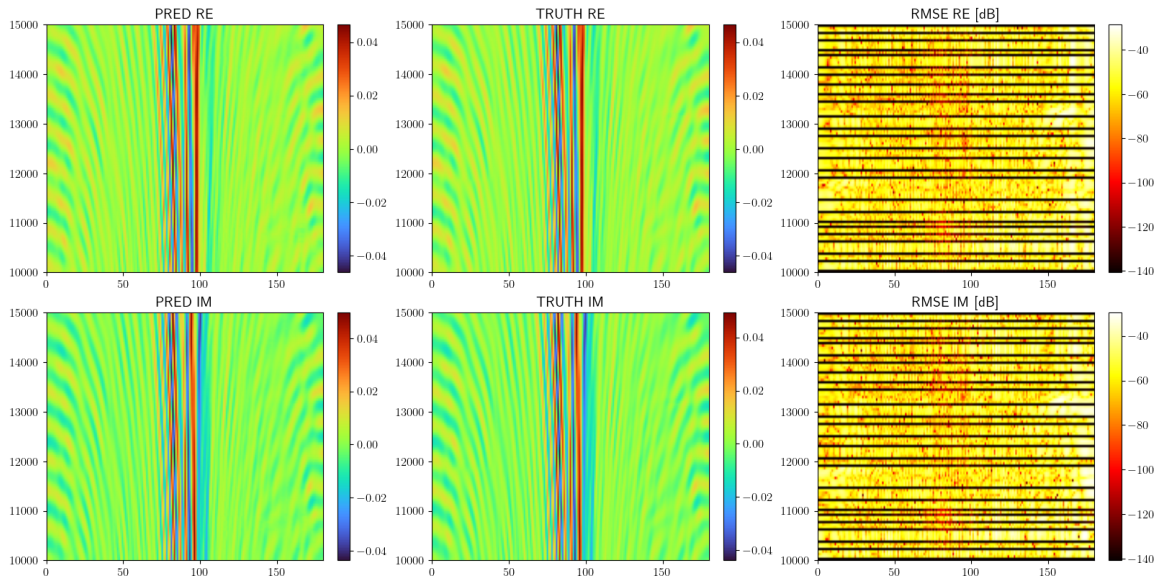


Figure: Prediction vs. Ground truth of monostatic farfields on PRIME aircraft



# Scaling study: Strong scaling

## Demonstration 4: Tanker aircraft

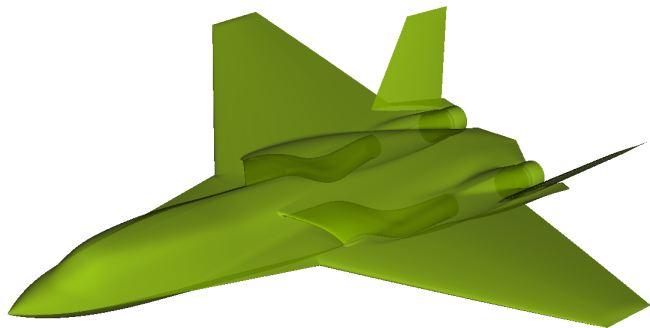


Figure: A schematic view of Tanker aircraft

### Simulation Settings

- $\theta = 90$  DEG
- $\phi \in [0, 10]$  DEG
- $f \in [1.2, 1.4]$  GHz
- Material: PEC
- # Unknowns: 2,216,950

### Results

- Final # $f$ :
- RMSE:
- Total Time:

### System Info

- CPU: Intel(R) Xeon(R) W-3375
- CORE: 76
- MEM: 500 GB

## Demonstration 4: Tanker aircraft

## Demonstration 5: Tanker aircraft

# Conclusion

## Appendix: GPR-kernels

- Radial basis function (RBF)

$$k_{\text{RBF}}(\mathbf{x}, \mathbf{x}') = \exp\left(-\frac{\|\mathbf{x} - \mathbf{x}'\|^2}{2\sigma^2}\right)$$

- Periodic

$$k_{\text{periodic}}(\mathbf{x}, \mathbf{x}') = \exp - \frac{2 \sin^2\left(\pi \sqrt{\|\mathbf{x} - \mathbf{x}'\|^2/p}\right)}{l^2}$$

- RBF-periodic (RBFP)

$$k_{\text{RBFP}}(\mathbf{x}, \mathbf{x}') = k_{\text{RBF}}(\mathbf{x}, \mathbf{x}') \times k_{\text{periodic}}(\mathbf{x}, \mathbf{x}')$$

- Stacked-RBFP

$$k_{\text{Stacked-RBFP}}^N(\mathbf{x}, \mathbf{x}') = \sum_{i=0}^N k_{\text{RBFP}}^i(\mathbf{x}, \mathbf{x}')$$