

EXPERIMENT 20

AIM

Analyze simulated browser history to find frequent domains, activity in a selected period and URLs matching suspicious patterns.

ALGORITHM

1. Store browser history records.
2. Count visits for each domain.
3. Display the frequency summary.
4. Inspect URLs for suspicious keywords.
5. Report matching time and URL.
6. Use the result as a forensic indicator.
7. Stop.

CODE

```
from collections import Counter


history = [
    ("09:00", "google.com", "https://google.com"),
    ("09:05", "youtube.com", "https://youtube.com"),
    ("09:10", "google.com", "https://google.com"),
    ("09:20", "secure-login-example.com",
     "http://secure-login-example.com/login")
]

domain_counts = Counter(domain for _, domain, _ in history)

print("Most visited:")
for domain, count in domain_counts.items():
    print(domain, "->", count)

for time, domain, url in history:
    if "login" in url.lower() or "verify" in url.lower():
        print("Suspicious:", time, url)
```

OUTPUT

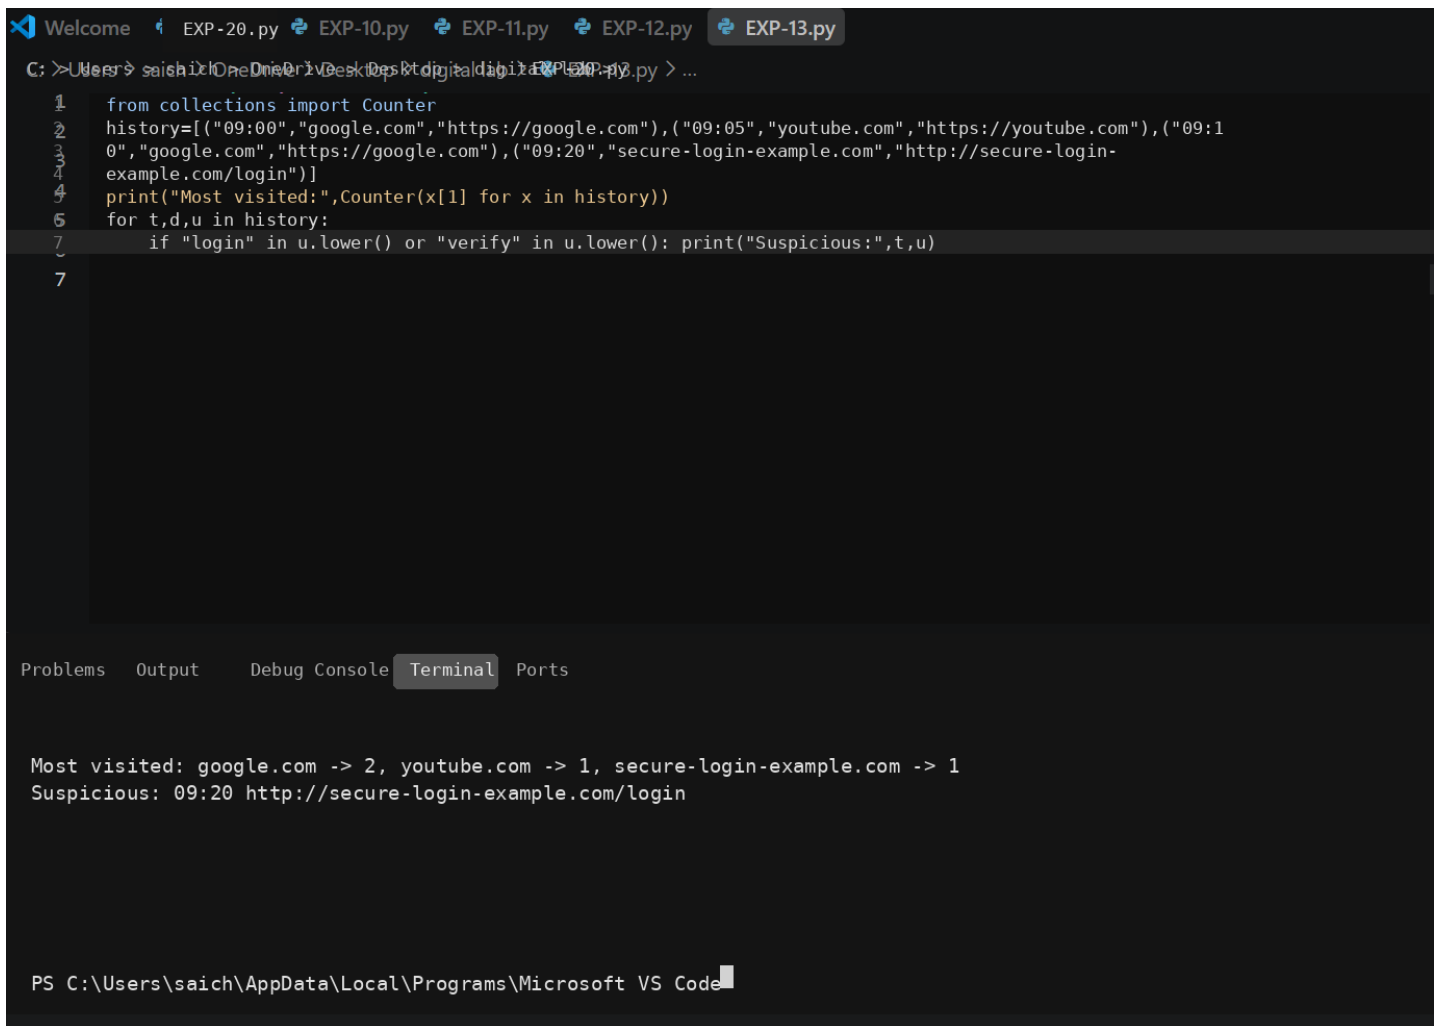

The screenshot shows a Visual Studio Code editor with a file explorer on the left and a terminal at the bottom. The file explorer shows a project named 'EXP-13.py' with several other files. The terminal displays the output of the script, which is a list of visited URLs and a suspicious URL.

```
1 from collections import Counter
2 history=[("09:00","google.com","https://google.com"),("09:05","youtube.com","https://youtube.com"),("09:1
3 0","google.com","https://google.com"),("09:20","secure-login-example.com","http://secure-login-
4 example.com/login")]
5 print("Most visited:",Counter(x[1] for x in history))
6 for t,d,u in history:
7     if "login" in u.lower() or "verify" in u.lower(): print("Suspicious:",t,u)
```

Most visited: google.com -> 2, youtube.com -> 1, secure-login-example.com -> 1
Suspicious: 09:20 http://secure-login-example.com/login

PS C:\Users\saich\AppData\Local\Programs\Microsoft VS Code

RESULT

The program separates normal high-frequency browsing from potentially suspicious URL activity.