

EXPERIMENT 24

AIM

Compare simulated USB connection records against an authorized-device list and summarize unrecognized connections.

ALGORITHM

1. Define authorized USB device identifiers.
2. Store simulated connection records.
3. Process each connection.
4. Check the device against the authorized set.
5. Classify it as AUTHORIZED or UNRECOGNIZED.
6. Display device, time, user and status.
7. Stop.


CODE

```
authorized_devices = {"USB-001", "USB-002"}

connections = [
    ("USB-001", "2026-08-19 09:00", "alice"),
    ("USB-099", "2026-08-19 10:30", "bob"),
    ("USB-002", "2026-08-19 11:00", "alice")
]

for device, timestamp, user in connections:
    status = "AUTHORIZED" if device in authorized_devices else "UNRECOGNIZED"
    print(device, timestamp, user, status)
```

OUTPUT

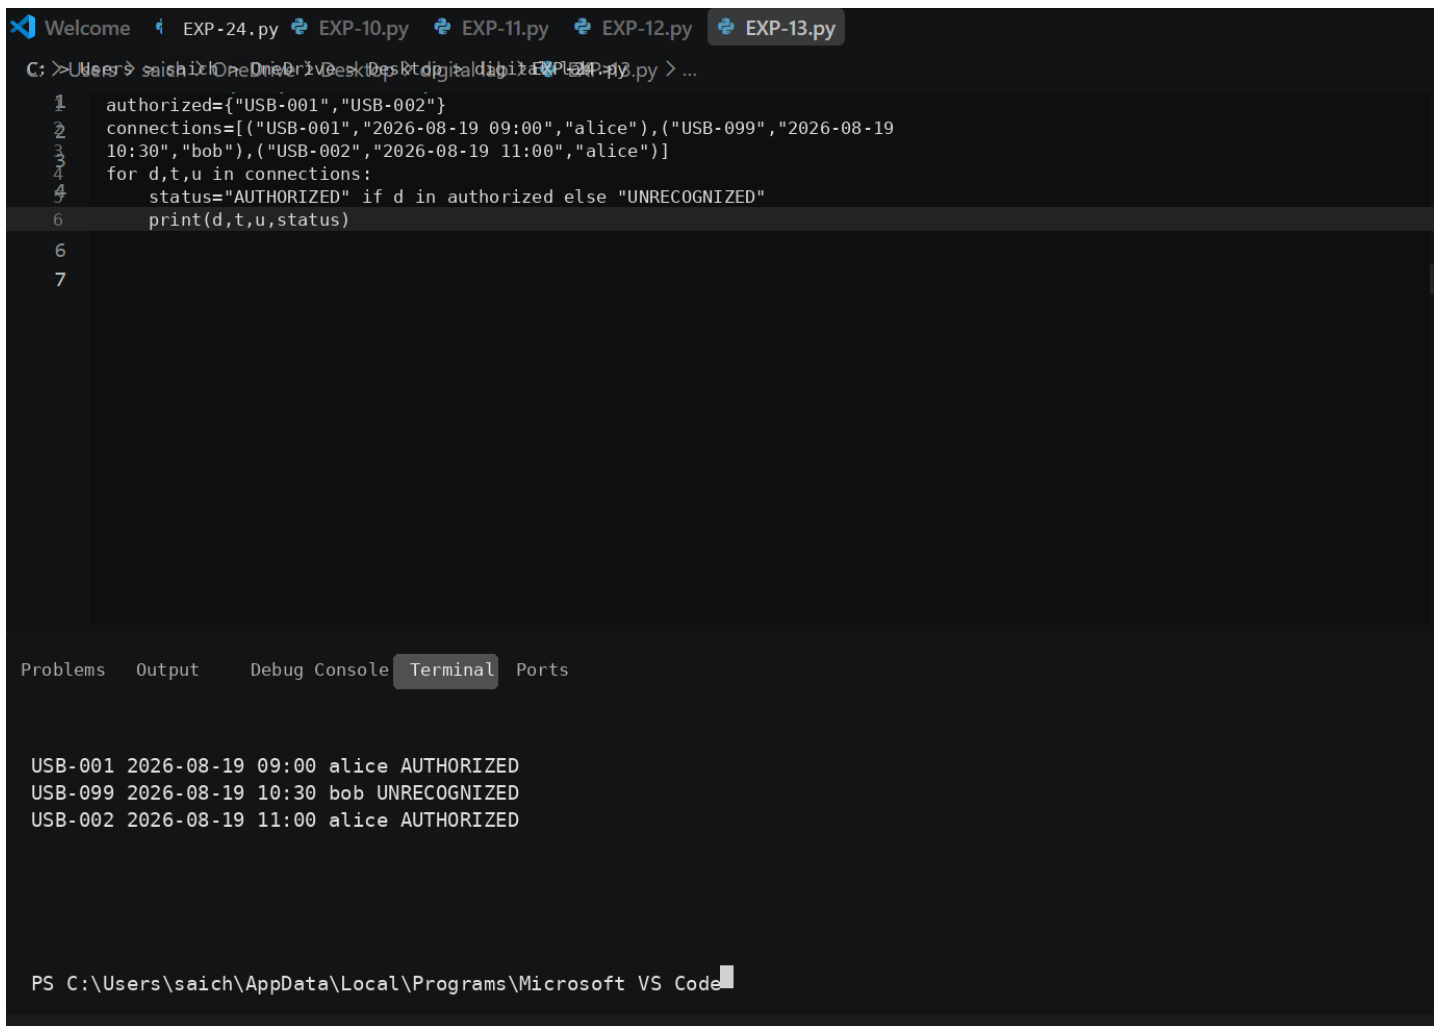

The screenshot shows a VS Code editor with a file explorer on the left and a terminal at the bottom. The file explorer shows a project named 'EXP-13.py' with a file named 'EXP-13.py'. The terminal shows the output of the script, which is a list of USB connections and their status.

```
1 authorized={"USB-001", "USB-002"}
2 connections=[("USB-001", "2026-08-19 09:00", "alice"), ("USB-099", "2026-08-19
3 10:30", "bob"), ("USB-002", "2026-08-19 11:00", "alice")]
4 for d,t,u in connections:
5     status="AUTHORIZED" if d in authorized else "UNRECOGNIZED"
6     print(d,t,u,status)
7
```

USB-001 2026-08-19 09:00 alice AUTHORIZED
USB-099 2026-08-19 10:30 bob UNRECOGNIZED
USB-002 2026-08-19 11:00 alice AUTHORIZED

RESULT

The program distinguishes authorized and unrecognized USB devices and reports the unrecognized connection.