

Experiment No. 1: Basic Kali Linux Commands

1. rm Command

Aim:

To execute and demonstrate the rm command in Kali Linux for removing a file.

Program / Command:

```
touch sample.txt
ls
rm sample.txt
ls
```

Input:

```
touch sample.txt
rm sample.txt
```

Output:

```
└─(kali㉿kali)-[~]
└─$ touch sample.txt
```

```
└─(kali㉿kali)-[~]
└─$ ls
Desktop  Documents  Downloads  sample.txt  Music  Pictures
```

```
└─(kali㉿kali)-[~]
└─$ rm sample.txt
```

```
└─(kali㉿kali)-[~]
└─$ ls
Desktop  Documents  Downloads  Music  Pictures
```

Result:

Thus, the rm command was successfully executed and the specified file was removed.

2. users Command

Aim:

To execute and demonstrate the users command in Kali Linux for displaying the users currently logged into the system.

Program / Command:

```
users
```

Input:

```
users
```

Output:

```
└─(kali㉿kali)-[~]  
└─$ users  
kali
```

Result:

Thus, the users command was successfully executed and the currently logged-in user was displayed.

Note: The output may be different on your Kali Linux system depending on the users currently logged in.

3. tree Command

Aim:

To execute and demonstrate the tree command in Kali Linux for displaying files and directories in a hierarchical structure.


Program / Command:

```
tree
```

Input:


tree

Output:

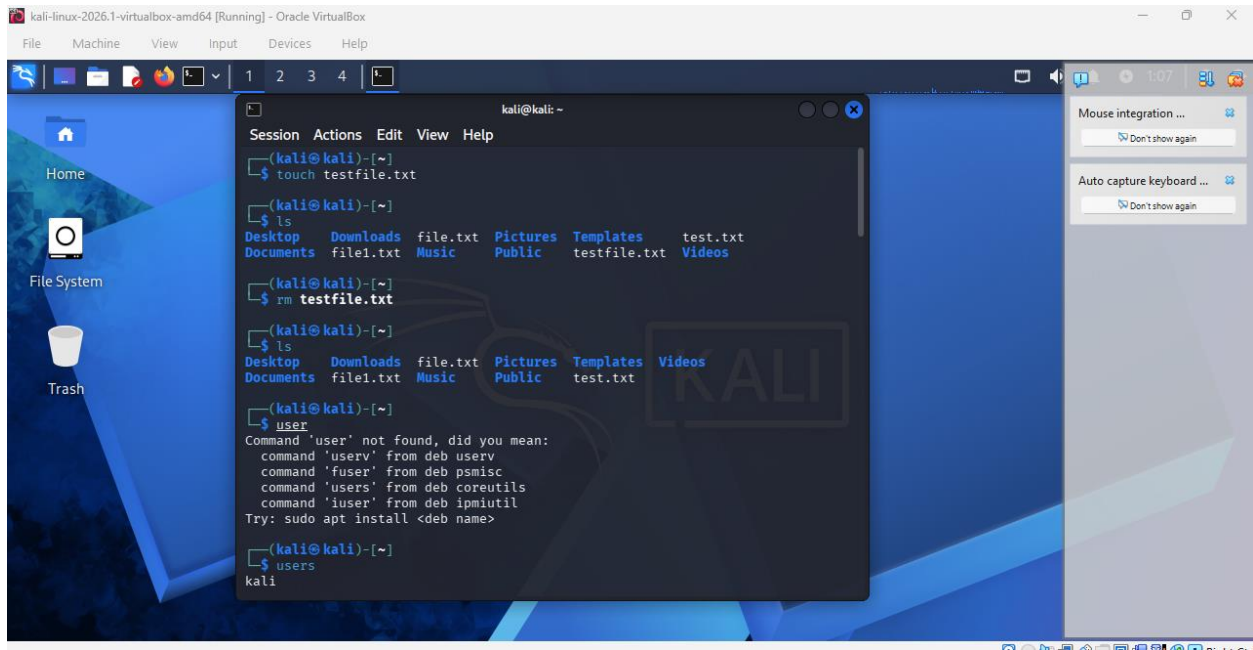


The screenshot shows a Kali Linux desktop environment with a terminal window open. The terminal displays the following commands and output:

```
kali@kali: ~  
$ touch testfile.txt  
$ ls  
Desktop  Downloads  file.txt  Pictures  Templates  test.txt  
Documents file1.txt  Music     Public    testfile.txt Videos  
$ rm testfile.txt  
$ ls  
Desktop  Downloads  file.txt  Pictures  Templates  Videos  
Documents file1.txt  Music     Public    test.txt  
$ user  
Command 'user' not found, did you mean:  
command 'userv' from deb userv  
command 'fuser' from deb psmisc  
command 'users' from deb coreutils  
command 'iuser' from deb ipmiutil  
Try: sudo apt install <deb name>  
$ users  
kali
```

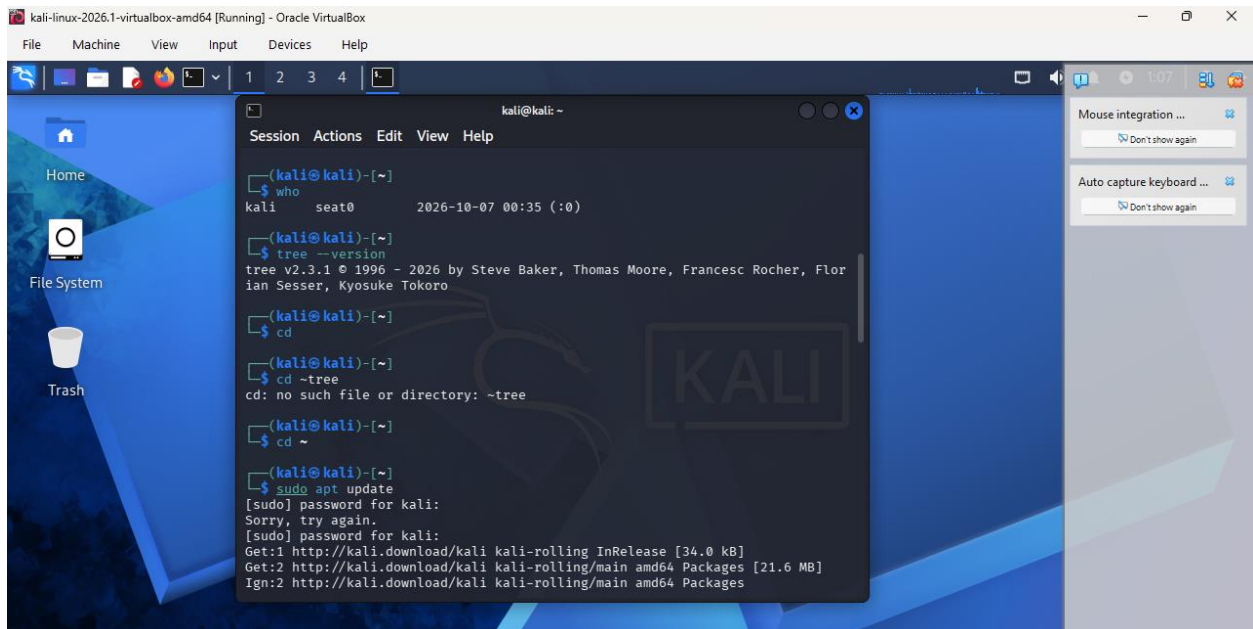

The screenshot shows the same Kali Linux desktop environment with the terminal window displaying the following commands and output:

```
kali@kali: ~  
$ who  
kali    seat0      2026-10-07 00:35 (:0)  
$ tree --version  
tree v2.3.1 © 1996 - 2026 by Steve Baker, Thomas Moore, Francesc Rocher, Florian Sesser, Kyosuke Tokoro  
$ cd  
$ cd ~tree  
cd: no such file or directory: ~tree  
$ cd ~  
$ sudo apt update  
[sudo] password for kali:  
Sorry, try again.  
[sudo] password for kali:  
Get:1 http://kali.download/kali kali-rolling InRelease [34.0 kB]  
Get:2 http://kali.download/kali kali-rolling/main amd64 Packages [21.6 MB]  
Ign:2 http://kali.download/kali kali-rolling/main amd64 Packages
```

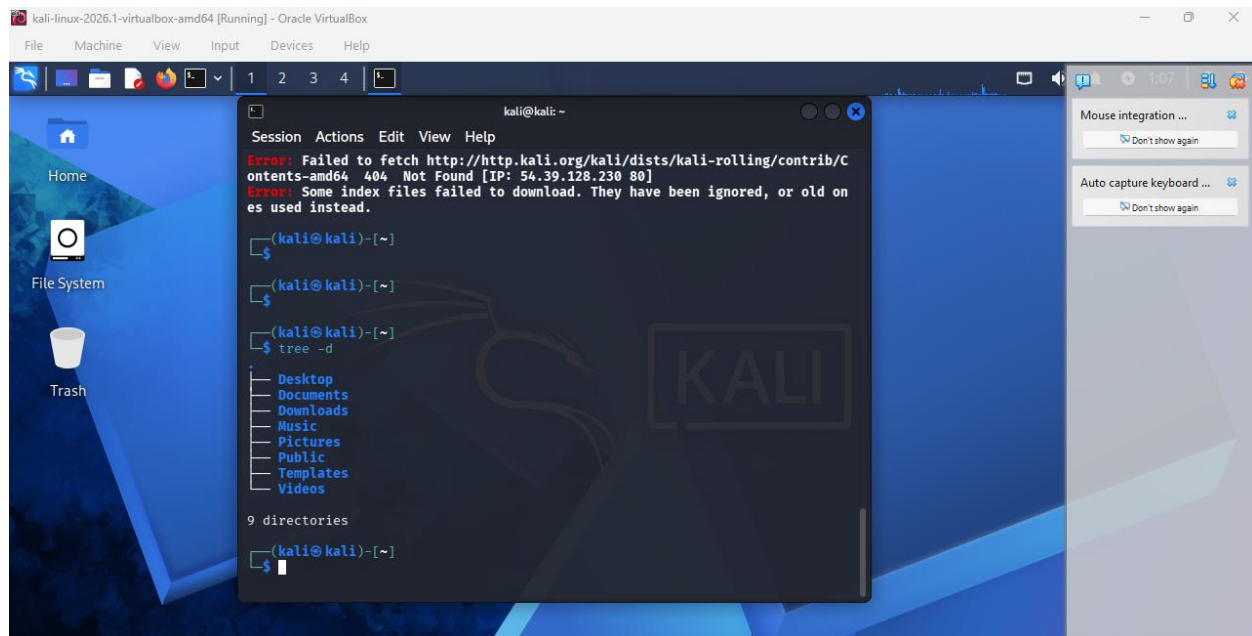

```
(kali@kali)-[~]
```

```
$ tree
```

```
.
├── Desktop
├── Documents
├── Downloads
├── Music
├── Pictures
├── Public
├── Templates
├── Videos
```

7 directories, 0 files

Result:

Thus, the tree command was successfully executed and the directory structure was displayed in a tree-like format.