Experiment 16: Create a Clone of a Virtual Machine and Test It by Loading the Previous Version / Cloned VM


Aim

To create a clone of an existing Virtual Machine using Oracle VM VirtualBox and test the cloned VM by loading and running it independently.

Procedure

1. Open Oracle VM VirtualBox on the host computer.
2. Select the previously created Virtual Machine that needs to be cloned.
3. Ensure that the Virtual Machine is in the Powered Off state.
4. Right-click on the selected Virtual Machine.
5. Choose the Clone option.
6. Enter a new name for the cloned Virtual Machine (e.g., Ubuntu VM Clone).
7. Select the clone type:
    - Full Clone – Creates a completely independent copy of the original VM.
    - Linked Clone – Creates a clone that depends on the original VM.
8. Select Full Clone to create an independent virtual machine.
9. Choose the appropriate MAC address policy.
10. Click Finish to start the cloning process.
11. Wait until the cloning process is completed.
12. The cloned Virtual Machine will appear in the VirtualBox Manager.
13. Select the cloned VM and click Start.
14. Check whether the operating system loads successfully.
15. Verify that the cloned VM works independently of the original VM.

IMPLEMENTATION

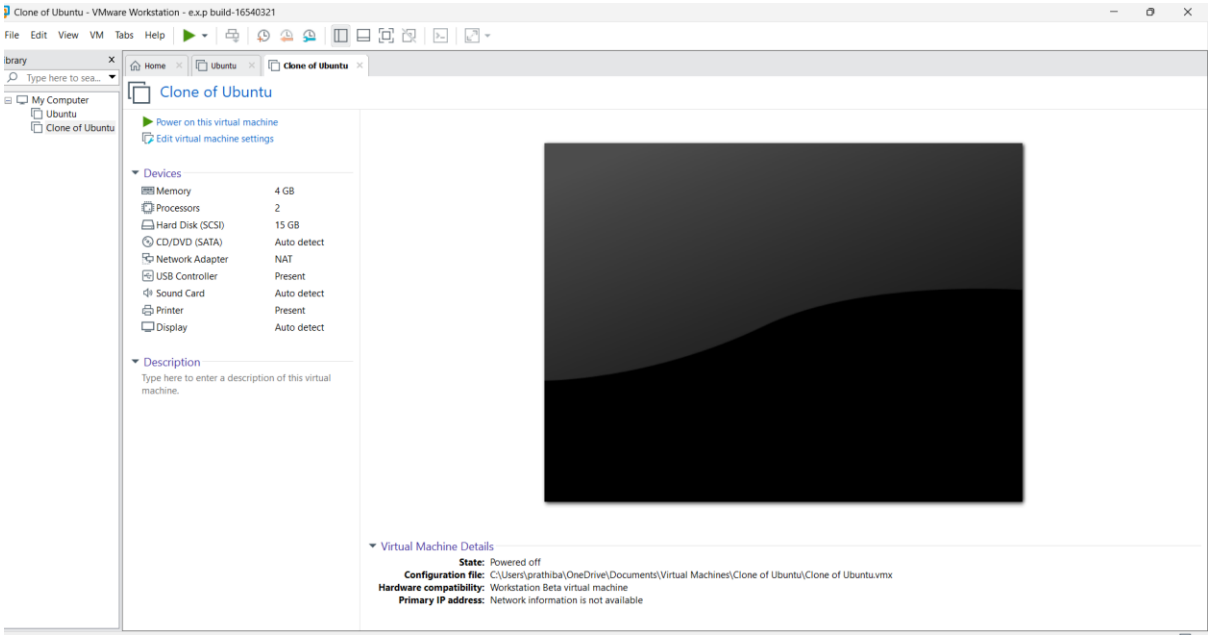

Result

Thus, a clone of the existing Virtual Machine was successfully created using Oracle VM VirtualBox. The cloned VM was started and tested successfully, confirming that the copied virtual machine works independently of the original VM.