



DC – AI – Routing – Switching – Security – Wireless – Automation

ACX 7020 Routers Deepdive

An HPE Juniper Networking Techpost

Dominique Blanchard

2026-03-16

HPE



Contents

1	ACX 7020 Routers Deepdive	2
1.1	High-Level Introduction	2
1.2	Naming convention	2
1.3	SKUs	3
1.4	Environment Standards	4
1.5	ACX7020 Hardware Overview	4
1.6	Software	4
1.7	Oversubscription	5
1.8	ACX7020 Ethernet Ports	5
1.9	Impact of Timing Activation	6
1.10	Port Checker Tool	6
1.11	Supported Port FEC	6
1.12	Serdes Rate	7
1.13	Supported Optics	8
1.14	Internal Description: Block Diagrams	8
1.15	No-FRU System and Redundancy	9
1.16	Routing Engine	9
1.17	Fans	10
1.18	AC and DC Power	10
1.19	Timing Support	11
1.20	MDB Profile support	11
1.21	Conclusion	12
1.22	Useful links	12
1.23	Glossary	13
1.24	Acknowledgments	13

1 ACX 7020 Routers Deepdive

Dominique Blanchard - 03/16/2026

1.1 High-Level Introduction

The ACX7020 is a HPE Juniper Networking product powered by Broadcom Qumran Q2N [BCM88295] and running Junos EVO modular software architecture. It offers a mix of 16 ports 1/10GbE and 4 ports 1/10/25GbE.



This 1RU Ethernet-only router offers 100Gbps bidirectional forwarding capacity and with Class-C Timing support.

It addresses primarily the Cable DAA/UAA use cases, Mobile xHaul Transport market, Converged Metro but can be used in multiple roles as soon as features and scales are meeting the requirements.

ACX7020 is a temperature hardened box supporting (operating) temperature from -40C to +65C and from 5 to 90% non-condensing (at an altitude of 6000 Feet)

Port Speed	Maximum Number of Ports on ACX7020(Details / Total)
25GbE	4
10GbE	16+4
1GbE	16+4

Maximum number of ports supported on ACX7020 Routers

1.2 Naming convention


We have a total of 4 SKUs (Stock Keeping Units) with the following characteristics:

- Ports density: 4x 1/10/25GbE and 16x 1/10GbE.


Port Number 0 to 3 [SFP28 1/10/25GbE]

Port Number 4 to 19 [SFP+ 1/10GbE] - Power: 1+1 AC or DC (PSU) -24VDC to -60V VDC, Typical power 60W - Airflow: S2S (Air Flow Side to Side)

Based on these parameters, the naming logic for the product itself and the SKU is the following.

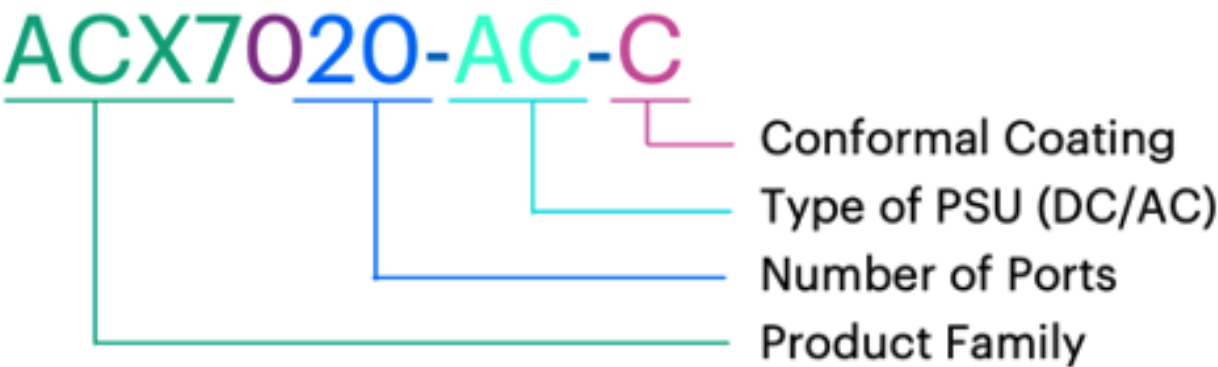

The ACX7020 is only available in Side-to-Side version as illustrated in the figure 3 below.

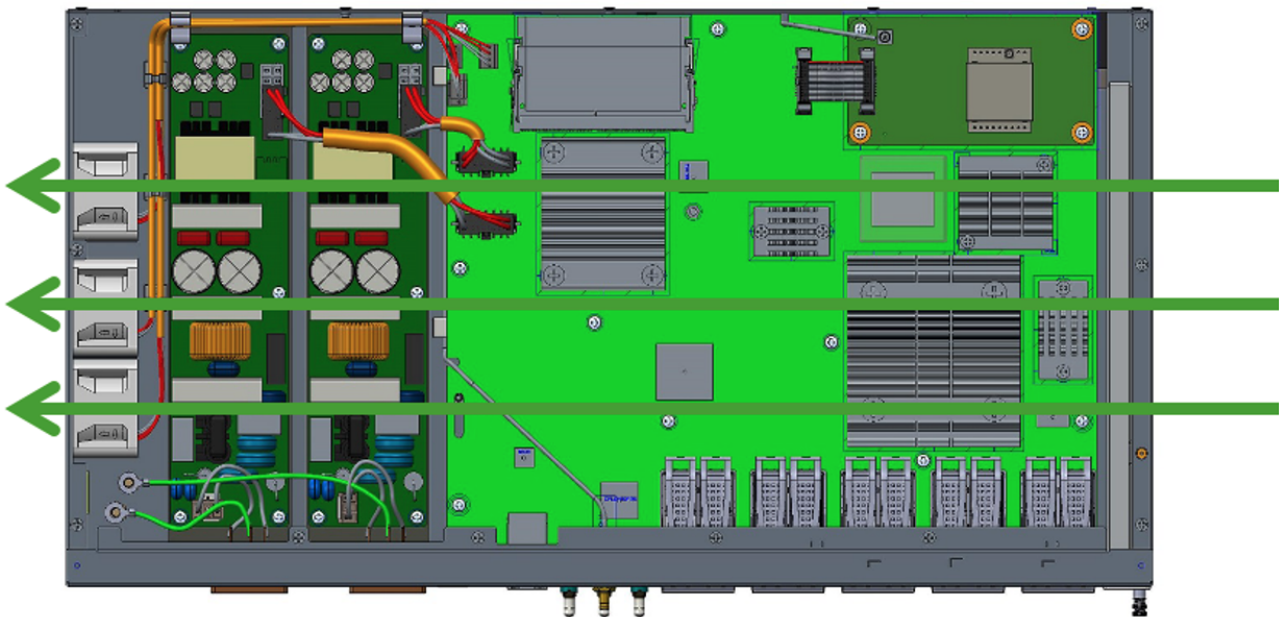

1.3 SKUs

ACX7020 is available with two fixed PSU, AC or DC and with, or without conformal coating. The combinations give us a total of 4 SKUs:

SKU	Description
ACX7020-AC	ACX7020 with PTP (SyncE+Transperent Clock+Boundary Clock),16GB DRAM, redundant AC PSU
ACX7020-DC	ACX7020 with PTP (SyncE+Transperent Clock+Boundary Clock),16GB DRAM, redundant DC PSU feed
ACX7020-AC-C	ACX7020 with PTP (SyncE+Transperent Clock+Boundary Clock),16GB DRAM, redundant AC PSU, Conformal coating

SKU	Description
ACX7020-DC-C	ACX7020 with PTP (SyncE+Transparent Clock+Boundary Clock), 16GB DRAM, redundant DC PSU feed, Conformal coating

A few additional/optional SKUs:

Optional SKU	Description
ACX7020-FLTR	ACX7020 Air Filter, Spare
ACX702X-RMK-21	ACX7020 / ACX7024 ETSI 21inch Rack Mount Kit, Spare
ACX702X-RMK-23	ACX7020 / ACX7024 23inch Rack Mount Kit, Spare

1.4 Environment Standards

ACX7020 is the temperature hardened router (-40C to 70C at 1,000 ft) and is compliant to the following environmental standards

- IEEE1613:2013 Smart Grid – Power Substations
- IEC 61850-3:2013 Telecom equipment in Power station and substation environments
- GR 63 issue 5
- GR 3108- Class 2 Edition 3 (65C at 6,000 ft)
- GR 3108- Class 2 Edition 3 (70C at 1,000 ft)

We invite you to take a look at the TechLibrary hardware guide for more details: <https://www.juniper.net/documentation/us/en/hardware/acx7020/index.html>

1.5 ACX7020 Hardware Overview

```

1 regress@rtme-acx7020-01> show chassis hardware
2 Hardware inventory:
3 Item Version Part number Serial number Description
4 Chassis HU3525AX0057 JNP7020_AC [ACX7020_AC]
5 PSM 0 BUILTIN BUILTIN JPSU-220W-AC
6 PSM 1 BUILTIN BUILTIN JPSU-220W-AC
7 Routing Engine 0 REV 11 650-179212 HU3525AX0057 RE-ACX-7020
8 CB 0 BUILTIN BUILTIN ACX7020 Control Board
9 FPC 0 BUILTIN BUILTIN ACX7020-FPC
10 PIC 0 BUILTIN BUILTIN MRATE- 4xSFP28 + 16xSFP+
11 Fan Tray 0 BUILTIN BUILTIN ACX7020 Fan, Right to Left Airflow - AFO

```

1.6 Software

The minimum Junos release required to operate ACX7020 is 24.4R2-EVO.

Image is named as: junos-evo-install-acx-f-x86-64-EVO

```
1 regress@rtme-acx7020-01> show version
2 Hostname: rtme-acx7020-01
3 Model: ACX7020_AC
4 Junos: 25.2R1.8-EVO
5 Yocto: 4.0.22
6 Linux Kernel: 5.15.164-10.22.33.18-yocto-standard-juniper-16986-g445edc512bb4
7 JUNOS-EVO OS 64-bit [junos-evo-install-acx-f-x86-64-25.2R1.8-EVO]
```


Both ACX7020 using “acx-f” images (f for fixed). “acx-m” will be used for modular systems.

1.7 Oversubscription

ACX7020 is an oversubscribed router. Total revenue port speed available ports is 260Gbps (250 is PTP in use). Broadcom Q2N chip interface bandwidth limit is 100Gbps.

1.8 ACX7020 Ethernet Ports

ACX7020 Front Panel view and Port Numbering

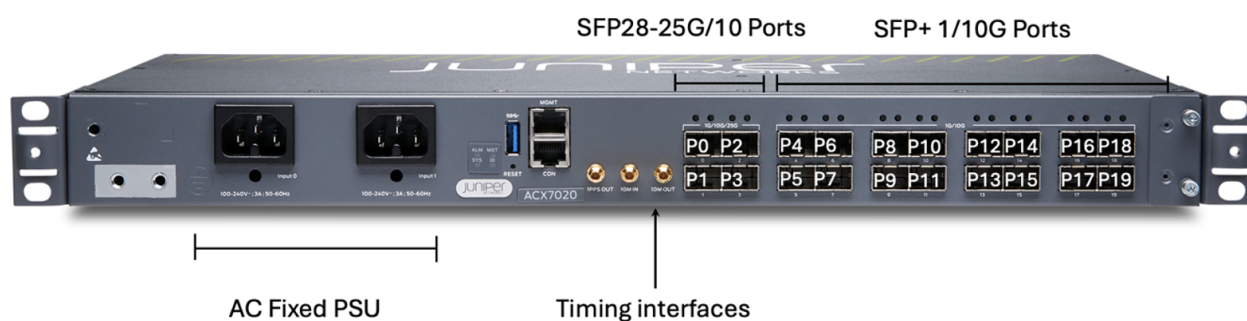

Port Number	Optic Type	Supported Port Speed	Default Port Speed
0 to 3	SFP28	4x25,4x10G,4x1Gbbps	25Gbps
4 to 19	SFP/SFP+	16x10G,4x1Gbps	10Gbps

Check the port capabilities with CLI “show chassis pic fpc-slot 0 pic-slot 0”

```

1 regress@rtme-acx7020-01> show chassis pic fpc-slot 0 pic-slot 0
2 FPC slot 0, PIC slot 0 information:
3   Type MRATE- 4xSFP28 + 16xSFP+
4   State Online
5   PIC version 00.00
6   Uptime 3 hours, 33 seconds
7
8 Port speed information:
9
10  Port PFE Capable Port Speeds
11  0 0 1x25G 1x10G 1x1G
12  1 0 1x25G 1x10G 1x1G
13  2 0 1x25G 1x10G 1x1G
14  3 0 1x25G 1x10G 1x1G
15  4 0 1x10G 1x1G
16  5 0 1x10G 1x1G
17  6 0 1x10G 1x1G
18  7 0 1x10G 1x1G
19  8 0 1x10G 1x1G
20  9 0 1x10G 1x1G
21 10 0 1x10G 1x1G
22 11 0 1x10G 1x1G
23 12 0 1x10G 1x1G

```

```

24 13 0 1x10G 1x1G
25 14 0 1x10G 1x1G
26 15 0 1x10G 1x1G
27 16 0 1x10G 1x1G
28 17 0 1x10G 1x1G
29 18 0 1x10G 1x1G
30 19 0 1x10G 1x1G
31 20 NA 1x10G

```

1.9 Impact of Timing Activation


Once PTP is enabled with below command, port 19 will not be available to use.

```

1 regress@rtme-acx7020-01# set chassis fpc 0 pic 0 ptp-mode ## PTP mode enabled
2
3 [edit]
4 regress@rtme-acx7020-01# commit
5 commit complete
6
7 [edit]
8 regress@rtme-acx7020-01# run show interfaces terse et-0/0/19
9 error: device et-0/0/19 not found


```

Once PTP config is committed, HW FPGA on port et-0/0/19 will be used in PTP circuitry.

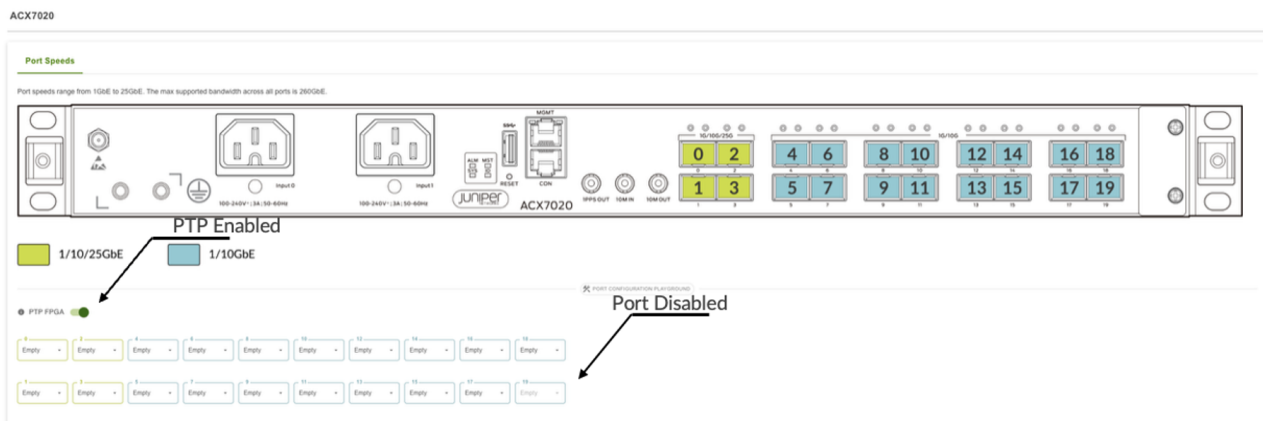

1.10 Port Checker Tool

The port checker (<https://apps.juniper.net/port-checker/acx7020/>) is a very handy tool allowing you to test the different port speed combination and identify the potential restrictions like PTP/Oversubscription.

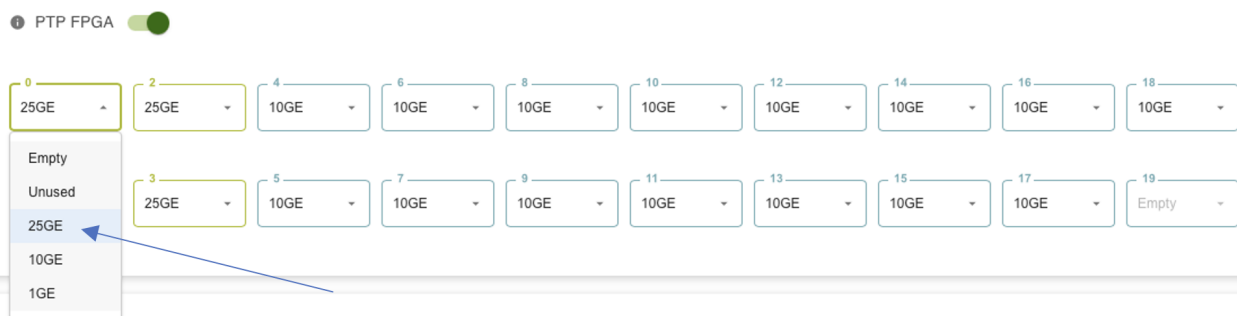

1.11 Supported Port FEC

Port Speed	Supported FEC
25GE	FEC74, FEC91, none
10GE	FEC74, FEC91, none

1.12 Serdes Rate

SerDes or serializer/deserializer is an integrated circuit (IC or chip) transceiver that converts parallel data to serial data and vice-versa. In the chart below, we display the SerDes rate for respective port speed.

Keep in mind that port speed and SerDes rates are different, the second category is Broadcom internal rates: 10.3125Gbps, 25.7825Gbps, 1.25Gbps...

SFP Ports 0 to 19	Q2 SerDes (Gbps)
25GbE	25.78125 (x1)
10GbE	10.3125 (x1)
1GbE	1.25 (x1)

```

1 [vrf:none] regress@rtme-acx7020-01:~# cli-pfe
2 regress@rtme-acx7020-01:pfe> show picd config
3
4 pic_info_table :
5     default config config config computed
6 pic_or_port speed pic_mode port_speed valid speed supported_speeds hidden_speeds
7 -----
8 pic-0/0 - - - yes -
9 port-0/0/0 1x10G - - - 1x10G [ 1x25G 1x10G 1x1G ] [ ]
10 port-0/0/1 1x10G - - - 1x10G [ 1x25G 1x10G 1x1G ] [ ]
11 port-0/0/2 1x10G - - - 1x10G [ 1x25G 1x10G 1x1G ] [ ]
12 port-0/0/3 1x10G - - - 1x10G [ 1x25G 1x10G 1x1G ] [ ]
13 port-0/0/4 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
14 port-0/0/5 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
15 port-0/0/6 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
16 port-0/0/7 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
17 port-0/0/8 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
18 port-0/0/9 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
19 port-0/0/10 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
20 port-0/0/11 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
21 port-0/0/12 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
22 port-0/0/13 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
23 port-0/0/14 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
24 port-0/0/15 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
25 port-0/0/16 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
26 port-0/0/17 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
27 port-0/0/18 1x10G - - - 1x10G [ 1x10G 1x1G ] [ ]
28 port-0/0/19 1x10G - - - 0x0 [ 1x10G 1x1G ] [ ]
29 port-0/0/20 0x0 - - - 1x10G [ 1x10G ] [ ]
30 usr_config :
31     pic_usr_config :
32         pic_name : pic-0/0
33         pic_mode_valid : false
34         pic_mode :
35         num_ports_valid : false
36         num_ports : 0
37         config_invalid : false
38         ptp_mode : true
39
40 regress@rtme-acx7020-01:pfe>

```

1.13 Supported Optics

A list of all supported optical modules is available in the following site.


<https://apps.juniper.net/hct/product/ACX7020/hwspecs>

1.14 Internal Description: Block Diagrams

ACX7020 is internally composed of multiple parts. We can summarize them as:

- A Broadcom Qumran 2n PFE (BCM88295) with 16GB of GDDR6
- An Intel x6414 CPU (4 cores) with 16GB DDR4 memory and SSD storage
- An internal controllers for I2C (inter-integrated circuit), fan control, ...
- A PTP FPGA
- A TPM 2.0 module (Trusted Platform Module)

The ACX7020 is a “System on the Chip” (SoC). That means it is based on a single PFE where all parts involved in the forwarding tasks are directly connected. This Qumran PFE is a deep-buffer ASIC with hybrid packet memory (internal and external). The external buffer is present on the side of the package: 16GB of GDDR6 memory.

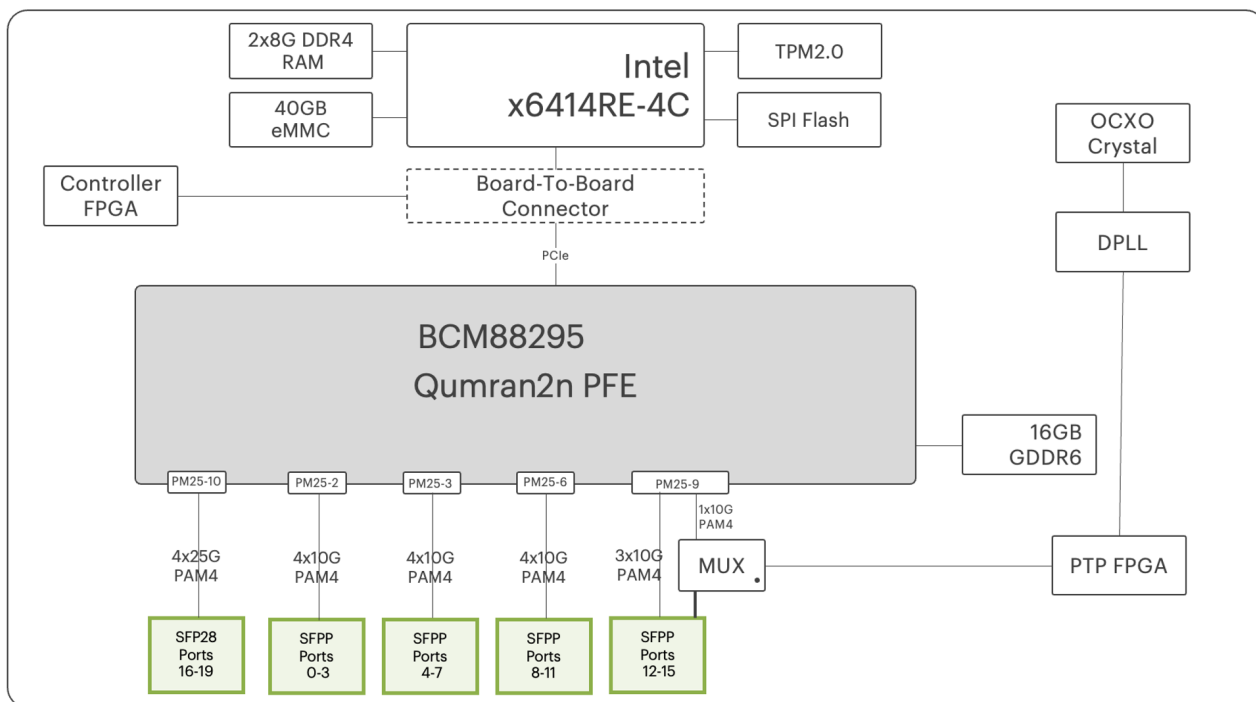

In this diagram, we are presenting the SerDes at 25G (instead of 25.7875Gbps) and 10G (instead of 10.3125Gbps) for sake of simplicity.

We notice the hardware shared for port 19 and PTP FPGA via mux section. At a single point in time, only one can be used.

We invite you to check the articles to learn more about the ASIC selection process and many more details on the packet forwarding ASIC.

- Building the ACX7000 Series: the PFE: <https://juniper.github.io/techposts/building-the-acx7000-series-the-pfe/article>

- Let's Talk About VOQ and DNX Pipeline: <https://juniper.github.io/techposts/voq-and-dnx-pipeline/article>


The different components can be monitored via CLI.

```

1 regress@rtme-acx7020-01:pfe> show system info
2
3                               DATE + TIME
4
5   Date : Thu Mar 05 08:54:34 2026
6   System uptime : 05:33:01
7   PFE uptime : 05:32:10
8
9
10                              CPU
11
12   Model name : Intel Atom(R) x6414RE Processor @ 1.50GHz
13   Nodes : 1
14   Cores : 4
15   Hyper threads : 4
16   Pairs : 0 1 2 3
17
18
19                              MEMORY
20
21   Total : 14.76GB
22   Free : 6.97GB
23   Shared : 209.35MB
24
25
26                              PROCESSES
27
28   -----
29   PID NAME MEMORY %CPU UPTIME THREADS PG-FLT
30
31                               TOTAL 80-100 60-80 40-60
32   -----
33   7128 aft-sysinfo 82.89MB 2.4 05:32:08 6 0 0 0 34032
34   7856 evoaft-jvisiond 115.75MB 0.0 05:32:01 7 0 0 0 37186
35   6979 imgd 5.20MB 0.0 05:32:10 2 0 0 0 20412
36   7435 mgd 79.41MB 0.0 05:32:06 1 0 0 0 28159
37   9234 mgd 17.13MB 0.0 05:31:42 1 0 0 0 8755
38   10818 mgd 83.00MB 0.0 05:31:18 1 0 0 0 7079
39   19842 mgd 14.39MB 0.0 02:12:39 1 0 0 0 523
40   9222 mgd-api 73.82MB 0.0 05:31:42 4 0 0 0 33580
41   7932 packetio 259.77MB 0.0 05:32:01 39 0 0 0 23783
42   9886 packetio-dds-ag 73.27MB 0.0 05:31:35 6 0 0 0 33458

```

1.15 No-FRU System and Redundancy

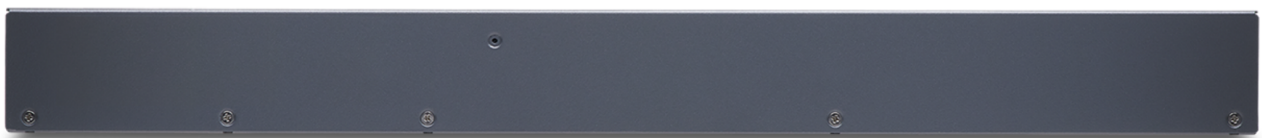

In ACX7020 systems, aside from optics, there is no field replaceable Units, and the redundant parts are the power supply modules and the fans.

1.16 Routing Engine

ACX7020 have a single routing engine. That means we don't support any kind of High-Availability (HA) option at the RE level. Also, In-Service System Upgrade (ISSU) is not supported, nor planned.

1.17 Fans

The chassis is equipped with 3 fixed side-to-side fans. They can NOT be replaced, however the cooling redundancy is 2+1. So, the system will stay operational with one fan failure case. A part failing eventually implies a router replacement to restore the 2+1 redundancy.

We verify the fan operation with:

```
1 regress@rtme-acx7020-01> show chassis fan
2   Item Status % RPM Measurement
3   Fan Tray 0 Fan 1 OK 33% 8000 RPM
4   Fan Tray 0 Fan 2 OK 32% 7900 RPM
5   Fan Tray 0 Fan 3 OK 32% 7900 RPM
6
7 regress@rtme-acx7020-01>
```

Also, we can check the temperature of various components and also the fan operating speeds with:

```
1 regress@rtme-acx7020-01> show chassis environment
2 Class Item Status Measurement
3 Temp FPC 0 Sensor Q2N Max Reading OK 42 degrees C / 107 degrees F
4   Routing Engine 0 CPU Temperature OK 44 degrees C / 111 degrees F
5   Routing Engine 0 RE temperature OK 36 degrees C / 96 degrees F
6   Routing Engine 0 FPC temperature OK 36 degrees C / 96 degrees F
7   Routing Engine 0 Outlet temperature OK 36 degrees C / 96 degrees F
8   Routing Engine 0 Inlet temperature OK 27 degrees C / 80 degrees F
9   Routing Engine 0 Q2N thermal Diode OK 31 degrees C / 87 degrees F
10  Routing Engine 0 DIMM0 Temperature OK 33 degrees C / 91 degrees F
11  Routing Engine 0 DIMM1 Temperature OK 34 degrees C / 93 degrees F
12  Routing Engine 0 Temp Hotswap Controller OK 34 degrees C / 93 degrees F
13  Routing Engine 0 MP2940c Temperature OK 38 degrees C / 100 degrees F
14 Fan Fan Tray 0 Fan 1 OK 8000 RPM
15   Fan Tray 0 Fan 2 OK 7900 RPM
16   Fan Tray 0 Fan 3 OK 7900 RPM
17
18 regress@rtme-acx7020-01>
```

1.18 AC and DC Power

You notice two PSM on both ends of the router, they can be AC or DC with single PSU or dual. With a 1+1 PSM configuration, we have power redundancy: if one fails, the system will raise an alarm but will stay fully operational.

```
1 regress@rtme-acx7020-01> show chassis power detail
2 Chassis Power Voltage(V) Power(W)
3
4 Total Input Power 49
5   PSM 0
6     State: Online
7     Capacity 220 W (maximum 220 W)
8   PSM 1
9     State: Online
10    Capacity 220 W (maximum 220 W)
11
12 System:
13   Zone 0:
14     Capacity: 440 W (maximum 440 W)
15     Actual usage: 50 W
16   Total system capacity: 440 W (maximum 440 W)
```

Note: it is possible to deactivate half of the ports and shut down the associated PFE core. This power-saving mode can reduce the consumption for low port density deployments:

<https://www.juniper.net/documentation/us/en/software/junos/chassis/topics/task/configuring-power-saving-mode.html>

Typically configured ports “unused” (turning down SerDes) can save up to 5W on 50W.

1.19 Timing Support

The ACX7020 supports:

- Synchronous Ethernet with enhanced ESMC
- PTP G.8275.1 / G.8275.1enh / G.8275.2 Profile
- Meets G.8273.2 T-BC Class C Performance
- IEEE 1588 transparent clock along with G.8273.3 T-TC

Note:

- Sync-E and PTP Hybrid not supported on 1G ports
- Port 19 is disabled when you activate PTP

1.20 MDB Profile support

If you are not familiar with the concept of MDB / Hardware profiles, please check this link first:

<https://juniper.github.io/techposts/acx7000-hardware-profiles/article>

Two MDB Profiles are supported: lean-edge (default) and cloud-metro. A reload is required to change the profile configuration.

Default mode: Lean edge profile.

```

1 [vrf:none] regress@rtme-acx7020-01:~# cli-pfe
2 regress@rtme-acx7020-01:pfe> show evo-pfemdb mdb-info
3 User Config : Profile:lean-edge Kaps:1
4 Max possible mac limit for this profile:85000
5
6 TableName Type Capacity EntrySize
7 =====
8 TCAM 0 0
9 KAPS1 KAPS (LPM) 1572864 0
10 KAPS2 KAPS (LPM) 65536 0
11 ISEM1 Exact Match 65536 30
12 ISEM2 Exact Match 81920 30
13 ISEM3 Exact Match 65536 30
14 INLIF1 Direct Access 65536 60
15 INLIF2 Direct Access 32768 60
16 INLIF3 Direct Access 32768 60
17 IVSI Direct Access 21846 90
18 LEM Exact Match 393216 30
19 IOEM1 Exact Match 49152 30
20 IOEM2 Exact Match 65536 30
21 MAP Direct Access 0 0
22 FEC1 Direct Access 32768 150
23 FEC2 Direct Access 26215 150
24 FEC3 Direct Access 32768 150
25 PPMC Exact Match 98304 30
26 GLEM1 Exact Match 65536 30
27 GLEM2 Exact Match 65536 30
28 EEDB1 EEDB 32768 0
29 EEDB2 EEDB 32768 0
30 EEDB3 EEDB 32768 0
31 EEDB4 EEDB 32768 0
32 EEDB5 EEDB 16384 0
33 EEDB6 EEDB 16384 0
34 EEDB7 EEDB 16384 0
35 EEDB8 EEDB 16384 0
36 EOEM1 Exact Match 32768 30
37 EOEM2 Exact Match 49152 30
38 ESEM Exact Match 65536 30
39 EVSI Direct Access 32768 30
40 SEXEM1 Exact Match 65536 30
41 SEXEM2 Exact Match 0 0
42 SEXEM3 Exact Match 0 0
43 LEXEM Exact Match 131072 30

```

```
44 RMEP_EM Exact Match 65536 30
```

Alternative option: cloud-metro profile

```
1 [vrf:none] regress@rtme-acx7020-01:~# cli-pfe
2 regress@rtme-acx7020-01:pfe> show evo-pfemdb mdb-info
3 User Config : Profile:cloud-metro Kaps:1
4 Max possible mac limit for this profile:270000
5
6 TableName Type Capacity EntrySize
7 =====
8 TCAM 0 0
9 KAPS1 KAPS (LPM) 917504 0
10 KAPS2 KAPS (LPM) 65536 0
11 ISEM1 Exact Match 65536 30
12 ISEM2 Exact Match 49152 30
13 ISEM3 Exact Match 49152 30
14 INLIF1 Direct Access 65536 60
15 INLIF2 Direct Access 65536 60
16 INLIF3 Direct Access 65536 60
17 IVSI Direct Access 21846 90
18 LEM Exact Match 1245184 30
19 IOEM1 Exact Match 49152 30
20 IOEM2 Exact Match 49152 30
21 MAP Direct Access 0 0
22 FEC1 Direct Access 26215 150
23 FEC2 Direct Access 13108 150
24 FEC3 Direct Access 26215 150
25 PPMC Exact Match 65536 30
26 GLEM1 Exact Match 65536 30
27 GLEM2 Exact Match 65536 30
28 EEDB1 EEDB 32768 0
29 EEDB2 EEDB 32768 0
30 EEDB3 EEDB 32768 0
31 EEDB4 EEDB 32768 0
32 EEDB5 EEDB 16384 0
33 EEDB6 EEDB 16384 0
34 EEDB7 EEDB 0 0
35 EEDB8 EEDB 0 0
36 EOEM1 Exact Match 32768 30
37 EOEM2 Exact Match 32768 30
38 ESEM Exact Match 49152 30
39 EVSI Direct Access 16384 30
40 SEXEM1 Exact Match 65536 30
41 SEXEM2 Exact Match 0 0
42 SEXEM3 Exact Match 0 0
43 LEXEM Exact Match 131072 30
44 RMEP_EM Exact Match 65536 30
```

1.21 Conclusion

The ACX7020 router is 1-RU, 100Gbps platform, ideally positioned for small cell site and it can be with 1G/10G/25aggregation. In the next articles, we will continue the description of the ACX7000 portfolio and will dig deeper into the specific features of these products.

1.22 Useful links

- ACX7020 Data sheet: <https://www.juniper.net/us/en/products/routers/acx-series/acx7000-family-cloud-metro-routers/acx7000-line/acx7020-cloud-metro-routers-datasheet.html>
- Building the ACX7100 Series: the PFE: <https://juniper.github.io/techposts/building-the-acx7000-series-the-pfe/article>
- Let's talk about VOQ and DNX Pipeline: <https://juniper.github.io/techposts/voq-and-dnx-pipeline/article>
- Hardware Guide: <https://www.juniper.net/documentation/us/en/hardware/acx7020/index.html>
- Hardware Compatibility Tool: <https://apps.juniper.net/hct/product/ACX7020/hwspecs>

1.23 Glossary

- FRS: First Revenue Ship
- I2C: Inter-Integrated Circuit
- MDB: Modular DataBase
- PFE: Packet Forwarding Engine
- PSM : Power Supply Module
- PTP: Precision Time Protocol
- S2S: Side to Side
- SKU: Stock Keeping Unit
- TPM : Trusted Platform Module
- PSU: Power Supply Unit

1.24 Acknowledgments

Thanks a lot to Nicolas for the document review.



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

