



DC – AI – Routing – Switching – Security – Wireless – Automation

ACX7000 ERSPAN and Port Mirroring

An HPE Juniper Networking Techpost

Pankaj Kumar

2023-05-30

HPE



Contents

1	ACX7000 ERSPAN and Port Mirroring	3
1.1	Analyzer	3
1.1.1	Sample Analyzer Configuration	3
1.2	Local Port Mirroring	3
1.2.1	Topology	4
1.2.2	Configuration example:	4
1.3	ERSPAN Remote mirroring	5
1.3.1	Remote Mirroring Topology	5
1.3.2	Analyser Configuration	6
1.3.3	Basic L2 circuit configuration	6
1.3.4	Traffic capture analysis	7
1.4	Useful links	8
1.5	Glossary	8
1.6	Acknowledgments	8

List of Figures

1	Topology Port Mirroring	4
2	Traffic analyzer	5
3	Topology ERSPAN	6
4	Packet capture ERSPAN	7

1 ACX7000 ERSPAN and Port Mirroring

Pankaj Kumar - 05/30/2023

Traffic mirroring is a useful method for debugging traffic patterns. The ACX7000 family of products supports both local port mirroring and ERSPAN. This article describes how to utilize these functionalities.

1.1 Analyzer

Local Port or remote mirroring are implemented via a software component we call “analyzer”. Under this forwarding-options analyzer configuration statement, we will define certain parameters like:

- Input: the traffic collection point
- Output: where the captured traffic will be redirected
- Ingress/Egress: the direction of the traffic we want to capture

1.1.1 Sample Analyzer Configuration

```
1 root@rtme-acx-48l-08# show forwarding-options
2 analyzer {
3     A0 {
4         input { ### Analyzer Input
5             ingress { ### Traffic Direction [ingress or egress]
6                 interface et-0/0/4.0; ### Traffic collection point
7             }
8         }
9         output { ### Analyzer Output
10            ip-address 120.20.20.2; ### or interface, send the monitor traffic various options
11        }
12    }
13 }
```

1.2 Local Port Mirroring

Port mirroring is supported on ACX7K family products. It allows for the complete ingress/egress traffic of an interface to be mirrored to another local port on the device.

1.2.1 Topology

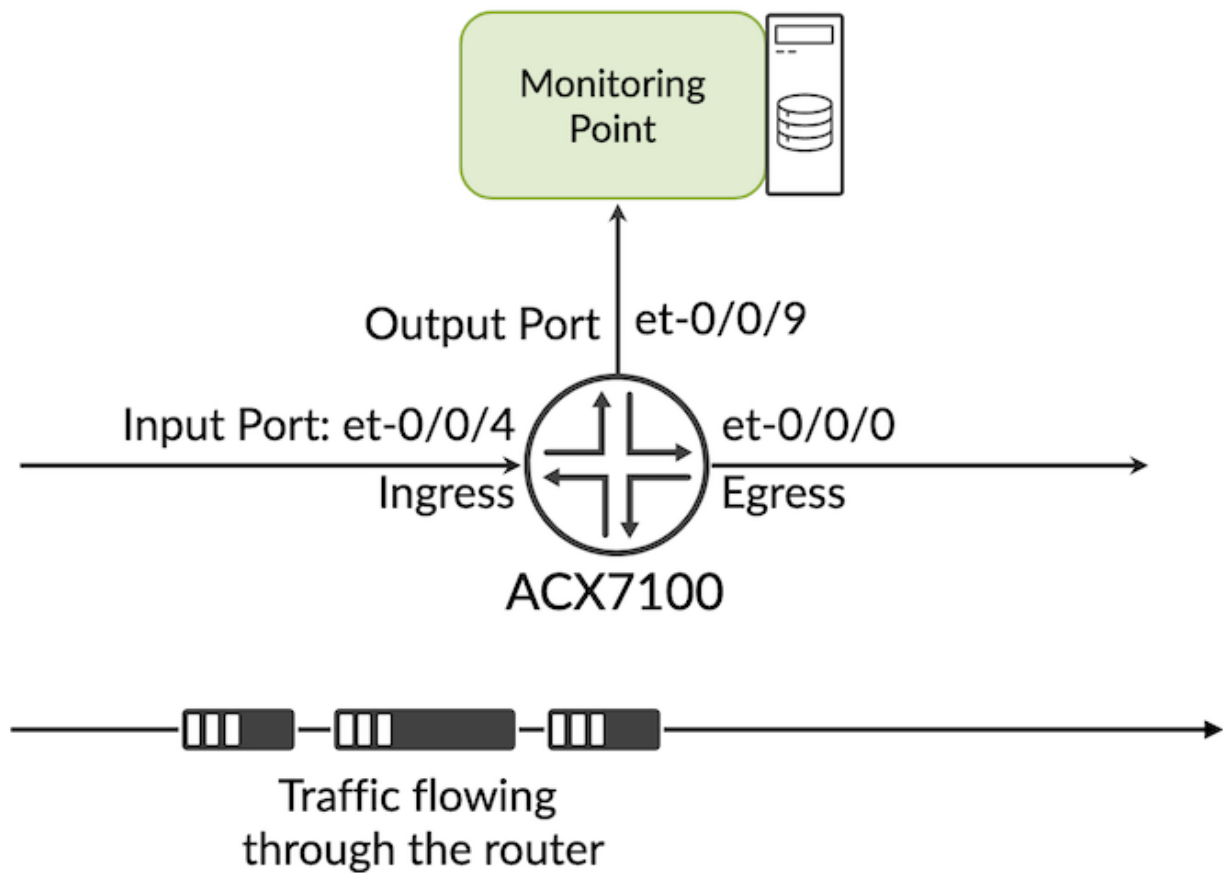


Figure 1: Topology Port Mirroring

1.2.2 Configuration example:

```

1 root@rtme-acx-48l-08# show forwarding-options
2 analyzer {
3     A0 {
4         input {
5             ingress {
6                 interface et-0/0/4.0;
7             }
8         }
9         output {
10            interface et-0/0/9.0;
11        }
12    }
13 }
14
15 root@rtme-acx-48l-08# show interfaces et-0/0/9
16 unit 0;
17
18 root@rtme-acx-48l-08# show vlans
19 v-10 {
20     vlan-id 10;
21     interface et-0/0/4.0;
22     interface et-0/0/0.0;
23 }
24 root@rtme-acx-48l-08# show interfaces et-0/0/0
25 flexible-vlan-tagging;
26 encapsulation flexible-ethernet-services;
27 unit 0 {
28     encapsulation vlan-bridge;
29     vlan-id 10;
30 }

```

```

31
32 root@rtme-acx-48l-08# show interfaces et-0/0/4
33 flexible-vlan-tagging;
34 encapsulation flexible-ethernet-services;
35 unit 0 {
36     encapsulation vlan-bridge;
37     vlan-id 10;
38 }

```

11884	2.376600030	1.1.1.1	2.2.2.2	IPv4	500 any host internal protocol (61)
> Frame 11884: 500 bytes on wire (4000 bits), 500 bytes captured (4000 bits) on interface unknown, id 0 > Ethernet II, Src: 00:00:00_00:00:22 (00:00:00:00:00:22), Dst: 00:00:00_00:00:11 (00:00:00:00:00:11) > 802.1Q Virtual LAN, PRI: 0, DEI: 0, ID: 10 > Internet Protocol Version 4, Src: 1.1.1.1, Dst: 2.2.2.2 > Data (458 bytes)					

Incoming traffic on et-0/0/4 is captured on et-0/0/9

Figure 2: Traffic analyzer

1.3 ERSPAN Remote mirroring

ERSPAN (Encapsulated Remote Port ANalyzer) is basically remote mirroring. This feature allows the capture of packets anywhere across a routed network. It mirrors traffic on one or more “source” ports and delivers the packets to a “destination” port on remote end, via an ERSPAN tunnel.

ERSPAN encapsulates mirrored packets using tunnelling with IP delivery. After a captured packet has been encapsulated, it is forwarded throughout the network across a special Layer 3 tunnel. The data section contains the original mirrored packet.

In the following example, ERSPAN is demonstrated with L2Circuit. However, users can choose to utilize alternative options like EVPN-MPLS, EVPN-VPWS, VPLS, or L2VPN.

1.3.1 Remote Mirroring Topology

Here, we present a straightforward example of the L2Circuit operating between PE1 and PE2, with traffic flowing through it. Our goal is to capture the incoming traffic to the L2Circuit on the ACX7100 device and direct this captured traffic to a Tester connected over the Layer 3 routed network.

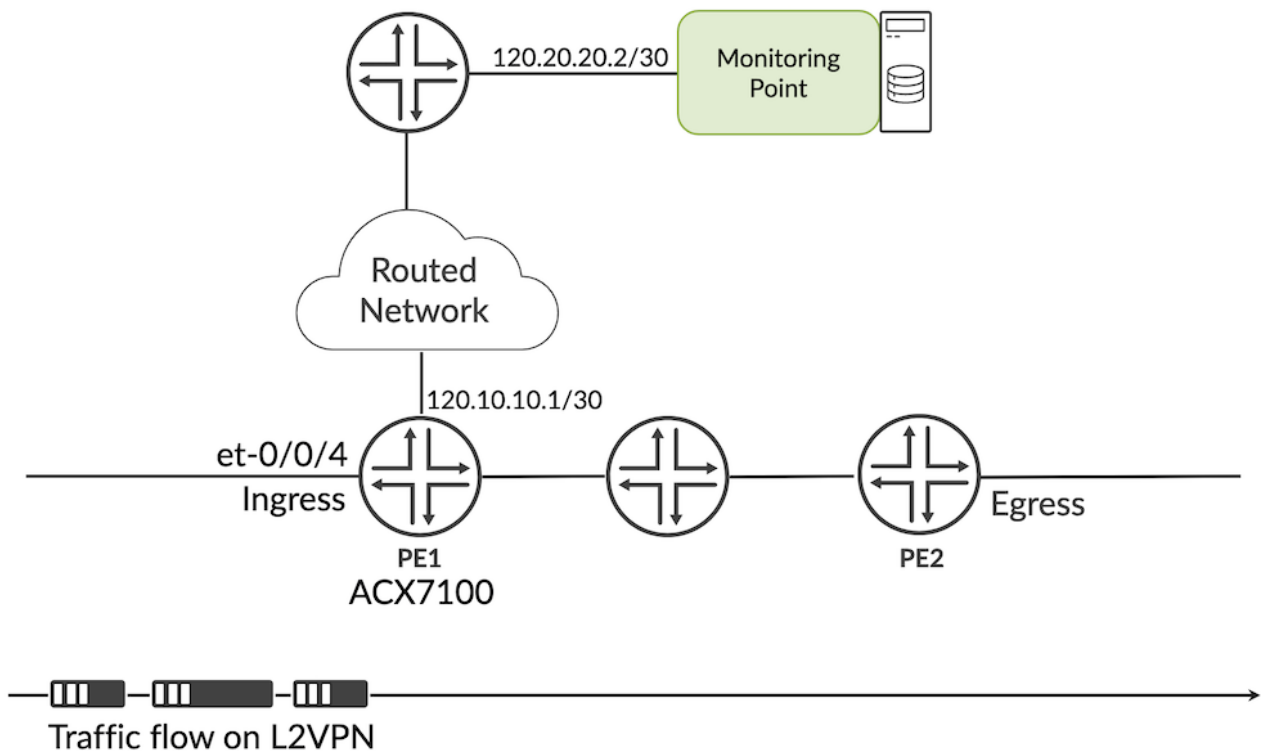


Figure 3: Topology ERSPAN

1.3.2 Analyser Configuration

```

1 root@rtme-acx-48l-08# show forwarding-options
2 analyzer {
3   A0 {
4     input { ### Analyzer Input
5       ingress { ### Traffic Direction [ingress or egress]
6         interface et-0/0/4.0; ### Traffic collection point
7       }
8     }
9     output { ### Analyzer Output
10      ip-address 120.20.20.2; ### send the monitored traffic to this IP destination
11    }
12  }
13 }

```

1.3.3 Basic L2 circuit configuration

```

1 root@rtme-acx-48l-08# show interfaces et-0/0/4
2 encapsulation ethernet-ccc;
3 unit 0 {
4   family ccc;
5 }
6
7 root@rtme-acx-48l-08# show protocols l2circuit
8 neighbor 33.33.33.33 {
9   interface et-0/0/4.0 {
10     virtual-circuit-id 1;
11   }
12 }

```

L2Circuit connections:

```

1 root@rtme-acx-48l-08# run show l2circuit connections
2
3 <SNIP>

```

```

4
5 Neighbor: 33.33.33.33
6   Interface Type St Time last up # Up trans
7   et-0/0/4.0(vc 1) rmt Up Feb 27 20:07:19 2023 1
8   Remote PE: 33.33.33.33, Negotiated control-word: Yes (Null)
9   Incoming label: 604, Outgoing label: 16
10  Negotiated PW status TLV: No
11  Local interface: et-0/0/4.0, Status: Up, Encapsulation: ETHERNET
12  Flow Label Transmit: No, Flow Label Receive: No

```

Remote traffic Collection on L3 interface should be reachable from the device.

```

1 root@rtme-acx-48l-08# run show route 120.20.20.2
2
3 inet.0: 15 destinations, 15 routes (15 active, 0 holddown, 0 hidden)
4 + = Active Route, - = Last Active, * = Both
5
6 120.20.20.0/30 *[OSPF/10] 13:59:18, metric 2
7   > to 120.10.10.2 via et-0/0/45.0

```

1.3.4 Traffic capture analysis

Here below is the traffic captured on the monitoring point, we can see clearly how actual traffic get cooked up with new L2/L3 headers and actual traffic is encapsulated inside GRE and ERSPAN header. Traffic is destined to 120.20.20.2 which is configured as “output” under the analyzer and source IP is the next-hop IP, in this case: 120.10.10.2.

```

13759 2.751399980 1.1.1.1 2.2.2.2 IPv4 550 any host internal protocol (61)
> Frame 1: 550 bytes on wire (4400 bits), 550 bytes captured (4400 bits) on interface unknown, id 0
> Ethernet II, Src: JuniperN_af:ca:92 (f0:1c:2d:af:ca:92), Dst: Artisoft_9e:4e:69 (00:00:6e:9e:4e:69) NEW L2 header
> Internet Protocol Version 4, Src: 120.10.10.1, Dst: 120.20.20.2 NEW L3 header
> Generic Routing Encapsulation (ERSPAN) NEW GRE/ERSPAN header added
  > Flags and Version: 0x1000
  Protocol Type: ERSPAN (0x88be)
  Sequence Number: 0
> Encapsulated Remote Switch Packet ANALYSIS Type II
  0001 .... .. = Version: Type II (1)
  .... 0000 0000 0000 = Vlan: 0
  000. .... .. = COS: 0
  ...1 0... .. = Encap: Originally 802.1Q encapsulated (2)
  .... 00... .. = Truncated: Not truncated (0)
  .... 00 0000 0000 = SpanID: 0
  0000 0000 0000 .... .. = Reserved: 0
  .... 1010 0000 0000 0000 0101 = Index: 655365
> Ethernet II, Src: 00:00:00_00:00:22 (00:00:00:00:00:22), Dst: 00:00:00_00:00:11 (00:00:00:00:00:11)
> 802.1Q Virtual LAN, PRI: 0, DEI: 0, ID: 10
> Internet Protocol Version 4, Src: 1.1.1.1, Dst: 2.2.2.2
> Data (458 bytes)

```

Actual Traffic arrived on the UNI port of L2circuit

Figure 4: Packet capture ERSPAN

Considerations

Couple of things to know when configuring mirroring on ACX7000 platforms:

- Port Mirror and ERSPAN functionality are available on ACX7K products from 22.4R1 onwards.
- The analyser is configured on IFL (sub-interface), but actual mirroring will happen at IFD (main interface). The user can add et-0/0/0.0 or et-0/0/0.10 in analyzer config, but all packets on this interface et-0/0/0 will be mirrored.
- Mirrored traffic can be redirect to IPv4 destination only. i.e “output” as IPv4 address.
- Cant apply Analyzer on IRB interface / mirroring on IRB interface not supported.
- Any change in the output configuration (input interface or output host), should be first removed and then re-configured/re-applied.

- If the route to reach mirror destination changes and points to any interface other than the one mentioned in ERSPAN Analyzer config, the configuration must be modified and re-applied accordingly.
- Maximum of 16 ingress and 8 egress mirror instances are supported. If you configure more than what is supported, commit error will be thrown.
- On a single output port, we can configure max 8 ingress/egress instances combined. If you exceed it, a commit error will be thrown.
- Mirrored traffic will not be load balancing if the next hop have multiple paths (ECMP).
- Filter based mirroring is considered as part of our roadmap.

1.4 Useful links

- Documentation: https://www.juniper.net/documentation/us/en/software/junos/network-mgmt/topics/topic-map/port-mirroring-and-analyzers.html#id-understanding-port-mirroring-on-ex2200-ex3200-ex3300-ex4200-ex4500-ex4550-ex6200-and-ex8200__d134607e2156

1.5 Glossary

- ERSPAN: Encapsulated Remote SPAN
- EVPN: Ethernet Virtual Private Network
- GRE: Generic Routing Encapsulation
- IFD: Interface Device (physical interface)
- IFL: Interface Logical (logical interface)
- IRB: Integrated Routing and Bridging
- L2VPN: Layer2 Virtual Private Network

1.6 Acknowledgments

Many thanks to Nicolas Fevrier for reviewing the article and providing feedback



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

