



DC – AI – Routing – Switching – Security – Wireless – Automation

ACX7024 Deepdive

An HPE Juniper Networking Techpost

Pankaj Kumar

2022-09-13

HPE



Contents

1	ACX7024 Deepdive	3
1.1	Introduction	3
1.1.1	Naming Convention	3
1.1.2	Environment standards	5
1.1.3	Software	5
1.1.4	Oversubscription	6
1.2	ACX7024 Ethernet Ports	6
1.2.1	ACX7024 Front Panel view and Port Numbering	6
1.2.2	ACX7024 Port	7
1.2.3	ACX7024 Rear View	8
1.2.4	Port Configuration and Port Checker Tool	9
1.2.5	Serdes Rate	10
1.2.6	Supported Optics	11
1.3	Internal Description: Block Diagrams	11
1.4	Fan Tray and Power Module Redundancy	12
1.5	PFE Description	13
1.6	Timing Support	13
1.7	In Conclusion	13
1.8	Useful links	13
1.9	Glossary	14
1.10	Acknowledgments	14

List of Figures

1	ACX7024 Front view	3
2	ACX7024 Block Diagram	11

1 ACX7024 Deepdive

Pankaj Kumar - 09/13/2022

Everything about the new addition to the Cloud-Metro family, the ACX7024. A 1-RU router, with 360Gbps forwarding capacity.

1.1 Introduction



Figure 1: ACX7024 Front view

ACX7024 is 1RU Ethernet-only router with 360Gbps bidirectional forwarding capacity and with Class-C Timing. It is the temperature hardened and support from -40C to +65C.

This router is primarily targeted at the Cell site /Access market but can be used in multiple roles as soon as features and scales are meeting the requirements. It supports Ethernet ports from 1GE to 100GE.

Maximum number of ports supported on ACX7024:

Port Speed	ACX7024 Ports Details	Total
100GE	4x1	4
50GE	4x (2x1)	8
40GE	4x1	4
25GE	24 + 4x (4x1)	40
10GE	24 + 4x (4x1)	40
1GE	24x1	24

1.1.1 Naming Convention

We have a total of 4 SKUs (Stock Keeping Units) available based on Power supply module type and number.

- ACX7024-DC-1PSU: ACX7024 with single DC PSU
- ACX7024-DC-2PSU: ACX7024 with two DC PSUs Redundant PSU]
- ACX7024-AC-1PSU: ACX7024 with single AC PSU
- ACX7024-AC-2PSU: ACX7024 with two AC PSUs [Redundant PSU]

Ports density: 4x 100GE and 24 x 1/10/25GE:

- Port Number 0 to 3 [QSFP+ 40/100G]

- Port Number 4 to 27 [SFP+ 1/10/25/G]


System cooling is AFO (Air Flow Out / Front-to-Back) or Side to side with Baffle. And we have 4 options for power supply: AC or DC, and 1 or 1+1 PSU. The typical power consumption is below 200W.

Based on these parameters, the naming logic for the product itself and the SKU are the following.

ACX7024



ACX7024-AC-1PSU

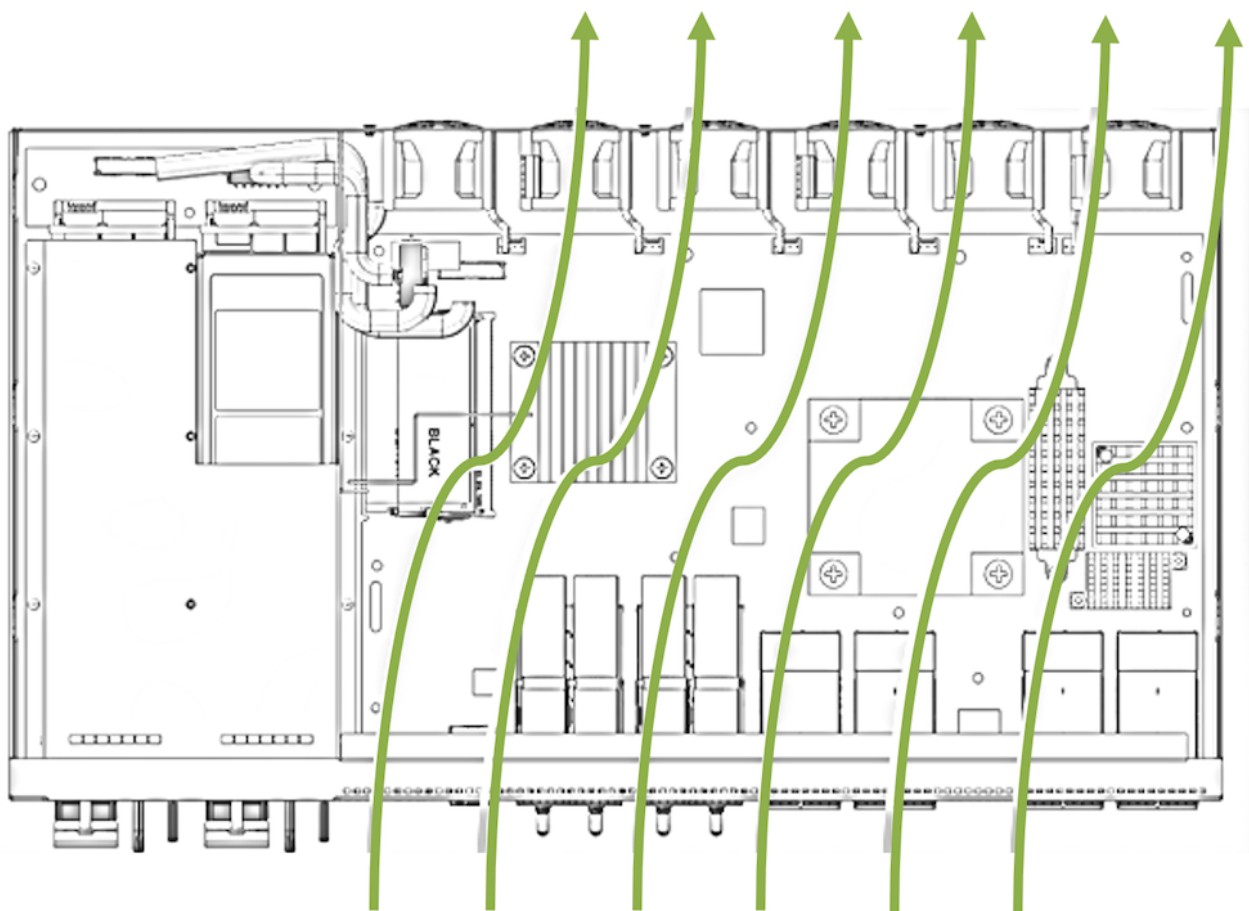

```
1 root@acx7024-01# set chassis pem minimum 1 <<< If using only one PSU unit
```

1.1.2 Environment standards

ACX7024 is the temperature hardened box [-40C to 65C]and is compliant to below Environment standards

- IEEE1613:2013 Smart Grid – Power Substations
- IEC 61850-3:2013 Telecom equipment in Power station and substation environments
- GR 63 issue 5
- GR 3108- Class 2 Edition 3

```
1 root@rtme-acx7024-01> show chassis hardware
2 Hardware inventory:
3 Item Version Part number Serial number Description
4 Chassis FL1822Axxxxx JNP7024 [ACX7024]
5 PSM 0 REV 02 740-134839 1F34C0xxxxx JPSU-400W-DC-AFI
6 PSM 1 REV 02 740-134839 1F34C0xxxxx JPSU-400W-DC-AFI
7 Routing Engine 0 REV 06 650-136135 FL1822Axxxxx RE-ACX-7024
8 CB 0 BUILTIN BUILTIN Control Board
9 FPC 0 BUILTIN BUILTIN ACX7024-FPC
10 PIC 0 BUILTIN BUILTIN MRATE- 24xSFP28 + 4xQSFP
11 Xcvr 4 REV 01 740-031980 A44Bxxx SFP+-10G-SR
12 Xcvr 5 REV 01 740-031980 A41Bxxx SFP+-10G-SR
13 Xcvr 7 REV 01 740-031981 K5V20xxxxx SFP+-10G-LR
14 Xcvr 8 REV 01 740-031981 K6R20xxxxx SFP+-10G-LR
15 Fan Tray 0 BUILTIN BUILTIN ACX7024 Fan, Front to Back Airflow - AFO
```

1.1.3 Software

```
1 root@rtme-acx7024-01> show version
2 Hostname: rtme-acx7024-01
3 Model: ACX7024
4 Junos: 22.3R1.1-EVO
5 Yocto: 3.0.2
6 Linux Kernel: 5.2.60-yocto-standard-g3614f3c
7 JUNOS-EVO OS 64-bit [junos-evo-install-acx-f-x86-64-22.3R1.1-EVO]
8
9 root@rtme-acx7024-01>
```

1.1.4 Oversubscription

ACX7024

☐ PTP FPGA ⓘ

Port 0	Port 1	Port 2	Port 3
100GE ▾	100GE ▾	100GE ▾	100GE ▾

Port 4	Port 7	Port 10	Port 13	Port 16	Port 19	Port 22	Port 25
25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	Empty ▾

Port 5	Port 8	Port 11	Port 14	Port 17	Port 20	Port 23	Port 26
25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	Empty ▾

Port 6	Port 9	Port 12	Port 15	Port 18	Port 21	Port 24	Port 27
25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	25GE ▾	Empty ▾	Empty ▾

[Click here](#) to view ACX7024 internal collateral page. †

† Hidden from customers and partners. This is visible to you because you have logged into Juniper Networks internal network.

Maximum Interface Bandwidth is 880G


Configuration status: 

Reason: Invalid Configuration

- Configuration on ports has exceeded a maximum bandwidth support of 880GE.

1.2 ACX7024 Ethernet Ports

1.2.1 ACX7024 Front Panel view and Port Numbering

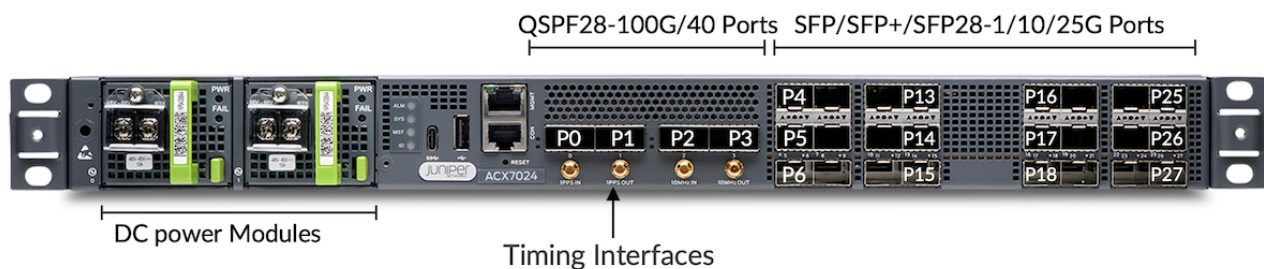

Port Number	Optic Type	Supported Port Speed	Default Port Speed
0 - 3	QSFP28/QSFP+	100G,40G,2x50G,4x25,4x10G	100G

Port Number	Optic Type	Supported Port Speed	Default Port Speed
4 - 27	SFP/SFP+/SFP28	1G,10G,25G	10G

```

1 acx7024> show chassis pic fpc-slot 0 pic-slot 0
2 Port speed information:
3
4 Port PFE Capable Port Speeds
5 0 0 1x100G 1x40G 2x50G 4x25G 4x10G
6 1 0 1x100G 1x40G 2x50G 4x25G 4x10G
7 2 0 1x100G 1x40G 2x50G 4x25G 4x10G
8 3 0 1x100G 1x40G 2x50G 4x25G 4x10G
9 4 0 1x10G 1x1G 1x25G
10 5 0 1x10G 1x1G 1x25G
11 6 0 1x10G 1x1G 1x25G
12 7 0 1x10G 1x1G 1x25G
13 8 0 1x10G 1x1G 1x25G
14 9 0 1x10G 1x1G 1x25G
15 10 0 1x10G 1x1G 1x25G
16 11 0 1x10G 1x1G 1x25G
17 12 0 1x10G 1x1G 1x25G
18 13 0 1x10G 1x1G 1x25G
19 14 0 1x10G 1x1G 1x25G
20 15 0 1x10G 1x1G 1x25G
21 16 0 1x10G 1x1G 1x25G
22 17 0 1x10G 1x1G 1x25G
23 18 0 1x10G 1x1G 1x25G
24 19 0 1x10G 1x1G 1x25G
25 20 0 1x10G 1x1G 1x25G
26 21 0 1x10G 1x1G 1x25G
27 22 0 1x10G 1x1G 1x25G
28 23 0 1x10G 1x1G 1x25G
29 24 0 1x10G 1x1G 1x25G
30 25 0 1x10G 1x1G 1x25G
31 26 0 1x10G 1x1G 1x25G
32 27 0 1x10G 1x1G 1x25G
33 28 NA 1x10G


```

1.2.2 ACX7024 Port

```

1 root@rtme-acx7024-01# set chassis fpc 0 pic 0 ptp-mode. <<< PTP mode enabled
2
3 root@rtme-acx7024-01# commit
4 commit complete
5
6 [edit]
7 root@rtme-acx7024-01# run show interfaces terse et-0/0/27
8 error: device et-0/0/27 not found <<< Once PTP is committed HW FPGA of port et-0/0/27 will be
   used in PTP circuitry.

```

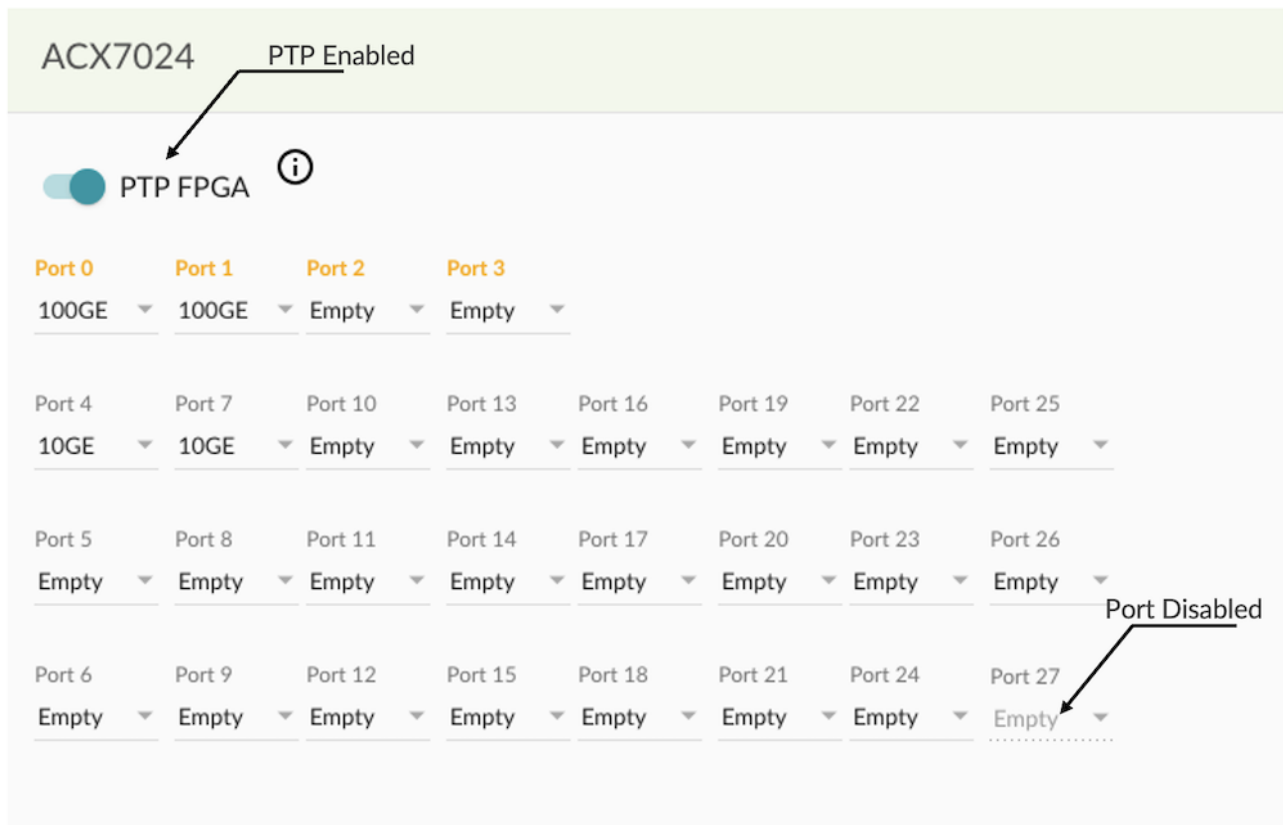

1.2.3 ACX7024 Rear View



```

1 root@rtme-acx7024-02> show chassis environment
2 Class Item Status Measurement
3 Power PSM 0 OK 39 degrees C / 102 degrees F
4   PSM 1 OK 37 degrees C / 98 degrees F
5 Temp FPC 0 Sensor Q2U Max Reading OK 51 degrees C / 123 degrees F
6   Routing Engine 0 CPU Temperature OK 40 degrees C / 104 degrees F
7   Routing Engine 0 RE temperature OK 40 degrees C / 104 degrees F
8   Routing Engine 0 FPC temperature OK 40 degrees C / 104 degrees F
9   Routing Engine 0 Outlet temperature OK 46 degrees C / 114 degrees F
10  Routing Engine 0 Inlet temperature OK 32 degrees C / 89 degrees F
11  Routing Engine 0 Q2U thermal Diode OK 38 degrees C / 100 degrees F
12  Routing Engine 0 DIMM0 Temperature OK 34 degrees C / 93 degrees F
13  Routing Engine 0 DIMM1 Temperature OK 35 degrees C / 95 degrees F
14 Fan Fan Tray 0 Fan 1 OK 10200 RPM
15   Fan Tray 0 Fan 2 OK 10200 RPM
16   Fan Tray 0 Fan 3 OK 10200 RPM
17   Fan Tray 0 Fan 4 OK 10200 RPM
18   Fan Tray 0 Fan 5 OK 10100 RPM
19   Fan Tray 0 Fan 6 OK 10200 RPM


```

1.2.4 Port Configuration and Port Checker Tool

ACX7024

☐ PTP FPGA ⓘ

Various supported port speed options

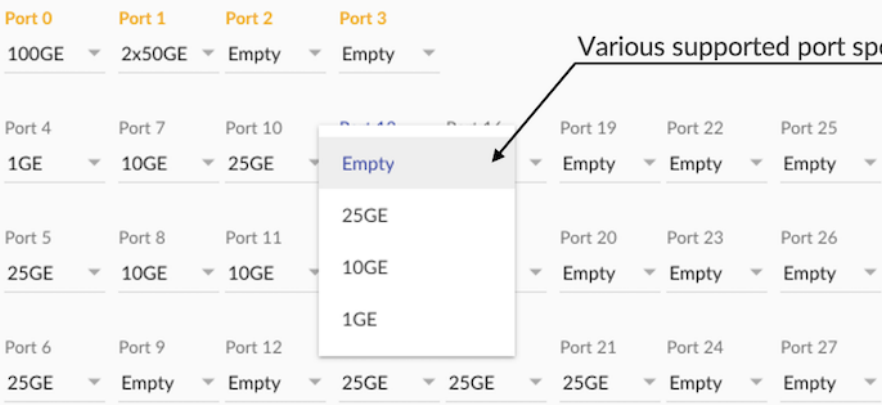

Selected configuration:

Port Speed	Count
100GE	1
50GE	2
1GE	1
25GE	6
10GE	3

Port speed and supported FEC:

Port Speed	Supported FEC
100GE	FEC91,None
50GE	FEC91,None
40GE	FEC74,None
25GE	FEC91,FEC74,None
10GE	FEC74,None

Channelized interface configuration: by default et-0/0/2 is with 100G speed, if you want to use this port as 4x25 mode set below command.

```

1 root@rtme-acx7024-02# set interfaces et-0/0/0 number-of-sub-ports 4 speed 25g
2
3 root@rtme-acx7024-02# run show interfaces terse et*
4 Interface Admin Link Proto Local Remote
5 et-0/0/0:0 up up
6 et-0/0/0:1 up up
7 et-0/0/0:2 up up
8 et-0/0/0:3 up up
9

```

```

10 Note :- Default FEC can be changed like below :-
11 root@rtme-acx7024-02# set interfaces et-0/0/1 ether-options fec fec91

```

1.2.5 Serdes Rate

SerDes or serializer/deserializer is an integrated circuit (IC or chip) transceiver that converts parallel data to serial data and vice-versa. With Broadcom Qumran2u, below are the serdes rate for respective port speed. Keep in mind that port speed and Serdes rates are different, the second category is Broadcom internal rates: 10.3125Gbps, 25.7825Gbps, 1.25Gbps...

SFP Ports 4 - 27	Q2u SerDes (Gbps)
25GE	25.78125
10GE	10.3125
1GE	1.25
QSFP28 Ports 0 - 3	
100GE	4x 25.78125
40GE	4x10.3125
2x50GE	4x25.78125
4x10GE	4x10.3125
4x25GE	4x25.78125

```

1 [vrf:none] root@rtme-acx7024-02:~# cli-pfe
2 root@rtme-acx7024-:pfe> show picd config
3 pic_info_table :
4     default config config config computed
5 pic_or_port speed pic_mode port_speed valid speed supported_speeds hidden_speeds
6 -----
7 pic-0/0 - - - -
8 port-0/0/0 1x100G - - - 1x100G [ 1x100G 1x40G 2x50G 4x25G 4x10G ] [ ]
9 port-0/0/1 1x100G - - - 1x100G [ 1x100G 1x40G 2x50G 4x25G 4x10G ] [ ]
10 port-0/0/2 1x100G - - - 1x100G [ 1x100G 1x40G 2x50G 4x25G 4x10G ] [ ]
11 port-0/0/3 1x100G - - - 1x100G [ 1x100G 1x40G 2x50G 4x25G 4x10G ] [ ]
12 port-0/0/4 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
13 port-0/0/5 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
14 port-0/0/6 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
15 port-0/0/7 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
16 port-0/0/8 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
17 port-0/0/9 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
18 port-0/0/10 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
19 port-0/0/11 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
20 port-0/0/12 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
21 port-0/0/13 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
22 port-0/0/14 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
23 port-0/0/15 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
24 port-0/0/16 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
25 port-0/0/17 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
26 port-0/0/18 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
27 port-0/0/19 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
28 port-0/0/20 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
29 port-0/0/21 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
30 port-0/0/22 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
31 port-0/0/23 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
32 port-0/0/24 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
33 port-0/0/25 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
34 port-0/0/26 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]
35 port-0/0/27 1x10G - - - 1x10G [ 1x10G 1x1G 1x25G ] [ ]

```

1.2.6 Supported Optics

<https://apps.juniper.net/hct/product/?prd=ACX7024>

1.3 Internal Description: Block Diagrams

ACX7024 is internally composed of multiple parts. We can summarize them as:

- A Broadcom Qumran2u PFE (BCM88284) with 2GB of GDDR6
- Intel xC3508 CPU (4 cores) with DDR4 memory and SSD storage
- Internal controllers for I2C (inter-integrated circuit), fan control, ...
- PTP FPGA
- TPM 2.0 module (Trusted Platform Module)

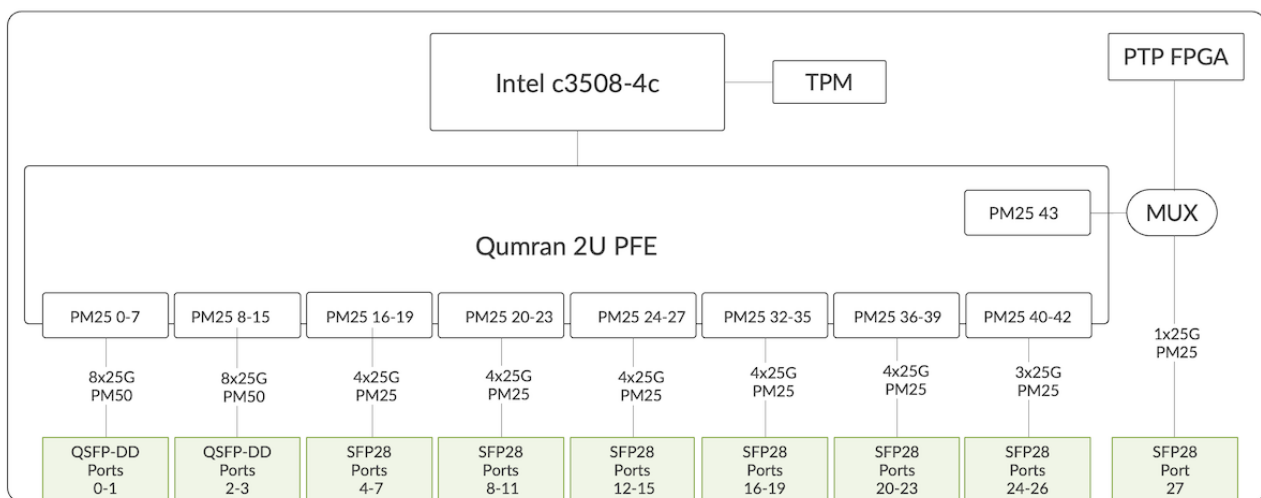


Figure 2: ACX7024 Block Diagram

In this diagram, we are presenting the SerDes at 50G (instead of 53.125G) and 25G (instead of 25.7875G) for sake of simplicity. The block diagram clearly explains the hardware shared for port 27 and PTP FPGA via mux section.

The different components can be monitored via CLI.

```

1 root@rtme-acx7024-01:pfe> show system info
2
3 System Date : Fri Aug 26 06:19:38 PDT 2022
4 System Uptime : Up for 11-04:04:42
5 Pfe Uptime : Up for 11-04:02:33
6
7 CPU INFO:
8 =====
9 Model name : Intel(R) Atom(TM) CPU C3508 @ 1.60GHz
10 Configured CPU Speed : 1600.012 1600.019 1600.005 1600.049 MHz
11 Physical cores : 4
12 Hyperthreaded cores : 4
13 L1 Cache size : 224 kB
14 L2 Cache size : 8192 kB
15 L23Cache size :
16
17 CPU PAIRS:
18 =====
19 Core 0 :
20 Core 1 : 3
21 Core 2 : 0

```

```

22 Core 3 :
23
24 SYSTEM MEMORY USAGE (MB):
25 =====
26 MemTotal: 15995356 kB
27 MemFree: 1574808 kB
28 MemAvailable: 10628760 kB
29 Buffers: 694952 kB
30 Cached: 8513080 kB
31 SwapCached: 0 kB
32 SwapTotal: 1048572 kB
33 SwapFree: 1048572 kB

```

1.4 Fan Tray and Power Module Redundancy

ACX7024 have a single routing engine. That means we don't support any kind of High-Availability (HA) option at the RE level. Also, In-Service System Upgrade (ISSU) is not supported, nor planned.

The only field replaceable parts on these routers are:

- the Power Supply Modules (2x AC or 2x DC)

AC and DC systems

You notice two PSM on both ends of the router, they can be AC or DC with single PSU or dual. But we can't mix the two categories. With a 1+1 PSM configuration, we have power redundancy: if one fails, the system will raise an alarm but will stay fully operational.

```

1 root@rtme-acx7024-01> show chassis power detail
2 Chassis Power Voltage(V) Power(W)
3
4 Total Input Power 96
5   PSM 0
6     State: Online
7     Input 53 46
8     Output 12.18 33.8
9     Capacity 400 W (maximum 400 W)
10  PSM 1
11    State: Online
12    Input 53 50
13    Output 12.17 35.84
14    Capacity 400 W (maximum 400 W)
15
16 System:
17   Zone 0:
18     Capacity: 800 W (maximum 800 W)
19     Actual usage: 96 W
20   Total system capacity: 800 W (maximum 800 W)

```

ACX7024 relies on six fixed fans for cooling purposes:

- ACX7024 is designed for front-to-back airflow and side to side with baffle airflow

The system supports single rotor failure and FAN 5+1 redundancy.

```

1 root@rtme-acx7024-01> show chassis fan
2   Item Status % RPM Measurement
3   Fan Tray 0 Fan 1 OK 34% 8300 RPM
4   Fan Tray 0 Fan 2 OK 34% 8200 RPM
5   Fan Tray 0 Fan 3 OK 34% 8300 RPM
6   Fan Tray 0 Fan 4 OK 34% 8300 RPM
7   Fan Tray 0 Fan 5 OK 34% 8200 RPM
8   Fan Tray 0 Fan 6 OK 34% 8300 RPM

```

1.5 PFE Description

We invite you to check the articles to learn more about the ASIC selection process and many more details on the packet forwarding ASIC.

- Building the ACX7000 Series: the PFE: <https://juniper.github.io/techposts/building-the-acx7000-series-the-pfe/article>
- Let's Talk About VOQ and DNX Pipeline: <https://juniper.github.io/techposts/voq-and-dnx-pipeline/article>

The ACX7024 is “Systems on the Chip” (SoC). That means it is based on a single PFE where all parts involved in the forwarding tasks are directly connected. This Qumran (BCM88284) PFE is a deep-buffer ASIC with hybrid packet memory (internal and external). The external buffer is 2x 8Gb (2GB) of GDDR6 memory.

Follow-up articles will come in near future describing some internal key aspects of the PFE like the oversubscription handling etc.

1.6 Timing Support

- Supports Synchronous Ethernet with enhanced ESMC
- Supports PTP G.8275.1/G.8275.1enh/G.8275.2 Profile
- Meets G.8273.2 T-BC Class C Performance
- Supports 1588 transparent clock along with G.8273.3 T-TC

Note:- Sync-E and PTP Hybrid not supported on 1G ports.

1.7 In Conclusion

The ACX7024 router is 1-RU, 360Gbps platform, ideally positioned for small cell site and it can be with 1G/10G/25/50GE/40G aggregation. In the next articles, we will continue the description of the ACX7000 portfolio and will dig deeper into the specific features of these products.

1.8 Useful links

- ACX7024 Data sheet: <https://www.juniper.net/us/en/products/routers/acx-series/acx7024-cloud-metro-router-datasheet.html>
- Product introduction on YouTube: <https://www.youtube.com/watch?v=tzEeTW5JODk>
- Building the ACX7100 Series: the PFE: <https://juniper.github.io/techposts/building-the-acx7000-series-the-pfe/article>
- Let's talk about VOQ and DNX Pipeline: <https://juniper.github.io/techposts/voq-and-dnx-pipeline/article>
- Hardware guides: <https://www.juniper.net/documentation/us/en/hardware/acx7024/index.html>
- HCT Link: <https://apps.juniper.net/hct/product/?prd=ACX7024>

1.9 Glossary

- AFO: AirFlow Out
- FRS: First Revenue Ship
- I2C: Inter-Integrated Circuit
- PFE: Packet Forwarding Engine
- PSM : Power Supply Module
- PTP: Precision Time Protocol
- SKU: Stock Keeping Unit
- TPM : Trusted Platform Module
- PSU: Power Supply Unit

1.10 Acknowledgments

Thanks a lot to Ravi Modgekar and Nicolas for document review.



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

