



DC – AI – Routing – Switching – Security – Wireless – Automation

ACX7509 Deepdive

An HPE Juniper Networking Techpost

Nicolas Fevrier

2022-11-14

HPE



Contents

1	ACX7509 Deepdive	3
1.1	Introduction	3
1.1.1	Parts and naming convention / SKUs	4
1.2	Hardware Description	6
1.2.1	Chassis	6
1.2.2	Flexible PIC Concentrators	7
1.2.3	RCB and FEB	9
1.2.4	Power Supply Modules and Fan Trays	11
1.2.5	Field Replaceable?	13
1.3	Software	13
1.4	ACX7509 Ethernet Ports	14
1.4.1	Port Numbering	14
1.4.2	Slot Position Impact	16
1.4.3	ACX 7509-FPC-20Y	17
1.4.4	ACX7509-FPC-16C	21
1.4.5	ACX 7509-FPC-4CD	27
1.4.6	Maximum number of ports supported on ACX7509 Routers	29
1.5	Internal Details	30
1.5.1	Block Diagrams	30
1.5.2	PFE Description	30
1.6	Redundancy	34
1.7	In Conclusion	37
1.8	Useful links	38
1.9	Glossary	38
1.10	Acknowledgements	39

List of Figures

1	Front view of the ACX7509	3
2	Front view of the ACX7509 with EMI door	4
3	ACX7509 Product Naming Convention	5
4	ACX7509 Product Naming Convention	5
5	Front view of an empty ACX7509 chassis	6
6	Back view of an ACX7509 chassis with 2x Fan Trays and 4x Power Modules	7
7	Side view of an ACX7509 chassis	7
8	ACX7509-FPC-20Y	8
9	ACX7509-FPC-16C	8
10	ACX7509-FPC-4CD	9
11	ACX7509 Routing and Control Board	9
12	ACX7509 Forwarding Engine Board	10
13	Position of the FEBs in the back of the ACX7509 chassis	10
14	PSU and Fan Trays inserted in the rear side of a ACX7509 chassis	11
15	ACX7509 FPC slots numbering	15
16	FPC ports numbering	15
17	FPC slots connections to the PFEs of a FEB	16
18	ACX7509-FPC-20Y capability in different chassis slots	17
19	Using ACX7509-FPC-20Y for 1GE, 10GE and 25GE	18
20	ACX7509-FPC-20Y in the Port Checker	19
21	ACX7509-FPC-16C in slots 1 and 5	22
22	ACX7509-FPC-16C and Port Checker options in PM50 slots (1 and 5)	22
23	ACX7509-FPC-16C examples in PM25 slots	23
24	ACX7509-FPC-16C and 100GE/4x25GE in PM25 slots	24
25	ACX7509-FPC-16C and 40GE/4x10GE in PM25 slots	24
26	Port Checker with combination of channelized / non-channelized ports	26
27	Port 13 disabled in slot 7 for PTP	27
28	ACX7509-FPC-4CD in Slots 1 and 5	27
29	ACX7509-FPC-4CD Different options in the port checker	28
30	ACX7509 High Level block diagram	30
31	Jericho2c	31
32	Bandwidth dependent on packet size	32
33	Example of optimization in Aggregation use-case	33
34	Example of optimization in Ring Aggregation topology	34
35	Nominal redundant state	35
36	RCB0 failure scenario	35
37	FEB0 failure scenario	36
38	Redundant mode data path	36
39	FEB0 failure scenario	37

1 ACX7509 Deepdive

Nicolas Fevrier - 11/14/2022

The first centralized platform of the ACX7000 family. Based on a modular design, it offers control plane and forwarding plane redundancy with port density spanning from 1GE to 400GE, in just 5RU.

1.1 Introduction

The ACX7509 is a centralized platform part of the ACX7000 family. This router is powered by two Broadcom Jericho2c [BCM8882x] and runs Junos EVO modular software.

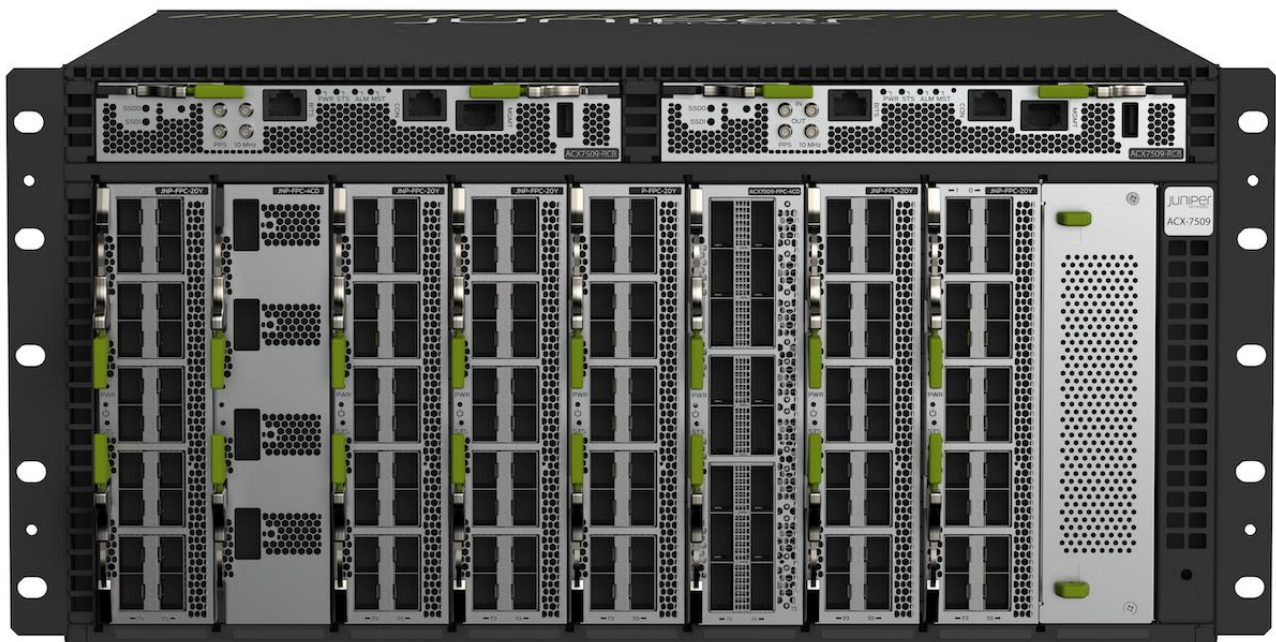


Figure 1: Front view of the ACX7509



Figure 2: Front view of the ACX7509 with EMI door

With 5RU height and 600mm depth, it's a very small form-factor modular system proposing 9 slots (8 available with current hardware generation) for three types of line cards called Flexible PIC Concentrators (FPC).

The ACX7509 is the only of its kind to offer in just 5 rack units:

- Deep buffer capability and high routing scale
- Line card modularity for ports spanning from 1GE to 400GE
- Control plane redundancy with two Routing / Control Boards (RCB)
- Forwarding plane redundancy with two Forwarding Engine Boards (FEB), offering a total of 4.8Tbps full duplex and 1+1 redundancy
- Fan trays and power supply redundancy

This modularity also provides investment protection: it will be possible to introduce faster interface types (800GE and following generation) by simply upgrading the FEB.

Depending on the port density requirement, the operator can decide to populate the ACX7509 chassis with three different FPC:

- ACX7509-FPC20Y: 20 ports SFP for 1GE, 10GE, 25GE or 50GE (total forwarding capability of 1Tbps)
- ACX7509-FPC-16C: 16 ports QSFP-DD for 40GE or 100GE (total forwarding: 1.6Tbps)
- ACX7509-FPC-4CD: 4 ports QSFP-DD for 200GE or 400GE (total forwarding: 1.6Tbps)

Certain rules need to be followed regarding the position of these FPC in the chassis, we will detail them in this document.

1.1.1 Parts and naming convention / SKUs

The chassis structure is the same QFX5700, hence the multiple SKUs with "JNP5K-*".

The naming logic is illustrated here:



Figure 3: ACX7509 Product Naming Convention

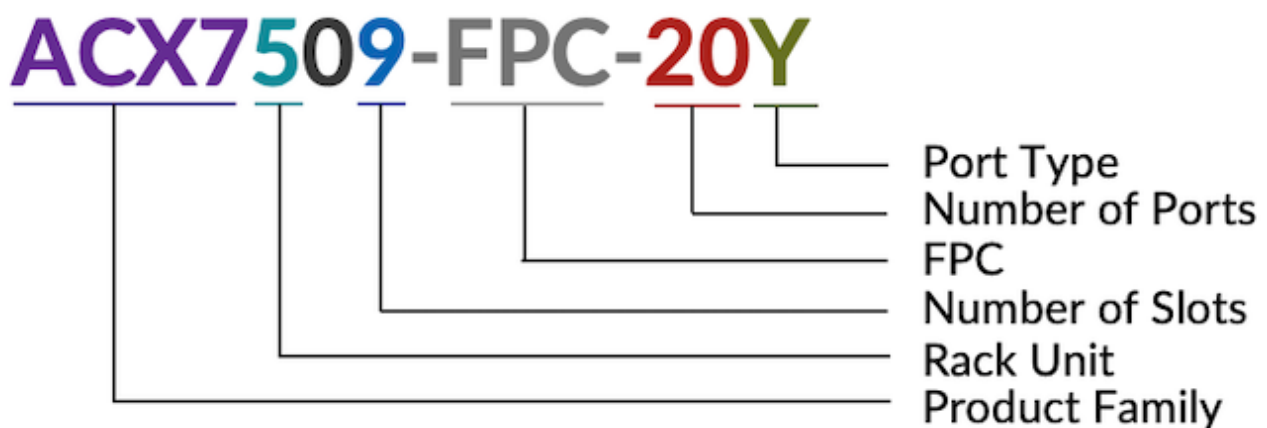


Figure 4: ACX7509 Product Naming Convention

The following SKUs are available today:

- ACX7509-BASE-AC: ACX7509 5RU 8-slot chassis with 1 RCB, 1 FEB, 2 AC Power supplies, 2 Fan trays
- ACX7509-BASE-DC: ACX7509 5RU 8-slot chassis with 1 RCB, 1 FEB, 2 DC Power supplies, 2 Fan trays
- ACX7509-PREMIUM-AC: ACX7509 5RU 8-slot chassis with 2 RCB, 2 FEB, 4 AC Power supplies, 2 Fan trays
- ACX7509-PREMIUM-DC: ACX7509 5RU 8-slot chassis with 2 RCB, 2 FEB, 4 DC Power Supplies, 2 Fan Trays
- ACX7509-FPC-16C: 16 port, 100G line card for ACX7509
- ACX7509-FPC-4CD: 4 port, 400G line card for ACX7509
- ACX7509-FPC-20Y: 20 port, 50G line card for ACX7509

And spare parts:

- ACX7509-RCB: ACX7509 Routing Control Board, spare
- ACX7509-RCB-LT: ACX7509 Routing Control Board, with limited encryption, spare
- ACX7509-FEB: ACX7509 Packet Forwarding Engine, spare
- JNP5700-CHAS: Chassis for ACX7509, spare
- ACX7509-EMI: ACX7509 EMI Door, spare
- ACX7509-FLTR: ACX7509 Air Filter, spare
- JNP5700-FAN: Fan Tray, spare
- JNP-3000W-DC-AFO: DC 3000W front-to-back airflow, spare

- JNP-3000W-AC-AFO: AC 3000W front-to-back airflow, spare
- JNP5K-FPC-BLNK: FPC Blank for unused slots in chassis
- JNP5K-RCB-BLNK: RCB Blank for unused slot in chassis
- JNP5K-FEB-BLNK: FEB Blank for unused slot in chassis
- JNP5K-RMK-4POST: QFX5700 4-post Rack mount kit

1.2 Hardware Description

1.2.1 Chassis

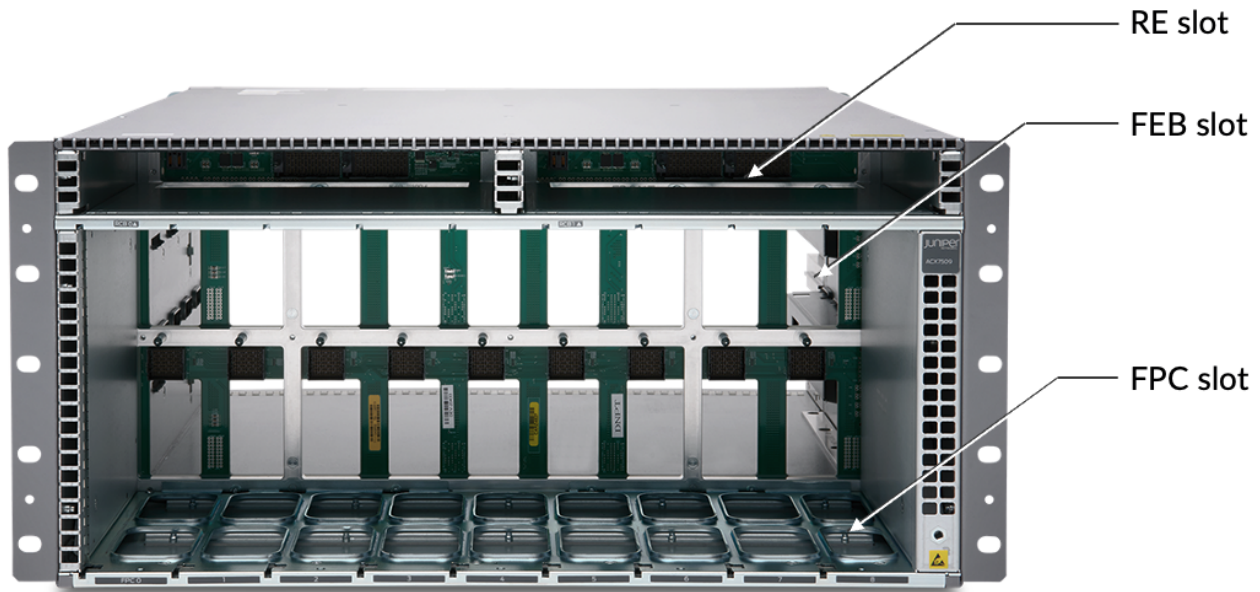


Figure 5: Front view of an empty ACX7509 chassis

The Figure above presents a view of a chassis with no common or line cards:

- FPCs are inserted vertically in the front
- RCBs are inserted horizontally in the top part of the front
- FEBs are inserted horizontally first from the back. They will connect to the FPCs via Orthogonal Direct (OD) connectors and will be covered by Fan Trays.
- The chassis also contains a partial mid-plane to distribute the power to the different elements and where will be transmitted the control signals



Figure 6: Back view of an ACX7509 chassis with 2x Fan Trays and 4x Power Modules

In the Figure, we can see the 2 Fan Trays covering the FEBs and on the top part, the 4 Power Supply Units.



Figure 7: Side view of an ACX7509 chassis

Finally, this side view clearly shows the relative position of FEBs and Fan Trays in the chassis. It explains why you need to extract first the FTs to get access to the Forwarding Boards. The chassis itself is 600mm deep (what we call “Metal to Metal”). With cable bend radius, air filters and EMI door, it takes 800mm space.

1.2.2 Flexible PIC Concentrators

Despite the lack of PIC and flexibility, the line cards in an ACX7509 are named FPC for historical reasons.

Today, we have three different types of FPCs to insert in slots 0 to 7 (slot 8 is not available in current FEBs but could be with future hardware version). An FPC inserted in slot 8 will not be connected to the Packet Forwarding Engine (PFE) but only through the control plane links offered by the midplane. In a nutshell, nothing can be done with a FPC in this slot.

We will come back on these concepts later in the document, but at this moment it's important to understand that slots 0, 2, 3, 4, 6 and 7 are connected to the PFE through 25Gbps links while slots 1 and 5 are connected

via 50Gbps SERDES. It will have a direct impact on the support of the different FPCs and their port density.

The first one is the ACX7509-FPC-20Y. It offers 20 SFP ports:

- 1GE with SFP optic modules
- 10GE with SFP+
- 25GE with SFP28
- 50GE with SFP56

The 20Y FPC can be used in any slot of the chassis, but the position will have a direct impact on the port types and density. Please check the “Ethernet Ports” section for more details.



Figure 8: ACX7509-FPC-20Y

The second card ACX7509-FPC-16C offers 16 QSFP ports: 40GE (QSFP+) and 100GE (QSFP28) for a maximum total bandwidth of 1.6Tbps. Depending on the slot where the FPC is inserted, it will support 8x 100GE or 16x 100GE. More details on the “Ethernet Ports” section below.

Note: no restriction in term of power or cooling for high power optics (ZR/ZR+).



Figure 9: ACX7509-FPC-16C

The third card available today is the ACX7509-FPC-4CD. This FPC offers connectivity for 4 ports 200GE or 400GE and can only be positioned in slots 1 and 5 of the chassis.



Figure 10: ACX7509-FPC-4CD

Since the router is a centralized platform with forwarding ASICs located only in the FEBs, the FPCs are not as complex in design than traditional modular chassis. These cards are not hosting PFEs or complex CPU/RAM/storage architecture.

When you insert a new FPC in an empty slot, it will not become active until you issue “request chassis fpc slot #number online”. It can also be achieved with a manual press of the front button. With the same logic, before ejecting an FPC, turn it offline via CLI or use the button.

More details here: <https://www.juniper.net/documentation/us/en/hardware/acx7509/topics/topic-map/acx7509-maintain-fpcs.html>

1.2.3 RCB and FEB

The ACX7509 chassis can be ordered in 4 flavors mixing AC or DC power supplies and “Base” or “Premium”. Base or Premium are different in terms of control plane and forwarding plane redundancy capabilities:

- Base: 1x RCB and 1x FEB
- Premium: 2x RCBs and 2x FEBs

Only these two combinations are supported. We will NOT support 1x RCB + 2x FEBs or 2x RCBs + 1x FEB operation. A shared-fate mechanism makes sure that matching RE and FEB are active simultaneously.

In redundant configuration, if one “Active” element fails, it triggers a switchover of both RCB and FEB. Simply put, if RCB0 and FEB0 are Active and RCB0 fails, then both RCB1 and FEB1 will take the ownership and will become Active.

The Routing and Control Board (RCB), as the name implies, is responsible for the control plane and the management of the different elements of the chassis.

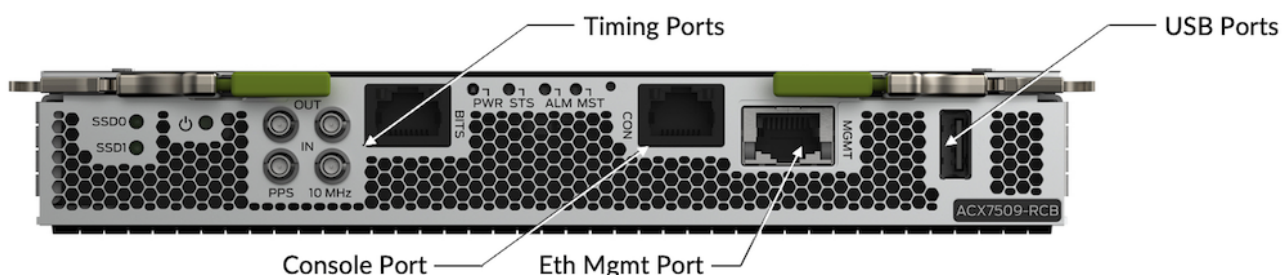


Figure 11: ACX7509 Routing and Control Board

RCB are inserted horizontally in the top front of the chassis. The extractors / levers must be positioned on the top, it's an "inverted" FRU (field replaceable unit).

A single RCB is required to operate the chassis, and obviously, two are needed for control plane redundancy.

On the front plate, it offers the connectivity:

- DIN and RJ45 for timing protocols
- RJ45 for console port
- RJ45 for ethernet management port
- USB2.0

Internally, it contains an Intel x86 CPU (6C @ 2.9GHz), 64GB of DDR4 RAM and 2x100G M.2 SSD volumes. These RCBs are connected to the midplane and communicate with the other chassis parts via PCIE, Ethernet and I2C interfaces.

Check the TechLibrary page for details on the maintenance and operation: <https://www.juniper.net/documentation/us/en/hardware/acx7509/topics/topic-map/acx7509-maintain-rcb.html>

The FEBs are field replaceable boards (but internal to the system) handling all the forwarding tasks of the centralized chassis.



Figure 12: ACX7509 Forwarding Engine Board

The router can operate with one single FEB and of course, redundancy can only be proposed with two FEB inserted.

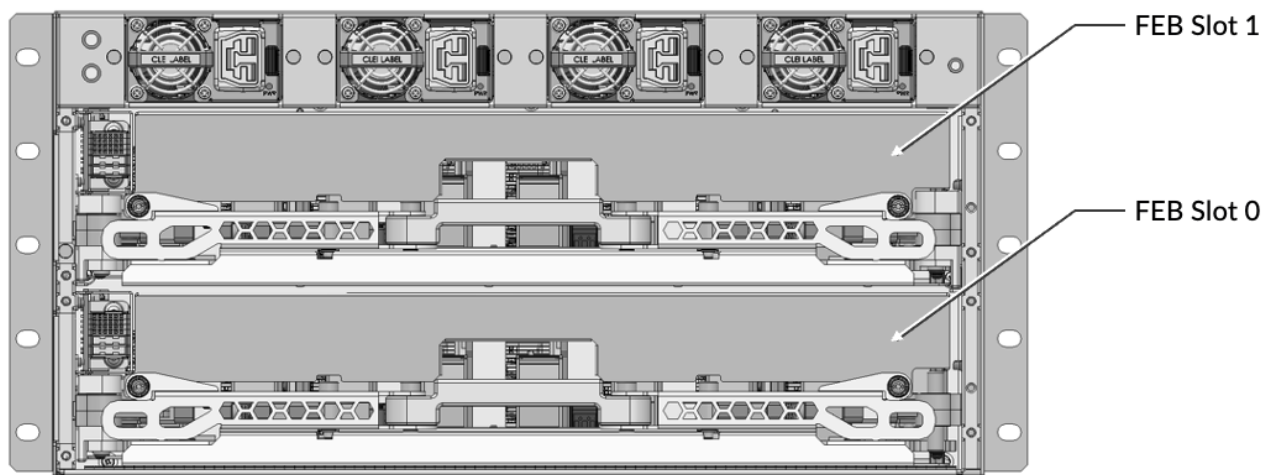


Figure 13: Position of the FEBs in the back of the ACX7509 chassis

The FEB are inserted horizontally from the back of the chassis and only after the Fan Trays have been extracted. They connect to the midplane and offer direct connectivity to the FPC inserted from the front vertically.

Each FEB contains two Jericho2c PFE connected back-to-back and offers different SERDES speeds with a mix of Port Macro PM25 and PM50. The boards have Optical Direct (OD) connectors to attach directly to the FPCs. Internally, they communicate to the RCB via PCIE, Ethernet and I2C interfaces.

The “Internal Details” section will elaborate on the port connectivity and the TechLibrary page provides details on FEB maintenance and operation: <https://www.juniper.net/documentation/us/en/hardware/acx7509/topics/topic-map/acx7509-maintain-febs.html>

1.2.4 Power Supply Modules and Fan Trays

We will call the power supply block “Power Supply Unit” (PSU) or “Power Supply Module” (PSM), it all means the same thing.

Two options are available on ACX7509: AC/HDVC (JNP-3000W-AC-AFO) or DC (JNP-3000W-DC-AFO). When ordering a “Base” bundle, it contains 1+1 Power Supply Units (PSU) while the “Premium” bundle is coming with 2+2 PSUs.

Note: we don’t support mix of AC and DC Power Modules in the chassis.

These 3000W power blocks are inserted on the top, from the back of the chassis.

The calculator lets you configure the traffic load, the number and type of optics, the FPCs and provide site requirement information: <https://apps.juniper.net/power-calculator/> or the direct link to the ACX7509: <https://apps.juniper.net/power-calculator/?view=calculate&pdt=10107509&type=2>

The ACX7509 chassis cooling is guaranteed by two Fan Trays blocks inserted in the back, below the power supply modules.

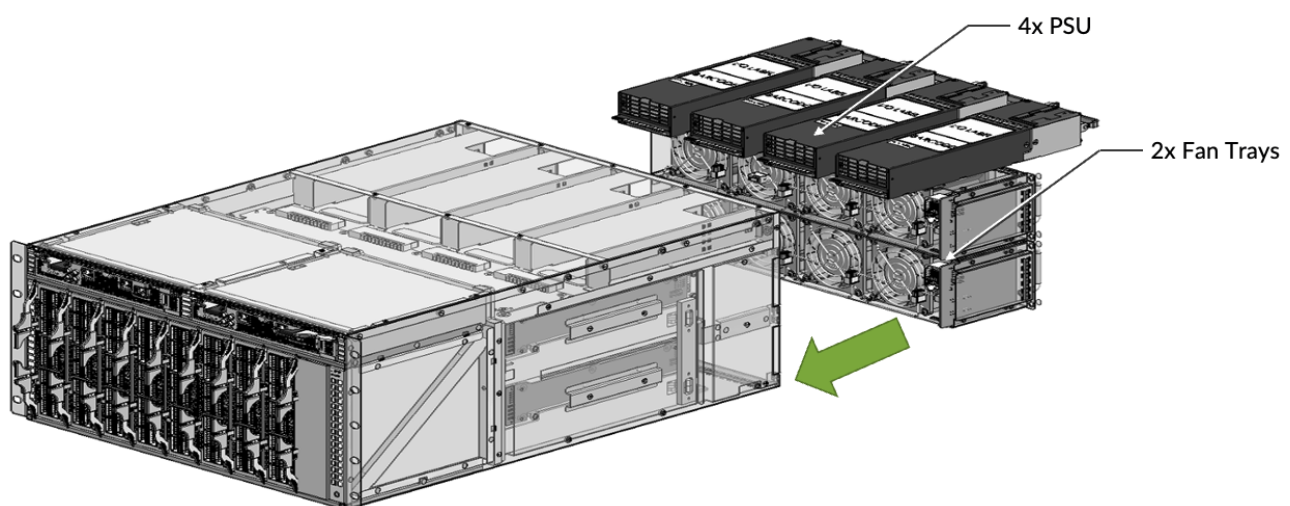


Figure 14: PSU and Fan Trays inserted in the rear side of a ACX7509 chassis

The cooling of the chassis is done only in “Air Flow Out” (AFO) mode, that means from Front to Back. The system can be operated with one Fan Tray ejected for 3 minutes for a short maintenance window. Check recommendation on the TechLibrary page: <https://www.juniper.net/documentation/us/en/hardware/acx7509/topics/topic-map/acx7509-maintain-cooling-system.html>

```

1 regress@rtme-acx7509-re0> show chassis hardware
2 Hardware inventory:
3 Item Version Part number Serial number Description
4 Chassis JN12706xxxxx ACX7509
5 Midplane 0 REV 13 750-111095 CARZxxxx ACX7509 Midplane
6 PSM 0 REV 08 740-073765 1GE2Bxxxxxx AC AFO 3000W PSU
7 PSM 1 REV 08 740-073765 1GE2Bxxxxxx AC AFO 3000W PSU
8 Routing Engine 0 BUILTIN BUILTIN ACX7509-RE
9 CB 0 REV 14 750-123768 CASExxxx Control Board
10 FPC 1 REV 13 750-120787 CASBxxxx JNP-FPC-20Y
11 PIC 0 BUILTIN BUILTIN 20x1/10/25/50-SFP56
12 Xcvr 0 0 NON-JNPR ECL140xxxxxx SFP+-10G-LR
13 Xcvr 1 REV 01 740-031981 UJ1xxxx SFP+-10G-LR
14 Xcvr 2 REV 01 740-031981 45T012xxxxxx SFP+-10G-LR
15 Xcvr 3 0 NON-JNPR AU5xxxx SFP+-10G-SR
16 Xcvr 4 REV 01 740-031980 193363xxxxxx SFP+-10G-SR
17 Xcvr 5 REV 01 740-021308 AN1xxxx SFP+-10G-SR
18 Xcvr 6 0 NON-JNPR ONT154xxxxxx SFP+-10G-LR
19 Xcvr 7 REV 01 740-030658 AA1206xxxxxx SFP+-10G-USR
20 FPC 2 REV 18 750-110070 CASExxxx JNP-FPC-16C
21 PIC 0 BUILTIN BUILTIN 16x100G-QSFP
22 Xcvr 0 REV 01 740-061405 1ECQ15xxxxxx QSFP-100GBASE-SR4-T2
23 Xcvr 1 REV 01 740-058734 1F1CQ1xxxxxxxx QSFP-100GBASE-SR4
24 Xcvr 4 REV 01 740-061405 1ECQ13xxxxxx QSFP-100GBASE-SR4-T2
25 Xcvr 5 REV 01 740-061405 1ECQ15xxxxxx QSFP-100GBASE-SR4-T2
26 Xcvr 8 REV 01 740-032986 QB30xxxxxx QSFP+-40G-SR4
27 FPC 5 REV 13 750-110072 CASAXxxx JNP-FPC-4CD
28 PIC 0 BUILTIN BUILTIN 4x400G QSFP56-DD
29 Fan Tray 0 REV 12 750-111810 CARZxxxx Fan Tray/Controller AFO
30 Fan Tray 1 REV 12 750-111810 CARZxxxx Fan Tray/Controller AFO
31 FEB 0 REV 15 750-110560 CASFxxxx Q2C Forwarding Engine Board
32
33 {master}
34 regress@rtme-acx7509-re0>

```

On this router, we only have 1+1 PSU.

```

1 regress@rtme-acx7509-re0> show chassis power detail
2 Chassis Power Voltage(V) Power(W)
3
4 Total Input Power 409
5 PSM 0
6 State: Online
7 Input 1 201 177
8 Output 12.02 129.23
9 Capacity 3000 W (maximum 3000 W)
10 PSM 1
11 State: Online
12 Input 1 203 232
13 Output 11.99 115.4
14 Capacity 3000 W (maximum 3000 W)
15 PSM 2
16 State: Offline
17 Input 1 0 0
18 Output 0.0 0.0
19 Capacity 0 W (maximum 0 W)
20 PSM 3
21 State: Offline
22 Input 1 0 0
23 Output 0.0 0.0
24 Capacity 0 W (maximum 0 W)
25
26 Item Used(W)
27 CB 0 72
28 FPC 2 57
29 Fan Tray 0 14
30 Fan Tray 1 14
31 FEB 0 158
32
33 System:
34 Zone 0:
35 Capacity: 6000 W (maximum 6000 W)
36 Allocated power: 1310 W (4690 W remaining)
37 Actual usage: 409 W
38 Total system capacity: 6000 W (maximum 6000 W)
39 Total remaining power: 4690 W
40
41 {master}
42 regress@rtme-acx7509-re0> show chassis fan

```

```

43      Item Status % RPM Measurement
44      Fan Tray 0 Fan 0 OK 25% 3150 RPM
45      Fan Tray 0 Fan 1 OK 26% 3750 RPM
46      Fan Tray 0 Fan 2 OK 25% 3150 RPM
47      Fan Tray 0 Fan 3 OK 26% 3750 RPM
48      Fan Tray 0 Fan 4 OK 25% 3150 RPM
49      Fan Tray 0 Fan 5 OK 26% 3750 RPM
50      Fan Tray 0 Fan 6 OK 24% 3000 RPM
51      Fan Tray 0 Fan 7 OK 26% 3750 RPM
52      Fan Tray 1 Fan 0 OK 25% 3150 RPM
53      Fan Tray 1 Fan 1 OK 26% 3750 RPM
54      Fan Tray 1 Fan 2 OK 27% 3300 RPM
55      Fan Tray 1 Fan 3 OK 26% 3750 RPM
56      Fan Tray 1 Fan 4 OK 24% 3000 RPM
57      Fan Tray 1 Fan 5 OK 25% 3600 RPM
58      Fan Tray 1 Fan 6 OK 25% 3150 RPM
59      Fan Tray 1 Fan 7 OK 25% 3600 RPM
60
61      {master}
62      regress@rtme-acx7509-re0>

```

1.2.5 Field Replaceable?

Let's review the replaceable parts (FRU) in the chassis and how we can operate them in production:

Field Replaceable Units

Power Supply Modules	Hot-insertable and Hot-removable
Fan Trays	Hot-insertable and Hot-removable
Routing and Control Board	Routing and Control Board Backup RCB is Hot-insertable and Hot-removable
Forwarding Engine Board Backup	FEB is Hot-insertable and Hot-removable
Flexible PIC Concentrator	FPCs are Hot-insertable and Hot-removable

1.3 Software

The minimum Junos EVO release required to operate ACX7509 is 21.4R1 and High Availability (HA) support has been introduced in 22.1R1.

The image is named: junos-evo-install-acx-x86-64-EVO

```

1 regress@rtme-acx7509-re0> show version
2 Hostname: rtme-acx7509-03-re0
3 Model: acx7509
4 Junos: 22.3R1.7-EVO
5 Yocto: 3.0.2
6 Linux Kernel: 5.2.60-yocto-standard-g9a086a2b7
7 JUNOS-EVO OS 64-bit [junos-evo-install-acx-x86-64-22.3R1.7-EVO]
8
9 {master}
10 regress@rtme-acx7509-re0>

```

1.4 ACX7509 Ethernet Ports

1.4.1 Port Numbering

In ACX7000 family, all physical interfaces are named “et-*” regardless of the optics/speed. It simplifies significantly the port migration tasks. In this example below, you can verify that port 1GE, 10GE, 25GE, 100GE or 400GE are all “et-x/y/z”.

For example, the ports 0 in FPC2 are 100GE QSFP28 SR4 and the port 8 is a breakout of 4x10GE from a QSFP+ SR4. They will appear as et-2/0/0 and et-2/0/8:[0-3] respectively.

```

1 regress@rtme-acx7509-03-re0> show chassis hardware
2 Hardware inventory:
3 Item Version Part number Serial number Description
4 <SNIP>
5 FPC 2 REV 18 750-110070 CASE7493 JNP-FPC-16C
6   PIC 0 BUILTIN BUILTIN 16x100G-QSFP
7     Xcvr 0 REV 01 740-061405 1ECQ15251T7 QSFP-100GBASE-SR4-T2
8     Xcvr 1 REV 01 740-058734 1F1CQ1A6140D5 QSFP-100GBASE-SR4
9     Xcvr 4 REV 01 740-061405 1ECQ13240BL QSFP-100GBASE-SR4-T2
10    Xcvr 5 REV 01 740-061405 1ECQ15253XN QSFP-100GBASE-SR4-T2
11    Xcvr 8 REV 01 740-032986 QB300621 QSFP+-40G-SR4
12    Xcvr 12 REV 01 740-058734 1F1CQ1A6140BG QSFP-100GBASE-SR4
13 <SNIP>
14
15 {master}
16 regress@rtme-acx7509-03-re0> show interfaces et-2/0/0 terse
17 Interface Admin Link Proto Local Remote
18 et-2/0/0 up up
19 et-2/0/0.0 up up inet 192.168.23.2/24
20                               mpls
21                               multiservice
22
23 {master}
24 regress@rtme-acx7509-03-re0> show interfaces et-2/0/8:0 terse
25 Interface Admin Link Proto Local Remote
26 et-2/0/8:0 up up
27 et-2/0/8:0.4001 up up inet 135.135.0.2/24
28                               multiservice
29 et-2/0/8:0.4002 up up inet 135.135.0.4/24
30                               multiservice
31 et-2/0/8:0.4003 up up inet 135.135.0.6/24
32                               multiservice
33 et-2/0/8:0.4004 up up inet 135.135.0.8/24
34                               multiservice
35 et-2/0/8:0.4005 up up inet 135.135.0.10/24
36                               multiservice

```

You can understand the port numbering logic here: et-[FPC]/[PIC]/[Port] with PIC=0.

Physically speaking, the slots and ports are numbered like this:

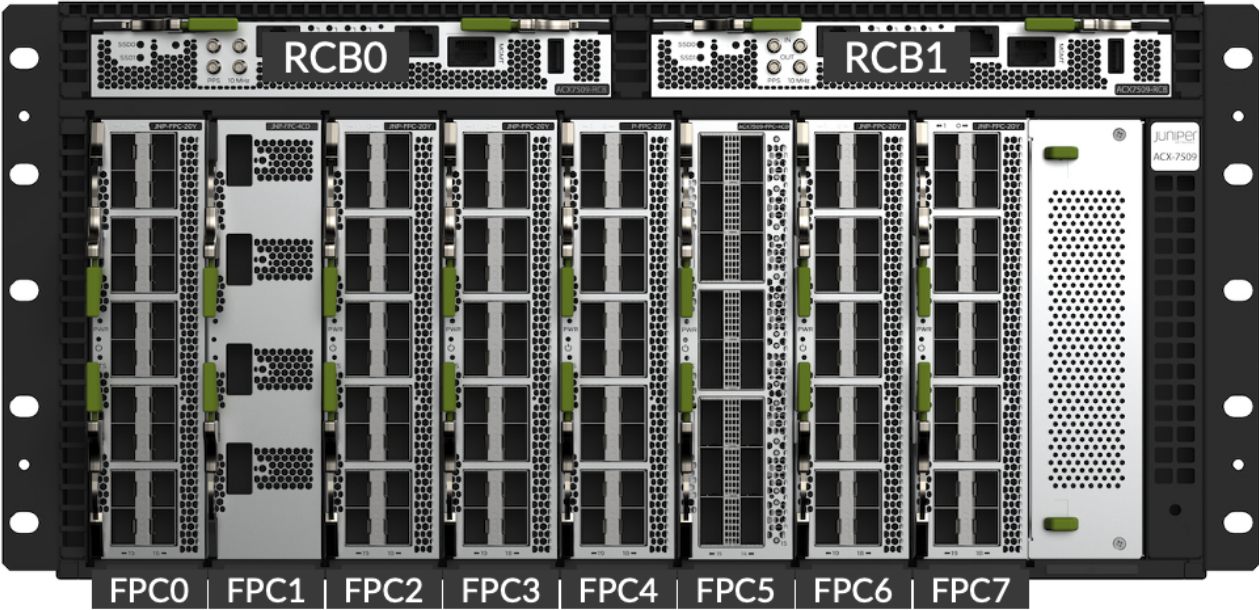


Figure 15: ACX7509 FPC slots numbering

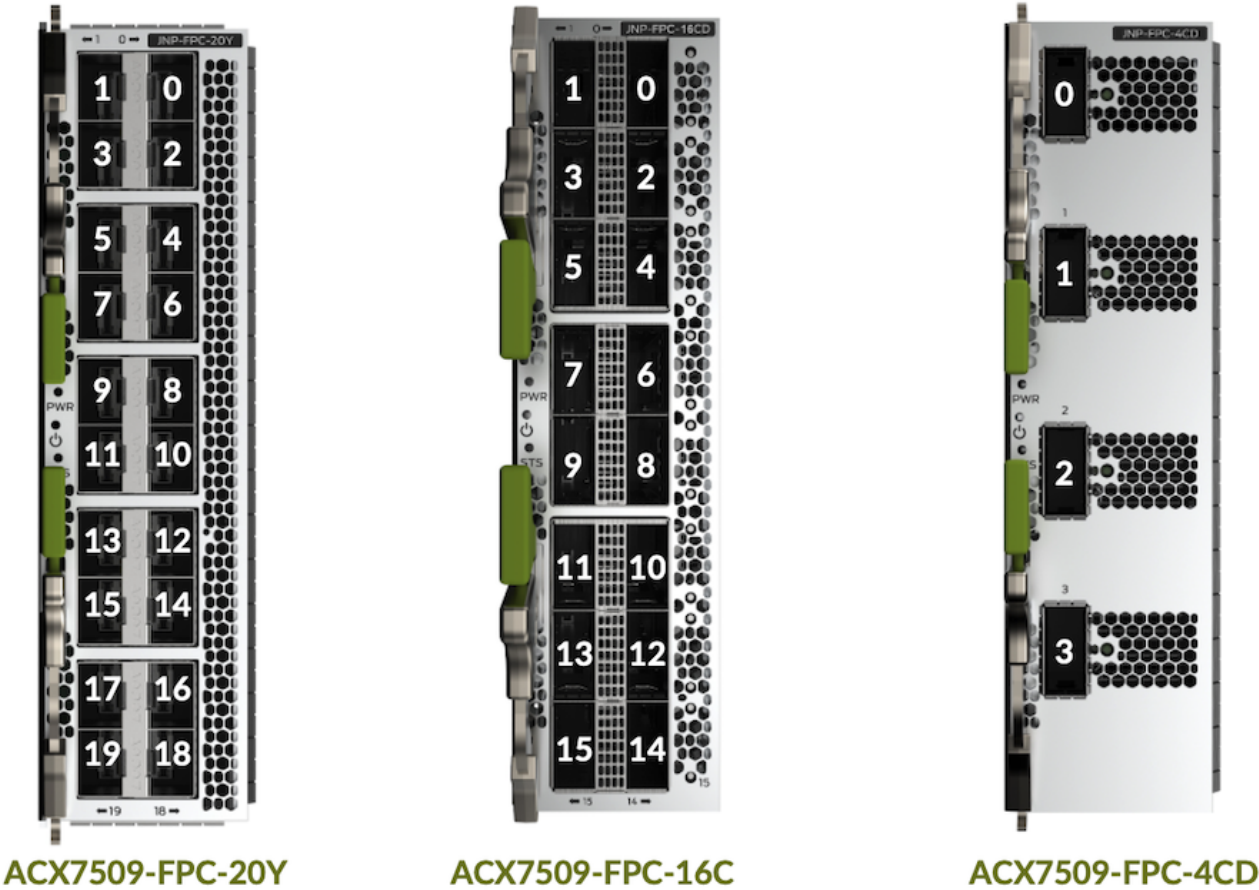


Figure 16: FPC ports numbering

1.4.2 Slot Position Impact

The FPCs support different port combinations, depending on their position in the chassis. To understand why the position influences the FPC capabilities, let's represent at high-level the Packet Forward Engine (PFE) used in the two FEBs:

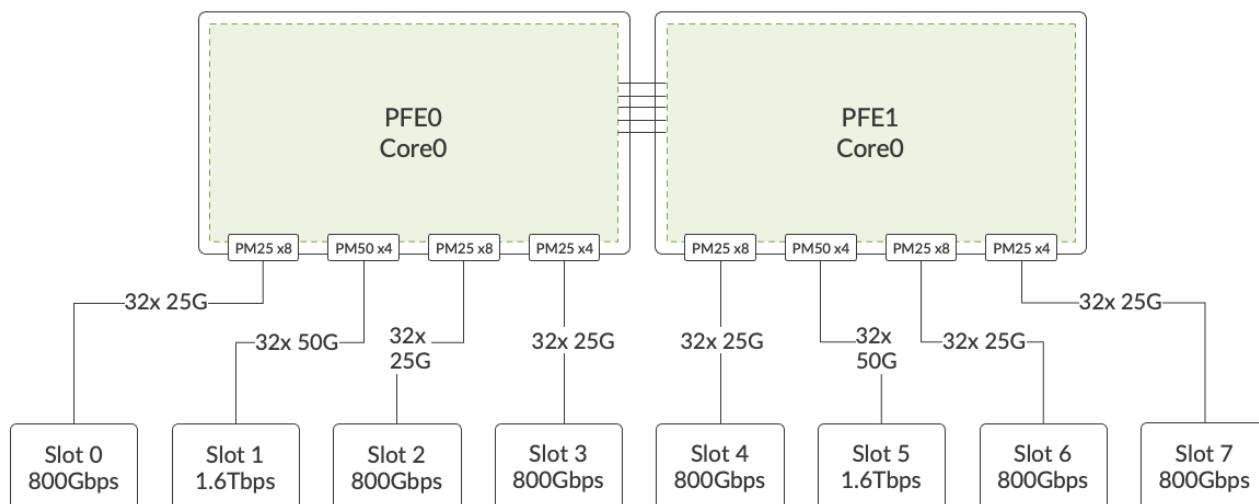


Figure 17: FPC slots connections to the PFEs of a FEB

We have two Jericho2c (or Qumran2c, it's not relevant in this discussion) in each Forwarding Engine Board.

More details will be provided in the PFE section below. What's important at this point are the Port Macros available on each Jericho2c:

- 4x PM50, offering 8 SERDES each, for a total of 32x 50Gbps
- 24x PM25, offering 4 SERDES each, for a total of 96x 25Gbps
- Total of 128 SERDES

The PFE0 is connected to slots 0 to 3, while PFE1 is connected to slots 4 to 7.

Slots 1 and 5 are connected via PM50, also other slots are linked with PM25.

We invite you to read more on the Port Macros in this TechPost: <https://juniper.github.io/techposts/building-the-acx7000-series-the-pfe/article>

In a nutshell:

PM25 supports up to 25.7815Gbps enabling:

- 1GE/10GE/25GE over one lane
- 40GE/50GE over two lanes
- 40GE/100GE over four lanes

PM50 supports up to 53.125Gbps enabling:

- 10GE/25GE/50GE over one lane
- 40GE/50GE/100GE over two lanes
- 40GE/100GE/200GE over four lanes
- 400GE over eight lanes

You understand that an FPC may have different capabilities whether we insert it in a PM25 slot or a PM50 slot.

Always use the port checker tool to verify the support and understand the potential restrictions: <https://apps.juniper.net/home/port-checker/index.html>

1.4.3 ACX 7509-FPC-20Y

This FPC offers 20 ports SFP for 1GE to 50GE connectivity.

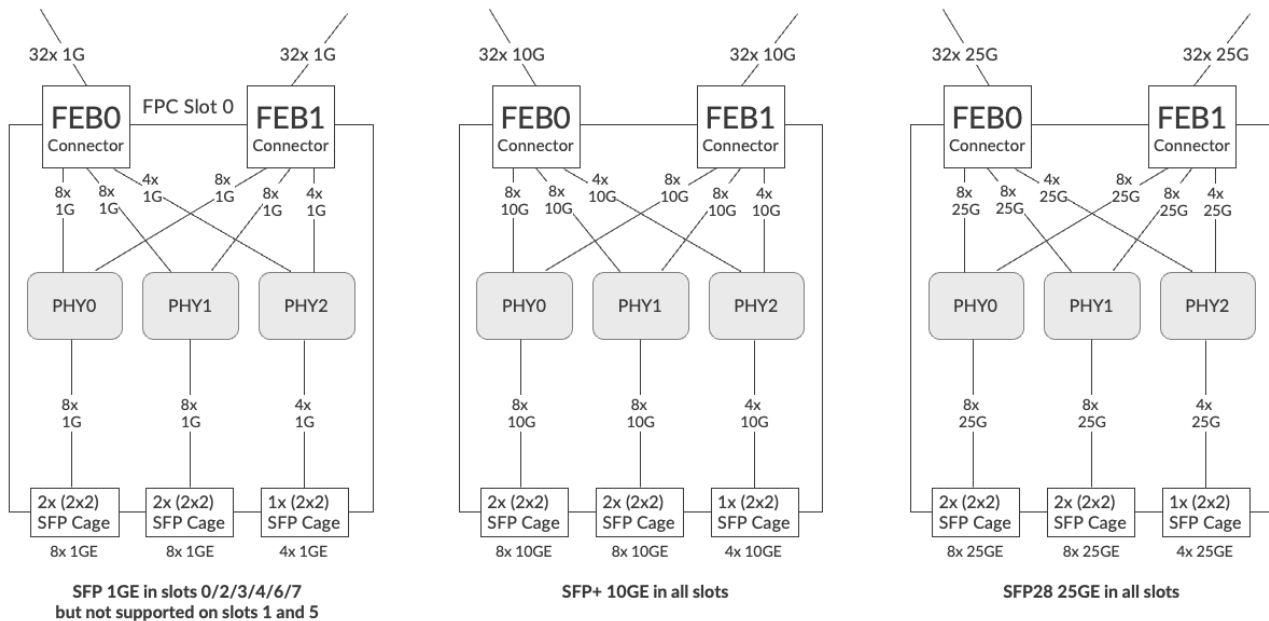


Figure 18: ACX7509-FPC-20Y capability in different chassis slots

SFP 1GE is supported on all the slots except those using PM50 (slots 1 and 5). No limitation for SFP+ 10GE and SFP28 25GE, supported with the FPC inserted in any slot of the ACX7509 chassis.

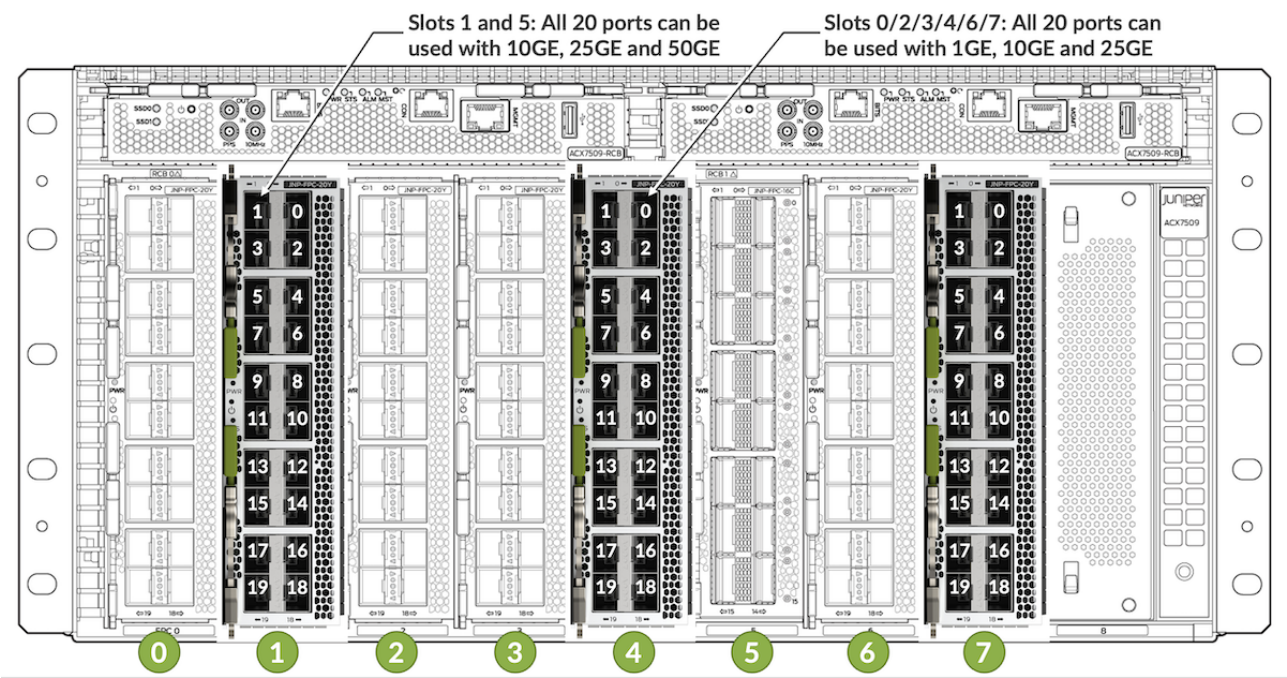


Figure 19: Using ACX7509-FPC-20Y for 1GE, 10GE and 25GE

You can use the port checker to verify the supported combinations and options:

ACX7509_FPC16C **ACX7509_FPC20Y** ACX7509_FPC4CD

FPC 0, 2, 3, 4, 6 and 7

Port 0 25GE	Port 2 1GE	Port 4 10GE	Port 6 1GE	Port 8 25GE	Port 10 10GE	Port 12 1GE	Port 14 10GE	Port 16 25GE	Port 18 Empty
Port 1 10GE	Port 3 25GE	Port 5 1GE	Port 7 10GE	Port 9 1GE	Port 11 25GE	Port 13 1GE	Port 15 10GE	Port 17 25GE	Port 19 Empty

FPC 1 and 5

Port 0 25GE	Port 2 10GE	Port 4 10GE	Port 6 25GE	Port 8 Empty	Port 10 Empty	Port 12 Empty	Port 14 Empty	Port 16 Empty	Port 18 Empty
Port 1 10GE	Port 3 25GE	Port 5 10GE	Port 7 25GE	Port 9 Empty	Port 11 Empty	Port 13 Empty	Port 15 Empty	Port 17 Empty	Port 19 Empty

ACX7509_FPC20Y front panel

Configuration status: 

Figure 20: ACX7509-FPC-20Y in the Port Checker

We check the port capabilities on slot 1.

```

1 regress@rtme-acx7509-01-re0> show chassis pic fpc-slot 1 pic-slot 0
2 FPC slot 1, PIC slot 0 information:
3   Type 20x1/10/25/50-SFP56
4   State Online
5   PIC version 255.09
6   Uptime 3 hours, 56 minutes, 36 seconds
7
8 PIC port information:
9 <SNIP>
10
11 Port speed information:
12
13 Port PFE Capable Port Speeds
14 0 0 1x1G 1x10G 1x25G 1x50G
15 1 0 1x1G 1x10G 1x25G 1x50G
16 2 0 1x1G 1x10G 1x25G 1x50G
17 3 0 1x1G 1x10G 1x25G 1x50G
18 4 0 1x1G 1x10G 1x25G 1x50G
19 5 0 1x1G 1x10G 1x25G 1x50G
20 6 0 1x1G 1x10G 1x25G 1x50G
21 7 0 1x1G 1x10G 1x25G 1x50G
22 8 0 1x1G 1x10G 1x25G 1x50G
23 9 0 1x1G 1x10G 1x25G 1x50G
24 10 0 1x1G 1x10G 1x25G 1x50G
25 11 0 1x1G 1x10G 1x25G 1x50G
26 12 0 1x1G 1x10G 1x25G 1x50G
27 13 0 1x1G 1x10G 1x25G 1x50G

```

```
28 14 0 1x1G 1x10G 1x25G 1x50G
29 15 0 1x1G 1x10G 1x25G 1x50G
30 16 0 1x1G 1x10G 1x25G 1x50G
31 17 0 1x1G 1x10G 1x25G 1x50G
32 18 0 1x1G 1x10G 1x25G 1x50G
33 19 0 1x1G 1x10G 1x25G 1x50G
34
35 {master}
36 regress@rtme-acx7509-01-re0>
```


Note: this output is displaying hardware capabilities,

- It doesn't reflect what the software support
- It doesn't reflect what is tested and therefore officially supported

By default, all ports of the ACX7509-FPC-20Y are configured for 25GE, meaning if you insert SFP28 optics, you don't need to configure anything specific. You'll need to set up speed explicitly for 1GE and 10GE.


50GE optics support is added in JUNOS 22.4R1:

- only in slots 1 and 5
- all 20 ports of the FPC can be used

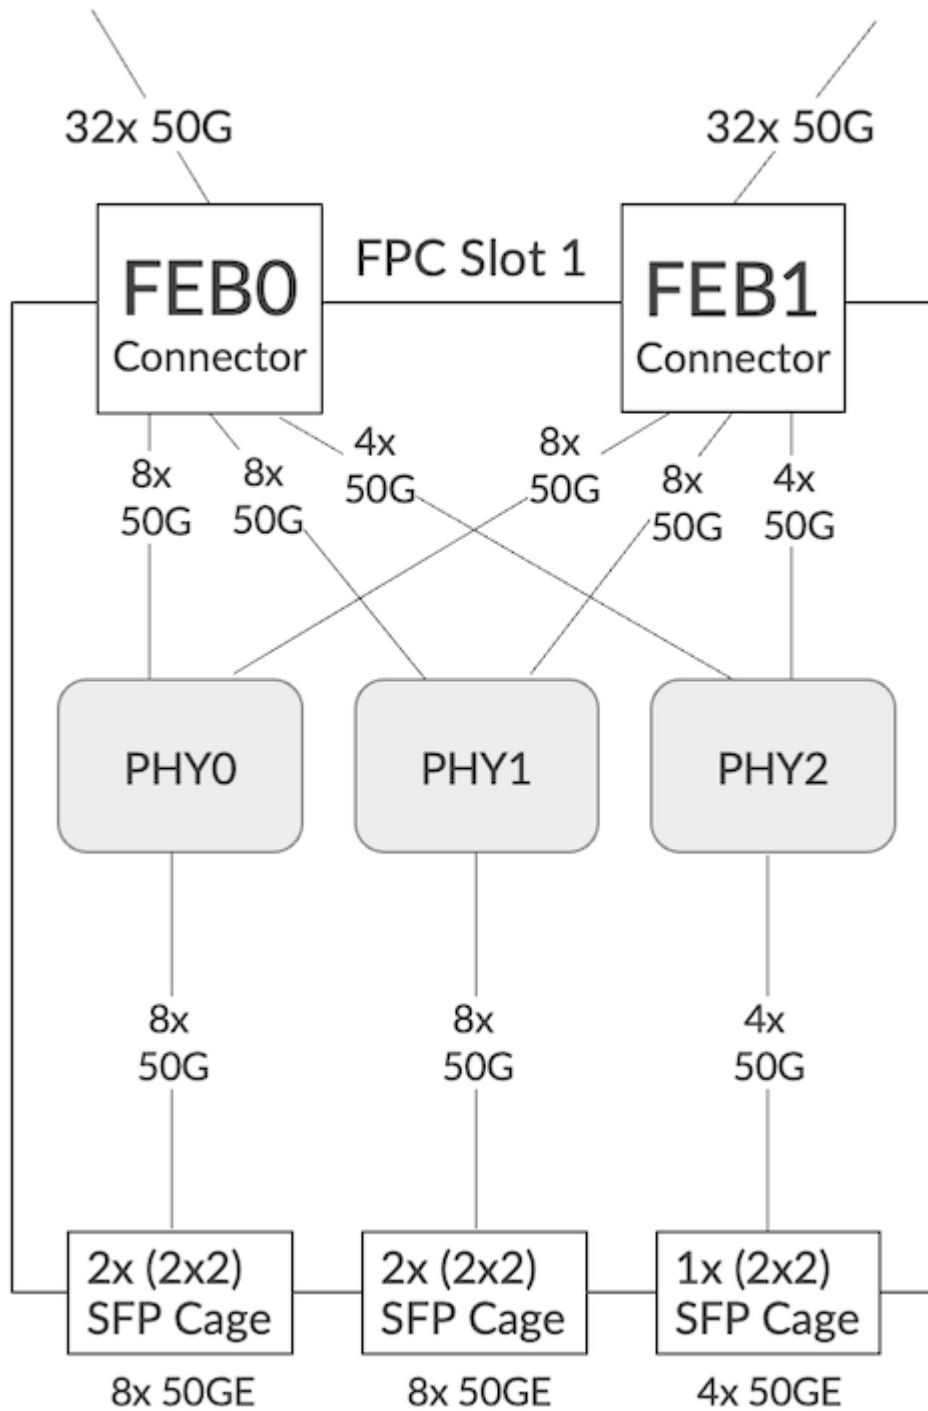

1.4.4 ACX7509-FPC-16C

This second FPC is designed for high density 100GE use cases but can also be used for other scenarios. When inserted in PM50 slots (1 and 5), we can enable the full capability with 16 ports QSFP28 100GE:

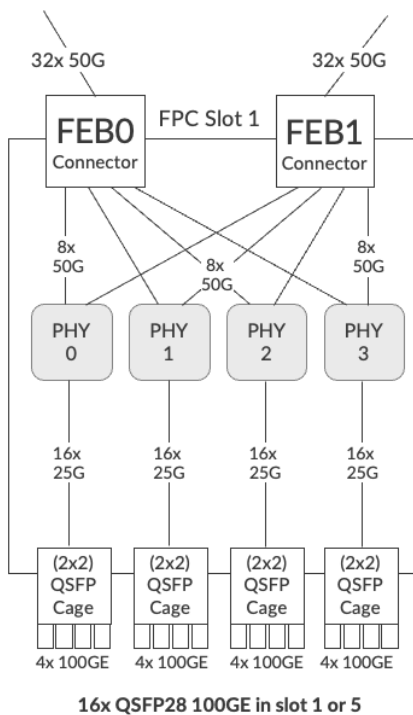

Only 100GE optics supported

FPC 1 and 5

Empty	Port 4	Port 6	Port 8	Port 10	Port 12	Port 14
100GE	Empty	Empty	Empty	Empty	Empty	Empty
Empty	Port 5	Port 7	Port 9	Port 11	Port 13	Port 15
Empty	Empty	Empty	Empty	Empty	Empty	Empty

4x25GE Breakout technically possible

40GE technically possible too

No software support in slots 1/5

Figure 21: ACX7509-FPC-16C in slots 1 and 5

This FPC is composed of 4 PHY modules fulfilling different roles including MUX, retimer, Gearbox and Reverse Gearbox (GB/RGB). They guarantee communication between FEB (via Orthogonal Direct connectors) and the optical cages / modules.

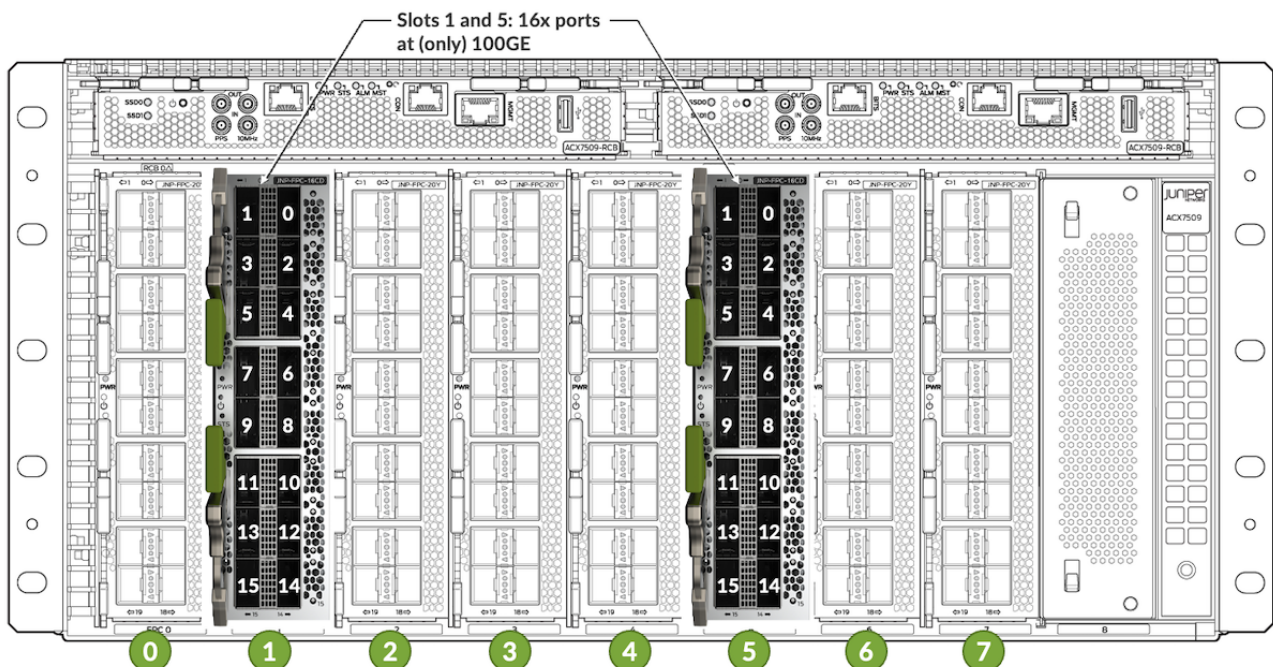


Figure 22: ACX7509-FPC-16C and Port Checker options in PM50 slots (1 and 5)

The PHY in the FPC are used in Gearbox mode, with 50Gbps on the system side and 25Gbps on the line side. That way, we support 4 lanes options (SR4, LR4, ...)

```
1 regress@rtme-acx7509-02-re0> show chassis pic fpc-slot 5 pic-slot 0
```

```

2 FPC slot 5, PIC slot 0 information:
3   Type 16x100G-QSFP
4   State Online
5   PIC version 255.09
6   Uptime 53 days, 8 hours, 43 minutes, 21 seconds
7
8 PIC port information:
9 <SNIP>
10
11 Port speed information:
12
13 Port PFE Capable Port Speeds
14 0 1 1x100G 1x40G 4x10G 4x25G
15 1 1 1x100G 1x40G 4x10G 4x25G
16 2 1 1x100G 1x40G 4x10G 4x25G
17 3 1 1x100G 1x40G 4x10G 4x25G
18 4 1 1x100G 1x40G 4x10G 4x25G
19 5 1 1x100G 1x40G 4x10G 4x25G
20 6 1 1x100G 1x40G 4x10G 4x25G
21 7 1 1x100G 1x40G 4x10G 4x25G
22 8 1 1x100G 1x40G 4x10G 4x25G
23 9 1 1x100G 1x40G 4x10G 4x25G
24 10 1 1x100G 1x40G 4x10G 4x25G
25 11 1 1x100G 1x40G 4x10G 4x25G
26 12 1 1x100G 1x40G 4x10G 4x25G
27 13 1 1x100G 1x40G 4x25G 4x10G
28 14 1 1x100G 1x40G 4x25G 4x10G
29 15 1 1x100G 1x40G 4x25G 4x10G
30
31 {master}
32 regress@rtme-acx7509-02-re0>

```

Today, the software doesn't support 40GE optics or 4x 10GE / 4x 25GE break out options in these slots.

When inserted in the PM25 slots (0/2/3/4/6/7), we have different capabilities.

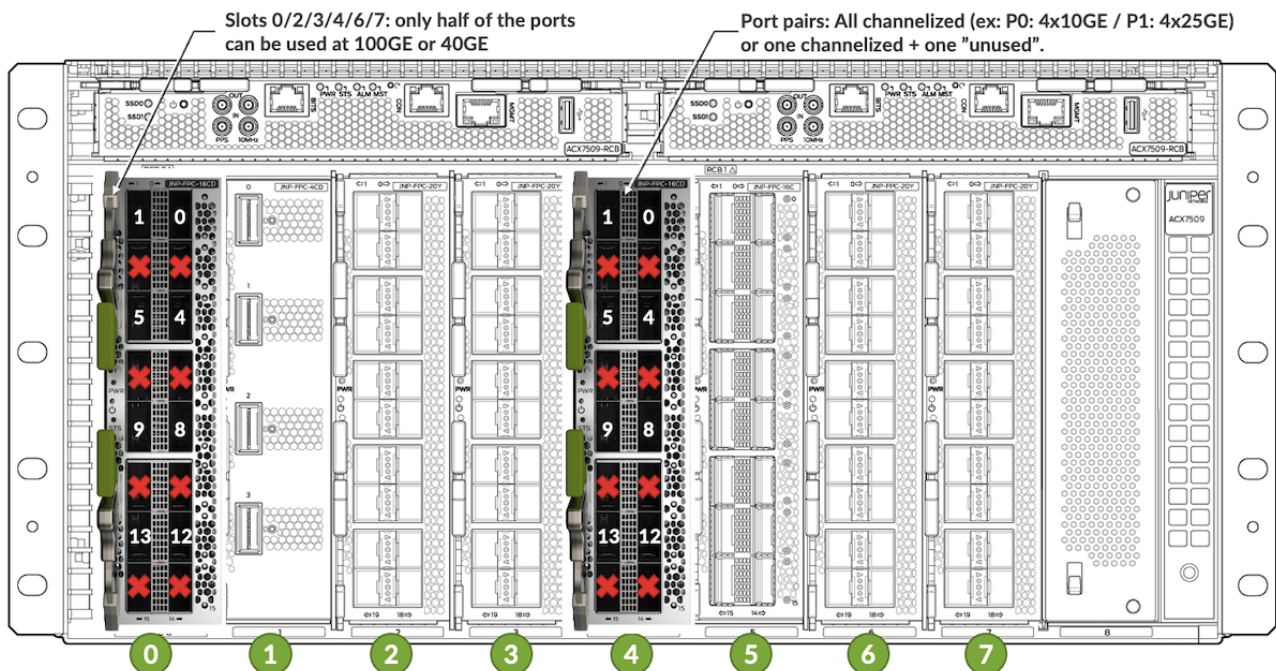


Figure 23: ACX7509-FPC-16C examples in PM25 slots

In these PM25 slots 0/2/3/4/6/7, we can only use half of the ports of the FPC.

More precisely, we can only use the first two ports of each cage:

- 0 and 1
- 4 and 5

- 8 and 9
- 12 and 13

These ports can be populated with 100GE, 4x 25GE, 40GE and 4x 10GE with some restrictions we will list a bit later. The other ports will not appear, the user doesn't need to configure them in any specific manner.

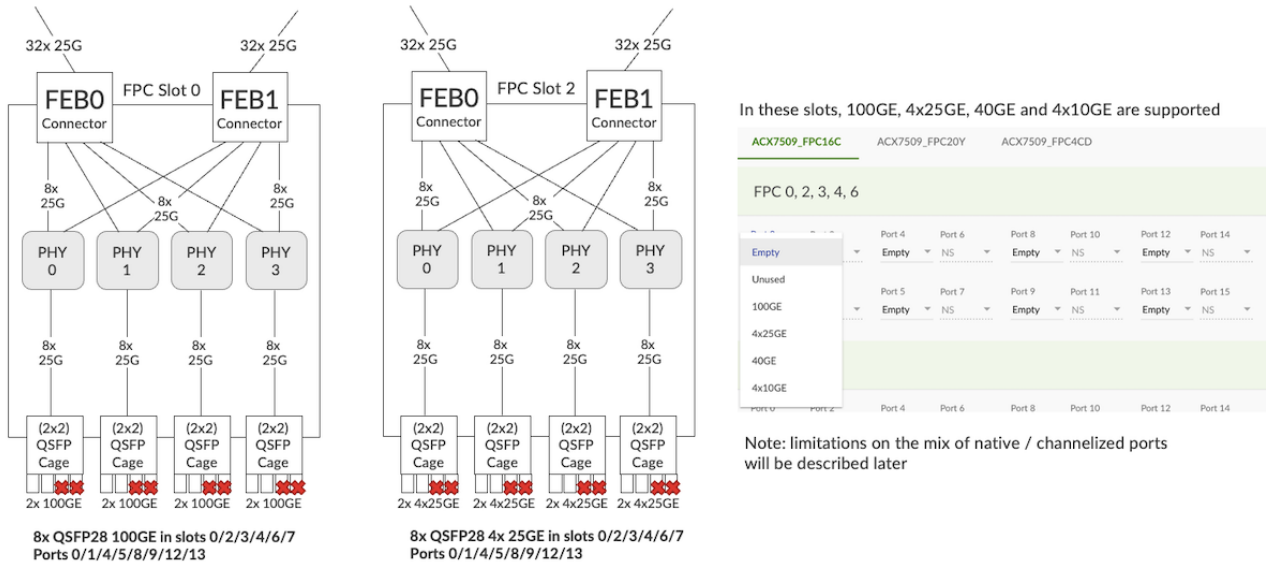


Figure 24: ACX7509-FPC-16C and 100GE/4x25GE in PM25 slots

The PHYs are used as retimers here (25Gbps to 25Gbps) and HMUX. The port checker clearly shows the port restrictions and the available options.

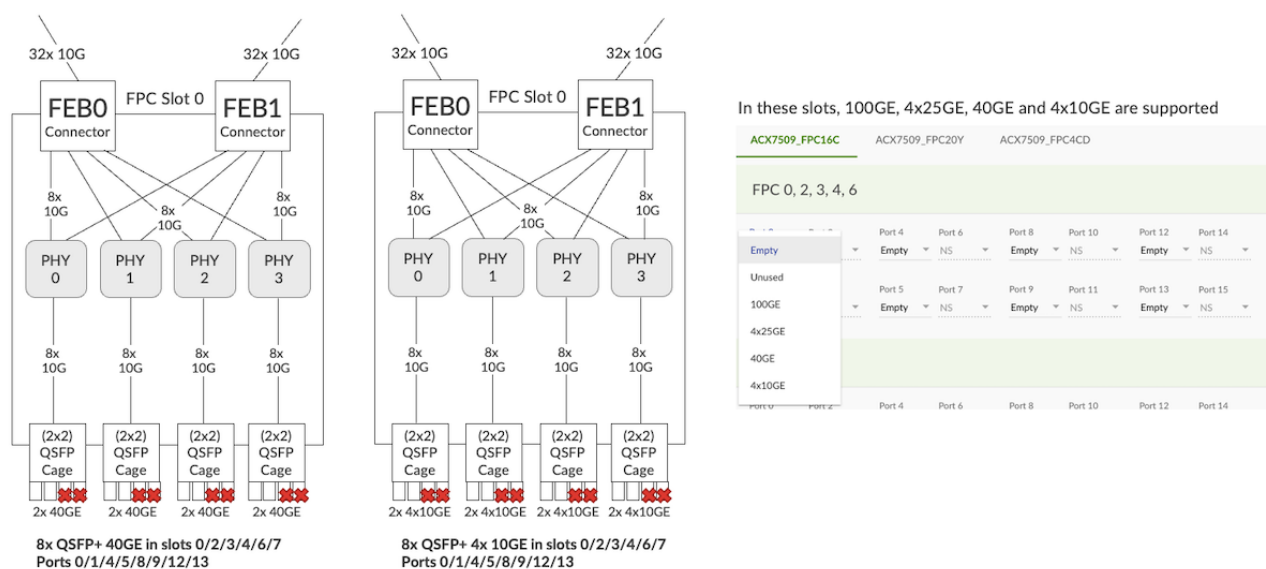


Figure 25: ACX7509-FPC-16C and 40GE/4x10GE in PM25 slots

```
1 regress@rtme-acx7509-03-re0> show chassis pic fpc-slot 2 pic-slot 0
2 FPC slot 2, PIC slot 0 information:
3   Type 16x100G-QSFP
4   State Online
5   PIC version 255.09
6   Uptime 1 day, 9 hours, 34 minutes, 47 seconds
7
8 PIC port information:
```

```

9  <SNIP>
10
11  Port speed information:
12
13  Port PFE Capable Port Speeds
14  0 0 1x100G 1x40G 4x10G 4x25G
15  1 0 1x100G 1x40G 4x10G 4x25G
16  4 0 1x100G 1x40G 4x10G 4x25G
17  5 0 1x100G 1x40G 4x10G 4x25G
18  8 0 1x100G 1x40G 4x10G 4x25G
19  9 NA 1x100G 1x40G 4x10G 4x25G
20  12 0 1x100G 1x40G 4x10G 4x25G
21  13 0 1x100G 1x40G 4x25G 4x10G
22
23  {master}
24  regress@rtme-acx7509-03-re0>

```

Regarding the use of channelized ports, some basic rules need to be followed.

Within a group of two adjacent ports (0-1, 4-5, 8-9, 12-13), if one is configured as channelized, the other must be channelized too or kept empty.

In the example, below, the port checker allows the configuration of Port4: 4x25GE with Port5: 4x10GE. But it raises an alarm with Port0: 100GE and Port1: 4x25GE.

If a user tries to force an unsupported configuration (channelized port with adjacent non-channelized port), the ports will not come up and a PIC violation alarm will be triggered.

ACX7509_FPC16C
ACX7509_FPC20Y
ACX7509_FPC4CD

FPC 0, 2, 3, 4, 6

Port 0 100GE	Port 2 NS	Port 4 4x25GE	Port 6 NS	Port 8 100GE	Port 10 NS	Port 12 4x10GE	Port 14 NS
Port 1 4x25GE	Port 3 NS	Port 5 4x10GE	Port 7 NS	Port 9 40GE	Port 11 NS	Port 13 4x10GE	Port 15 NS

FPC 1 and 5

Port 0 Empty	Port 2 Empty	Port 4 Empty	Port 6 Empty	Port 8 Empty	Port 10 Empty	Port 12 Empty	Port 14 Empty
Port 1 Empty	Port 3 Empty	Port 5 Empty	Port 7 Empty	Port 9 Empty	Port 11 Empty	Port 13 Empty	Port 15 Empty

FPC 7

Port 0	Port 2	Port 4	Port 6	Port 8	Port 10	Port 12	Port 14

Configuration status:
Reason: Invalid Configuration

- On FPC 0, 2, 3, 4, 6: with 4x25GE configured on the port 1, port 0 should either be configured as unused or channelized.

Figure 26: Port Checker with combination of channelized / non-channelized ports

Finally, let's highlight a specific exception here: when using the ACX7509-FPC-16Y in slot 7, a port is disabled to allow the PTP configuration: port 13.

Note: even if you don't configure specifically PTP, the port is unused.

As illustrated in figure 26 below, the port checker will not let you configure it.

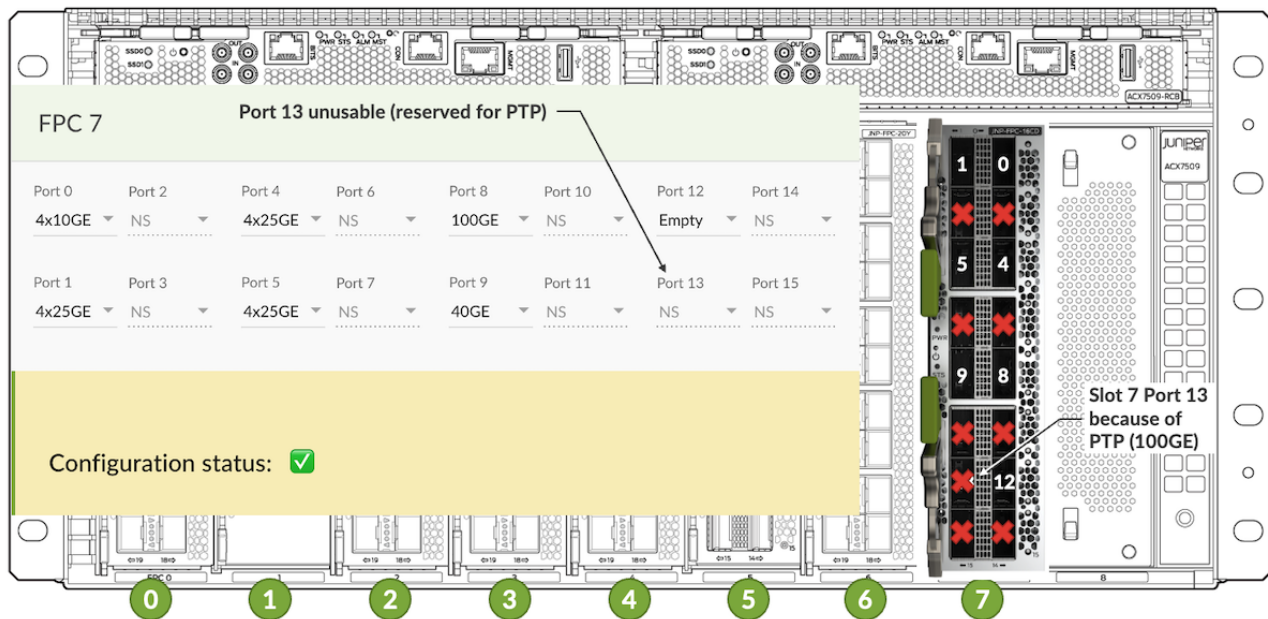


Figure 27: Port 13 disabled in slot 7 for PTP

1.4.5 ACX 7509-FPC-4CD

Only slot 1 and slot 5 can provide 53Gbps PAM4 and, therefore, support 400GE interfaces.

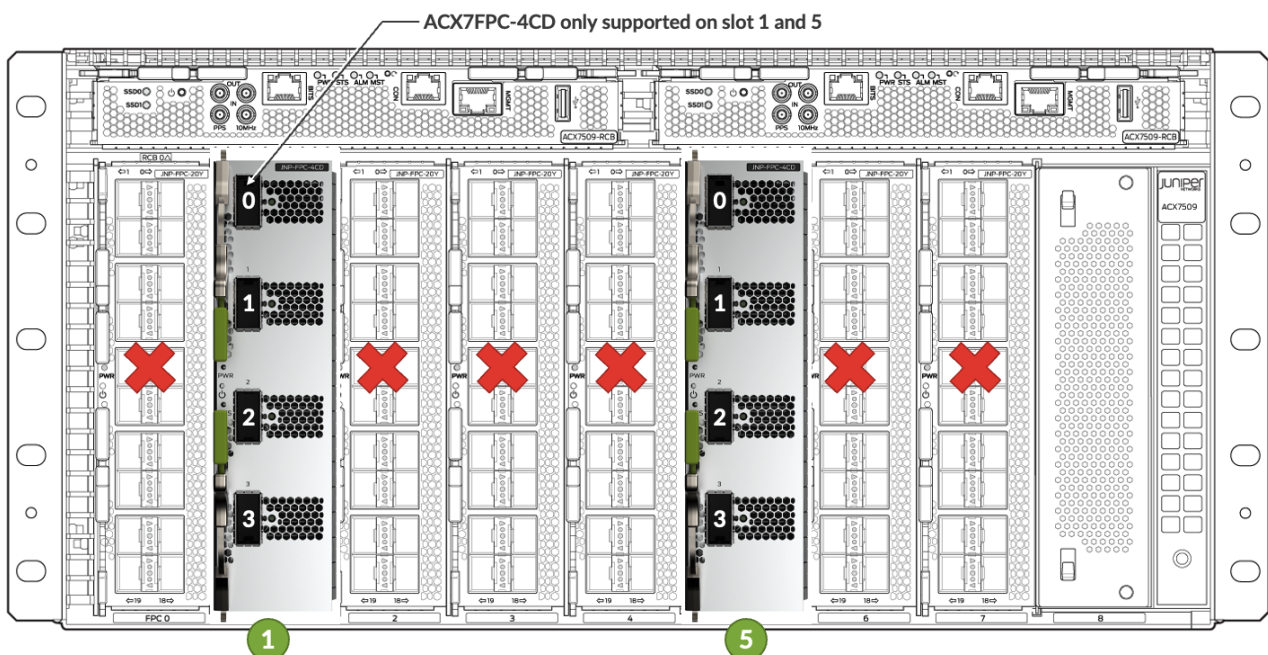


Figure 28: ACX7509-FPC-4CD in Slots 1 and 5

All the ports can be used at 400GE or in breakout of 4x 100GE. No restriction in the mix when enabling breakout here.

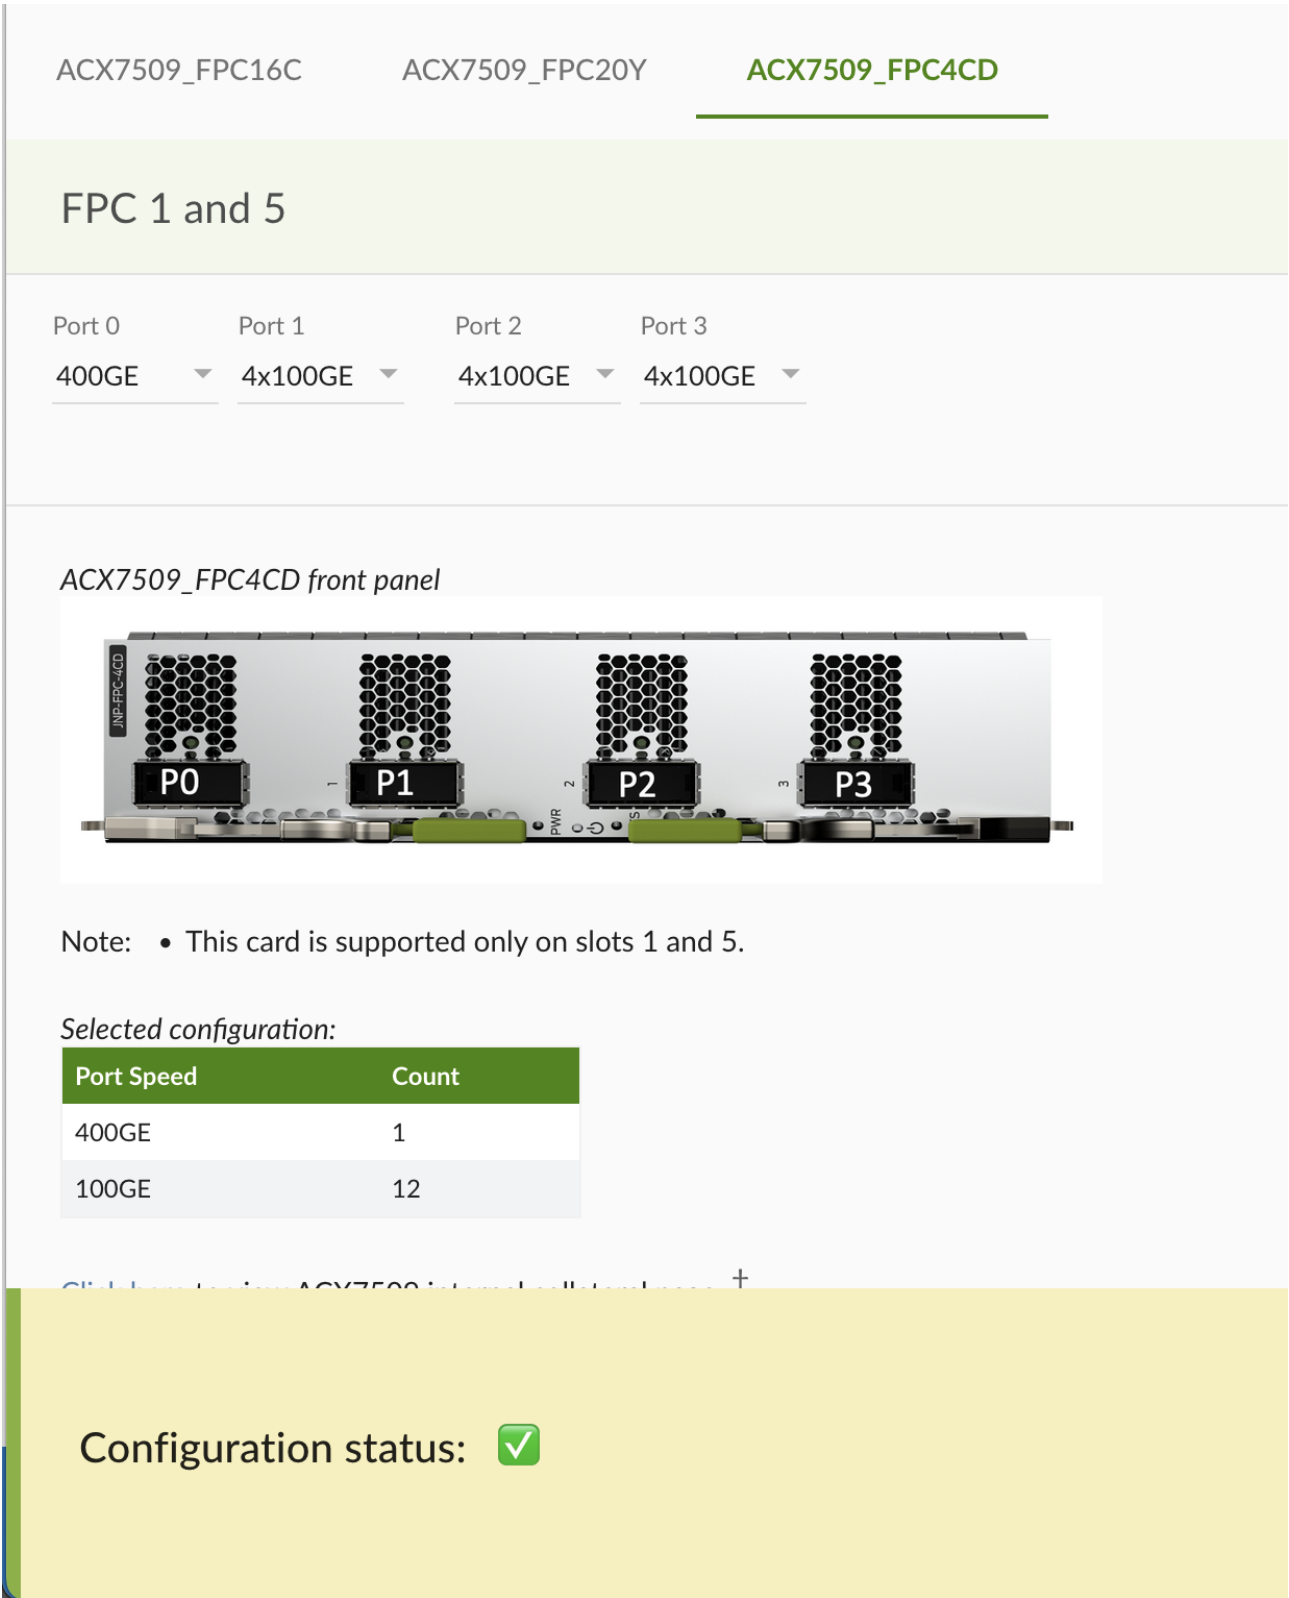


Figure 29: ACX7509-FPC-4CD Different options in the port checker

```
1 regress@rtme-acx7509-01-re0> show chassis pic fpc-slot 5 pic-slot 0
2 FPC slot 5, PIC slot 0 information:
3   Type 4x400G QSFP56-DD
4   State Online
5   PIC version 255.09
6   Uptime 3 hours, 57 minutes, 26 seconds
7
8 PIC port information:
9 <SNIP>
```

```

10
11 Port speed information:
12
13 Port PFE Capable Port Speeds
14 0 1 1x400G 4x100G 1x200G 2x100G 8x50G
15 1 1 1x400G 4x100G 1x200G 2x100G 8x50G
16 2 1 1x400G 4x100G 1x200G 2x100G 8x50G
17 3 1 1x400G 4x100G 1x200G 2x100G 8x50G
18
19 {master}
20 regress@rtme-acx7509-01-re0>

```

To verify the latest support of optics, always use the Hardware Compatibility Tool: <https://apps.juniper.net/hct/product/?prd=ACX7509>

1.4.6 Maximum number of ports supported on ACX7509 Routers

Now that we detailed the potential restrictions in term of FPC position in the chassis, let's identify the maximum number of ports we can offer in an ACX7509 and how we calculate it.

	1GE	10GE	25GE	40GE	50GE	100GE	200GE	400GE
Native	120	160	160	47	N/S	79	N/S	8
With BreakOut	N/A	188	188	N/A	N/S	79	N/S	N/A

N/A: Not applicable – N/S: Not supported

Let's check the math here:

- 1GE available on ACX7509-FPC-20Y only, in PM25 slots (0/2/3/4/6/7) 6x FPC and 20x ports each: 120x 1GE total.
- 10GE available on ACX7509-FPC-20Y natively and ACX7509-FPC-16C with QSFP+ breakout cables. With a chassis full populated with ACX7509-FPC-20Y cards: 8x FPC and 20x SFP+ each: 160x 10GE total. With breakout cable: ACX7509-FPC-16C supports 4x 10GE on PM25 slots only, and on half of the ports, with a specific case of slot 7 where port 13 is blocked for PTP. That gives us: 5x FPC with 8x QSFP+ 4x10GE and 1x FPC with 7x QSFP+ 4x 10GE for a total of $5 \times 8 \times 4 + 7 \times 4 = 188 \times 10GE$.
- 25GE: same logic than 10GE with SFP28 and breakout on QSFP28. Native: 8x FPC and 20x SFP28 each: 160x 25GE total. With breakout: 5x FPC with 8x QSFP28 4x25GE and 1x FPC with 7x QSFP28 4x 25GE: $5 \times 8 \times 4 + 7 \times 4 = 188 \times 25GE$ total.
- 40GE via QSFP+ modules and therefore only supported on the ACX7509-FPC-16C in PM25 slots (0/2/3/4/6/7) on half of the ports and with the specific case of slot 7. $5 \times 8 + 7 = 47 \times 40GE$ total.
- 50GE not supported at the moment of the publication of this article, in the roadmap. When available, it will be on ACX7509-FPC-20Y in PM50 slots 1 and 5. 2x FPC and 20x SFP56 modules each; 40x 50GE total.
- 100GE available on ACX7509-FPC-16C natively, with 16 ports in PM50 slots and 8 ports in PM25 slots (with slot 7 exception). Also available with breakout on ACX7509-FPC-4CD but it doesn't improve the max supported scale. 2x FPC with 16x QSFP28 each + 5x FPC with 8x QSFP28 each + slot 7 FPC with 7x QSFP28. That gives us 79x 100GE total.
- 200GE not supported at the moment of the publication of this article.
- 400GE supported on ACX7509-FPC-4CD only in slots 1 and 5. 2x 4x QDD56 modules: 8x 400GE total.

1.5 Internal Details

1.5.1 Block Diagrams

The ACX7509 is internally composed of multiple parts, themselves containing different chipsets .

At very high-level, we can summarize them to:

- FEB (potentially x2) each of them containing
 - Two Broadcom Jericho2c PFE (BCM8882x) with 2x 4GB HBM
 - Orthogonal Direct connectors towards the 8 FPCs
- RCB (potentially x2), each of them containing
 - Intel x86 CPU with DDR4 memory and SSD storage
 - PCI switch to interconnect the different components
 - Internal controllers for I2C (inter-integrated circuit), fan control, ...
 - TPM 2.0 module (Trusted Platform Module)
- FPC
 - PHY acting as HMUX, retimer and (Reverse) Gearboxes to adapt 50 Gbps PAM4 into 25Gbps NRZ or vice versa, to broadcast and select traffic to and from FEBs
 - FPGA for control signals
 - Optical cages to accommodate different optic modules

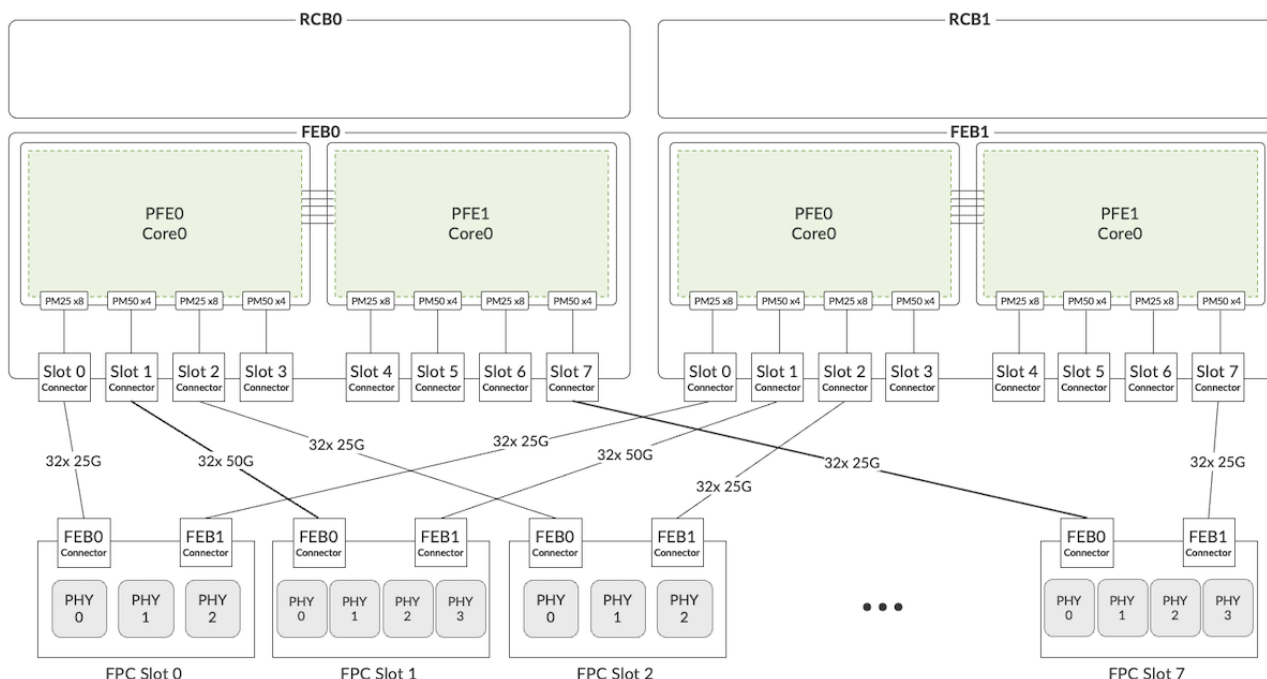


Figure 30: ACX7509 High Level block diagram

1.5.2 PFE Description

Let's zoom in the Packet Forwarding Engine used in the ACX7509.

Each FEB hosts two Broadcom Jericho2c (BCM8882x) in back-to-back “mesh” mode.

Jericho2c is a single core chipset offering:

- 2.4Tbps and 1BPPS forwarding capacity
- 4Tbps of Network Interfaces (NIF) via a mix of 32x 50Gbps SERDES and 96x 25Gbps SERDES
- 48 Fabric 50Gbps SERDES
- 128k Virtual Output Queues
- 384k Counters
- Hybrid buffering with 16MB on-chip ingress buffer, 4GB off-chip ingress buffer and 6MB for egress queueing.

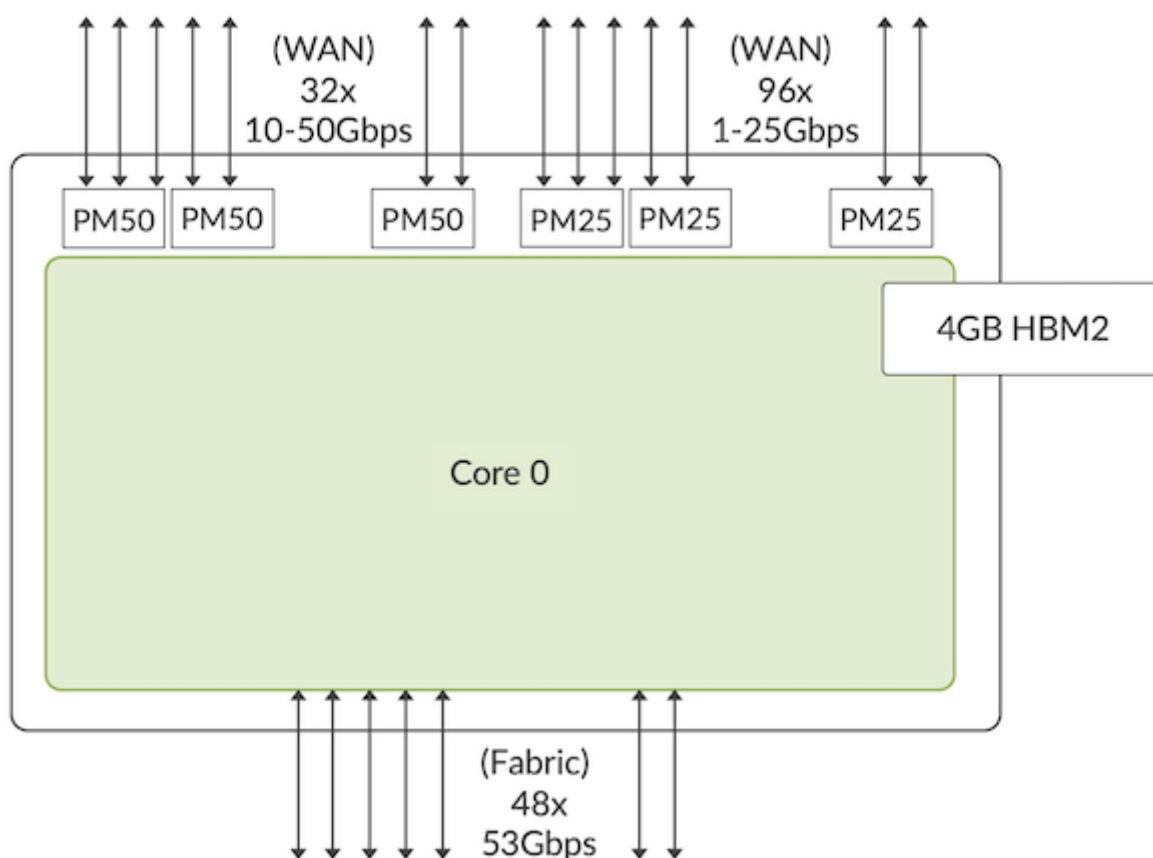


Figure 31: Jericho2c

So, why two J2c at 2.4Tbps instead of a single Jericho2 at 4.8Tbps?

This dual ASIC approach offers multiple advantages, but the two major ones are:

- A mix of PM25 and PM50 allowing ports from 1GE to 400GE in the same chassis J2 only offers PM50s, check [the link for more details](#)
- Higher scalability in queues and counters

The two J2c ASICs are connected via 48x SERDES 50Gbps. The traffic “cellification” between ingress and egress pipelines and the internal headers added to each packet/cell (traffic management, packet processing and fabric headers), reduces this theoretical 2.4Tbps connection to 2.15Tbps in the best case. Let’s say it’s “more or less 2Tbps” to simplify the discussion.

The aggregated NIF represents 4Tbps (32x50G + 96x25G), but of course the chipset cannot push or receive these 4Tbps. Nevertheless, and it could be counter-intuitive, the chip can receive and transmit more than 2.4Tbps:

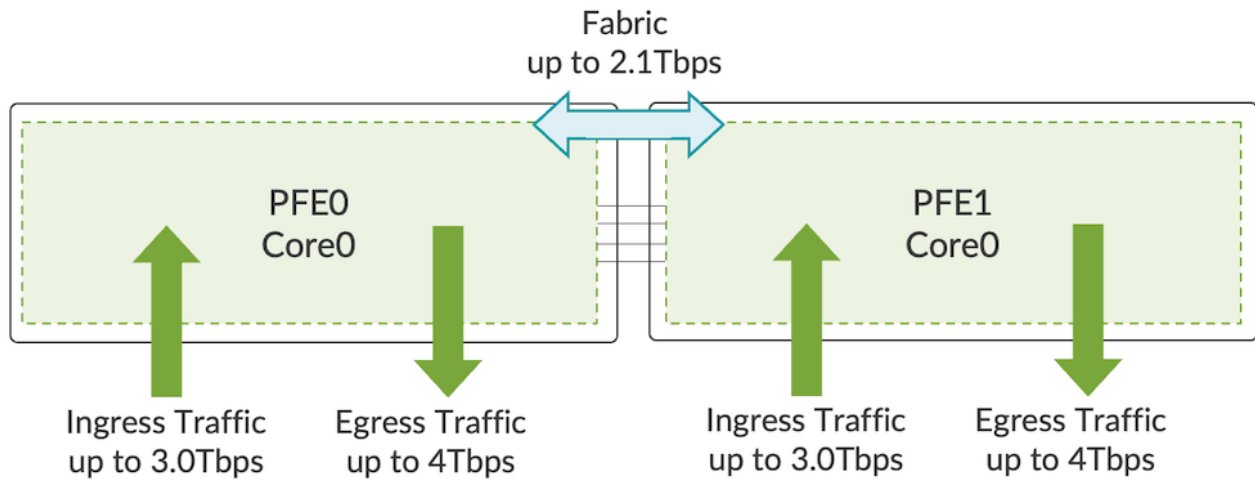


Figure 32: Bandwidth dependent on packet size

It's entirely dependent on the packet size, and for certain ranges like [505-570], the forwarding performance goes below 2.4Tbps. It's the famous sawtooth diagram you may have seen in the past.

In a nutshell, the larger the average packet size, the more bandwidth you will get.

You can imagine ideal cases to optimize the bandwidth like:

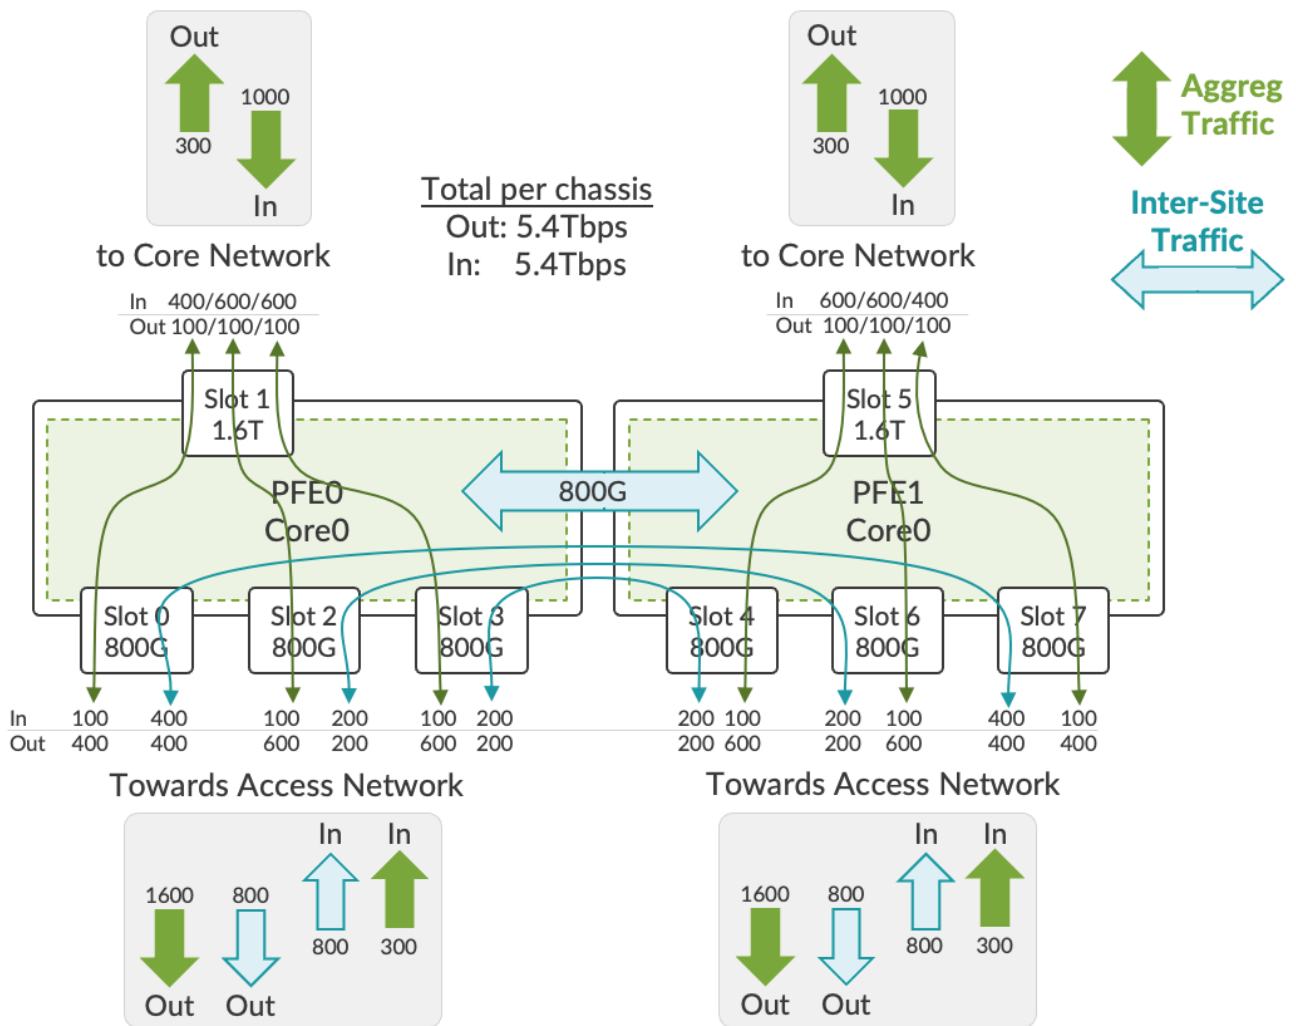


Figure 33: Example of optimization in Aggregation use-case

This example in figure 32 is supposing a 4:1 to 6:1 downstream/upstream ratio in an aggregation network and a third of east-west (inter-site) traffic.

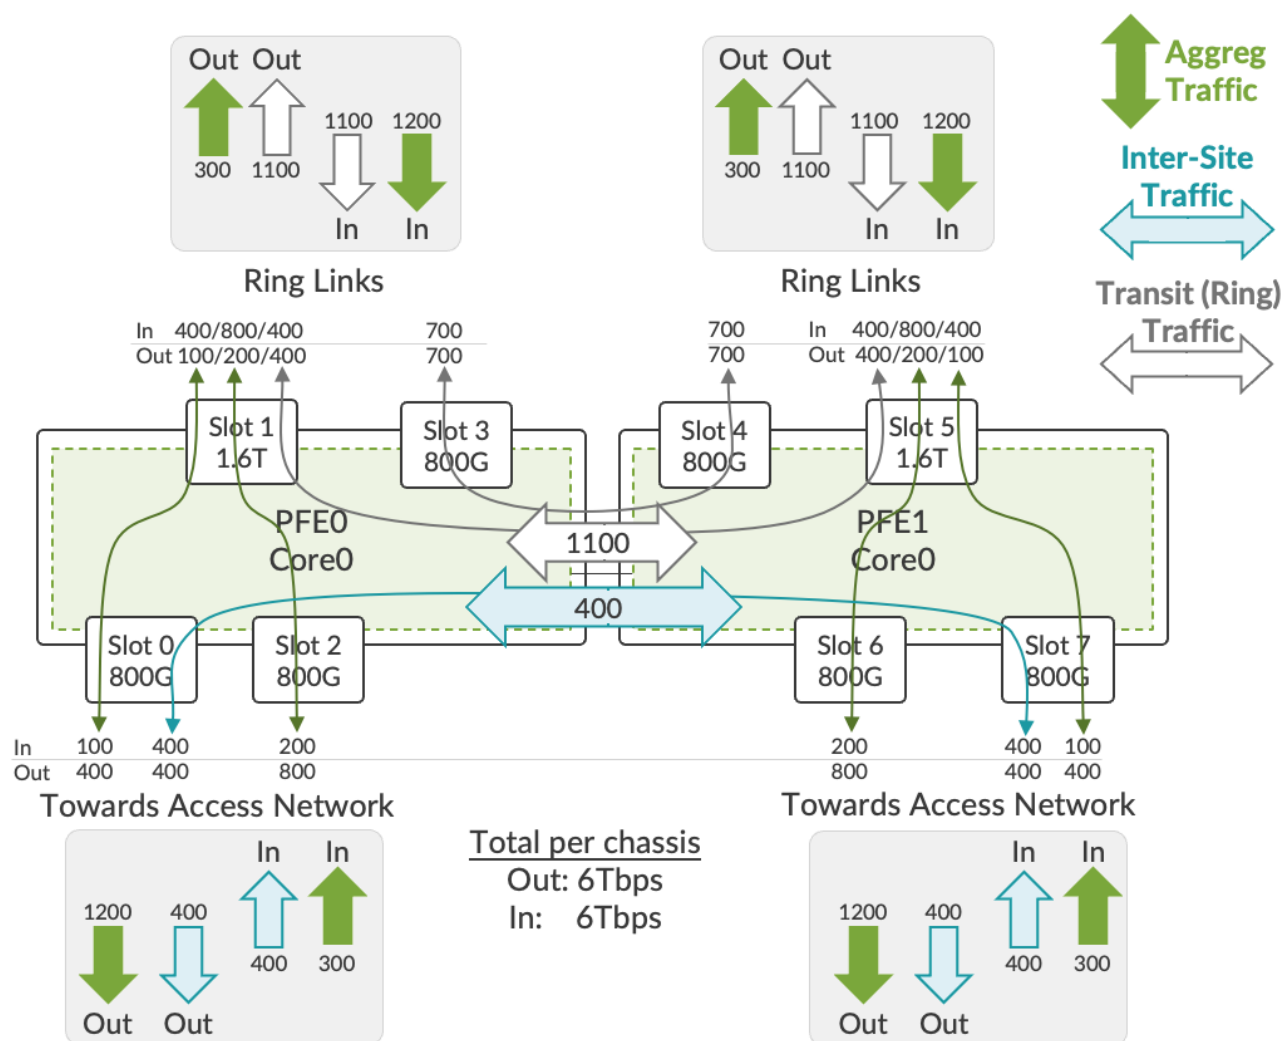


Figure 34: Example of optimization in Ring Aggregation topology

1.6 Redundancy

RCB0 and FEB0 are grouped and represent a tight pair, same for RCB1 and FEB1.

We **won't** support the following scenarios:

- 2x RCB 0+1 and only FEB0 (or only FEB1)
- 2x FEB 0+1 and only RCB0 (or only RCB1)
- RCB0 with FEB1
- RCB1 with FEB0

In the “Base” bundle, the ACX7509 chassis is shipped with only RCB0 and FEB0.

In the “Premium” bundle, the ACX7509 chassis is coming with RCB0 paired with FEB0 and RCB1 paired with FEB1. In this redundant configuration, they behave in a “shared fate” mode, meaning that the failure of one will trigger the mastership switchover.

If you insert a FEB without the matching RCB or vice versa, the system will trigger a mismatch alarm and the part will not come ONLINE.

To illustrate the logic, we start with the default status when you boot up the chassis: RCB/FEB Pair “0” is Active and Pair “1” is standby

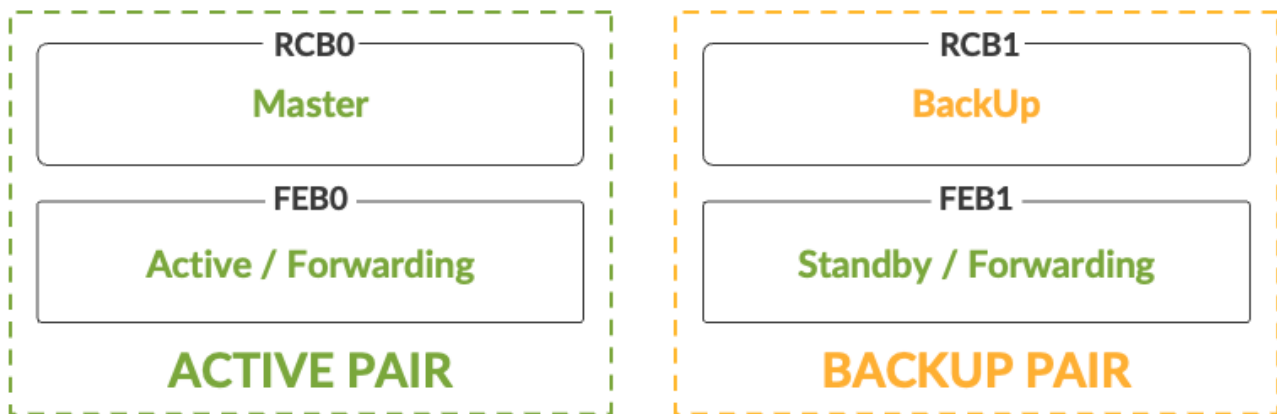


Figure 35: Nominal redundant state

In this situation, the RCB0 is Master and RCB1 is in Backup state.

Both FEBs are capable of forwarding (we will show why in a minute):

- FEB0 is Active and paired to RCB0
- FEB1 is in Standby mode, and paired to RCB1

If the RCB0 fails or is ejected:

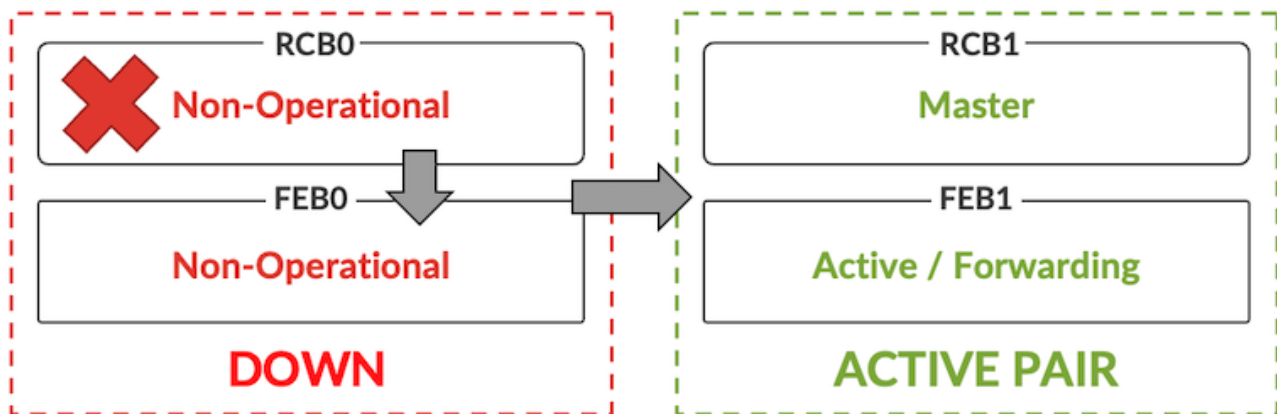


Figure 36: RCB0 failure scenario

It triggers a mastership switchover and the pair RCB1/FEB1 becomes Active / Master.

This happens in a few milliseconds, the I2C internal network enables the detection and triggers the change decision.

An alternative scenario is the failure of the FEB0:

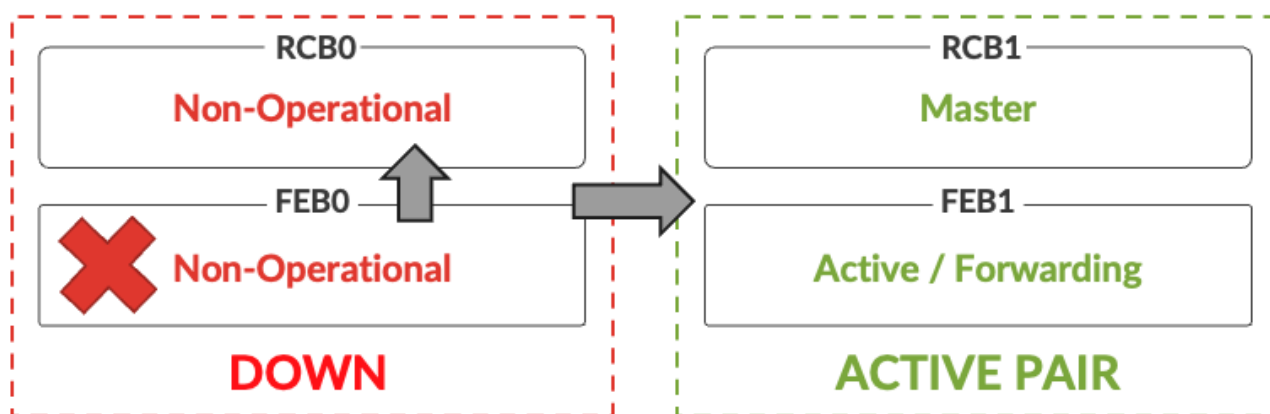


Figure 37: FEB0 failure scenario

Here again, a mastership switchover happens in a few milliseconds, with the pair RCB1/FEB1 taking the control.

The signaling of the mastership is also influencing the PHY behavior in the FPCs. And to understand why, let's follow the data path at high level in the chassis.

These PHYs are not only responsible for retiming and SERDES speed translation, but they also act as a Hybrid Multiplexer (HMUX) responsible for broadcasting the traffic coming from the interfaces towards the two FEBs and to select the appropriate traffic coming from the PFEs to be transmitted to the NIF.

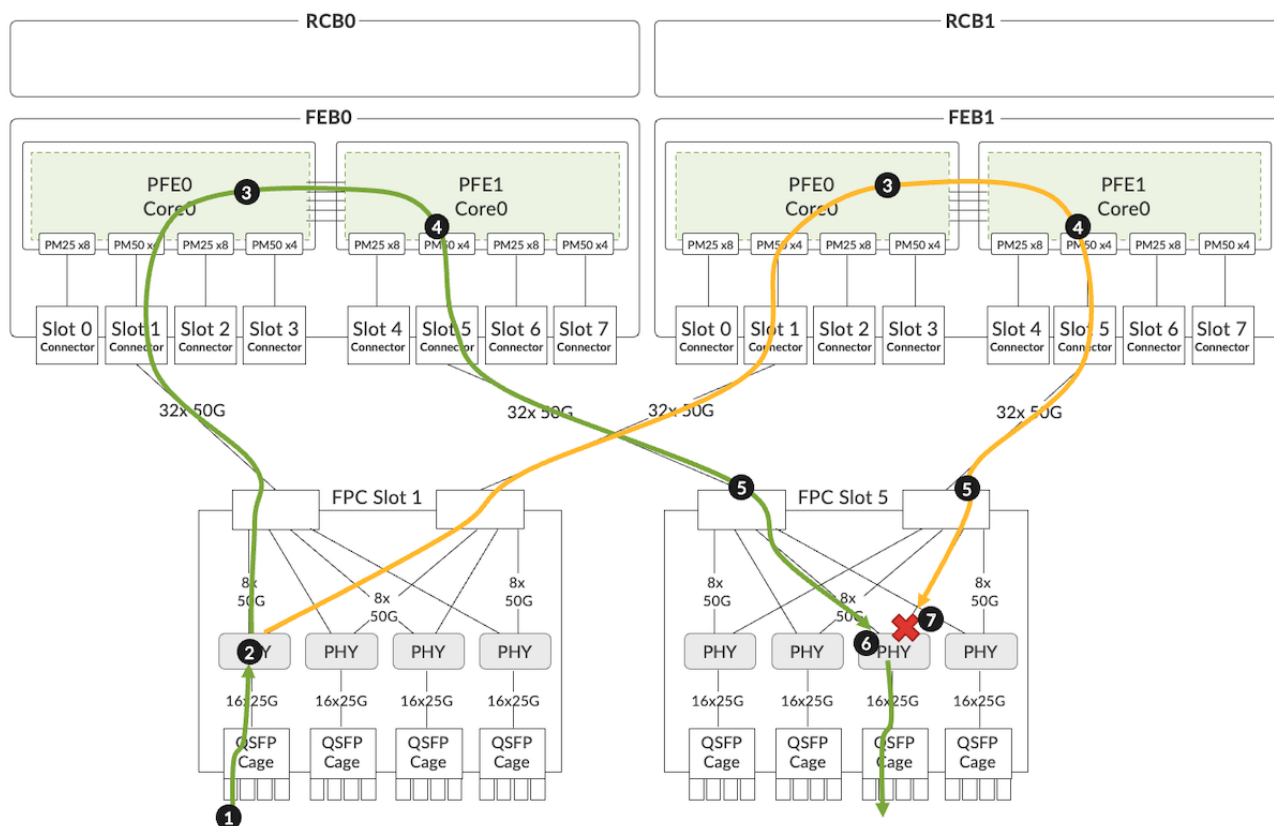


Figure 38: Redundant mode data path

1. The traffic is received on the FPC slot 1

2. The PHY associated to this interface duplicates the traffic to both FEB0 and FEB1 on the system-facing SERDES mapped to the source interface.
3. The traffic green and orange are received by both PFE0s of FEB0 and FEB1, the ingress packet treatment is applied, including the destination lookup and next-hop resolution, leading to the forwarding of the packets to PFE1
4. Still happening in parallel, the traffic arrives in PFE1 egress pipeline and is transmitted towards the FPC slot 5 via the OD connector
5. At that moment, the duplicated traffic arrives in FPC slot 5 and is passed to the PHY
6. Based on the FEB_SELECTOR configuration, it will forward the green traffic coming from the active FEB0
7. And it will drop the orange traffic coming from FEB1 (backup)

This FEB_SELECTOR information is signaled through the internal I2C networks. When a mastership switchover is triggered, making the pair RCB1/FEB1 Active, the information is instantly passed to the PHYs from the new active RCB, reprogramming the HMUX to accept traffic from FEB1 and no longer from FEB0 as show in figure

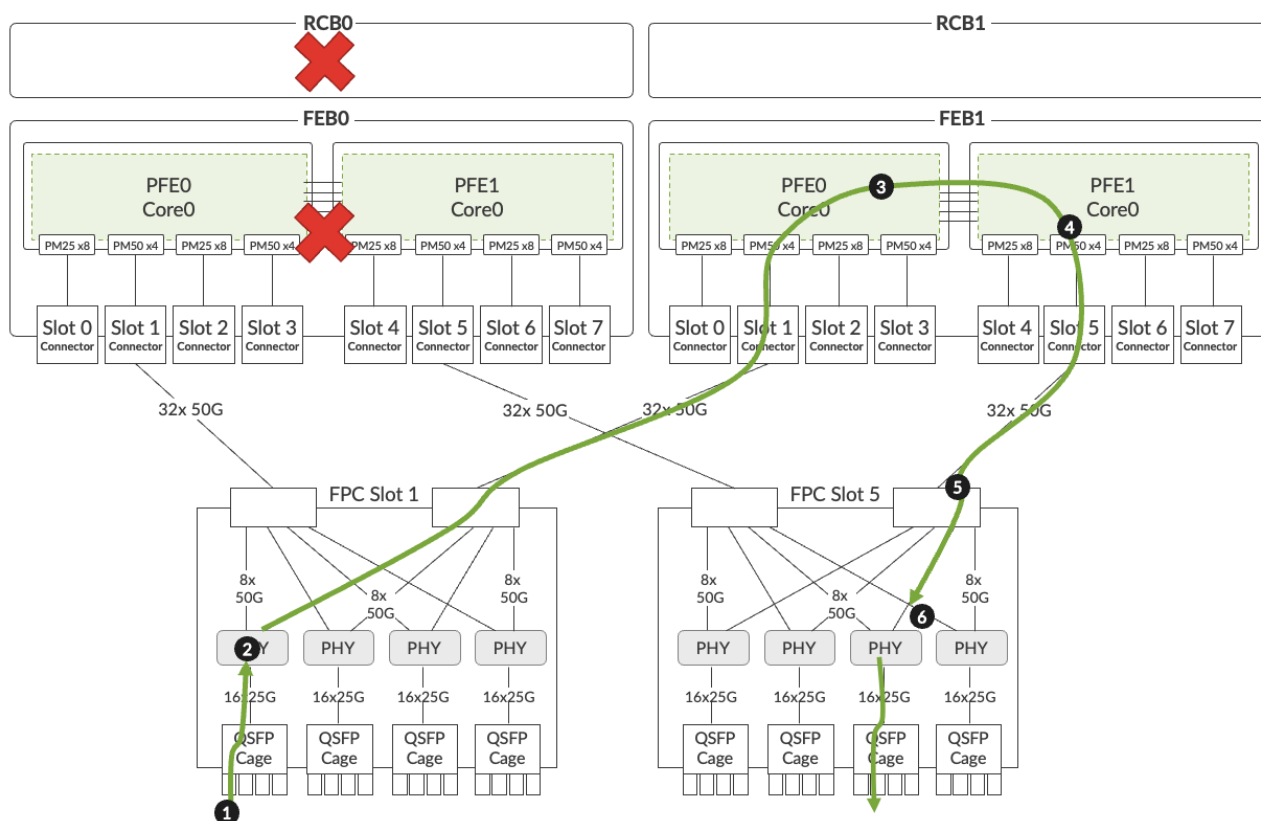


Figure 39: FEB0 failure scenario

1.7 In Conclusion

We didn't cover MACsec support and Class-C timing, both features enabled at the PHY level in the different PFCs (since Jericho2c can't provide these services). These two technologies will be the topic of dedicated TechPost article in the future.

For your information, a series of articles has been dedicated to the ACX7000 Metro use-cases validation and it

does include the ACX7509 chassis. They cover EVPN MAC-VRF, EVPN VPWS, L3VPN, 6PE, L2VPN, VPLS and L2 learning rate: how we configure it and what is the supported scale. The first articles of this series are listed in the links below.

Next article on ACX7509 will be dedicated to the High-Availability testing, stay tuned.

1.8 Useful links

- TechLibrary pages: <https://www.juniper.net/documentation/product/us/en/acx7509/>
- Datasheet: <https://www.juniper.net/content/dam/www/assets/datasheets/us/en/routers/acx7509-cloud-metro-router-datasheet.pdf>
- Port checker: <https://apps.juniper.net/home/port-checker/index.html>
- Power calculator: <https://apps.juniper.net/power-calculator/?view=calculate&pdt=10107509&type=2>
- EVPN MAC VRF Metro Validation: <https://juniper.github.io/techposts/evpn-mac-vrf-validation-on-acx7000/article>
- EVPN VPWS Metro Validation: <https://juniper.github.io/techposts/evpn-vpws-validation-on-acx7000/article>
- L3VPN and 6PE Metro Validation: <https://juniper.github.io/techposts/l3vpn-validation-on-acx7000/article>

1.9 Glossary

- AFO: Airflow Out
- ASIC: Application-Specific Integrated Circuit
- CLI: Command Line Interface
- CPU: Central Processing Unit
- DIN (connector): Deutsches Institut fur Normung e.V.
- FEB: Forwarding Engine Board
- FPC: Flexible PIC Concentrator
- FRU: Field Replaceable Unit
- FPGA: Field Programmable
- FT: Fan Tray
- HA: High Availability
- HMUX: Hybrid Multiplexer
- I2C: Inter-Integrated Circuit
- MUX: Multiplexer
- NIF: Network Interface
- NRZ: Non-Return to Zero
- OD: Orthogonal Direct (connectors)
- PAM4: Pulse Amplitude Modulation 4-level
- PFE: Packet Forwarding Engine
- PM: Port Macro
- PSM: Power Supply Module
- PSU: Power Supply Unit
- QSFP: Quad Small Form-factor Pluggable

- RCB: Routing Controller Board
- RU: Rack Unit
- SERDES: SERializer DESerializer
- SFP: Small Form-factor Pluggable
- SKU: Stock Keeping Unit
- VOQ: Virtual Output Queue

1.10 Acknowledgements

Many thanks to Vyasraj Satyanarayana, Dhaval Bhodia, Rajeshwar Sable for their explanations on the ACX7509 and PFE details. Thanks to Aysha Jabeen and Amit Kantelia for the review of this document.



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

