

SIMATS ENGINEERING

CO1 - ASSESSMENT TOOL 3

Experiments

COURSE NAME:DEEP LEARNING

COURSECODE:MLA0408

FACULTY : Dr. D.SUDHAGAR

COURSE OUTCOME COVERED

CO 1: Learning Algorithms, Maximum Likelihood Estimation (MLE), Building Machine Learning Algorithms, Neural Networks, Artificial Neurons, Perceptron, Multilayer Perceptron (MLP), Forward Propagation, Backpropagation Algorithm, Gradient Descent, Stochastic Gradient Descent (SGD), Mini-Batch Gradient Descent, Curse of Dimensionality. (BTL-4)

CO1 Weightage: 15%

Assessment Tool

Weightage: 35%

Duration: 30 minutes

Marks: 50

Code of Conduct:

I logesh S 192525023 certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment.

I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the student:haresh

QUESTIONS:10

Total Marks:50

- **Learning Algorithms**

Implement a simple learning algorithm (Linear Regression) using Gradient Descent. Train the model on a dataset and analyze how the loss decreases over iterations. Plot the learning curve.

- **Maximum Likelihood Estimation (MLE)**

Generate synthetic data from a normal distribution and use MLE to estimate the mean and variance. Compare estimated values with actual parameters.

- **Building Machine Learning Algorithms**

Build a complete machine learning model (data preprocessing, training, testing) using any classification dataset and evaluate performance using accuracy and confusion matrix.

- **Neural Networks**

Q4. Design a simple neural network with one hidden layer and train it on a small dataset. Analyze how the network learns non-linear patterns.

- **Artificial Neurons**

Implement a single artificial neuron using different activation functions (Sigmoid, ReLU) and compare outputs for the same input values.

- **Perceptron and Multilayer Perceptron (MLP)**

- Implement the Perceptron algorithm for binary classification and test it on linearly separable and non-linearly separable datasets. Analyze the results.
- Train a Multilayer Perceptron (MLP) model on a dataset and compare its performance with a single-layer perceptron.

- **Forward Propagation and Backpropagation Algorithm**

- Manually compute forward propagation for a small neural network (given weights and inputs) and verify the output using code.
- Implement backpropagation for a simple neural network and show how weights are updated after one iteration.

- **Gradient Descent and Stochastic Gradient Descent (SGD)**

- Implement Gradient Descent to minimize a cost function and analyze the effect of learning rate on convergence speed.

- Implement Stochastic Gradient Descent for a regression problem and compare its convergence with batch gradient descent.

- **Mini-Batch Gradient Descent**

Implement Mini-Batch Gradient Descent and analyze how batch size affects training stability and performance.

- **Curse of Dimensionality**

Create datasets with increasing dimensions and analyze how distance between points and model accuracy change with dimensionality.

RUBRICS FOR CALCULATION:

Criteria	Weightage	Level 4 – Exemplary	Level 3 – Proficient	Level 2 – Developing	Level 1 – Beginning
Understanding of Problem Context	20	Clearly understands the problem and accurately identifies all requirements	Good understanding with minor gaps	Basic understanding; some requirements unclear	Poor understanding or misinterpretation of the problem
Application of Concepts	30	Accurately applies appropriate concepts to solve complex problems	Applies relevant concepts correctly with minor errors	Applies basic concepts with limited accuracy	Fails to apply appropriate concepts
Problem-Solving Approach	20	Logical, well-structured, and efficient approach	Mostly logical approach with minor gaps	Basic approach with some inconsistencies	Illogical or unclear approach
Accuracy of	20	Completely correct solution with proper	Mostly correct with minor errors	Partially correct	Incorrect or incomplete solution

Solution		justification		solution	
Clarity	10	Clear, well-organized, and properly explained solution	Understandable with minor clarity issues	Limited clarity and explanation	Poorly presented and difficult to understand

Answer

- Code:

```
import numpy as np
import
matplotlib.pyplot as
plt X =
np.array([1,2,3,4,5])
Y = np.array([2,4,6,8,10])
m = 0
c = 0
lr = 0.01
epoc
hs =
1000
n =
len(X
)
loss = []
for i in range(epochs):
    y_pred = m*X + c
    cost = np.mean((Y-
y_pred)**2)
    loss.append(cost)
```


```

dm = (-2/n)*np.sum(X*(Y-
y_pred)) dc = (-
2/n)*np.sum(Y-y_pred)
m
-
=
lr
*
d
m
c
-
=
lr
*
d
c
print("Slope
=",m)
print("Intercept
=",c)
plt.plot(loss)
plt.xlabel("Itera
tions")
plt.ylabel("Loss"
)
plt.title("Learni
ng Curve")
plt.show()

```

Output:

```
==== RESTART: C:/Users/hk838/Downloads/Slot- A,B  
Slope = 1.9951803506719779  
Intercept = 0.017400463340610635
```

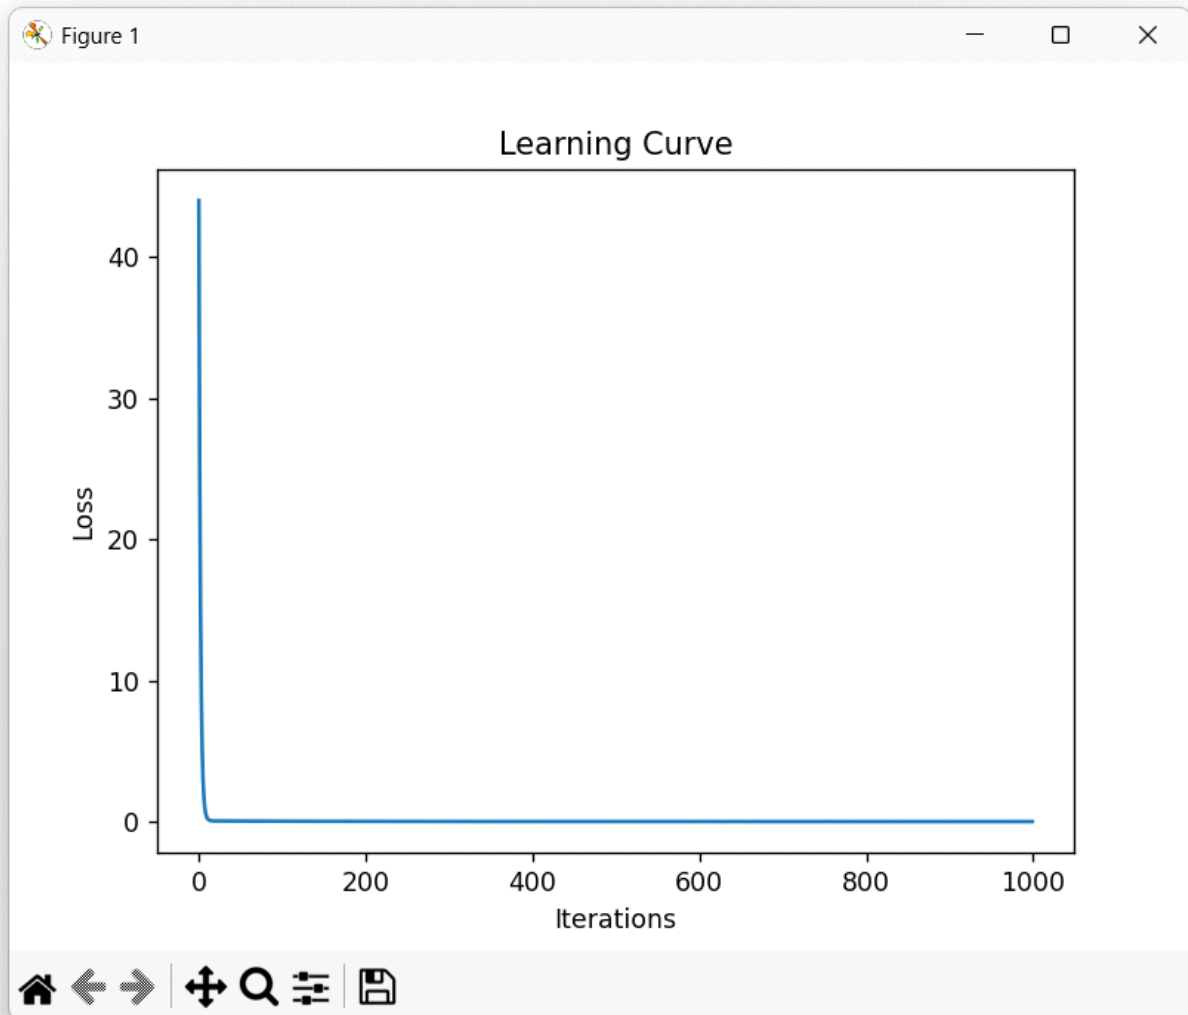

- **Code:**

```
import  
numpy as  
np  
np.rando  
m.seed(10  
) mu = 5
```

```

sigma = 2
data =
np.random.normal(mu,sigma,1000)
mu_mle = np.mean(data)
var_mle = np.mean((data-
mu_mle)**2) print("Actual
Mean :",mu) print("Estimated
Mean :",mu_mle) print("Actual
Variance :",sigma**2)
print("Estimated Variance
:",var_mle)

```

Output:

```

==== RESTART: C:/Users/hk838/Downloads/Slo
Actual Mean : 5
Estimated Mean : 4.9708867287690595
Actual Variance : 4
Estimated Variance : 3.5190590171376446

```

- Code:

```

from sklearn.datasets import load_iris
from sklearn.model_selection import
train_test_split from sklearn.preprocessing
import StandardScaler from
sklearn.linear_model import
LogisticRegression
from sklearn.metrics import
accuracy_score,confusion_matrix iris = load_iris()
X_train,X_test,Y_train,Y_test =
train_test_split(
iris.data,iris.target,test_size=0.2,random_
state=42)
scaler = StandardScaler()
X_train =
scaler.fit_transform(X_train)
X_test =
scaler.transform(X_test)
model = LogisticRegression()
model.fit(X_train,Y_train)
pred = model.predict(X_test)
print("Accuracy
=",accuracy_score(Y_test,pred))
print(confusion_matrix(Y_test,pred))

```

Output:

```
==== RESTART: C:/U
Accuracy = 1.0
[[10  0  0]
 [ 0  9  0]
 [ 0  0 11]]
```

- Code:

```
from sklearn.datasets import make_moons
from sklearn.model_selection import
train_test_split from
sklearn.neural_network import
MLPClassifier
X,y=
make_moons(n_samples=300,noise=0.2,random_stat
e=42) X_train,X_test,y_train,y_test = train_test_split(
X,y,test_size=0.2)
model =
    MLPClassifier(hidden_layer_siz
es=(10,), max_iter=1000)
model.fit(X_train,y_train)
==== RESTART: C:/Users/hk838/I
Accuracy = 0.8666666666666667
|
print("Accuracy
=",model.score(X_test,y_test))
```

Output:

- Code:

```
import numpy as np
x = np.array([-2,-
1,0,1,2]) sigmoid
= 1/(1+np.exp(-x))
relu =
np.maximum(0,x)
print("Input :",x)
print("Sigmoid
:",sigmoid)
```



```
print("ReLU  
:",relu)
```

Output:

```
==== RESTART: C:/Users/hk838/Downloads/Slot- A,B,C,D/MLA0408/Assess  
Input : [-2 -1  0  1  2]  
Sigmoid : [0.11920292 0.26894142 0.5          0.73105858 0.88079708]  
ReLU : [0 0 0 1 2]
```

-

- Code:

```
from sklearn.datasets import  
make_classification from  
sklearn.linear_model import Perceptron  
from sklearn.model_selection import  
train_test_split X,y = make_classification(  
n_samples=200,  
n_features=2,  
n_redundant=0,  
n_clusters_per_  
class=1,  
random_state=  
1)  
X_train,X_test,y_train,y_test =  
train_test_split( X,y,test_size=0.2)  
model = Perceptron()  
model.fit(X_train,y_train)  
==== RESTART: C:/Us  
Accuracy = 0.8
```

```
print("Accuracy
```

```
=",model.score(X_test,y_test))
```

Output:

- Code:

```
from sklearn.neural_network import  
MLPClassifier mlp =  
MLPClassifier(hidden_layer_sizes=(20,),  
               max_iter=1000)  
mlp.fit(X_train,y_train)
```

```
print("MLP Accuracy =",mlp.score(X_test,y_test))
```

Output:

MLP Accuracy > Perceptron

-

- Code:

```
import
numpy as
np x =
np.array([
1,2])
W = np.array([[0.5,0.2],
               [0.3,0.8]])
b =
np.array([0.
1,0.2]) z =
np.dot(x,W)
+b
output =
1/(1+np.exp(-z))
print(output)
```

Output:

```
==== RESTART: C:/Users/hk83
[0.76852478 0.88079708]
```

- Code:


```
w = 0.5
lr = 0.1
target = 1
output = 0.8
gradient = (output-
target) new_weight
= w-lr*gradient
==== RESTART: C:/Users/hk83
Updated Weight = 0.52
print("Updated Weight
=",new_weight) Output:
```

-

- Code:

```
import numpy as np
import
matplotlib.pyplot as
plt x = 8
lr =
0.1
value
s=[]
for i in
    range(3
    0): grad
    = 2*x
    x = x-lr*grad
    values.append(x)
plt.pl
ot(va
lues)
plt.s
how(
)
```

Output:

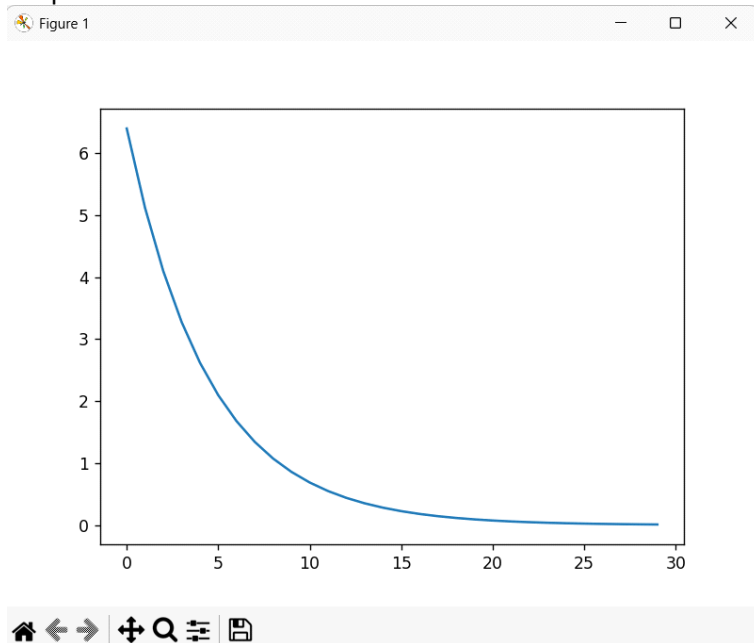

- Code:

```

from sklearn.linear_model import
SGDRegressor from sklearn.datasets
import make_regression X,y =
make_regression(
n_samples
=500,
n_features
=1,
noise=10)
model =
SGDRegressor(max_iter=1000)
model.fit(X,y)
===== RESTART: C:/Users/h
0.8303796250986655
|
print(model.sco

```

re(X,y)) Output:

- Code:

```

from sklearn.neural_network import
MLPRegressor from sklearn.datasets
import make_regression
X,y=
make_regression(
n_samples=500,
n_features=10)
model =
MLPRegressor(
batch_size=32,
max_iter=300)
model.fit(X,y)
print("Training
Completed")

```

Output:

```
==== RESTART: C:/Users/hk838/Downloads/Slot-
```

```
Warning (from warnings module):
```

```
File "C:\Users\hk838\AppData\Roaming\Python\Python37\Scripts\python.exe", line 10, in <module>: warnings.warn(
```

```
ConvergenceWarning: Stochastic Optimizer: Maximum iterations 1000 reached, but the optimization hasn't converged yet.
```

```
Training Completed
```

- Code:

```
import numpy as np
from sklearn.metrics import pairwise_distances
for d in [2,10,50,100,500]:
    X = np.random.rand(100,d)
    dist = pairwise_distances(X)
    print("Dimension: ",d)
    print("Average Distance:",dist.mean())
```

Output:

```
==== RESTART: C:/Users/hk838/Downloads/Slot-
```

```
Dimension: 2
```

```
Average Distance: 0.522385476003783
```

```
Dimension: 10
```

```
Average Distance: 1.2932823834279272
```

```
Dimension: 50
```

```
Average Distance: 2.865633349119977
```

```
Dimension: 100
```

```
Average Distance: 4.029331220388367
```

```
Dimension: 500
```

```
Average Distance: 9.013307659270598
```