


Untitled1* x

 Run    Source 

```
1 num1=as.integer(readline(prompt = "enter the first number:"))
2 num2=as.integer(readline(prompt = "enter the second number:"))
3 num3=num1+num2
4 print(num3)
5
6
```

4:1 (Top Level) R Script

Console Terminal x Background Jobs x

R 4.6.1 · ~/ 

In eval(ei, envir) : NAs introduced by coercion

```
> source("~/active-rstudio-document", echo = TRUE)

> num1=as.integer(readline(prompt = "enter the first number:"))
enter the first number:10

> num2=as.integer(readline(prompt = "enter the second number:"))
enter the second number:20

> num3=num1+num2

> print(num3)
[1] 30
> |
```

Untitled1* x

Source on Save

Run

```
1 num1=as.integer(readline(prompt = "enter the first number:"))
2 num2=as.integer(readline(prompt = "enter the second number:"))
3 num3=num1-num2
4 print(num3)
5
6
```

4:1 (Top Level) R Script

Console Terminal x Background Jobs x

R 4.6.1 · ~/

```
> print(num3)
[1] 30
> source("~/active-rstudio-document", echo = TRUE)

> num1=as.integer(readline(prompt = "enter the first number:"))
enter the first number:20

> num2=as.integer(readline(prompt = "enter the second number:"))
enter the second number:15

> num3=num1-num2

> print(num3)
[1] 5
>
```

Untitled1*

```
1 num1=as.integer(readline(prompt = "enter the first number:"))
2 num2=as.integer(readline(prompt = "enter the second number:"))
3 num3=num1*num2
4 print(num3)
5
6
```

3:11 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> print(num3)
[1] 5
> source("~/active-rstudio-document", echo = TRUE)

> num1=as.integer(readline(prompt = "enter the first number:"))
enter the first number:6

> num2=as.integer(readline(prompt = "enter the second number:"))
enter the second number:4

> num3=num1*num2

> print(num3)
[1] 24
>
```

Untitled1* x

Source on Save

Run

```
1 num1=as.integer(readline(prompt = "enter the first number:"))
2 num2=as.integer(readline(prompt = "enter the second number:"))
3 num3=num1/num2
4 print(num3)
5
6
```

3:11 (Top Level) ↕

R Script ↕

Console Terminal x Background Jobs x

R 4.6.1 · ~/

```
> print(num3)
[1] 24
> source("~/active-rstudio-document", echo = TRUE)

> num1=as.integer(readline(prompt = "enter the first number:"))
enter the first number:6

> num2=as.integer(readline(prompt = "enter the second number:"))
enter the second number:4

> num3=num1/num2

> print(num3)
[1] 1.5
>
```

Untitled1*

```
1 num=as.integer(readline(prompt="enter a number:"))
2 if(num%%2==0)
3 {
4   print("number is even")
5 }else{
6   print("number is odd")
7 }
8
9
```

5:2 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> source("~/active-rstudio-document", echo = TRUE)
> num=as.integer(readline(prompt="enter a number:"))
enter a number:8
> if(num%%2==0)
+ {
+   print("number is even")
+ }else{
+   print("number is odd")
+ }
[1] "number is even"
> |
```


Untitled1*

Source on Save

Run

Source

```
1 x = as.integer(readline(prompt = "ENTER THE FIRST NUMBER: "))
2 y = as.integer(readline(prompt = "ENTER THE SECOND NUMBER: "))
3 z = as.integer(readline(prompt = "ENTER THE THIRD NUMBER: "))
4
5 if (x > y && x > z) {
6   print(paste("GREATEST IS:", x))
7 } else if (y > z) {
8   print(paste("GREATEST IS:", y))
9 } else {
10  print(paste("GREATEST IS:", z))
11 }
12
13
```

12:1 (Top Level)

R Script

Console Terminal Background Jobs

R 4.6.1 · ~/

```
> x = as.integer(readline(prompt = "ENTER THE FIRST NUMBER: "))
ENTER THE FIRST NUMBER: 56
> y = as.integer(readline(prompt = "ENTER THE SECOND NUMBER: "))
ENTER THE SECOND NUMBER: 28
> z = as.integer(readline(prompt = "ENTER THE THIRD NUMBER: "))
ENTER THE THIRD NUMBER: 63
> if (x > y && x > z) {
+   print(paste("GREATEST IS:", x))
+ } else if (y > z) {
+   print(paste("GREATEST IS:", y))
+ } else {
+   print(paste("GREATEST IS:", z))
+ }
[1] "GREATEST IS: 63"
> |
```

Untitled1* x

Source on Save

Run

```
1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 summary(df $age)
6 write.csv(df,"datafr.csv")
7 |
```

7:1 (Top Level) R Script

Console Terminal x Background Jobs x

R 4.6.1 · ~/

```
> source("~/active-rstudio-document", echo = TRUE)
> names<-c("siri","mahi","chiru")
> age<-c(23,24,25)
> marks<-c(88,78,25)
> df<-data.frame(names,age,marks)
> summary(df $age)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
  23.0   23.5   24.0   24.0   24.5   25.0
> write.csv(df,"datafr.csv")
> |
```

```
1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 mean(df $age)
6 median(df $age)
7 mode(df $age)
8 write.csv(df,"datafr.csv")
9 |
```

```
> marks<-c(88,78,25)
> df<-data.frame(names,age,marks)
> mean(df $age)
[1] 24
> median(df $age)
[1] 24
> mode(df $age)
[1] "numeric"
> write.csv(df,"datafr.csv")
> |
```


Untitled1* x Untitled2* x

Source on Save Run Source

```
1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 IQR(df $age)
6 write.csv(df,"datafr.csv")
```

6:27 (Top Level) R Script

Console Terminal x Background Jobs x

R 4.6.1 · ~/

```
> source("~/active-rstudio-document", echo = TRUE)
> names<-c("siri","mahi","chiru")
> age<-c(23,24,25)
> marks<-c(88,78,25)
> df<-data.frame(names,age,marks)
> IQR(df $age)
[1] 1
> write.csv(df,"datafr.csv")
> |
```

Untitled1* x Untitled2* x

Source on Save Run Source

```
1 names<-c("siri","mah","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 quantile(df $age)
6 write.csv(df,"datafr.csv")
```

5:9 (Top Level) R Script

Console Terminal x Background Jobs x

R 4.6.1 · ~/

```
> source("~/active-rstudio-document", echo = TRUE)
> names<-c("siri","mah","chiru")
> age<-c(23,24,25)
> marks<-c(88,78,25)
> df<-data.frame(names,age,marks)
> quantile(df $age)
 0%  25%  50%  75% 100%
23.0 23.5 24.0 24.5 25.0
> write.csv(df,"datafr.csv")
> |
```

Untitled1* x Untitled2* x

Source on Save  Run  Source 

```
1 names<-c("siri","mahi","chiru")
2 age<-c(23,24,25)
3 marks<-c(88,78,25)
4 df<-data.frame(names,age,marks)
5 range(df $age)
6 write.csv(df,"datafr.csv")
```

5:1 (Top Level)  R Script 

Console Terminal x Background Jobs x 

R 4.6.1 · ~/ 

```
> source("~/active-rstudio-document", echo = TRUE)
> names<-c("siri","mahi","chiru")
> age<-c(23,24,25)
> marks<-c(88,78,25)
> df<-data.frame(names,age,marks)
> range(df $age)
[1] 23 25
> write.csv(df,"datafr.csv")
> |
```

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

Environment History Connections Tutorial

R Global Environment

diabetest1 20 obs. of 1 variable

preferences 3 obs. of 3 variables

Values

a	num [1:5]	55 67 89 80 90
A	num [1:20]	20 22 24 25 27 28 30 31 33 35 ...
age	num [1:5]	20 25 30 35 40
B	num [1:3]	22 28 10
C	num [1:3]	20 40 40
marks	num [1:3]	88 78 25
maximum		25

Files Plots Packages Help Viewer Presentation

Install Update

Package	Description	Source	Version
User Library			
☐ cellranger	Translate Spreadsheet Cell Rar	https://cran.rstudio.com	1.1.0
☐ cli	Helpers for Developing Comm	https://cran.rstudio.com	3.6.6
☐ cpp11	A C++11 Interface for R's C In	https://cran.rstudio.com	0.5.5
☐ crayon	Colored Terminal Output	https://cran.rstudio.com	1.5.3
☐ glue	Interpreted String Literals	https://cran.rstudio.com	1.8.1
☐ hms	Pretty Time of Day	https://cran.rstudio.com	1.1.4
☐ lifecycle	Manage the Life Cycle of your	https://cran.rstudio.com	1.0.5
☐ magrittr	A Forward-Pipe Operator for F	https://cran.rstudio.com	2.0.5
☐ pillar	Coloured Formatting for Colur	https://cran.rstudio.com	1.11.1
☐ pkgconfig	Private Configuration for 'R' Ps	https://cran.rstudio.com	2.0.3
☐ prettyunits	Pretty, Human Readable Form	https://cran.rstudio.com	1.2.0
☐ progress	Terminal Progress Bars	https://cran.rstudio.com	1.2.3
☐ R6	Encapsulated Classes with Refi	https://cran.rstudio.com	2.6.1
☒ readxl	Read Excel Files	https://cran.rstudio.com	1.5.0
☐ rematch	Match Regular Expressions wit	https://cran.rstudio.com	2.0.0
☐ rlang	Functions for Base Types and C	https://cran.rstudio.com	1.3.0
☐ tibble	Simple Data Frames	https://cran.rstudio.com	3.3.1

```
1 library(readxl)
2 diabetest1 <- read_excel("C:/Users/VEERA/Downloads/NARA.xlsx")
3 A <- c(diabetest1$Age)
4 Mean <- mean(A)
5 Mean
6 Std <- sd(A)
7
8 Zscore <- (A - Mean) / Std
9
10 Zscore
```

10.7 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 ~/\

```
> Mean <- mean(A)
[1] 37.7
> Std <- sd(A)
> Zscore <- (A - Mean) / Std
> Zscore
[1] -1.37899923 -1.22318011 -1.06736098 -0.98945142 -0.83363230 -0.75572274 -0.59990362
[8] -0.52199406 -0.36617494 -0.21035581 -0.13244625 0.02337287 0.17919199 0.33501111
[15] 0.56873979 0.80246848 0.95828760 1.34783540 1.73738321 2.12693101
>
```

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

Environment History Connections Tutorial

R Global Environment

diabetest1 20 obs. of 1 variable

preferences 3 obs. of 3 variables

Values

a	num [1:5]	55 67 89 80 90
A	num [1:20]	20 22 24 25 27 28 30 31 33 35 ...
age	num [1:5]	20 25 30 35 40
B	num [1:3]	22 28 10
C	num [1:3]	20 40 40
marks	num [1:3]	88 78 25
maximum		25

Files Plots Packages Help Viewer Presentation

Install Update

Package	Description	Source	Version
User Library			
☐ cellranger	Translate Spreadsheet Cell Rar	https://cran.rstudio.com	1.1.0
☐ cli	Helpers for Developing Comm	https://cran.rstudio.com	3.6.6
☐ cpp11	A C++11 Interface for R's C In	https://cran.rstudio.com	0.5.5
☐ crayon	Colored Terminal Output	https://cran.rstudio.com	1.5.3
☐ glue	Interpreted String Literals	https://cran.rstudio.com	1.8.1
☐ hms	Pretty Time of Day	https://cran.rstudio.com	1.1.4
☐ lifecycle	Manage the Life Cycle of your	https://cran.rstudio.com	1.0.5
☐ magrittr	A Forward-Pipe Operator for F	https://cran.rstudio.com	2.0.5
☐ pillar	Coloured Formatting for Colur	https://cran.rstudio.com	1.11.1
☐ pkgconfig	Private Configuration for 'R' Ps	https://cran.rstudio.com	2.0.3
☐ prettyunits	Pretty, Human Readable Form	https://cran.rstudio.com	1.2.0
☐ progress	Terminal Progress Bars	https://cran.rstudio.com	1.2.3
☐ R6	Encapsulated Classes with Refi	https://cran.rstudio.com	2.6.1
☒ readxl	Read Excel Files	https://cran.rstudio.com	1.5.0
☐ rematch	Match Regular Expressions wit	https://cran.rstudio.com	2.0.0
☐ rlang	Functions for Base Types and C	https://cran.rstudio.com	1.3.0
☐ tibble	Simple Data Frames	https://cran.rstudio.com	3.3.1

```
1 library(readxl)
2 diabetest1 <- read_excel("C:/Users/VEERA/Downloads/NARA.xlsx")
3 A <- c(diabetest1$Age)
4 Mean <- mean(A)
5 Mean
6 Minimum <- min(A)
7 Minimum
8 Maximum <- max(A)
9 Maximum
10 Maximum
11 Maximum
12
```

12.1 (Top Level) R Script

Console Terminal Background Jobs

R 4.6.1 ~/\

```
> Mean <- mean(A)
[1] 37.7
> Minimum <- min(A)
[1] 20
> Maximum <- max(A)
[1] 65
>
```


RStudio interface showing a script and console output.

```
1 library(readxl)
2
3 diabetesetl <- read_excel("C:/Users/VEERA/Downloads/NARA.xlsx")
4
5 A <- c(diabetesetl$Age)
6 Mean <- mean(A)
7
8 Minimum <- min(A)
9
10 Maximum <- max(A)
11
12 MinMax <- (A - Minimum) / (Maximum - Minimum)
13
14 MinMax
```

Console Output:

```
> Minimum
[1] 20
> Maximum <- max(A)
> Maximum
[1] 65
> MinMax <- (A - Minimum) / (Maximum - Minimum)
> MinMax
[1] 0.00000000 0.04444444 0.08888889 0.11111111 0.15555556 0.17777778 0.22222222 0.24444444
[9] 0.28888889 0.33333333 0.35555556 0.40000000 0.44444444 0.48888889 0.55555556 0.62222222
[17] 0.66666667 0.77777778 0.88888889 1.00000000
```

Environment pane shows variables:

Variable	Obs.	Var.
diabetesetl	20	1
preferences	3	3

User Library:

Package	Description	Source	Version
cellranger	Translate Spreadsheet Cell Rar	https://cran.rstudio.com	1.1.0
cli	Helpers for Developing Comm	https://cran.rstudio.com	3.6.6
cpp11	A C++11 Interface for R's C In	https://cran.rstudio.com	0.5.5
crayon	Colored Terminal Output	https://cran.rstudio.com	1.5.3
glue	Interpreted String Literals	https://cran.rstudio.com	1.8.1
hms	Pretty Time of Day	https://cran.rstudio.com	1.1.4
lifecycle	Manage the Life Cycle of your	https://cran.rstudio.com	1.0.5
magrittr	A Forward-Pipe Operator for F	https://cran.rstudio.com	2.0.5
pillar	Coloured Formatting for Col	https://cran.rstudio.com	1.11.1
pkgconfig	Private Configuration for 'R' Ps	https://cran.rstudio.com	2.0.3
prettyunits	Pretty, Human Readable Form	https://cran.rstudio.com	1.2.0
progress	Terminal Progress Bars	https://cran.rstudio.com	1.2.3
R6	Encapsulated Classes with Refr	https://cran.rstudio.com	2.6.1
readxl	Read Excel Files	https://cran.rstudio.com	1.5.0
rematch	Match Regular Expressions wit	https://cran.rstudio.com	2.0.0
rlang	Functions for Base Types and C	https://cran.rstudio.com	1.3.0
tibble	Simple Data Frames	https://cran.rstudio.com	3.3.1

RStudio interface showing a script and console output.

```
1 a <- c(55,67,89,80,90)
2
3 barplot(a)
4
```

Console Output:

```
> source("~/active-rstudio-document", echo = TRUE)
> a <- c(55,67,89,80,90)
> barplot(a)
> a <- c(55,67,89,80,90)
> barplot(a, horiz=TRUE)
> source("~/active-rstudio-document", echo = TRUE)
> a <- c(55,67,89,80,90)
> barplot(a)
>
```

Environment pane shows variables:

Variable	Obs.	Var.
df	3	3
preferences	3	3



User Library:



Variable	Obs.	Var.
a	5	1
A	3	1
age	3	1
B	3	1
C	3	1
marks	3	1
names	3	1

Plots pane shows a barplot:

The barplot displays the frequency of each value in the vector 'a'. The x-axis represents the values (55, 67, 89, 80, 90) and the y-axis represents the frequency (0 to 80). The bars are gray with black outlines.

Value	Frequency
55	1
67	1
89	1
80	1
90	1

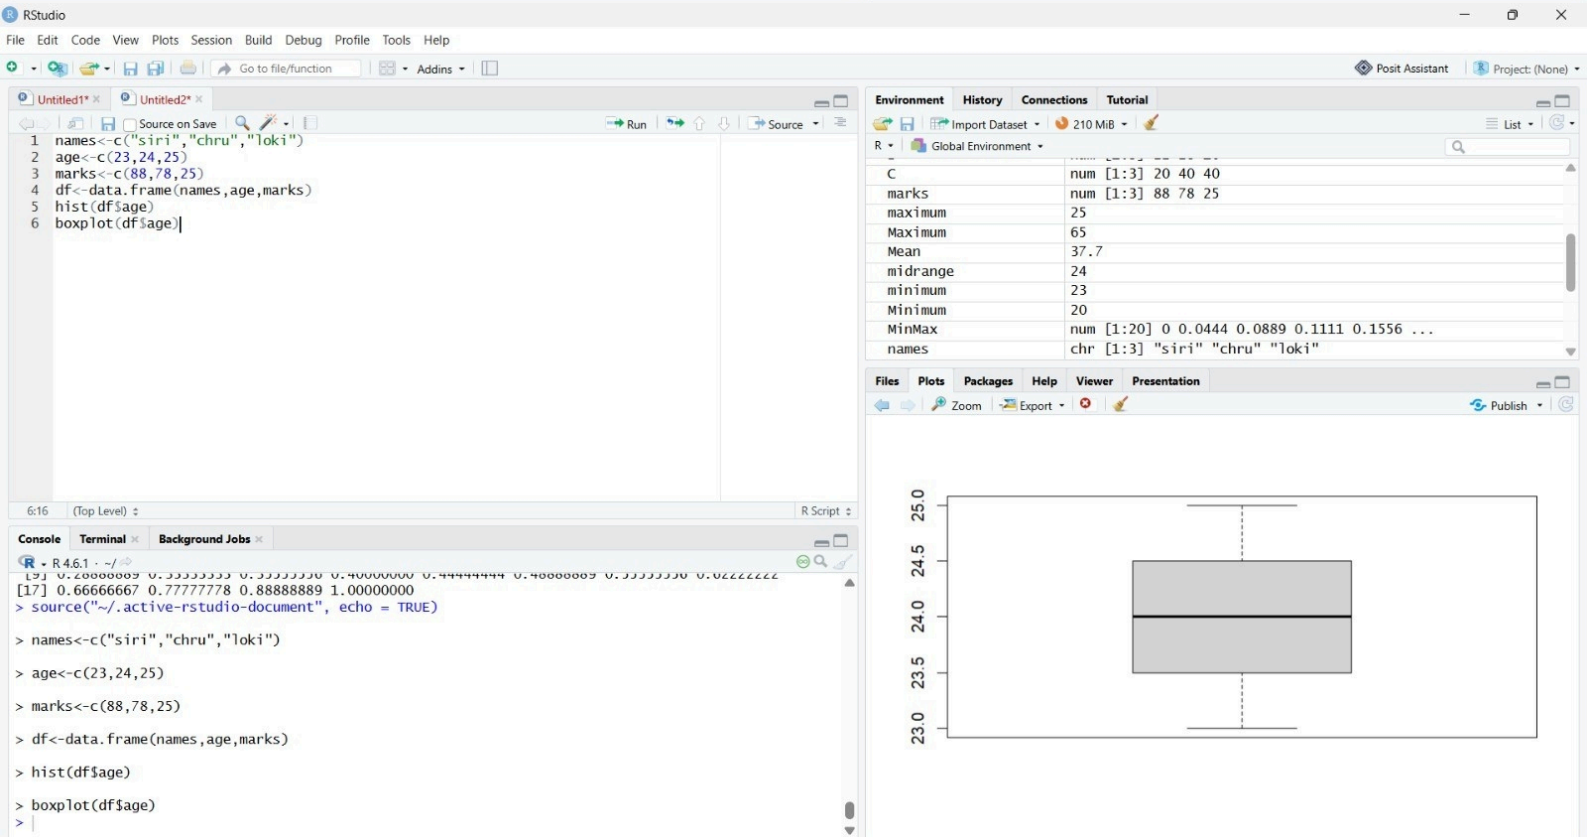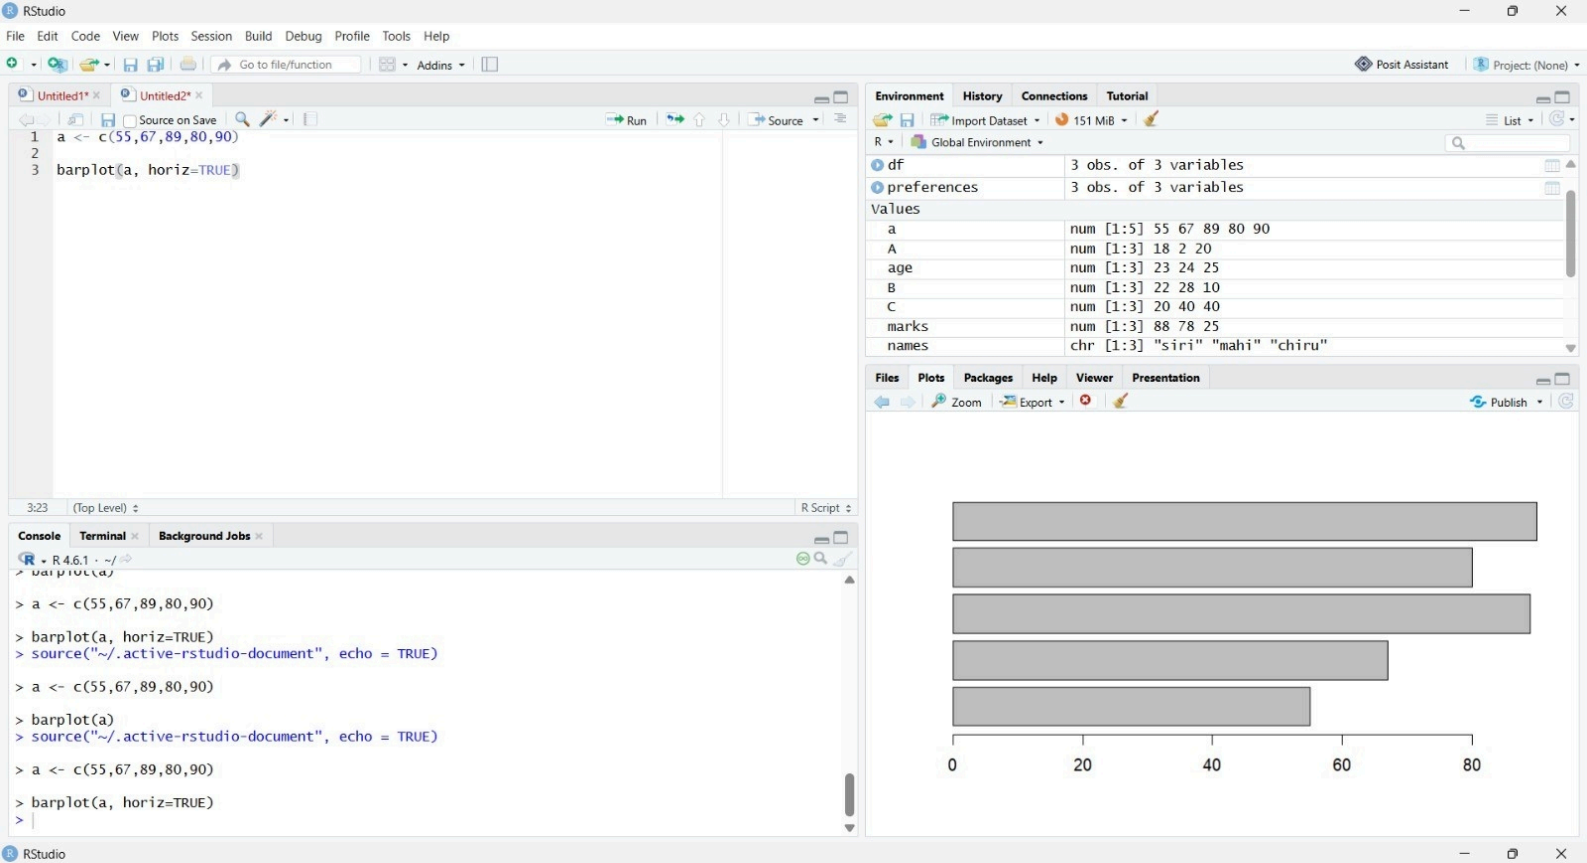

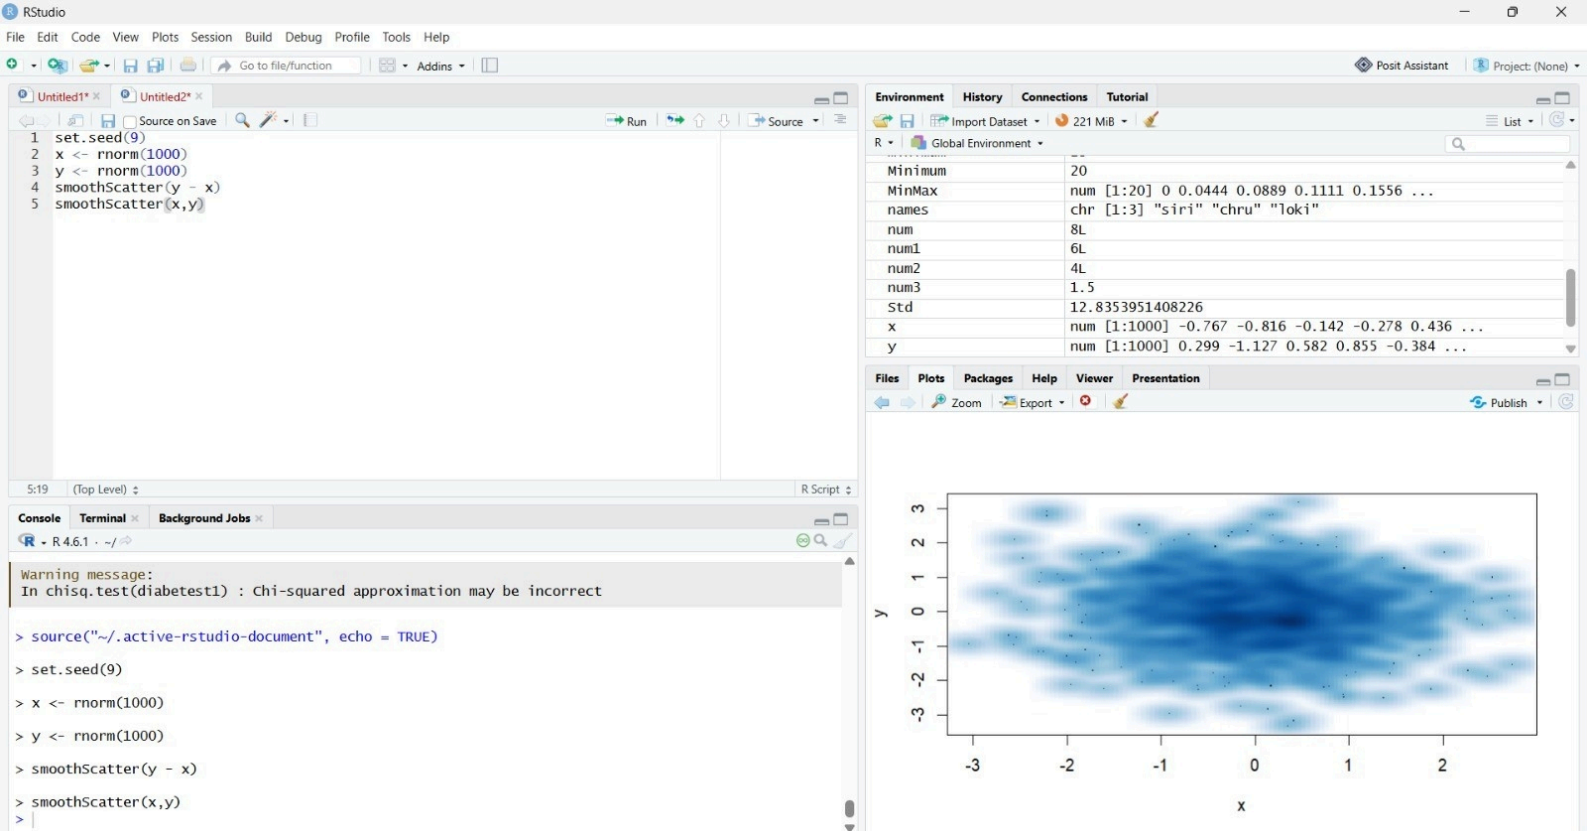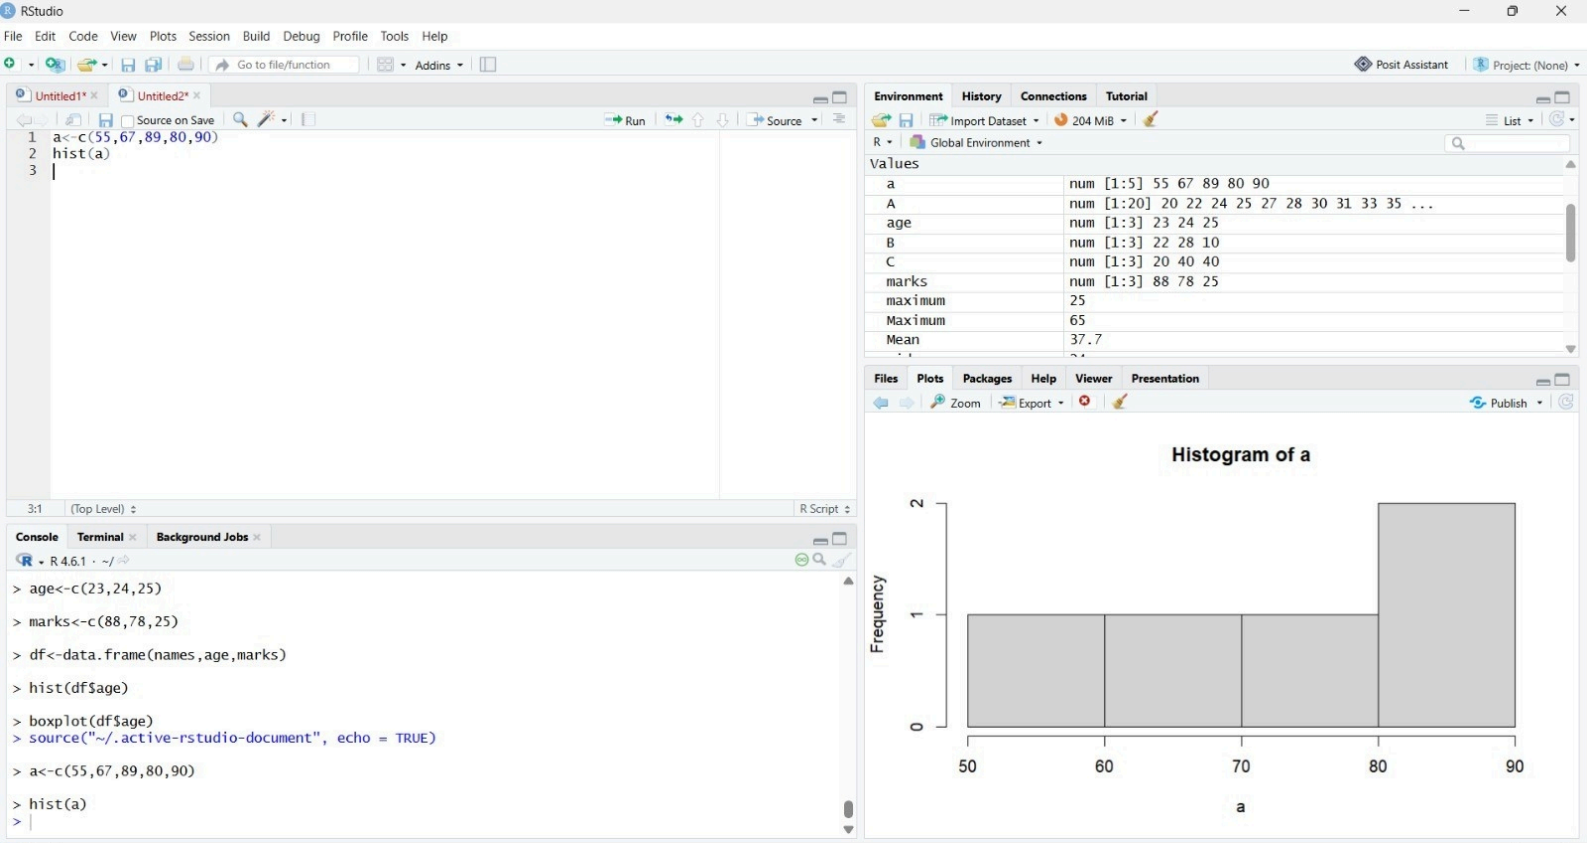

Console Terminal × Background Jobs ×

 R 4.6.1 · ~/ 


[illegible]

```
> chisq.test(diabetest1)
```

Pearson's Chi-squared test

```
data:  diabetest1
```

X-squared = 380, df = 361, p-value = 0.2358

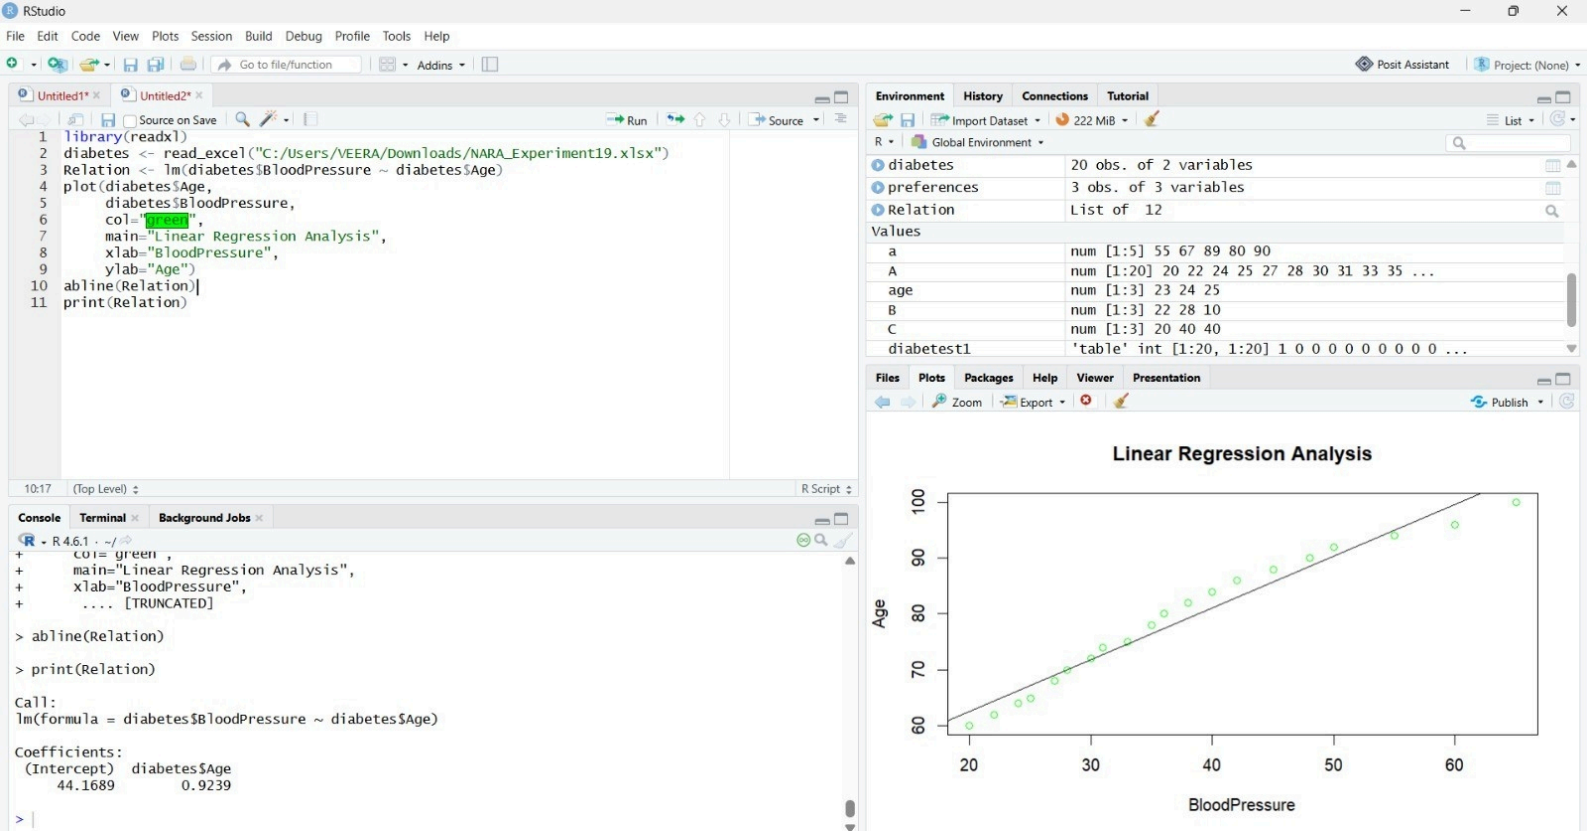

Untitled1* x Untitled2* x Untitled3* x

Source on Save Run Source

```
1 library(readxl)
2
3 diabetes <- read_excel("C:/Users/VEERA/Downloads/NARA_Experiment20.xlsx")
4
5 Input <- diabetes[, c("Age", "BloodPressure", "Glucose")]
6
7 Model <- lm(Age ~ BloodPressure + Glucose, data=Input)
8
9 print(Model)
```

9:13 (Top Level) R Script

Console Terminal x Background Jobs x

R 4.6.1 · ~/

```
> diabetes <- read_excel("C:/Users/VEERA/Downloads/NARA_Experiment20.xlsx")
> Input <- diabetes[, c("Age", "BloodPressure", "Glucose")]
> Model <- lm(Age ~ BloodPressure + Glucose, data=Input)
> print(Model)
```

Call:
lm(formula = Age ~ BloodPressure + Glucose, data = Input)

Coefficients:
(Intercept) BloodPressure Glucose
-93.4665 3.0083 -0.8037

> |