




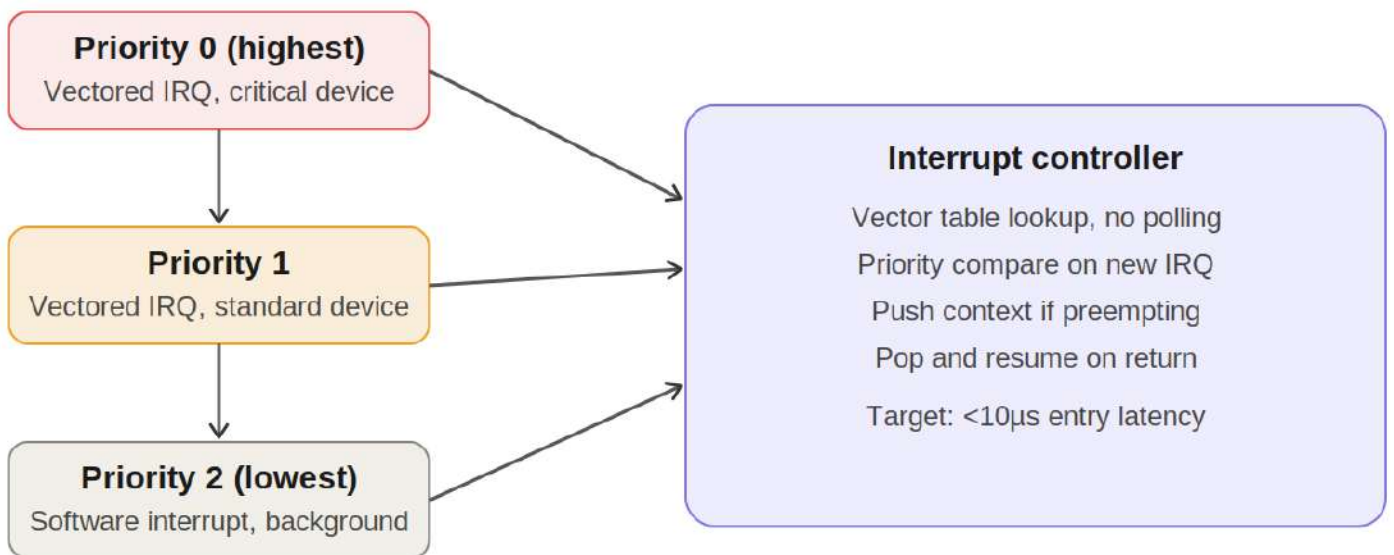


Higher priority preempts lower,
saved on interrupt stack

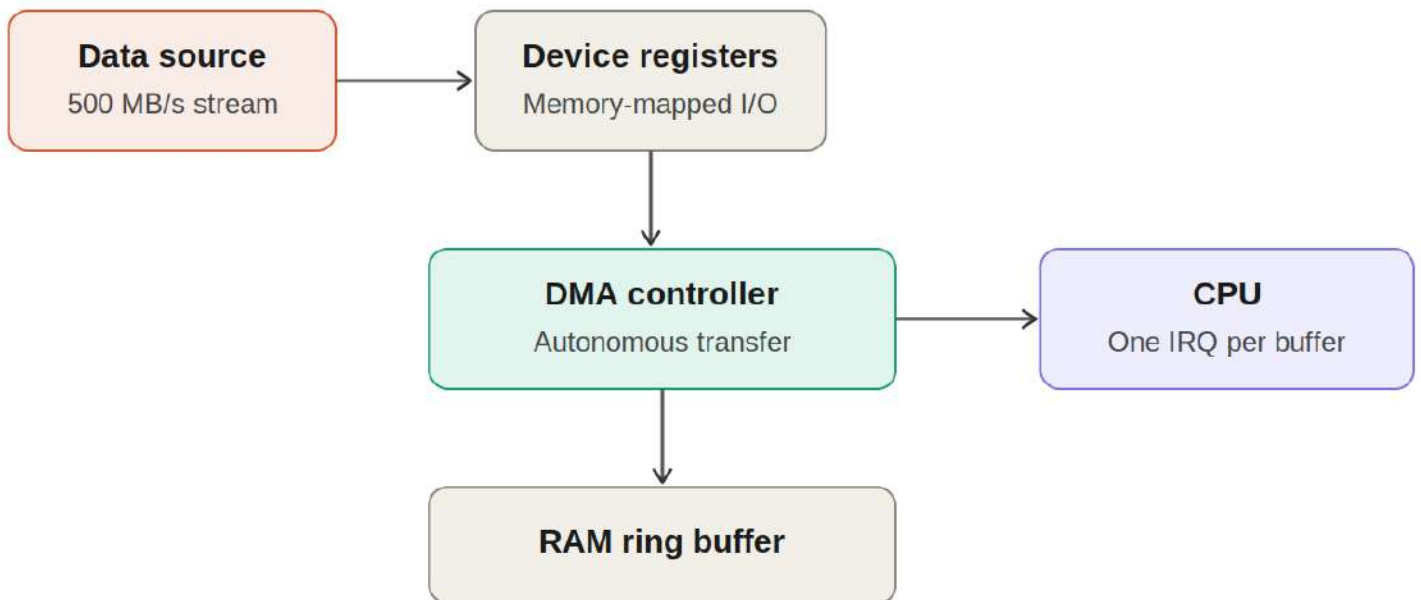

Interrupt-driven I/O (per-sample IRQ) would need CPU touch per unit — too costly at this rate
DMA reduces CPU load to buffer-boundary interrupts only

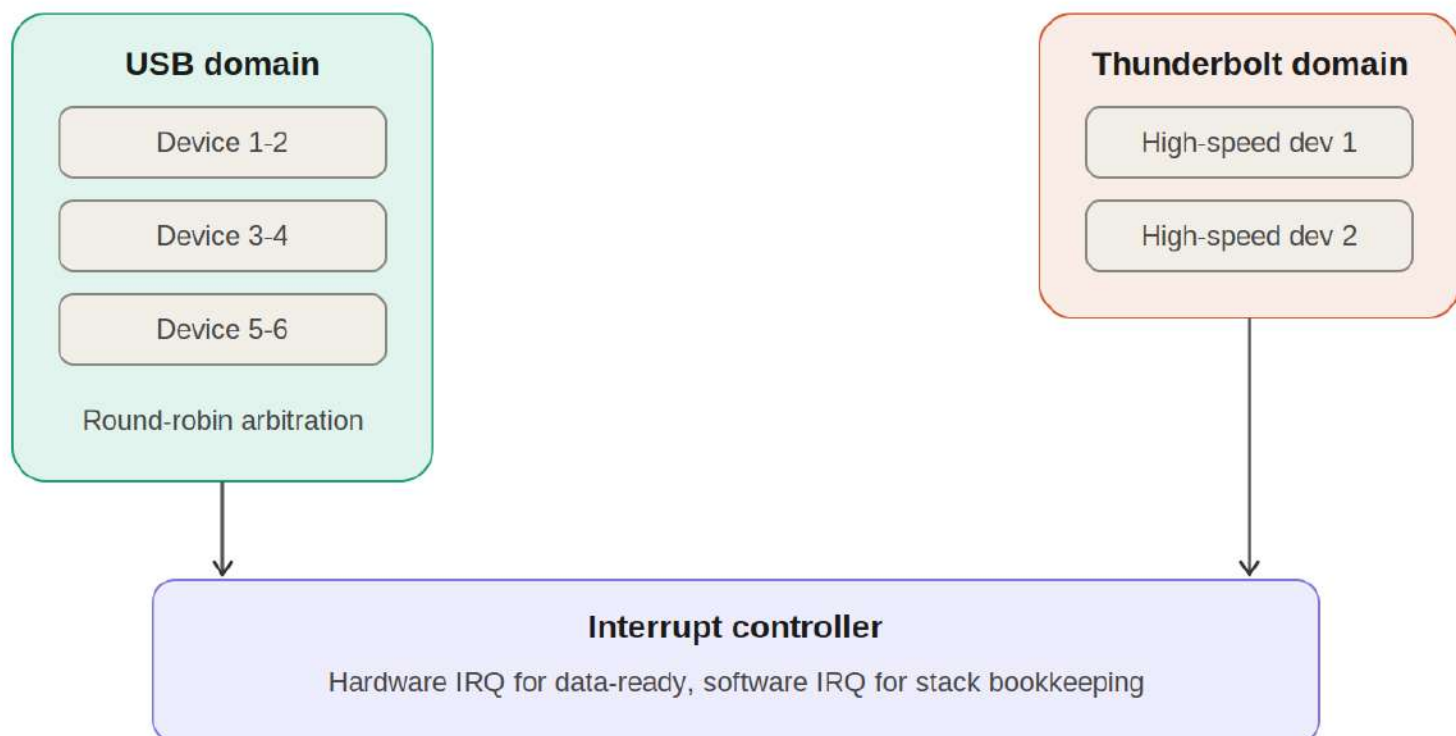

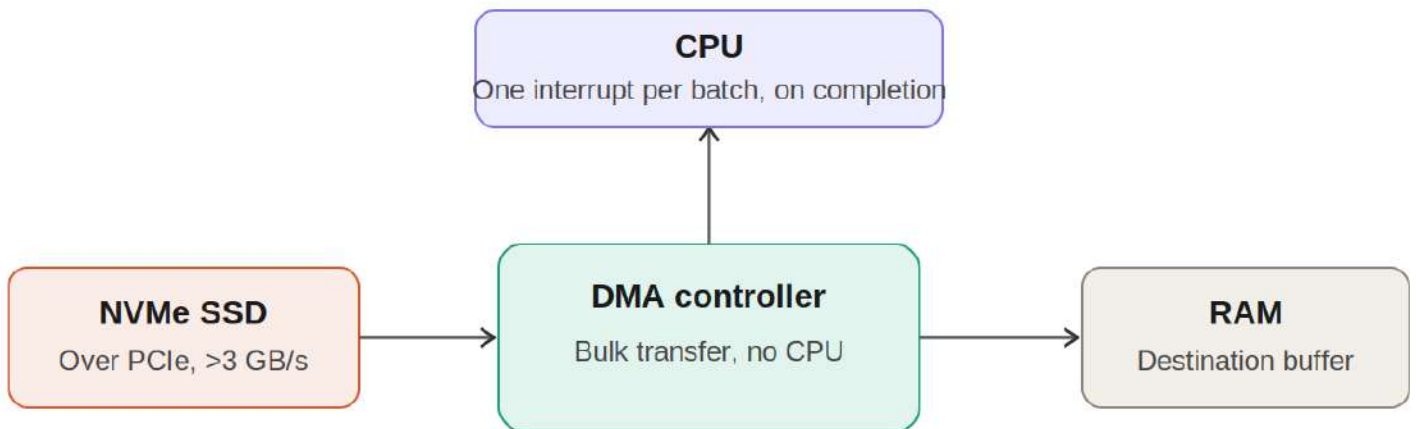

Command queues submitted once, DMA handles payload movement

