


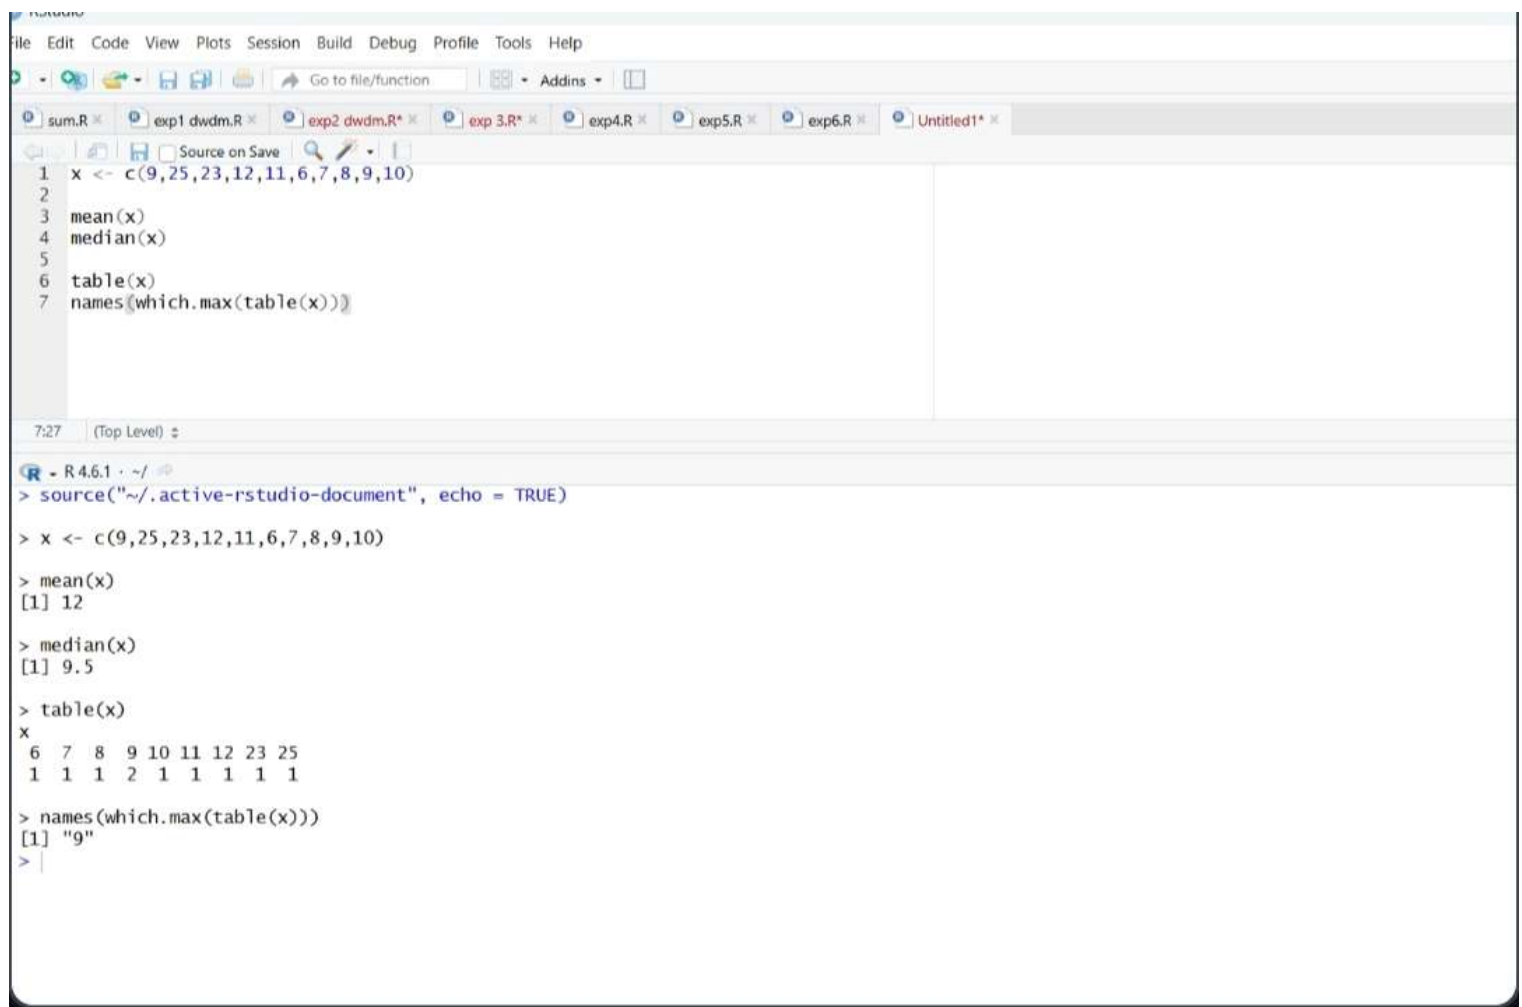

The screenshot displays the RStudio interface. The top menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, and Help. Below the menu is a toolbar with icons for file operations and a 'Go to file/function' search bar. The script editor shows a file named 'sum.R' with the following R code:

```
1 x <- c(9,25,23,12,11,6,7,8,9,10)
2
3 mean(x)
4 median(x)
5
6 table(x)
7 names(which.max(table(x)))
```

The console at the bottom shows the execution of the code, with the R version 'R 4.6.1' and the working directory '~/' indicated. The output is as follows:

```
> source("~/active-rstudio-document", echo = TRUE)

> x <- c(9,25,23,12,11,6,7,8,9,10)

> mean(x)
[1] 12

> median(x)
[1] 9.5

> table(x)
x
 6  7  8  9 10 11 12 23 25
1  1  1  2  1  1  1  1  1

> names(which.max(table(x)))
[1] "9"
> |
```