


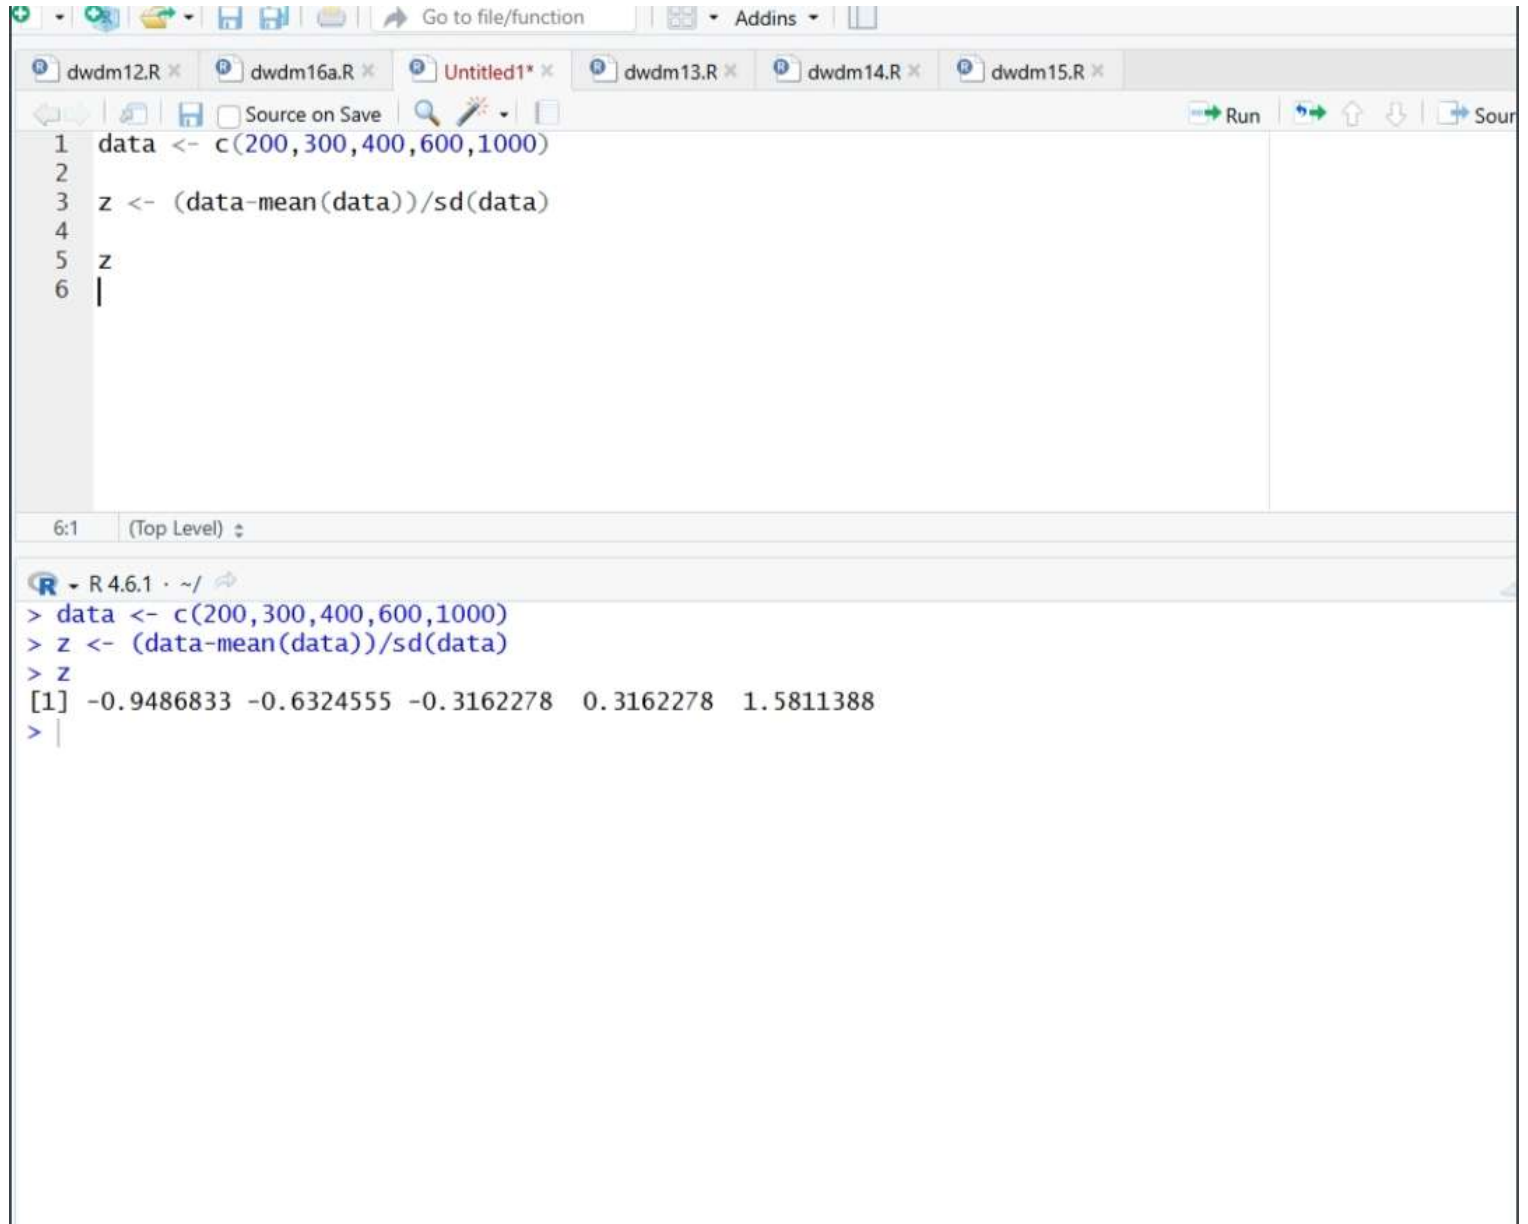

The image shows a screenshot of the RStudio IDE interface. The top toolbar includes icons for file operations and a 'Go to file/function' search bar. The menu bar shows 'Addins'. The tab bar at the top contains several open files: 'dwdm12.R', 'dwdm16a.R', 'Untitled1*' (the active file), 'dwdm13.R', 'dwdm14.R', and 'dwdm15.R'. Below the tabs is a toolbar with icons for navigation and execution, including a 'Run' button. The main editor window displays the following R code:

```
1 data <- c(200,300,400,600,1000)
2
3 z <- (data-mean(data))/sd(data)
4
5 z
6 |
```

Below the editor, the 'Console' pane shows the execution of the code:

```
R - R 4.6.1 - ~/
> data <- c(200,300,400,600,1000)
> z <- (data-mean(data))/sd(data)
> z
[1] -0.9486833 -0.6324555 -0.3162278  0.3162278  1.5811388
> |
```