


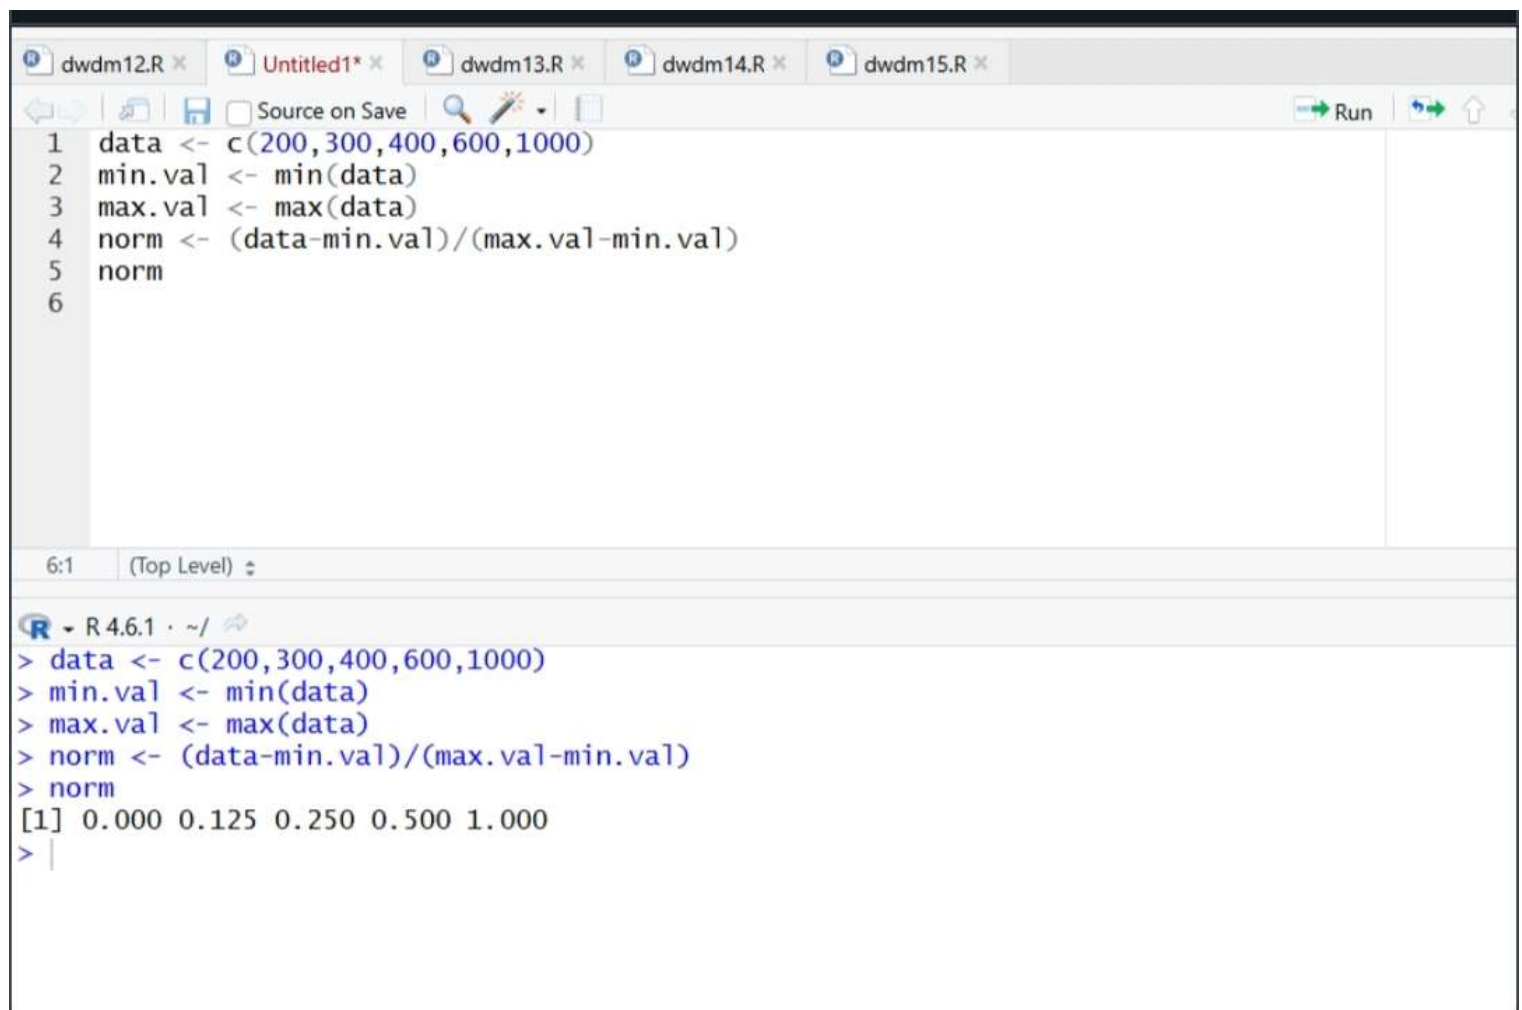

The image shows a screenshot of the RStudio IDE interface. The top pane displays a script with the following R code:

```
1 data <- c(200,300,400,600,1000)
2 min.val <- min(data)
3 max.val <- max(data)
4 norm <- (data-min.val)/(max.val-min.val)
5 norm
6
```

The bottom pane shows the console output for the executed code:

```
> data <- c(200,300,400,600,1000)
> min.val <- min(data)
> max.val <- max(data)
> norm <- (data-min.val)/(max.val-min.val)
> norm
[1] 0.000 0.125 0.250 0.500 1.000
> |
```

The interface includes a toolbar with icons for running, saving, and other functions, and a status bar at the bottom indicating the current position in the script (6:1) and the active environment (Top Level).