


2.CCNP Enterprise作业二——VTP

作业主题

VTP

作业目标

- 1. 理解 VTP 的原理与配置

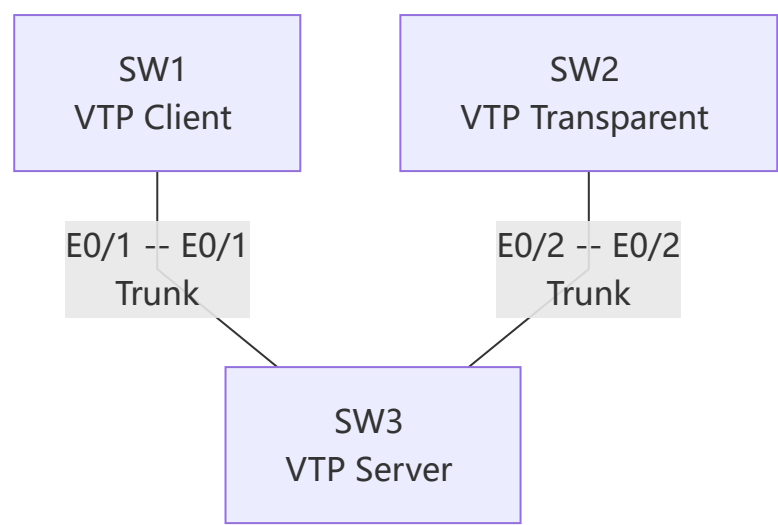

```
sw1 -- "E0/1 -- E0/1<br>Trunk" --- sw3
sw2 -- "E0/2 -- E0/2<br>Trunk" --- sw3
```

配置需求

- 1. SW1 为客户端模式、SW2 为透明模式、SW3 为服务器模式
- 2. 使用的是 VTP2, Domain 名称为 CCNP, 密码为 Cisco
- 3. 请新增 VLAN 10、VLAN 20 来验证 VTP 是否配置成功

作业要求

- 1. 请给出最终配置，并按照设备进行分类

sw1

```
sw1(config)#vtp mode
sw1(config)#vtp mode ?
client      Set the device to client mode.
off         Set the device to off mode.
server      Set the device to server mode.
transparent Set the device to transparent mode.
```

```
sw1(config)#vtp domain lab
Domain name already set to lab.
sw1(config)#vtp password lab123
Setting device VTP password to lab123

sw1(config)#vtp mode server
Device mode already VTP Server for VLANs.

sw1(config)#vtp version 2
VTP version is already in v2.
```

sw2

```
sw2(config)#vtp version 2
VTP version is already in v2.
sw2(config)#vtp do
sw2(config)#vtp domain lab
Domain name already set to lab.
sw2(config)#vtp pass
sw2(config)#vtp password lab123
Setting device VTP password to lab123
sw2(config)#vtp
sw2(config)#vtp mod
sw2(config)#vtp mode tr
sw2(config)#vtp mode transparent
Setting device to VTP Transparent mode for VLANs.
```

sw2

```
sw3(config)#vtp version 2
sw3(config)#vtp domain lab
Changing VTP domain name from NULL to lab
sw3(config)#
*Sep 11 06:34:57.435: %SW_VLAN-6-VTP_DOMAIN_NAME_CHG: VTP domain name changed to lab.
sw3(config)#vtp password
sw3(config)#vtp password lab123
Setting device VTP password to lab123
sw3(config)#vtp mode ser
sw3(config)#vtp mode server
Device mode already VTP Server for VLANs.
sw3(config)#vlan 10
sw3(config-vlan)#name dept1
sw3(config-vlan)#vlan 20
sw3(config-vlan)#name dept2
sw3(config-vlan)#exit
sw3(config)#vlan 30
sw3(config-vlan)#name dept3
sw3(config-vlan)#
```

2. 请给出现象验证截图

sw3创建vlan10, 20

sw1无法本地创建vlan，但是可以同步到sw3 创建的vlan

```
sw1#show vtp st
sw1#show vtp status
VTP Version capable      : 1 to 3
VTP version running      : 2
VTP Domain Name          : lab
VTP Pruning Mode         : Disabled
VTP Traps Generation     : Disabled
Device ID                : aabb.cc80.0100
Configuration last modified by 0.0.0.0 at 9-11-26 06:39:48
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN:
```

```
sw1#show vlan br
```

VLAN Name	Status	Ports
1 default	active	Et0/0, Et0/2, Et0/3, Et1/0, Et1/1, Et1/2, Et1/3, Et2/0, Et2/1, Et2/2, Et2/3, Et3/0, Et3/1, Et3/2, Et3/3
10 dept1	active	
20 dept2	active	
1002 fddi-default	act/unsup	
1003 trcrf-default	act/unsup	
1004 fddinet-default	act/unsup	
1005 trbrf-default	act/unsup	

```
sw1#
sw1#
```

sw2 可以本地创建修改vlan，但是无法同步sw3创建的vlan，可以透传vtp报文

sw1 x sw2 x sw3 x

sw2#show vlan br

Aa A- A+ B / SF Mono (Apple) 🔍 ▶

VLAN	Name	Status	Ports
1	default	active	Et0/0, Et0/1, Et0/3, Et1/0, Et1/1, Et1/2, Et1/3, Et2/0, Et2/1, Et2/2, Et2/3, Et3/0, Et3/1, Et3/2, Et3/3
1002	fddi-default	act/unsup	
1003	trcrf-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trbrf-default	act/unsup	

sw2#

sw2#

sw2#show vtp st

sw2#show vtp status

VTP Version capable : 1 to 3

VTP version running : 2

VTP Domain Name : lab

VTP Pruning Mode : Disabled

VTP Traps Generation : Disabled

Device ID : aabb.cc80.0200

Configuration last modified by 0.0.0.0 at 9-11-26 06:34:52

Feature VLAN:

VTP Operating Mode : Transparent

Maximum VLANs supported locally : 1005

Number of existing VLANs : 5

Configuration Revision : 0

MD5 digest : 0x2E 0xA7 0x28 0x21 0xC5 0x44 0x72 0xE4 0x37 0xD4 0xAD 0xC4 0x1F 0xB2 0x83 0xEF

sw2#

+

sw3 可以本地创建修改vlan 并同步到vlan1

```
SW1 x SW2 x SW3 x
% Invalid input detected at '^'
Aa A- A+ B / SF Mono (Apple) v O ►

sw3(config)#vtp version ?
<1-3> Set the administrative domain VTP version number

sw3(config)#vtp version ?
<1-3> Set the administrative domain VTP version number

sw3(config)#i
sw3#do
*Sep 11 06:33:29.260: %SYS-5-CONFIG_I: Configured from console by cons
ole
sw3#do show vt
sw3#do show vt
sw3#do show vtp
sw3#show v
sw3#show vt
sw3#show vtp
sw3#show vt?
vtemplate vtp

sw3#show vtp s
sw3#show vtp status
VTP Version capable : 1 to 3
VTP version running : 1
VTP Domain Name :
VTP Pruning Mode : Disabled
VTP Traps Generation : Disabled
Device ID : aabb.cc80.0300
Configuration last modified by 0.0.0.0 at 0-0-00 00:00:00
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN:
-----
VTP Operating Mode : Server
Maximum VLANs supported locally : 1005
Number of existing VLANs : 5
Configuration Revision : 0
MD5 digest : 0x57 0xCD 0x40 0x65 0x63 0x59 0x47
0xBD
```