






GCam@gcam-ftp.rtsiot.c

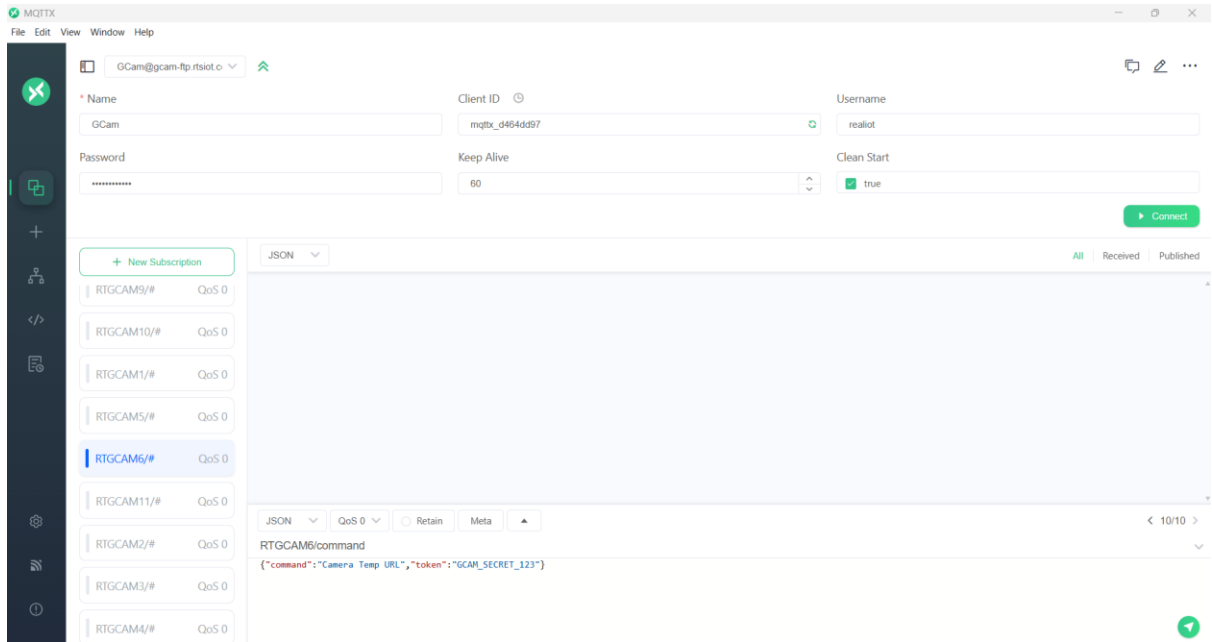

0

+ New Subscription

JSON

## New Subscription



\* Topic



RTGCAM12/#

\* QoS

Color



0

At most once

#691D3A



Alias



Subscription Identifier

No Local Flag



true



false

Retain as Published Flag



true



false

Retain Handling

0



Cancel

Confirm

The screenshot displays the MQTT Explorer interface. At the top, a filter bar shows 'JSON' format, 'QoS 0', and 'Retain' checkbox. The main pane shows a message from topic 'RTGCAM12/command' with payload: 

```
{ "command": "Import Default Audio", "token": "GCAM_SECRET_123" }
```

. Below this, a list of messages is shown. The first message is from 'Topic: RTGCAM12/command QoS: 0' with the same payload, timestamped '2026-04-09 14:54:20:680'. The second message is from 'Topic: RTGCAM12/device\_response QoS: 0' with a detailed JSON payload: 

```
{ "device_id": "RTGCAM12", "event": "default_audio_import_completed", "imported_count": 3, "skipped_count": 0, "imported_files": [ "Emg-Siren.mp3", "Meme-Siren.mp3", "Police-Siren.mp3" ], "skipped_files": [], "message": "Default audio imported to PI successfully" }
```

, timestamped '2026-04-09 14:54:20:745'.

## G-Cam MQTT:

### For Live Stream Request:

```
{"command":"Live Stream","token":"GCAM_SECRET_123"}
```

### For Manual Garbage Detection:

```
{"command":"Garbage Detect","token":"GCAM_SECRET_123"}
```

### For Checking Device Status & Data:

```
{"command":"Data Status","token":"GCAM_SECRET_123"}
```

**For Restart the Device:**

```
{"command":"Device Restart","token":"GCAM_SECRET_123"}
```

**For Audio Streaming (DVM-Direct Voice Message):**

```
{"command":"Audio File Play","audio_name":"Store Ravi  
Announcement.mp3","token":"GCAM_SECRET_123"}
```

or

```
{"command":"Audio File Play","audio_path":"/home/ftpuser/ftp/files/Audio/Store Ravi  
Announcement.mp3","token":"GCAM_SECRET_123"}
```

**For Close the G-Cam Software:**

```
{"command":"Close The Software","token":"GCAM_SECRET_123"}
```

**For Open the G-Cam Software:**

```
{"command":"Open The Software","token":"GCAM_SECRET_123"}
```

**For Restart the Device:**

```
{"command":"Device Restart","token":"GCAM_SECRET_123"}
```

**For Camera Setting Access:**

```
{"command":"Camera Temp URL","token":"GCAM_SECRET_123"}
```

**For Warning Audio Disable:**

```
{"command":"Warning Audio Disable","token":"GCAM_SECRET_123"}
```

**For Warning Audio Enable:**

```
{"command":"Warning Audio Enable","token":"GCAM_SECRET_123"}
```

### **For Scheduled Warning Audio:**

```
{"command":"Scheduled Warning  
Audio","start_time":"10AM","end_time":"6PM","token":"GCAM_SECRET_123"}
```

### **For Scheduled Warning Audio in 24hr Format:**

```
{"command":"Scheduled Warning  
Audio","start_time":"10:00","end_time":"18:00","token":"GCAM_SECRET_123"}
```

### **For Disable Schedule Warning Audio:**

```
{"command":"Scheduled Warning Disabled","token":"GCAM_SECRET_123"}
```

### **For Import Audio from Default Folder SFTP to PI:**

```
{"command":"Import Default Audio","token":"GCAM_SECRET_123"}
```

### **For Erase the Audio from Default folder in PI:**

```
{"command":"Erase Default Audio in PI","token":"GCAM_SECRET_123"}
```

### **For Play the Default Alert Audio:**

```
{"command":"Play Default Audio - Meme-Siren.mp3","token":"GCAM_SECRET_123"}
```

### **For Set Garbage Detection on Schedule (Default 1Hour):**

```
{"command":"Garbage Detection Set to 30mins","token":"GCAM_SECRET_123"}
```

or

```
{"command":"Garbage Detection Set to 3hours","token":"GCAM_SECRET_123"}
```

### **For Manual Reboot Router:**

```
{"command":"Trigger Router Reboot","token":"GCAM_SECRET_123"}
```