Copyleaks

Analysis Report

Scan details

Scan Time	Total Pages	Total Words
February 18th, 2026 at 11:09 UTC	4	775

Plagiarism Detection and AI Detection Report

New Scans 11:09 AM

Plagiarism Detection

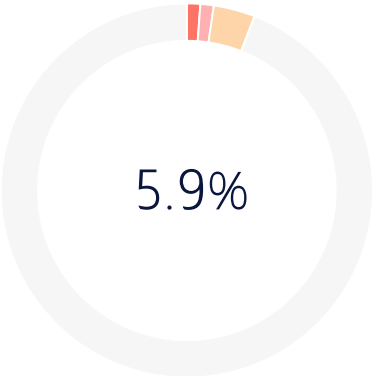

Plagiarism types	Text coverage	Words
Identical	1.2%	9
Minor Changes	1.2%	9
Paraphrased	3.6%	28
Excluded		
Omitted Words		0

AI Detection

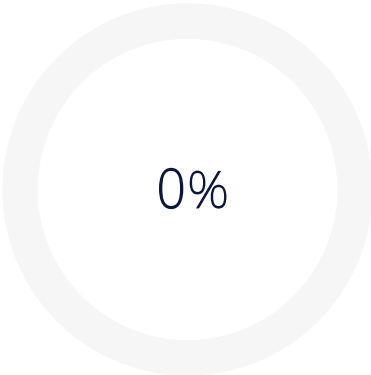

	Text coverage	Words
AI Text	0%	0
Human Text	100%	775
Excluded		
Omitted Words		0

Plagiarism

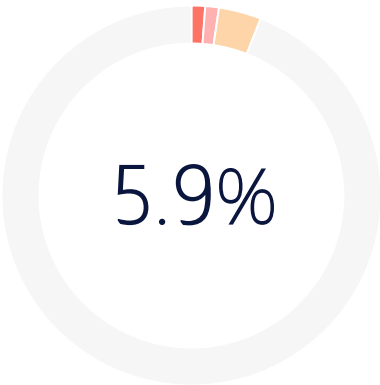

Results (2)

*Results may not appear because the feature has been disabled.

Private Cloud Hub	Shared Data Hub	Filtered / Excluded
0	0	0
Internet Sources	**AI Source Match**	**Current Batch**
2	0	0

Plagiarism types	Text coverage	Words
Identical	1.2%	9
Minor Changes	1.2%	9
Paraphrased	3.6%	28
Excluded		
Omitted Words		0

About Plagiarism Detection

Our AI-powered plagiarism scans offer three layers of text similarity detection: Identical, Minor Changes, and Paraphrased. Based on your scan settings we also provide insight on how much of the text you are not scanning for plagiarism (Omitted words).

Identical

One to one exact word matches. Learn more

Minor Changes

Words that hold nearly the same meaning but have a change to their form (e.g. “large” becomes “largely”). Learn more

Paraphrased

Different words that hold the same meaning that replace the original content (e.g. 'large' becomes 'big') Learn more

Omitted Words

The portion of text that is not being scanned for plagiarism based on the scan settings. (e.g. the 'Ignore quotations' setting is enabled and the document is 20% quotations making the omitted words percentage 20%) Learn more

Copyleaks Shared Data Hub

Our Shared Data Hub is a collection of millions of user-submitted documents that you can utilize as a scan resource and choose whether or not you would like to submit the file you are scanning into the Shared Data Hub. Learn more

Filtered and Excluded Results

The report will generate a complete list of results. There is always the option to exclude specific results that are not relevant. Note, by unchecking certain results, the similarity percentage may change. Learn more

Current Batch Results

These are the results displayed from the collection, or batch, of files uploaded for a scan at the same time. Learn more

Plagiarism Detection Results: (2)

fitcsvm - Train support vector machine (SVM) classifier for one-class and bin... 5.8%

https://www.mathworks.com/help/stats/fitcsvm.html

fitcsvm - Train support vector machine (SVM) classifier for one-class and binary classification - MATLAB Skip to content Main Content fit...

ClassificationSVM - Support vector machine (SVM) for one-class and binary cla... 3.7%

https://www.mathworks.com/help/stats/classificationsvm.html

ClassificationSVM - Support vector machine (SVM) for one-class and binary classification - MATLAB Skip to content Main Content Classifica...

```
SVMdl=fitcsvm(w,Y,'Holdout',0.3,'ClassNames',{'Faulty','Faultless'},'BoxConstraint',0.86,'KernelScale',0.32,'Standardize',true,'CrossVal','on');
Compactmdl=SVMdl.Trained{1}

Compactmdl=SVMdl.Trained{1}
A=test(SVMdl.Partition)
wtest=w(A,:)
Ytest=Y(A,:)
L=loss(Compactmdl,wtest,Ytest,'LossFun','classifcost')

SVMMd=fitcsvm(transformedData2,Y)

figure
gscatter(transformedData2(:,1),transformedData2(:,2),Y)
hold on
plot(sv(:,1),sv(:,2),'ko','MarkerSize',10)
legend('Faultless','Faulty','Support Vector')

Z1 = linspace(min(transformedData2(:,1)),max(transformedData2(:,1)),100);
Z2 = -(beta(1)/beta(2)*Z1)-b/beta(2);
plot(Z1,Z2,'-')

m = 1/sqrt(beta(1)^2 + beta(2)^2); % Margin half-width
Z1margin_low = Z1+beta(1)*m^2;
Z2margin_low = Z2+beta(2)*m^2;
Z1margin_high = Z1-beta(1)*m^2;
Z2margin_high = Z2-beta(2)*m^2;
plot(Z1margin_high,Z2margin_high,'b--')
plot(Z1margin_low,Z2margin_low,'r--')

>> load('/MATLAB Drive/060220263.mat')
>> untitledsvm2

SVMMd =

ClassificationSVM
ResponseName: 'Y'
CategoricalPredictors: []
ClassNames: {'Faultless' 'Faulty'}
```

ScoreTransform: 'none'

NumObservations: 100

Alpha: [28×1 double]

Bias: 0.7684

KernelParameters: [1×1 struct]

BoxConstraints: [100×1 double]

ConvergenceInfo: [1×1 struct]

IsSupportVector: [100×1 logical]

Solver: 'SMO'

Properties, Methods

```
>> L=loss(SVMMd,transformedData2,Y,'LossFun','classifcost')

L =

0.0500
```

Support Vectors

```
>> 0.7010 -0.1781
0.7553 -0.1352
0.5521 0.3692
0.8757 -0.4535
0.6023 0.2437
0.9779 -0.4891
0.6834 0.2063
0.5900 0.3586
0.9775 -0.4917
0.5697 0.3620
0.9736 -0.4756
0.5896 0.3540
0.9659 -0.4341
0.9714 -0.4731
0.9641 -0.4184
0.6583 0.0614
0.6615 -0.2686
0.0775 0.2039
0.8208 -0.3457
-2.1038 0.8177
```

-0.4092 1.3907

0.5040 0.3527

0.6197 0.2308

-0.4746 1.3927

0.6231 0.1598

0.5040 0.3527

0.9129 -0.3382

0.9699 -0.4493

Faultless,Faultless,4.30568078745785

Faulty,Faulty,-4.14833620803519

Faulty,Faulty,-0.596979595692227

Faultless,Faultless,4.62225225689108

Faulty,Faulty,-5.24999194604206

Faultless,Faultless,0.538386109082332

Faulty,Faulty,-4.88857701399252

Faultless,Faultless,0.514988842483658

Faultless,Faultless,1.71200561646181

Faultless,Faultless,0.913870464440913

plot(rocObj,'ClassNames','Faulty','ShowModelOperatingPoint',true)

>> op = modelOperatingPoint(rocObj,0.7)

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.78514 0.083333 1

{'Faultless'} 1.3049 0 0.83333

>> op = modelOperatingPoint(rocObj)

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.61891 0.16667 1

{'Faultless'} 1.3049 0 0.83333

```
>> op1 = modelOperatingPoint(rocObj,0.7)

op1 =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_________ _________ _________________ _________________

{'Faulty' } 0.78514 0.083333 1
{'Faultless'} 1.3049 0 0.83333

>> plot(rocObj,'ClassNames','Faulty','ShowModelOperatingPoint',true)
>> roc = rocmetrics(Ytest,Scores(:,1),'Faulty');
>> op = modelOperatingPoint(roc,0.7)

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_________ _________ _________________ _________________

{'Faulty'} 0.99958 0 1

>> roc = rocmetrics(Ytest,Scores(:,2),'Faulty');
>> op = modelOperatingPoint(roc,0.7)

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_________ _________ _________________ _________________

{'Faulty'} 1.5837 0.75 0
```

```
>> roc = rocmetrics(Ytest,Scores(:,1),'Faulty');
>> op = modelOperatingPoint(roc,0.7)

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_________ _________ _________________ _________________

{'Faulty'} 0.99958 0 1

>> plot(roc)
>> op = modelOperatingPoint(roc,0.5)

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_________ _________ _________________ _________________

{'Faulty'} 0.99958 0 1

>> op = modelOperatingPoint(roc,1)

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_________ _________ _________________ _________________

{'Faulty'} 1 0 0.94444

>> plot(roc)
>> op = modelOperatingPoint(roc,1.2)

op =

1×4 table
```

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty'} 1.5624 0 0.77778

>> plot(roc)

>> op = modelOperatingPoint(roc,0.2)

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty'} 0.30946 0.16667 1

>> plot(roc)

>> op = modelOperatingPoint(rocObj,0.7)

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.78514 0.083333 1

{'Faultless'} 1.3049 0 0.83333

>> op = modelOperatingPoint(rocObj,0.7)

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.78514 0.083333 1

{'Faultless'} 1.3049 0 0.83333

```
>> plot(rocObj,'ClassNames','Faulty','ShowModelOperatingPoint',true)
>> roc = rocmetrics(Ytest,Scores,'Faulty');
Error using rocmetrics>validateMultiClassSizes (line 1994)
Scores must have as many columns as the number of specified class names.

Error in rocmetrics>validateInputs (line 1926)
validateMultiClassSizes(scores, numClasses);
^^^
```

op =

1×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty'} 2.1991 0 0.44444

```
>> plot(roc)
>> plot(rocObj,'ShowModelOperatingPoint',true)
>> plot(rocObj,'ClassNames','Faulty','ShowModelOperatingPoint',true)
>> op = modelOperatingPoint(rocObj,0.7)
```

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.78514 0.083333 1

{'Faultless'} 1.3049 0 0.83333

```
>> plot(rocObj,'ClassNames','Faulty','ShowModelOperatingPoint',true)
>> modelOperatingPoint(rocObj)
```

ans =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.61891 0.16667 1

{'Faultless'} 1.3049 0 0.83333

```
>> modelOperatingPoint(rocObj)=0.7
```

Unable to use a value of type rocmetrics as an index.

```
>> modelOperatingPoint(rocObj)

ans =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_____ _____ _____ _____

{'Faulty' } 0.61891 0.16667 1
{'Faultless'} 1.3049 0 0.83333

>> modelOperatingPoint(rocObj)

ans =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_____ _____ _____ _____

{'Faulty' } 0.61891 0.16667 1
{'Faultless'} 1.3049 0 0.83333

>> op = modelOperatingPoint(rocObj,0.7)

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate
_____ _____ _____ _____

{'Faulty' } 0.78514 0.083333 1
{'Faultless'} 1.3049 0 0.83333

>> op = modelOperatingPoint(rocObj,0.7)

op =

2×4 table
```

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.78514 0.083333 1

{'Faultless'} 1.3049 0 0.83333

```
>> op = modelOperatingPoint(rocObj,0.5)
```

op =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 0.61891 0.16667 1

{'Faultless'} 1.3049 0 0.83333

```
>> modelOperatingPoint(rocObj,1)
```

ans =

2×4 table

ClassName Threshold FalsePositiveRate TruePositiveRate

_____ _____ _____ _____

{'Faulty' } 1.9992 0 1

{'Faultless'} 1.3049 0 0.83333

```
>> plot(rocObj,'ClassNames','Faulty','ShowModelOperatingPoint',true)
>> plot(rocObj,'ClassNames','Faultless','ShowModelOperatingPoint',true)
>>
```

AI Content

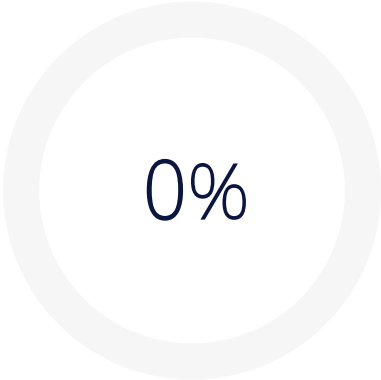

	Text coverage	Words
AI Text	0%	0
Human Text	100%	775
Excluded		
Omitted Words		0

About AI Detection

Our AI Detector is the only enterprise-level solution that can verify if the content was written by a human or generated by AI, including source code and text that has been plagiarized or modified. Learn more

AI Text

A body of text that has been generated or altered by AI technology. Learn more

Human Text

Any text that has been fully written by a human and has not been altered or generated by AI. Learn more

Copyleaks AI Detector Effectiveness

Credible data at scale, coupled with machine learning and widespread adoption, allows us to continually refine and improve our ability to understand complex text patterns, resulting in over 99% accuracy–far higher than any other AI detector–and improving daily. Learn more

Ideal Text Length

The higher the character count, the easier for our technology to determine irregular patterns, which results in a higher confidence rating for AI detection. Learn more

Reasons It Might Be AI When You Think It's Not

The AI Detector can detect a variety of AI-generated text, including tools that use AI technology to paraphrase content, auto-complete sentences, and more. Learn more

User AI Alert History

Historical data of how many times a user has been flagged for potentially having AI text within their content. Learn more

AI Logic

The number of times a phrase was found more frequently in AI vs human text is shown according to low, medium, and high frequency. Learn more