

# An Introduction to Python

Parham Alvani

Amirkabir University of Technology

`parham.alvani@gmail.com`

May 14, 2015




## What is python...

Python is a high-level, interpreted, interactive and object-oriented scripting language. Python is designed to be highly readable..




# Environment

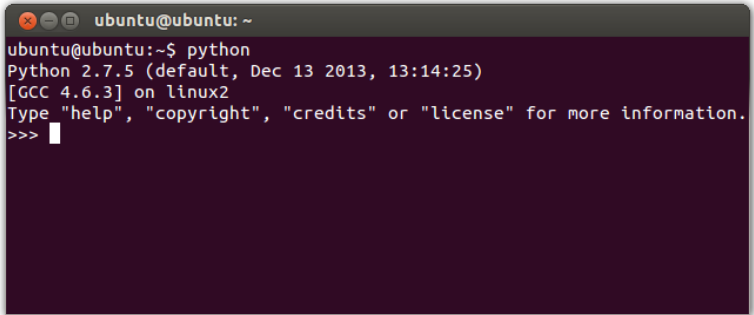A terminal window with a dark purple background and a grey title bar. The title bar contains three window control icons (close, minimize, maximize) and the text 'ubuntu@ubuntu: ~'. The terminal text is as follows:

```
ubuntu@ubuntu:~$ python
Python 2.7.5 (default, Dec 13 2013, 13:14:25)
[GCC 4.6.3] on linux2
Type "help", "copyright", "credits" or "license" for more information.
>>> 
```

# Variable Types

- ▶ Numbers
- ▶ String
- ▶ List
- ▶ Tuple
- ▶ Dictionary

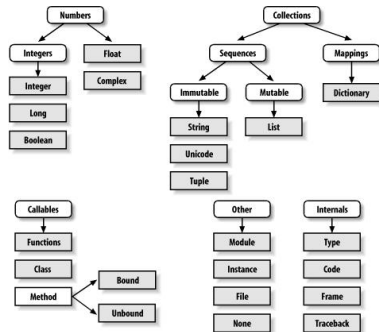

# Numbers

- ▶ Number data types store numeric values.
- ▶ They are immutable data types, means that changing the value of a number data type results in a newly allocated object.

# Strings

- ▶ Strings are among the most popular types in Python.
- ▶ We can create them simply by enclosing characters in quotes.
- ▶ Python treats single quotes the same as double quotes.


# Lists

- ▶ The most basic data structure in Python is the sequence.
- ▶ Each element of a sequence is assigned a number - its position or index.
- ▶ The first index is zero, the second index is one, and so forth.



# Tuples


- ▶ A tuple is a sequence of immutable Python objects.
- ▶ Tuples are sequences, just like lists.
- ▶ The differences between tuples and lists are:
  - the tuples cannot be changed unlike lists
  - tuples use parentheses, whereas lists use square brackets.

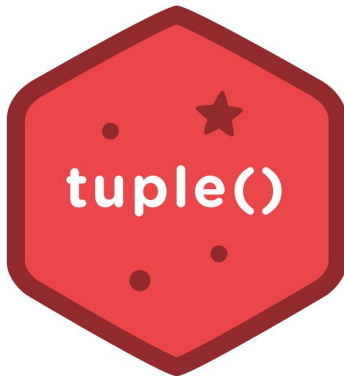



# Dictionary

- ▶ Each key is separated from its value by a colon ( : )
- ▶ The items are separated by commas
- ▶ The whole thing is enclosed in curly braces.

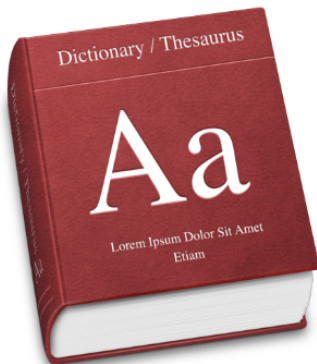


- ▶ If-Then-Else
- ▶ For
- ▶ While
- ▶ Exceptions

**FLOW**  **CONTROL**

# Functions

- ▶ Function blocks begin with the keyword `def`, followed by the function name and parentheses.
- ▶ Any input parameters or arguments should be placed within these parentheses.
- ▶ The first statement of a function can be an optional statement - the documentation string of the function or docstring.

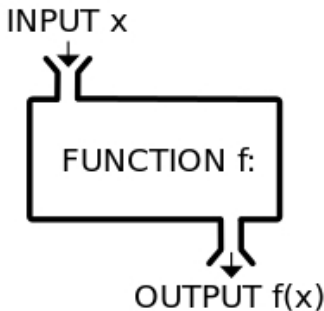

# Functions

```
def square(x):  
    return x * x
```

```
def hello():  
    return "Hello"
```

```
def printme( str ):  
    "This prints a passed string into this function"  
    print str  
    return
```

# Classes

- ▶ The class statement creates a new class definition.
- ▶ The name of the class immediately follows the keyword `class` followed by a colon as follows



# Classes

```
class Employee:
    """
    Common base class for all employees
    """
    empCount = 0

    def __init__(self, name, salary):
        self.name = name
        self.salary = salary
        Employee.empCount += 1

    def displayCount(self):
        print "Total Employee %d" % Employee.empCount

    def displayEmployee(self):
        print "Name : ", self.name, ", Salary: ", self.salary
```

```
emp1 = Employee("Zara", 2000)
```

# Garbage Collection

- Python deletes unneeded objects automatically to free the memory space.



# Inheritance

- Instead of starting from scratch, you can create a class by deriving it from a preexisting class by listing the parent class in parentheses after the new class name.





# Inheritance

```
class SubClassName (ParentClass1[, ParentClass2, ...]):  
    """  
    Optional class documentation string  
    """  
    # class_suite
```

# Base Overloading Methods

- ▶ `__init__( self [,args...] )` : Constructor (with any optional arguments)
- ▶ `__del__( self )` : Destructor, deletes an object
- ▶ `__repr__( self )` : Evaluatable string representation
- ▶ `__str__( self )` : Printable string representation
- ▶ `__lt__( self, other )`:
- ▶ `__le__( self, other )`:
- ▶ `__eq__( self, other )`:
- ▶ `__ne__( self, other )`:
- ▶ `__gt__( self, other )`:
- ▶ `__ge__( self, other )`:

These are the so-called rich comparison methods,  
and are called for comparison operators in preference to `__cmp__()` below.

# Base Overloading Methods

- ▶ `__cmp__ ( self, x )` : Called by comparison operations if rich comparison is not defined.
- ▶ `__add__( self, other )`:
- ▶ `__sub__( self, other )`:
- ▶ `__mul__( self, other )`:
- ▶ `__floordiv__( self, other )`:
- ▶ `__mod__( self, other )`:
- ▶ `__divmod__( self, other )`:
- ▶ `__pow__( self, other[, modulo] )`:

# Base Overloading Methods


- ▶ `__lshift__( self, other )`:
- ▶ `__rshift__( self, other )`:
- ▶ `__and__( self, other )`:
- ▶ `__xor__( self, other )`:
- ▶ `__or__( self, other )`:

These methods are called to implement the binary arithmetic operations

`+`, `-`, `*`, `//`, `%`, `divmod()`, `pow()`, `**`, `<<`, `>>`, `&`, `^`, `|`

# Multiple Inheritance

- ▶ Method Resolution Order (MRO)
- ▶ C3 Algorithm

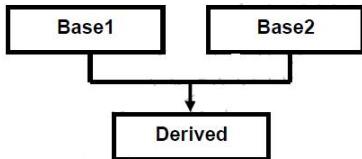

## C3 linearization

- ▶ the C3 superclass linearization is an algorithm used primarily to obtain the order in which methods should be inherited (the "linearization") in the presence of multiple inheritance, and is often termed "MRO" for Method Resolution Order.

# Questions?