



(a) MLA adapter: re-rotate only the decoupled RoPE sub-vector k^{pe} ; the latent c_t is position-free

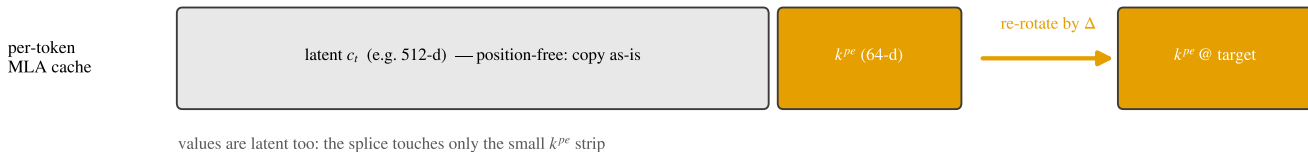

values are latent too: the splice touches only the small k^{pe} strip


(b) **M-RoPE adapter (vision):** re-rotate only the temporal axis t ; spatial h, w are intrinsic to the image

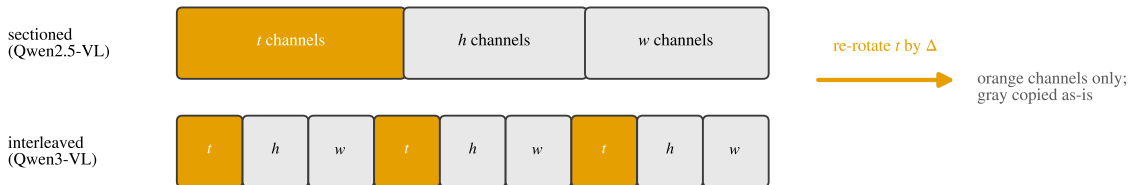

orange channels only;
gray copied as-is

interleaved
(Qwen3-VL)

(c) Sliding-window fix (Gemma): keep full per-token KV; let the attention mask enforce the window

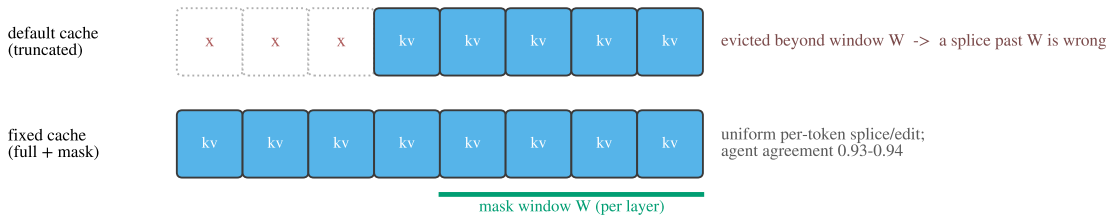

evicted beyond window W $\rightarrow$ a splice past W is wrong

fixed cache
(full + mask)

uniform per-token splice/edit;
agent agreement 0.93-0.94

mask window W (per layer)