26. Remove Duplicates from Sorted Array

Solved

Easy | Topics | Companies | Hint

Given an integer array `nums` sorted in **non-decreasing order**, remove the duplicates in-place such that each unique element appears only **once**. The **relative order** of the elements should be kept the **same**.

Consider the number of *unique elements* in `nums` to be `k`. After removing duplicates, return the number of unique elements `k`.

The first `k` elements of `nums` should contain the unique numbers in **sorted order**. The remaining elements beyond index `k - 1` can be ignored.

Custom Judge:

The judge will test your solution with the following code:

```
int[] nums = [...]; // Input array
int[] expectedNums = [...]; // The expected answer with correct length

int k = removeDuplicates(nums); // Calls your implementation

assert k == expectedNums.length;
for (int i = 0; i < k; i++) {
    assert nums[i] == expectedNums[i];
}
```

If all assertions pass, then your solution will be **accepted**.

Example 1:

```
Input: nums = [1,1,2]
Output: 2, nums = [1,2,_]
Explanation: Your function should return k = 2, with the first two elements of nums being 1 and 2 respectively.
It does not matter what you leave beyond the returned k (hence they are underscores).
```

Code

C | Auto

```c
#include <stdio.h>

int removeDuplicates(int nums[], int n)
{
    if(n == 0)
        return 0;

    int i, k = 1;

    for(i = 1; i < n; i++)
    {
        if(nums[i] != nums[i - 1])
        {
            nums[k] = nums[i];
            k++;
        }
    }

    return k;
}
```

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

nums =

[1,1,2]

Output

[1,2]

Expected

[1,2]

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

nums =

[0,0,1,1,1,2,2,3,3,4]

Output

[0,1,2,3,4]

Expected

[0,1,2,3,4]

Accepted 362 / 362 testcases passed

varshita24 submitted at Mar 11, 2026 15:51

Analysis | Solution

Runtime

0 ms | Beats 100.00%

Memory
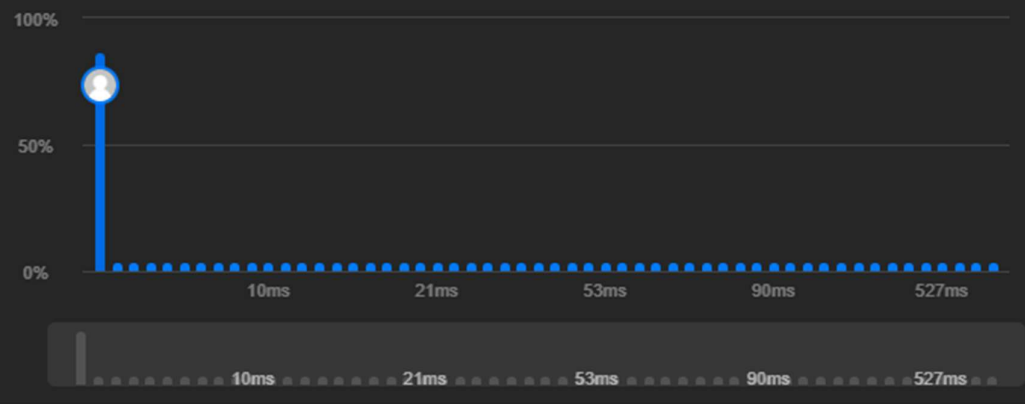
12.92 MB | Beats 6.58%