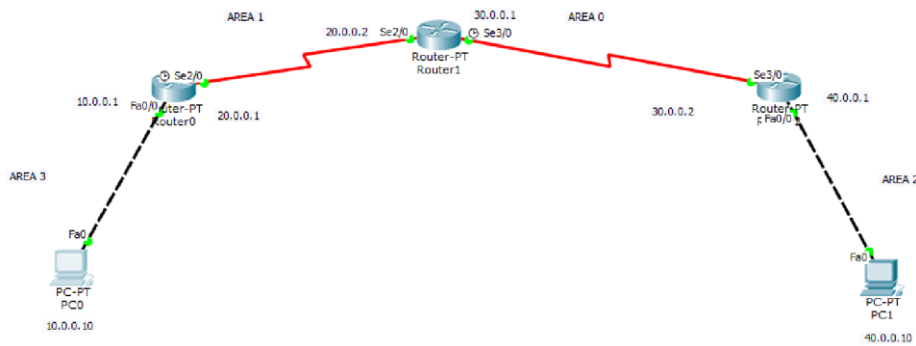# LAB 7

Configure OSPF routing protocol.

TOPOLOGY:

OUTPUT:

PC0

Physical Config **Desktop** Custom Interface

Command Prompt

```
Packet Tracer PC Command Line 1.0
PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

PC>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.10: bytes=32 time=4ms TTL=125
Reply from 40.0.0.10: bytes=32 time=6ms TTL=125
Reply from 40.0.0.10: bytes=32 time=12ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 4ms, Maximum = 12ms, Average = 7ms

PC>
```