

# 1Remote

Full documentation

 **Publication Date** : 2026-06-04

*This box will disappear when printing*

[mkdocs-print-site-plugin](#)

## Usage

Basic

## 1Remote Quick Start

1Remote is open source and free to use.


## Installation

[Download](#)

## Adding Servers

### Manually Adding a Server

1. Click the **+** button in the upper-right corner of the main window.

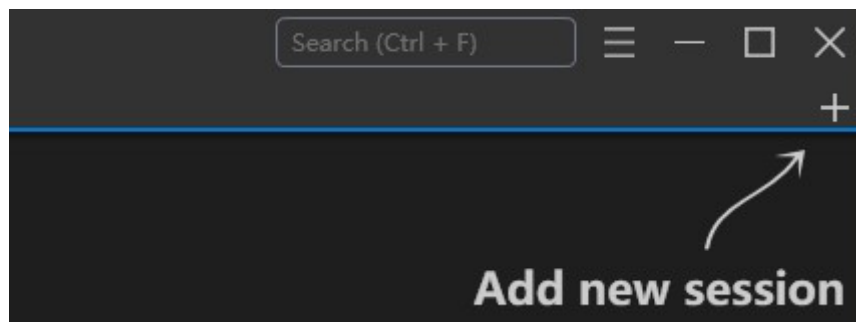


2. Choose a protocol, such as RDP, SSH, or VNC, at the top of the pop-up window.



3. Set the server's name, label, notes (supports Markdown), and other information and save.

[Learn more](#)


## Migrate from PRemoteM

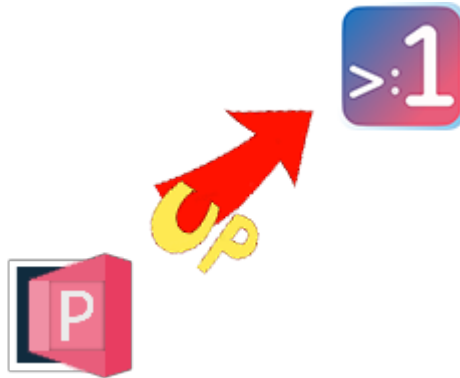

### **i** PRemoteM vs 1Remote

1Remote is the upgraded version of PRemoteM.

Since PRemoteM is our old name, our migration tool will auto detect your old data when your first start 1Remote.

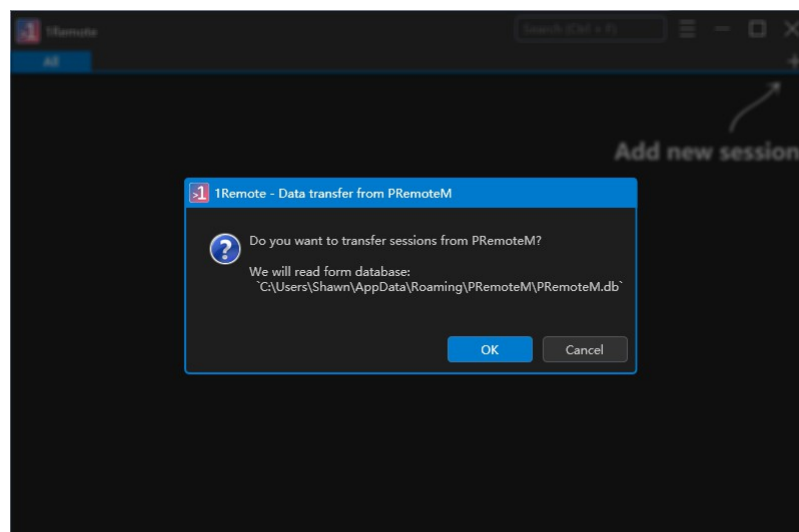

If the you miss the auto-migration, you can still import it manually:

1. In PRemoteM export all data following the [Data export](#) guide, you will get a \*.prma file.

- In 1Remote click the **+** button in the upper-right corner then click the **Import** button, select the \*.prma file you just exported in the pop-up dialog by select the file filter \*.\* , and click "Open" to complete the import.

## Starting Remote Connections

### Starting from the main window

Simply **double-click** a server to open the corresponding remote session.

### Starting from the Launcher

Press default shortcut **Alt + M** to show the launcher, then:



- type the keyword to select server you want then press **Enter** to start.
- Right** to show menu for the selected server.
- Tab →** to show the [Quick Connect view](#).

[Learn more](#)

## Customization


- Change language: **Setting -> General -> Language**
- Change theme: **Setting -> Theme -> Theme** . On this page, you can also customize your favorite color scheme.
- Change SSH color scheme: **Setting -> Protocol -> SSH -> KiTTY -> Themes**

[Learn more from the Overview](#)

## Managing Servers

### Adding Server


1. Click the **+** button in the upper-right corner of the main window.

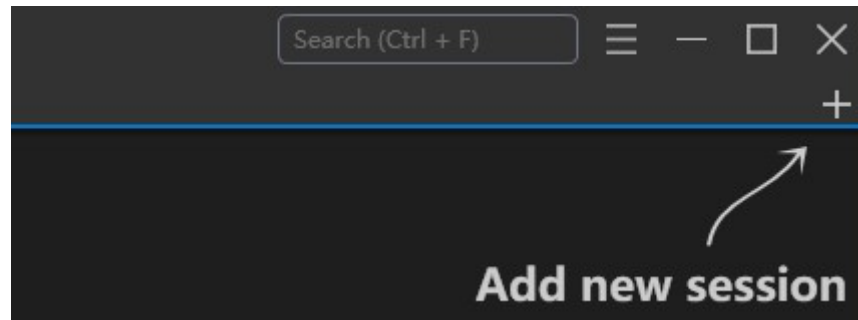

2. Choose a protocol, such as RDP, SSH, or VNC, at the top of the pop-up window.



3. Set the server's name, tags, notes (supports Markdown), and others.
4. (Optional) Customize the server icon (system-built or manually uploaded) and highlight color (default is no highlight, setting a highlight color will highlight the server in the list and connection process).

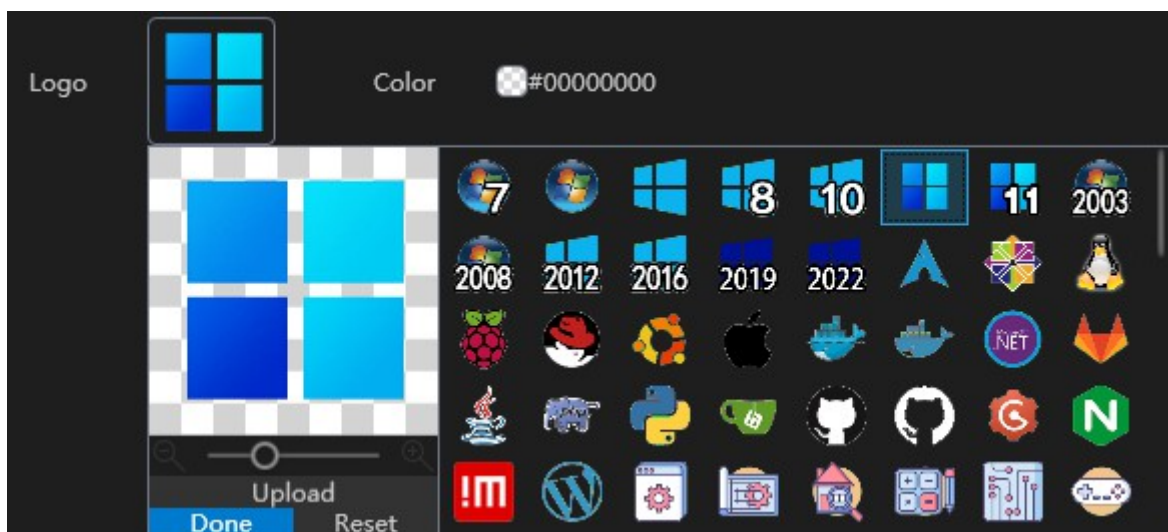

5. (Optional) Configure scripts for the server, such as opening VPN before starting remote desktop, or closing VPN after closing remote desktop. Scripts support cmd, PowerShell, and Python. Please see the [Open a VPN before connect](#) for further details.
6. Continue entering server **address**, **port**, **credentials** and other information, and select your desired connection settings.
7. Click the **Save** button to complete adding the server and return to the homepage.


### Style switching

Servers are displayed in the main window as cards or lists. You can click the **Settings** button in the upper-right corner of the interface to expand the menu and choose **Toggle Cards/List** to switch the display mode of servers.



## Sorting


- In list mode, click on the header above the list to sort the servers.
- Or you can click the **Settings** button in the upper-right corner of the interface to expand the menu and choose **"Sorting"** to sort the servers.
- If **Sort by drag** is selected, you can drag the server to the desired position to sort the servers.

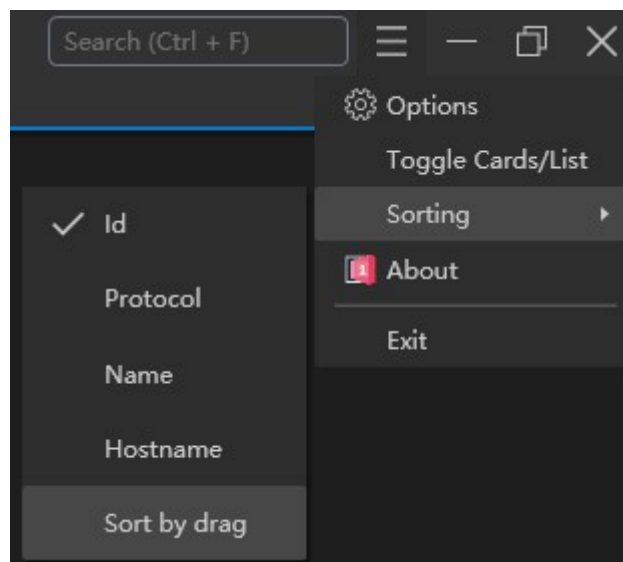

## Edit

When you move mouse over a server, the **Settings** button will be displayed. Clicking on this button will display a menu where you can connect to, edit, create a replica, delete, copy the server address and account password,

etc. (Note: If you connect to a MySQL server with read-only permissions, you will not be able to edit, copy, or delete server information stored in that database.)

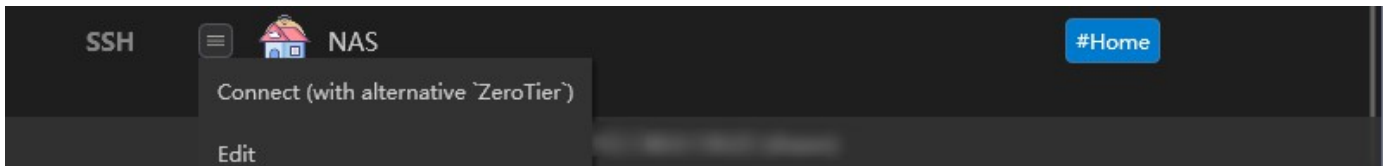


### Tip

You can also directly enter the edit interface by right-clicking on a server with your mouse.

## Bulk edit

By selecting multiple servers using the checkboxes and clicking the **Edit** button at the bottom of the main window, you can enter the batch editing interface to perform uniform editing operations on multiple servers. With proper server labels, you can easily select all servers under a specific label and modify their addresses or account passwords in bulk.

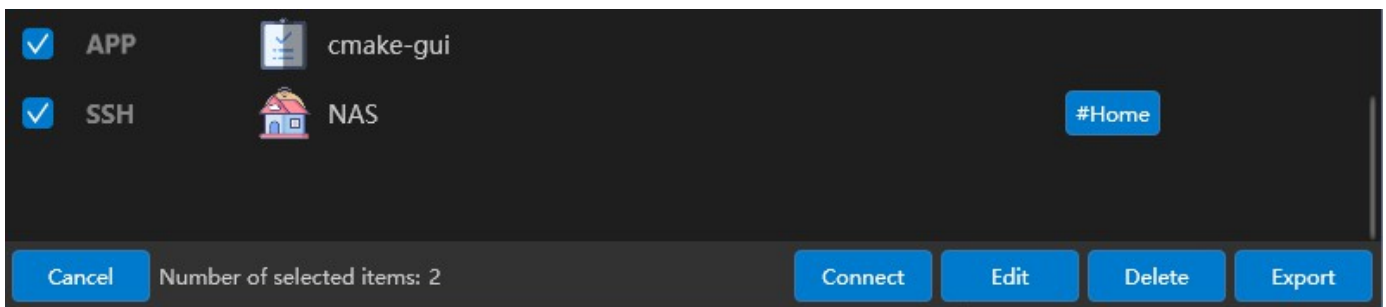

## Data export

### Warning

The exported data is stored in plain text, so please handle it with care.


When some servers are selected, **Export** button can export selected items to json file which you can import it to another PC or simply make a backup. Please see the [Data synchronization](#) for further details.

## Data import

1. Click the **+** button in the upper-right corner of the main window
2. Click **import json** to import json file exported from 1Remote.

### Importing from mRemoteNG


1. In mRemoteNG, right-click on the server and choose **"Export to File..."**. Set the **"File Format"** to **"mRemoteNG CSV"** in the pop-up window, and click the **OK** button in the lower-right corner to export.
2. In 1Remote, click the **+** button in the upper-right corner of the main window, and choose "import mRemoteNG csv". Select the CSV file you just exported in the pop-up dialog, and click "Open" to complete the import.

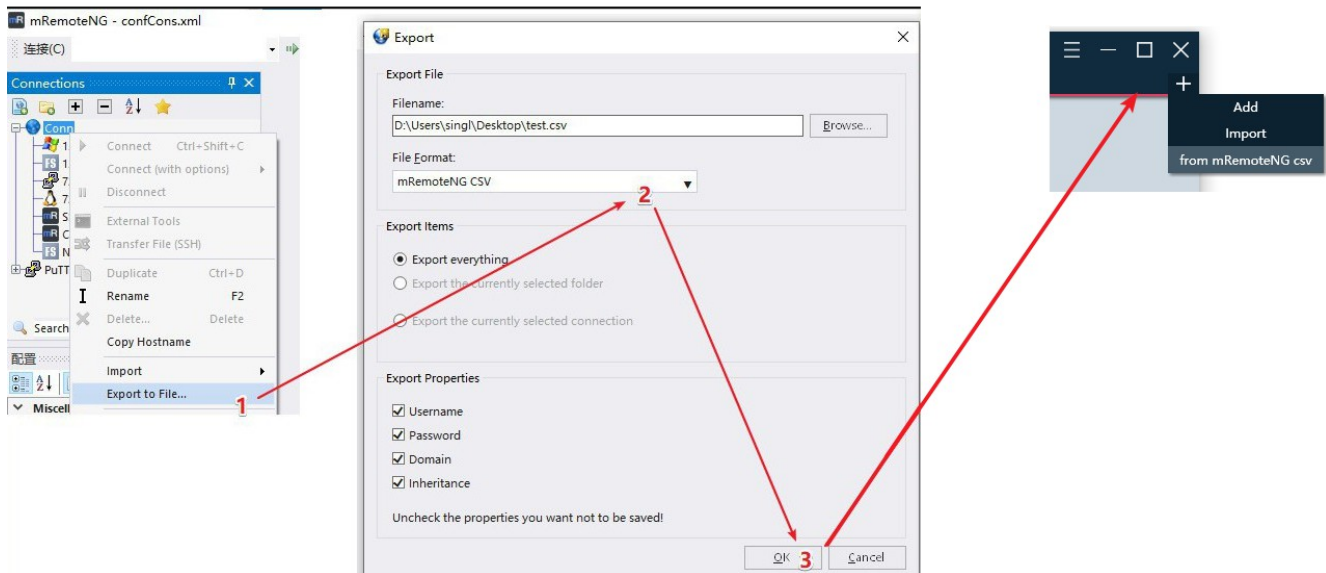

## Importing from PRemoteM

Since PRemoteM is our old name, you can also import data from PRemoteM.

Our migration tool will auto detect your old data when your first start 1Remote.

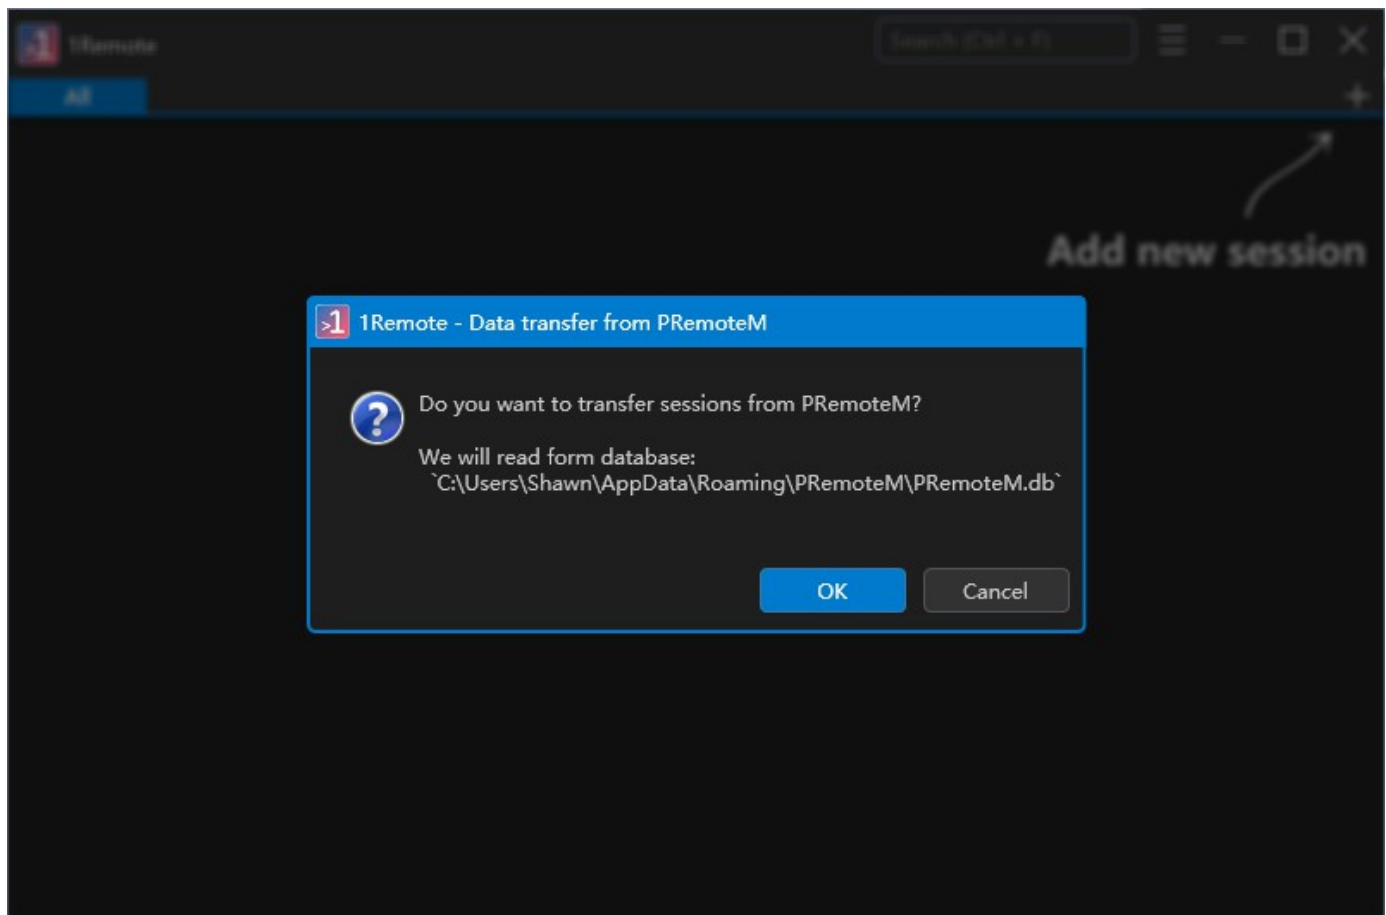

If the you miss the auto-migration, you can still import it manually:

1. In PRemoteM export all data following the [Data export](#) guide, you will get a \*.prma file.
2. In 1Remote click the **+** button in the upper-right corner then click the **Import** button, select the \*.prma file you just exported in the pop-up dialog by select the file filter \*.\* , and click "Open" to complete the import.

### Importing from RDP Files

#### Warning

We are not able to get password form RDP file, so you may have to enter password manually.

1. In MSTSC.exe, click "Show Options" to expand the window, click the **Save As...** button under "Connection settings", and save as an RDP file.
2. In 1Remote, click the **+** button in the upper-right corner of the main window, and choose "**import \*.rdp**". Select the RDP file you just saved in the pop-up dialog, and click "Open" to complete the import.

## Starting Remote Connections

### Starting from the main window



1. Servers are displayed in the main window as cards or lists. Double-click a server to open the corresponding remote session.
2. You can also check the checkbox in front of each server, and then click the **Connect** button at the bottom of the main window to start multiple remote sessions at once.
3. If you have labeled the servers, you can right-click the label in the label list above the main window, and click the **Connect** button to start multiple remote sessions at once.


## Starting from the Launcher

You can use the default shortcut **Alt + M** call the launcher, then type some key words to search the server you want to connect, then press **Enter** to start.

For more details about the Launcher, please see the [Launcher](#).

## Session view

Remote session windows are displayed in the window as tabs. You can detach the tab to a new window by dragging the tab to the upper-left corner of the window.

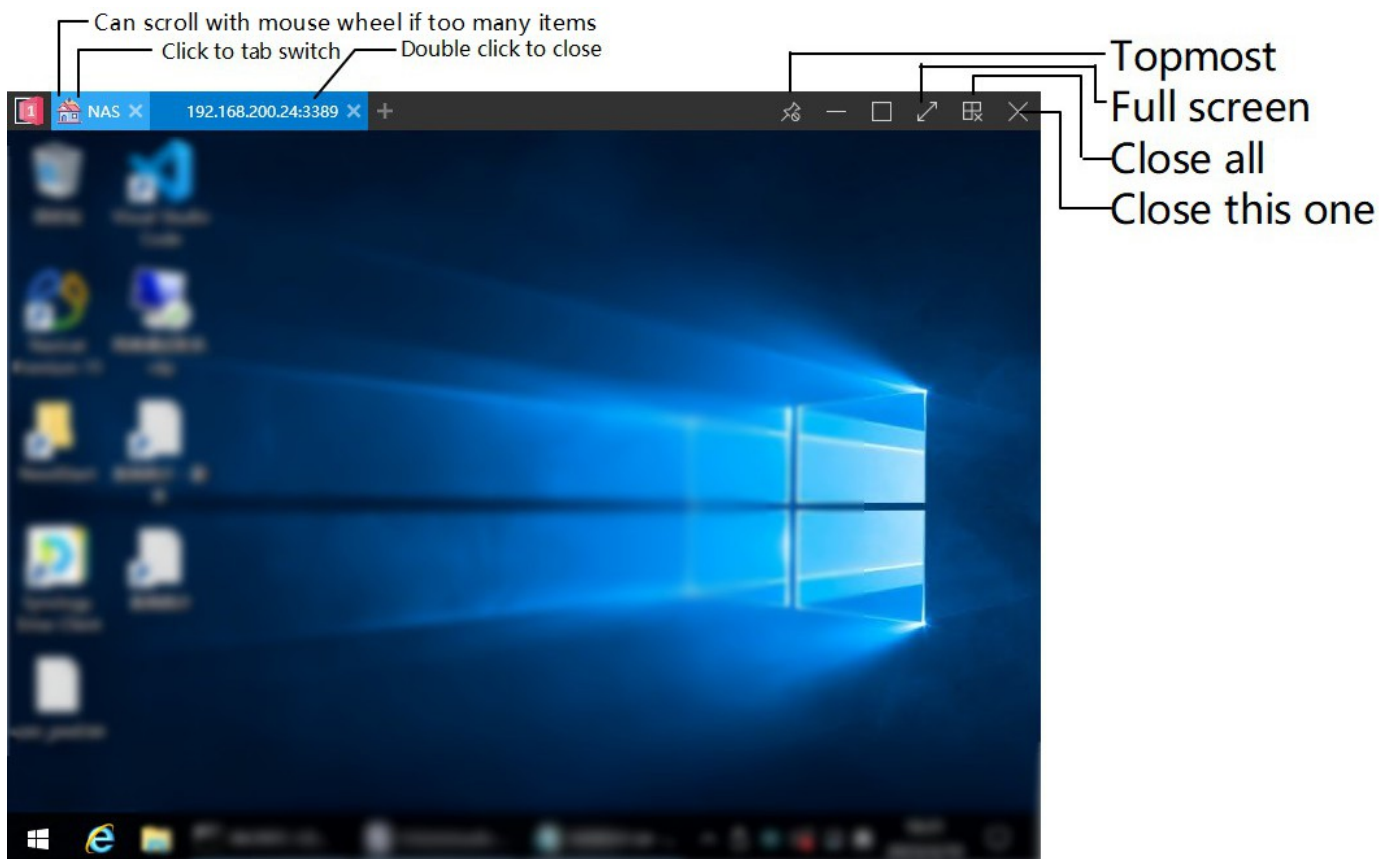


## Tag management

You can add multi-tag for each server, all your Tags will be shown on **Tag page**.


A short cut of the tags selected in this page will be display on the top bar for quick access.

I suggest making a tag name as short as you can to save space.

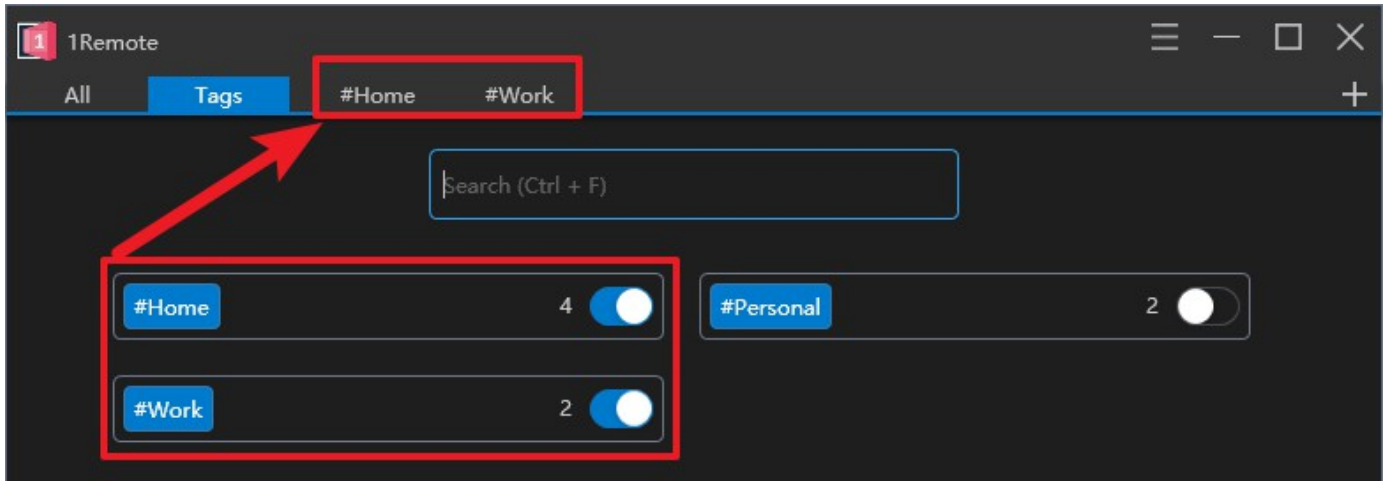

## Rename tag


Right-click on tag and you will find a **Rename** button.

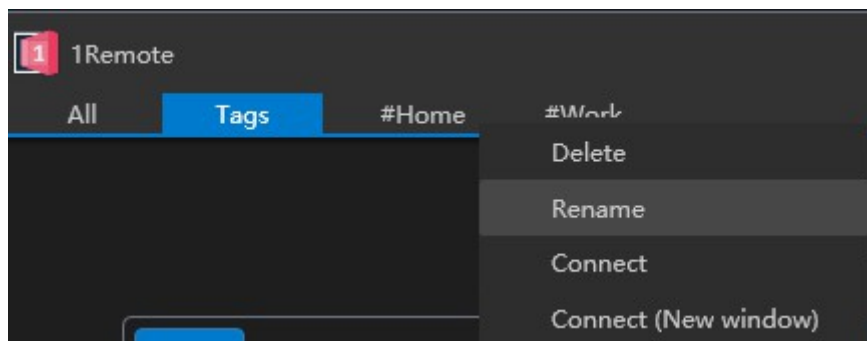


## Multiple filter

If you need a strong tag management, you can use multiple filter to find the server you want.

By click / right-click / ctrl-click on the tag, you can include or exclude the tag

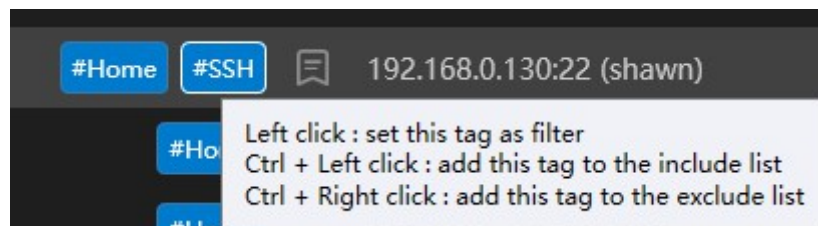

e.g. sometimes I wanna list all my servers in home but exclude RDP.

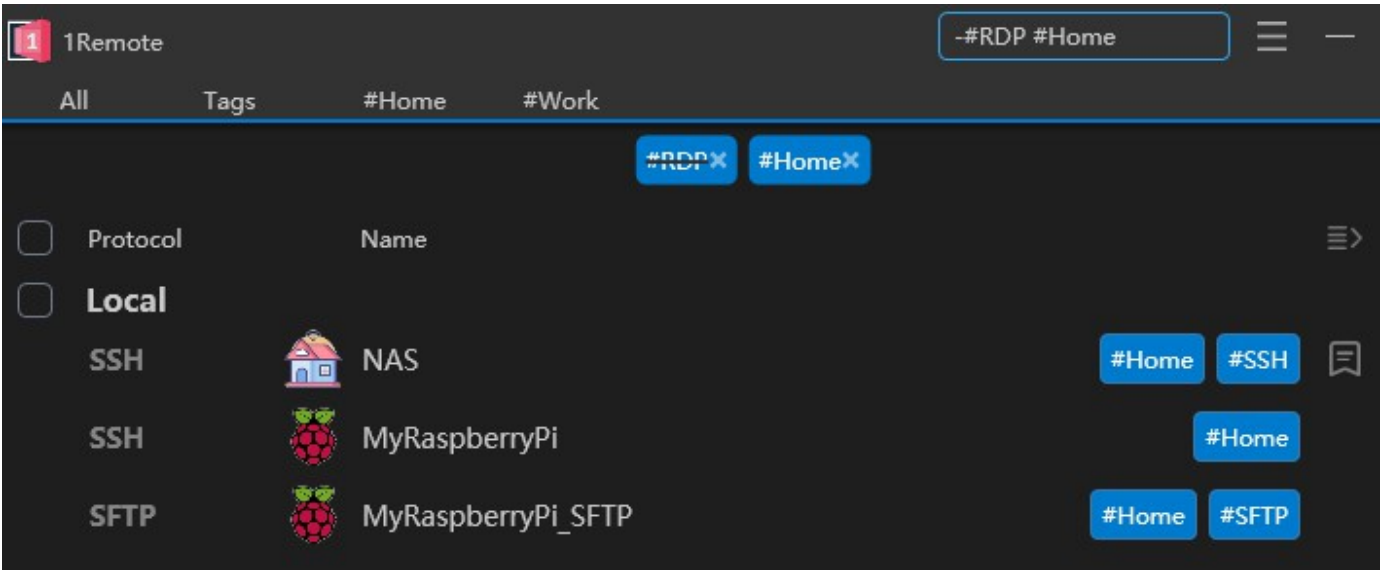

 Last Change: 2026-06-04 08:24

 Publication Date: 2026-06-04 08:25

## Launcher

# Launcher

Launcher is a place where you can quickly start a remote session. You can use the default shortcut  **Alt** +  **M** to open the quick start window of the server.


### Note

Launcher will be shown on the screen where your mouse is.

## Select

In launcher, items are ordering by recent use. Use the  **Up** and  **Down** arrow keys to select the desired server, or give some keywords to search for the desired server.




 key or mouse double click it to start the remote session.

## Options

When you select a server, you can use the **→** arrow key to open the options menu. There you can choose a credential to connect to the server.


 arrow key to go back to the server list.

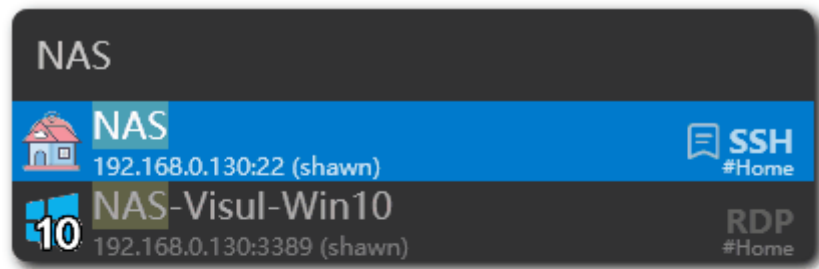

## Show note

If you write a note for the server, you can use the  arrow key to show the note.

Or simply click the note icon.

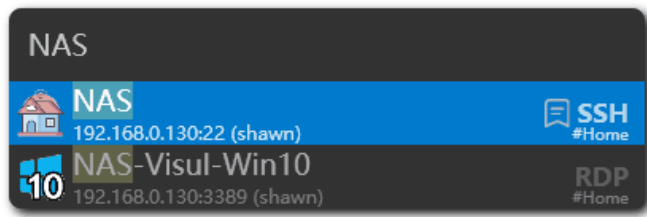

---


 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25


## Quick connect

In launcher you can make a quick connect to a server without creating a server profile.


After the launcher shows up, press the Tab → key to switch to the quick connect mode.

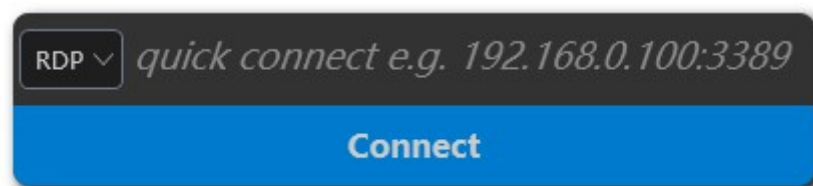


In this view you can select the protocol and fill the ip and port, then start the remote session.

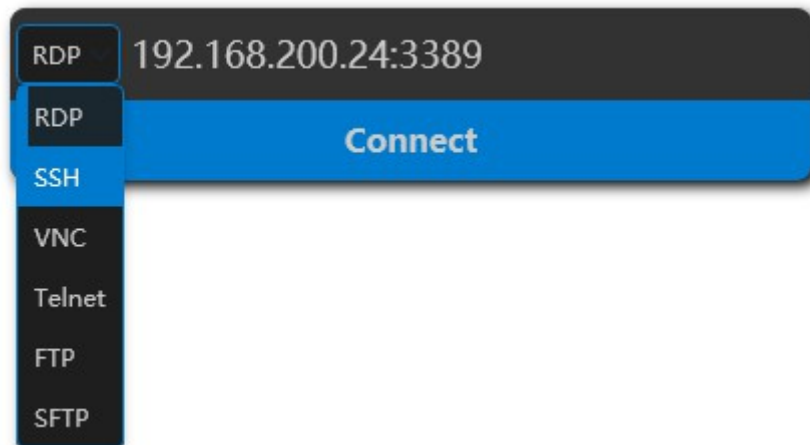

One you press  key, a password acquire window will show up, you need to fill the password before continue.

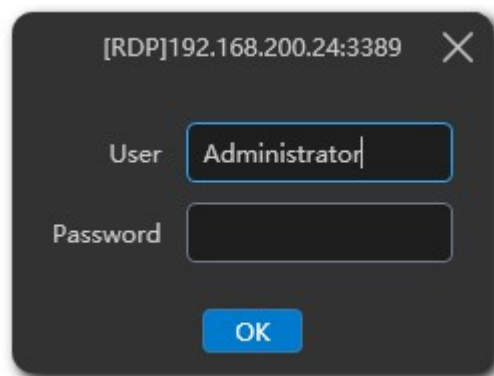

1Remote will help you remember your quick connect history, so you don't have to type the ip and port next time.

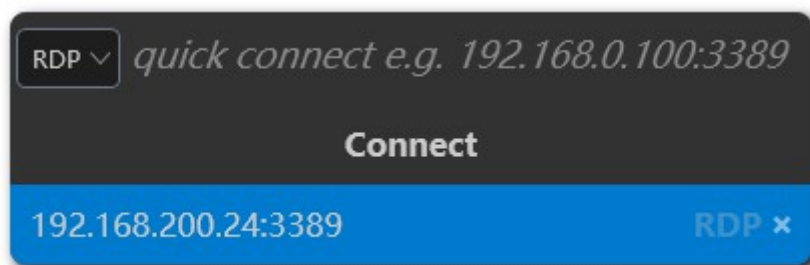

 **Warning**

We don't save the credential for security reason, so you need to fill the password every time you start a quick connect session.

Ended: Launcher

Ended: Basic


## Alternative-credential

1Remote allow you add credentials for alternative use. You can switch between them manually or automatically when open connections.

### Why

Sometimes you need to connect to the same server with different credentials or different host address. For example:

- Case1: You connect to a server with a normal account mostly, and connect to the same server with a root account when do some maintenance work.
- Case2: You connect to your NAS with LAN address at home, while connect to the same NAS with WAN address when you are outside.

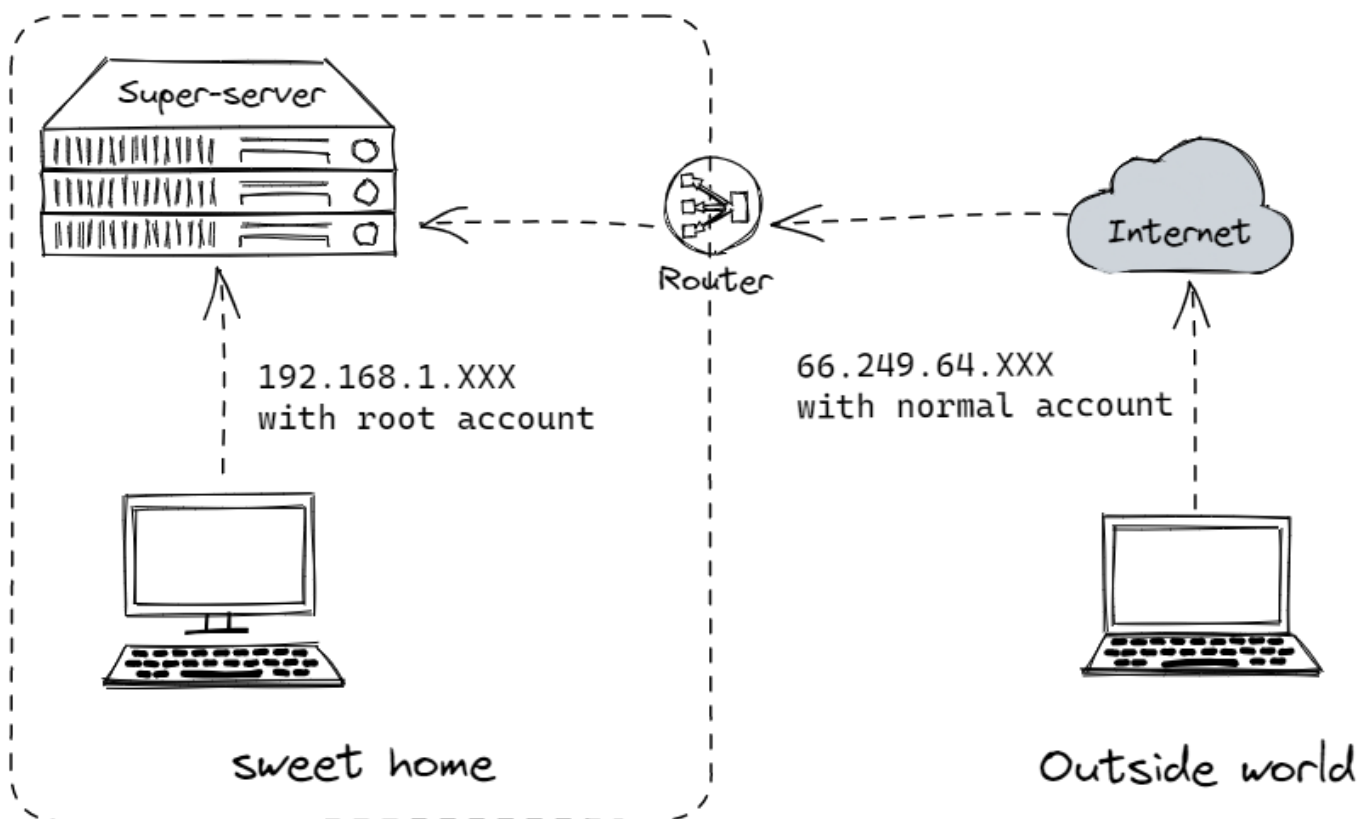

## Add/Edit

In 1Remote "**Alternative-credential**" can help you smoothly switch between different address and account.

In edit page, there's a session for alternative credentials. You can add a new credential by clicking the **+** button. Also you can edit or delete a credential by clicking the **Edit** button or **Delete** button.

**Connection**

Hostname  Port

User

Password  ☐ Use private key

Alternative support multi-address multi-account

LAN+root

**Edit** **Delete**

+

When you add a new credential, you need to fill the name, others are optional. The name is used to identify the credential, and it will be shown in the credential list.

**Connection**

Name

Hostname

Port


User

Password  ☐ Use private key


**Save** **Cancel**

## Work with List



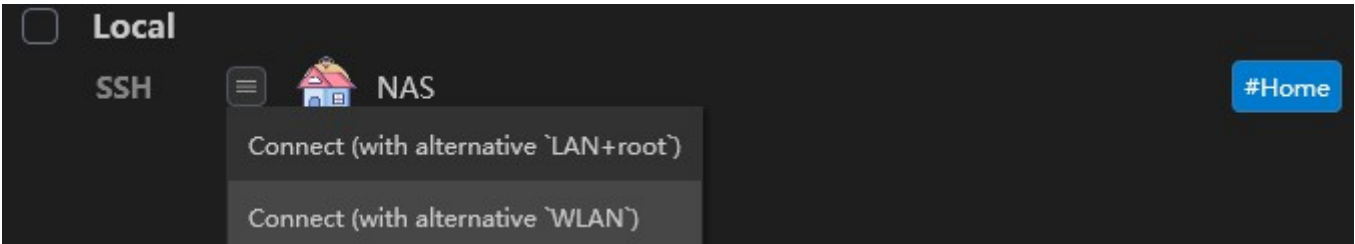


Work with Launcher(**By press key** → Right )

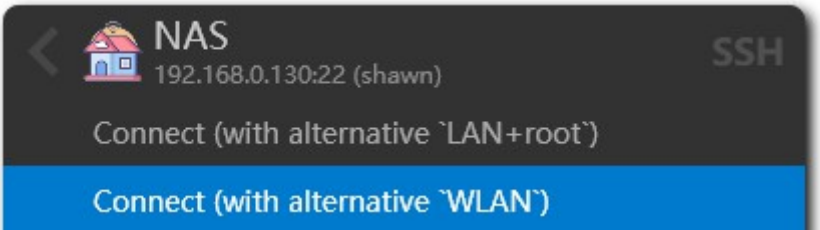

### Auto switching address

If you got **Automatic address switching** enabled, 1Remote will automatically switch to the alternative address when you connect to the server(according to the ping result).

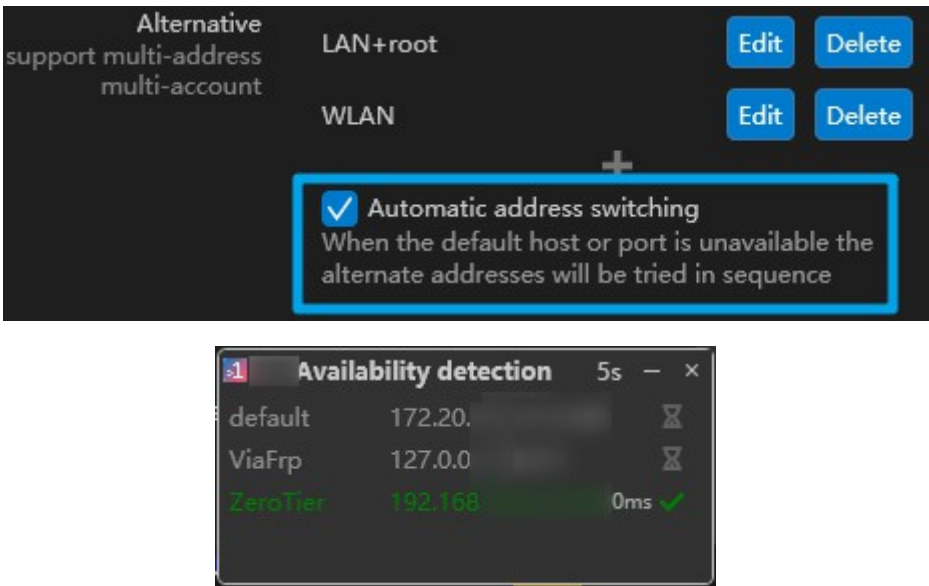

You **have no need** to switch the address to WLAN manually when you are outside:).

A chain is only as strong as it's weakest link is a metaphor

## Security

Since 1Remote is designed for snappy and fast experience, it is not easy to make a balance between convenience and safety. Since users are probably IT people with high security awareness, we decided to pay more attention to convenience, leaving security to the system, security software, and good user habits to protect. Therefore, we will only provide the most basic information security, and will not provide functions such as activation lock.

### Why 1Remote doesn't need a activation password

Since this program is a resident background app that starts a session through the launcher (Alt + M). If you have to enter a password every time you turn on the launcher, the experience will be greatly reduced. Or if the password is only required when the program is started, then the security cannot actually be properly guaranteed. Taking these into account, we believe that it is better for security guaranteed by the system, security software, and good user habits in long-term solution. As long as the user realizes that he should lock the system when he/she leaves the computer, 1Remote does not have to put add any activation protect. And if the user does not have such security awareness, then even if we adds the activation password, the information may still be leaked through other ways.

### What we provide

For the data sync / sharing reason, 1Remote only provide a basic string encryption in database (account, password, etc.). So it is recommended to enable hard disk encryption (like [Bitlocker](#)) to ensure that event when the 1Remote database is leaked or the hard disk is cracked physically, the theft will get nothings.

## Summary

- Lock Windows when you left your computer.
- Backup your data frequently.
- (Recommended) Enabled bitLocker.

---

 **Last Change:** 2026-06-04 08:24


 **Publication Date:** 2026-06-04 08:25

You may work with multiple devices to manage your servers. In this case, you can use the database synchronization settings to share server information across different devices.

## By export

Nothing to talk about, export, copy to other device, import...over.

## Sqlite Synchronization

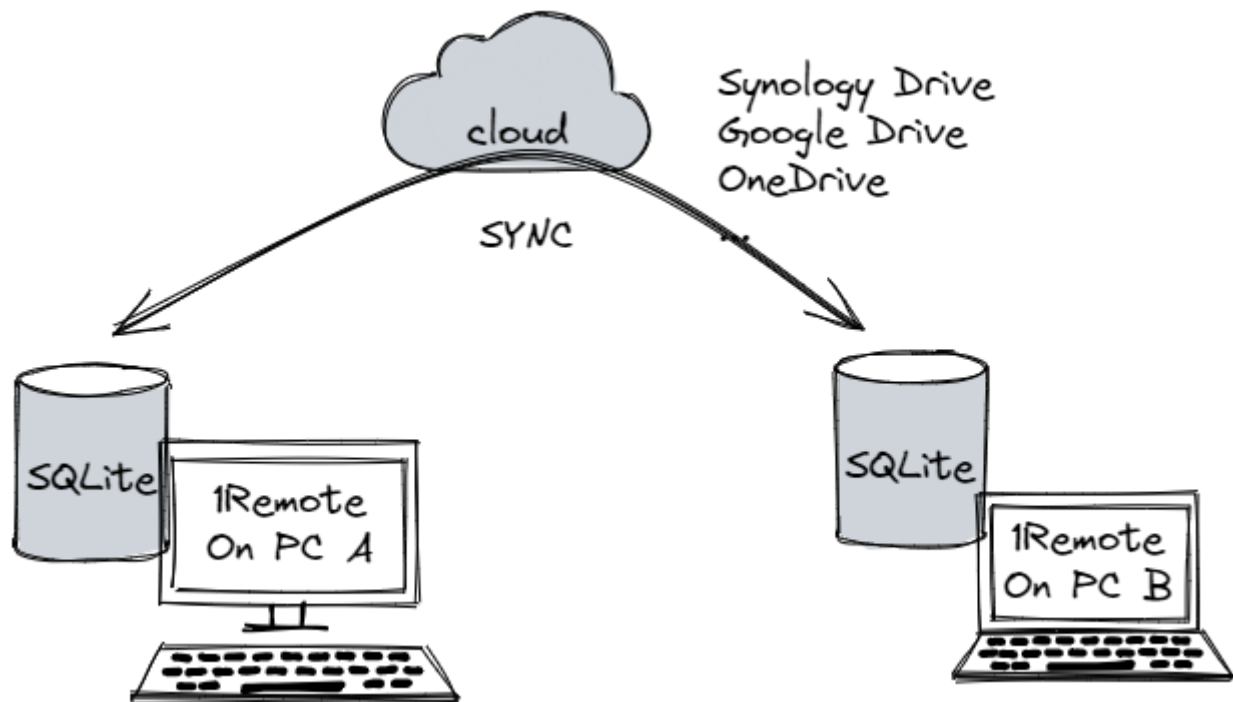

- Our main database is a un-occupied Sqlite database, so you can copy the database while 1Remote is still in used.
- We will check update and reload data every X minutes.


This means you can copy the database to other device using sync tools, and 1Remote will automatically detect the change and run a data reload procedure.

please do not remove the database file while 1Remote is still in used.

### Tip

In Options -> Database -> Local -> Edit , you can check up where your database file is.


You can also change the db path there.

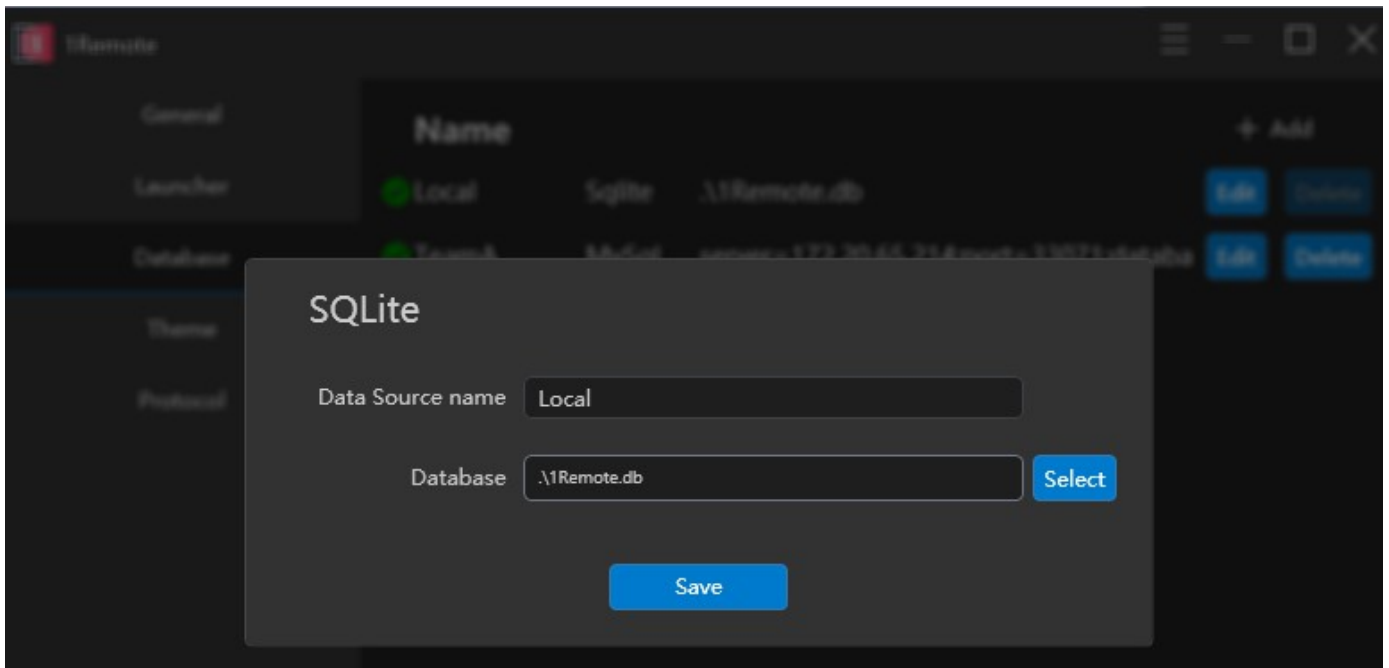

recommended tools:

- Synology NAS: [Cloud Station](#)
- Google Drive: [Google Drive](#)
- OneDrive: [OneDrive](#)
- JIanguoyun: [Jianguoyun](#)

By using MySQL

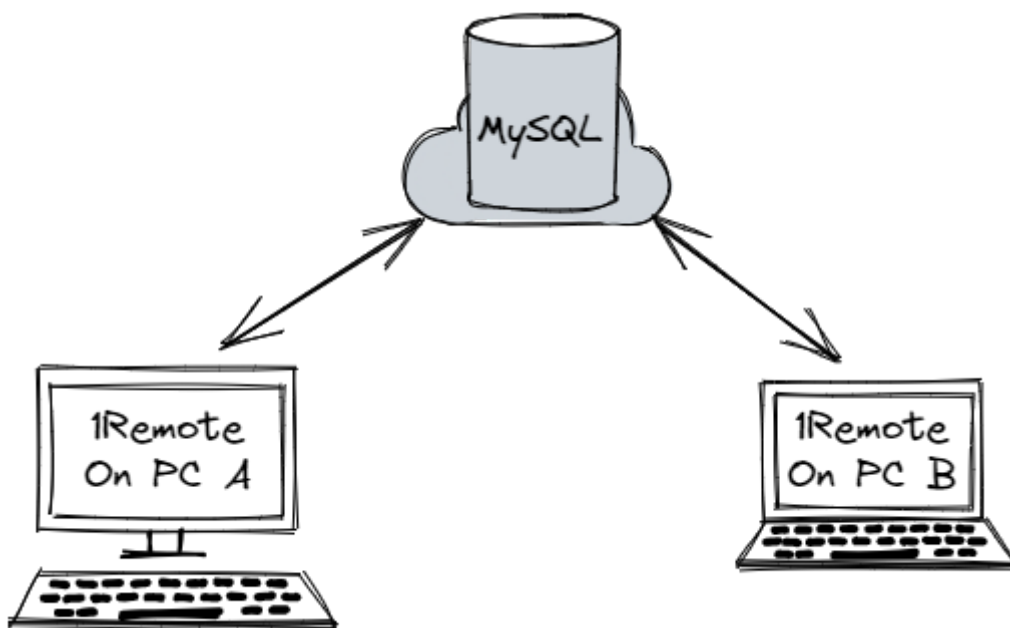

Using a MySQL database is a more professional way to synchronize data. When server info is edited on one device, other devices will update the modify in a few minutes. Go to `Options -> Database -> MySQL` to set up the database, check [Online database](#) for more details.

|          |         |        |                                       |             |
|----------|---------|--------|---------------------------------------|-------------|
| General  | Name    |        |                                       | + Add       |
| Launcher | ✓ Local | Sqlite | .\1Remote.db                          | MySQL       |
| Database | ✓ Work  | MySql  | server=172.20.65.214port=3306database | Edit Delete |

### Warning


This app does not use concurrency locks on data editing, so if you modify the database on 2 devices at the same time, data loss may occur. Please try to avoid this situation.

 Last Change: 2026-06-04 08:24

 Publication Date: 2026-06-04 08:25

## Use online database

1Remote supports various data sources such as local SQLite databases and online MySQL databases. You can connect to multiple databases at the same time, which allows you to store different server information in different databases and connect to different databases on different devices for flexible data management.

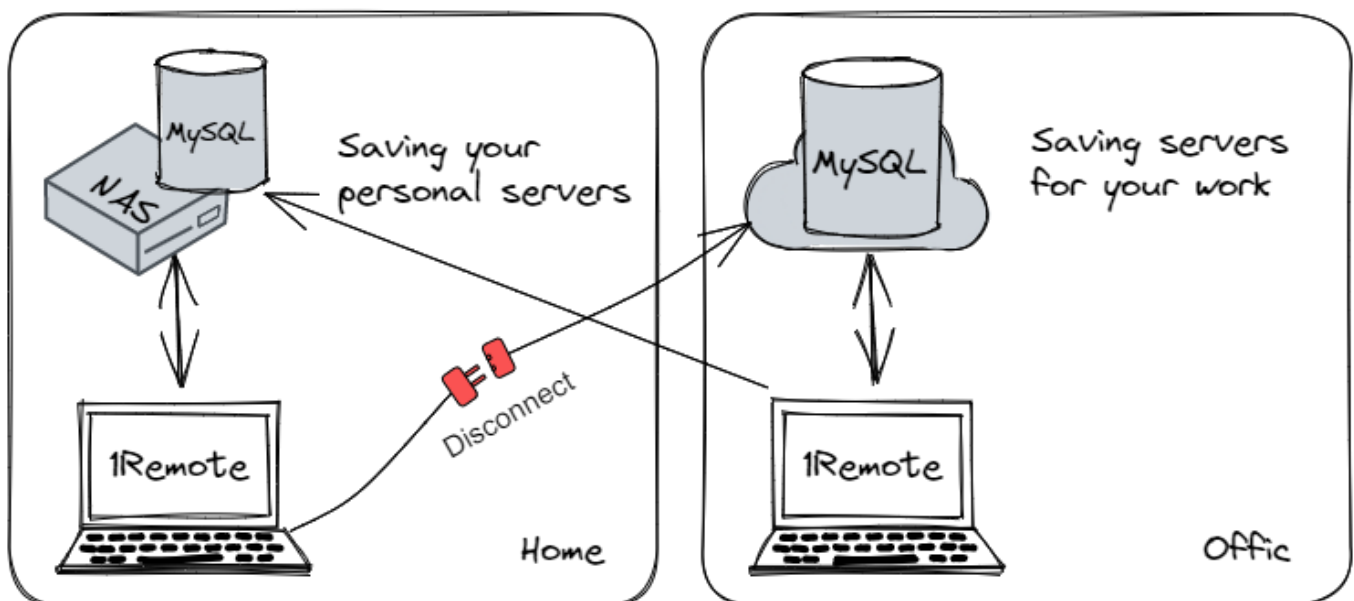


This is where configuring multiple databases becomes useful:


- **At home:** Connect to the MySQL database on your NAS to manage your personal servers when you back home.
- **On work:** Connect to both the MySQL on your home NAS and the MySQL on your company server to access the servers for work when you are in your office.
- **For team:** With MySQL, you can share the server with your colleagues, make them connect to different MySQL database can make sure they can only see the servers they have permission to access, more detail: [Team sharing](#)

## Use MySQL


Go to **Options** -> **Database** -> **MySQL** to set up the database

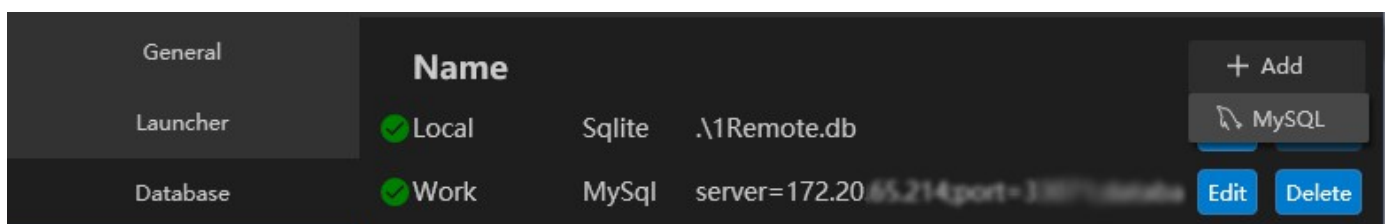


Fill the database info, make sure your account have the permission to read & write the database.

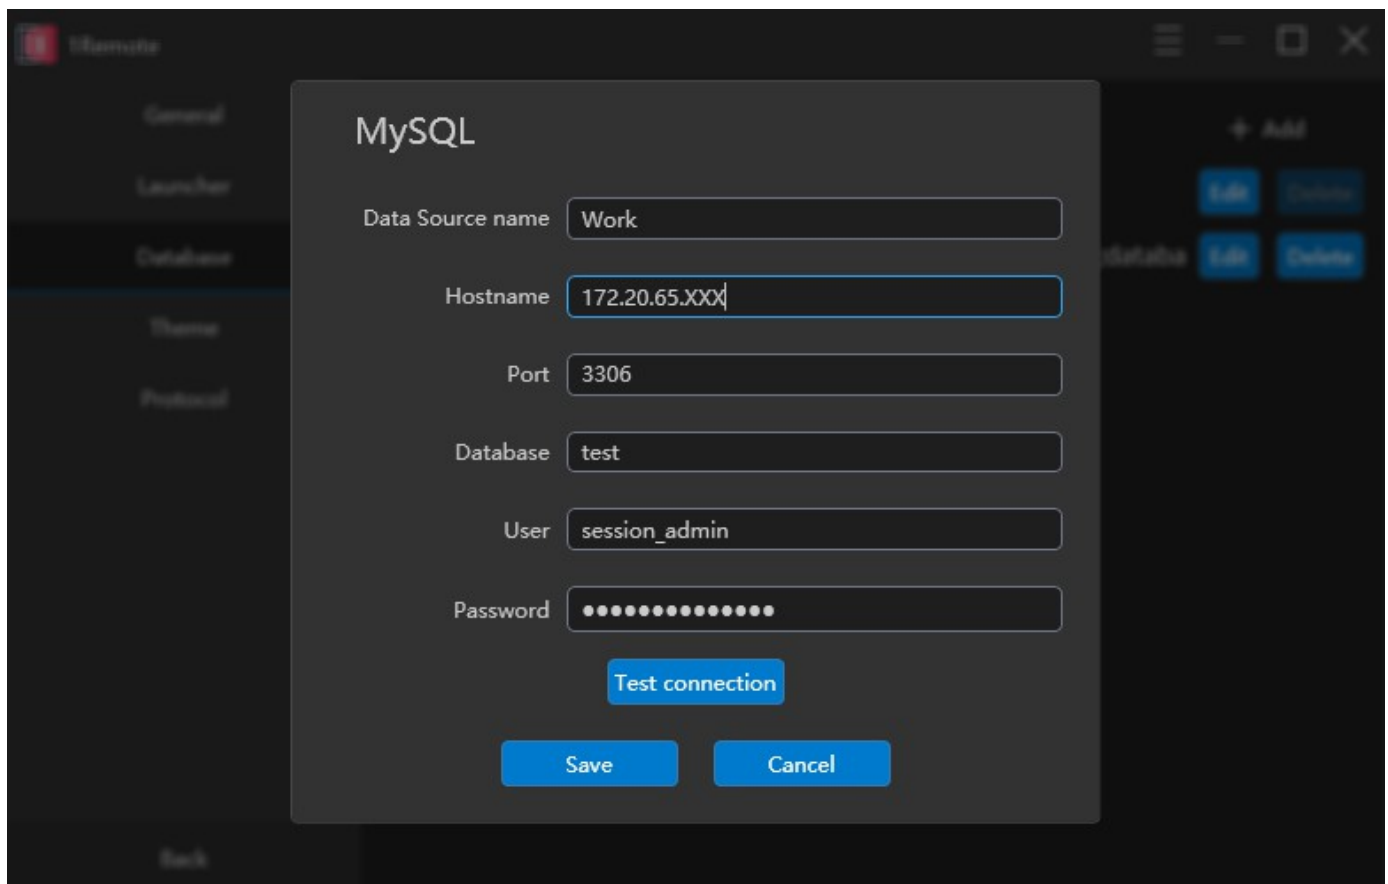


Press **Save** and your database will on the list. If connect failed, the database will be marked with a red cross.

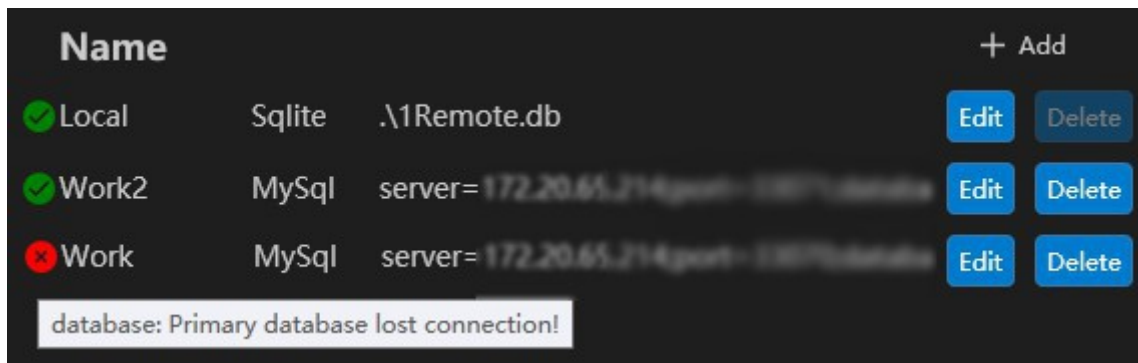

If there are multiple databases, you need select the database when you add a new server.

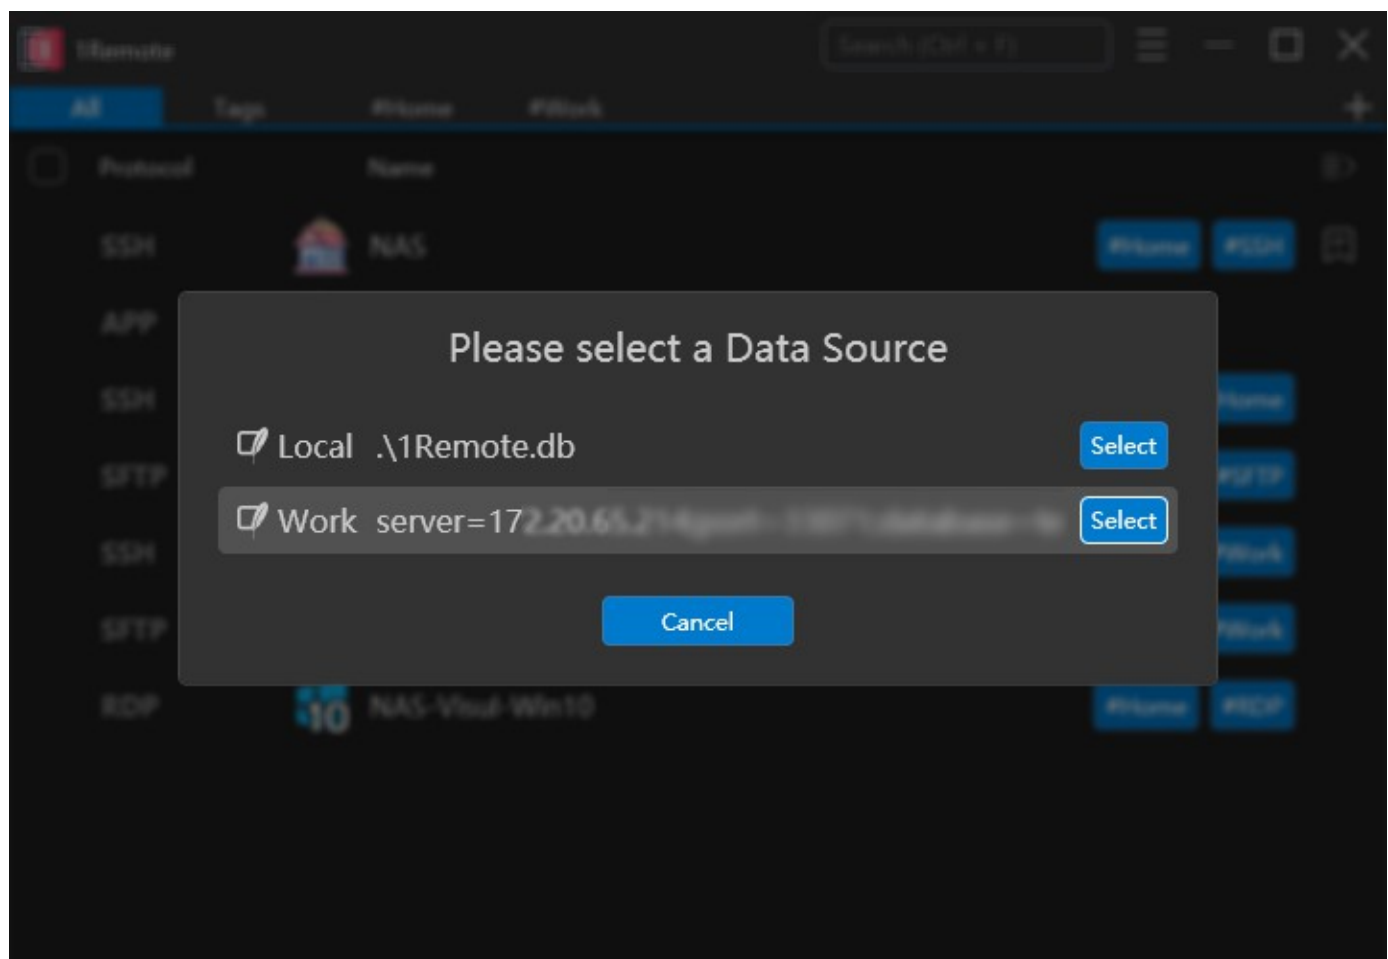

After you add a new server, you will find the list is grouped by database.

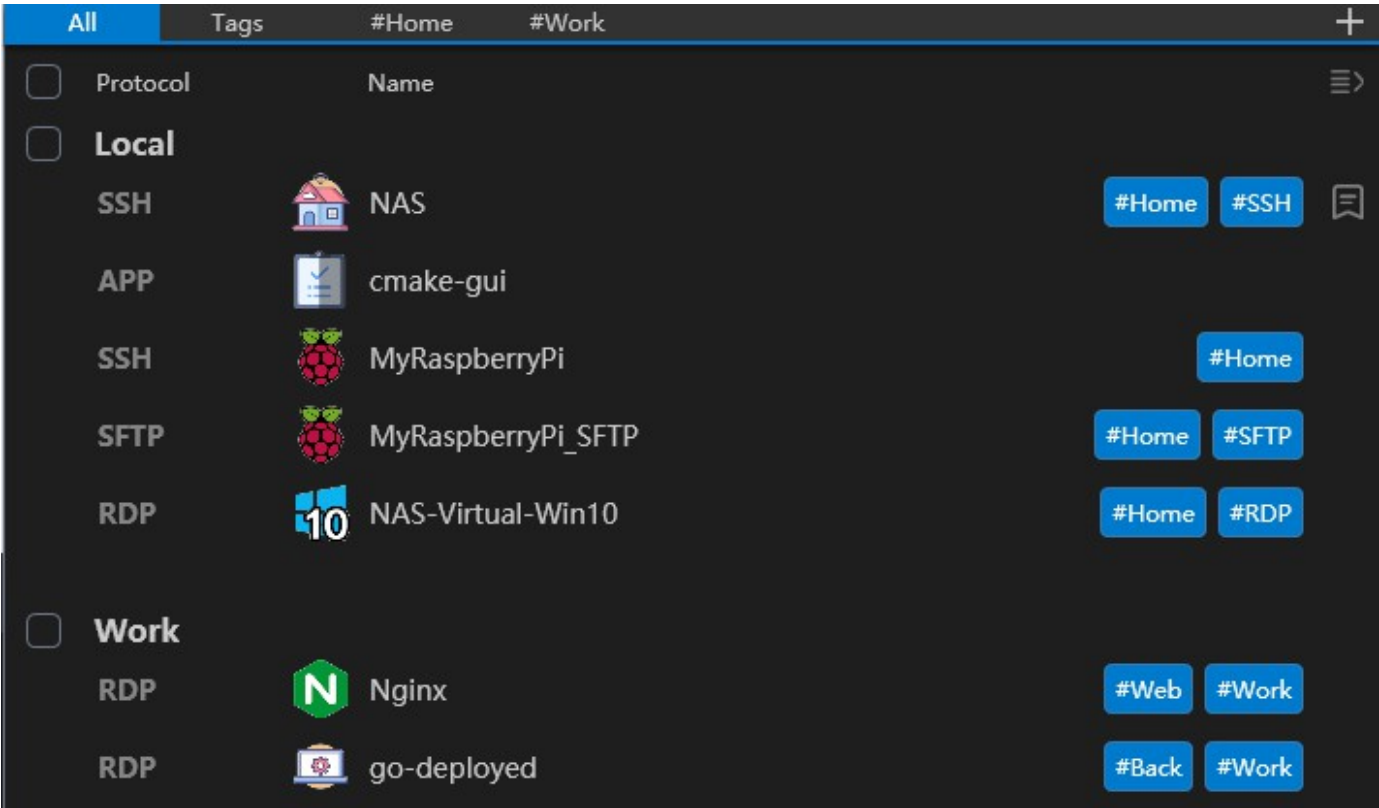

 Last Change: 2026-06-04 08:24

 Publication Date: 2026-06-04 08:25

# Ended: Database & Security

## Protocol

### Especial

The APP protocol allows you to start an external EXE program using 1Remote.

By passing the parameters to the program, you can customize the startup configuration of the program.

Then you can start the software you need from our launcher.

## Examples

Here are some examples of using the App protocol, you can also customize the required startup configuration according to your own needs.

Open [bing.com](https://bing.com) with Chrome



**Connection**

Exe path

CMD parameter

Hosting ☐ Caution: some exe can not be hosted by PRemoteM, please test by your self.

## Cmake

cmake-gui

File Tools Options Help

Where is the source code:

Preset:

Where to build the binaries:

Search:  ☐ Grouped ☐ Advanced

| Name                                                                                                                                                                                                                                                                              | Value |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| <p>Press Configure to update and display new values in red, then press Generate to generate selected build files.</p> <p><input type="button" value="Configure"/> <input type="button" value="Generate"/> <input type="button" value="Open Project"/> Current Generator: None</p> |       |

Open NoMachine with credential `Test.nxs`

**Connection**

Exe path


CMD parameter

Hosting ☐ Caution: some exe can not be hosted by PRemoteM, please test by your self.


How to use(NoMachine case)

Since the latest version of NoMachine no longer provides a session starting method of the command line by password, in 1Remote we define the App protocol to indirectly implement the NoMachine session.


1. Make sure the target machine can be connected with NoMachine. Right click and export the `.nxs` file of target machine.

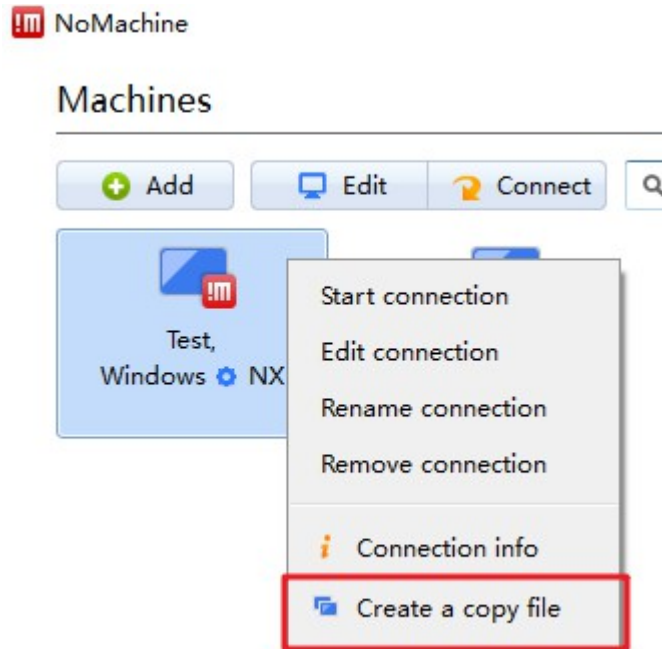

2. In 1Remote, add a new configuration of `APP` type. - Fill the path of `NXPlayer.exe` into the EXE path field - Fill the path of `.nxs` file into the parameter field - Save

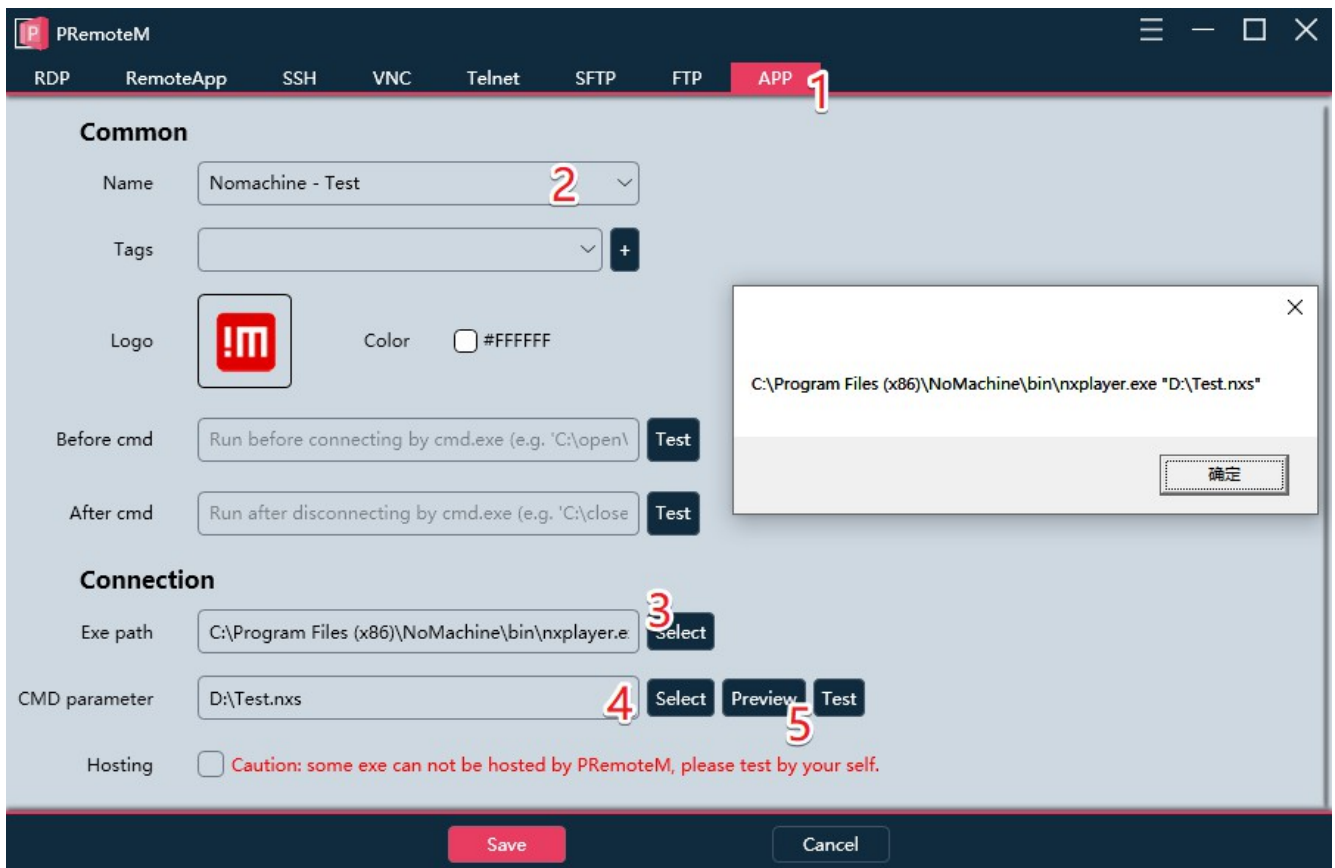

3. Then you can quickly start your NoMachine session from 1Remote.

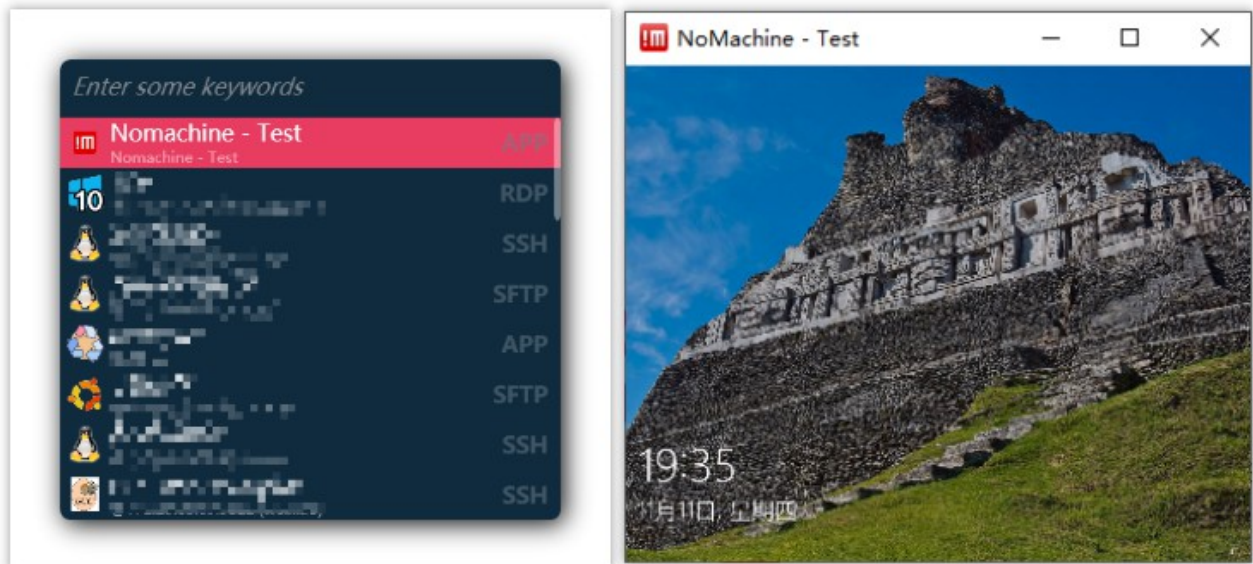


#### Tip

This is also applicable to other command parameters supported session launcher, such as PUTTY, WinSCP, etc. Even you can use this method to add one other programs (such as Word, NotePad, etc.) to 1Remote for a quick start.

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25

A RemoteApp program is an application installed on an RD Session Host server. Remote Desktop Connection (RDC) and the RD Session Host use Remote Desktop Protocol (RDP) to redirect screen information for just the application instead of the full session-based virtual desktop.

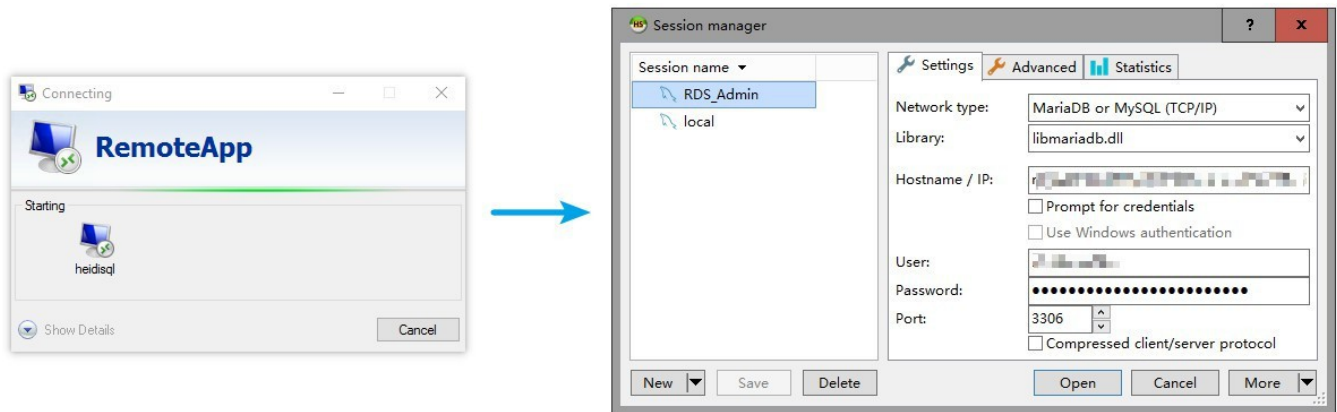

With RemoteApp programs, you can use RDS to make programs on a Remote Desktop Session Host (RD Session Host) server appear as if they are running on a user's local computer. RemoteApp program windows are shown on and integrated with a client's Desktop instead of being presented as part of a session-based virtual desktop. A RemoteApp program open on a Desktop.

Using a RemoteApp program is similar to using a local application. When you implement RDS to provide access to a few applications, RemoteApp programs generally are easier for users to understand and use than session-based virtual desktops. Users can become confused when there is a session-based virtual desktop and a local Desktop. This is particularly true if the session-based virtual desktop is used in full-screen mode.

## How to use

### Step1


1. Open Server Manager. Select Remote Desktop Services > Collections.
2. Select the collection needed to configure application launcher.
3. Select RemoteApp Programs
4. In the RemoteApp Programs area, select Tasks select > Publish RemoteApp Programs.
5. Click Add on the Publish RemoteApp programs dialog.
6. Select **EXE** from the application launcher installation location on the server.
7. Click Next.
8. On the Confirmation page, click Publish.
9. Finish other confirmations.

## Step1 Another way

1. install [RemoteApp Tool](#) on Server.
2. Create a RemoteApp by [RemoteApp Tool's](#) user guides, then [RemoteApp Tool](#) will help you do Step1. 1-9


## Step2

Add a RemoteApp config in 1Remote.

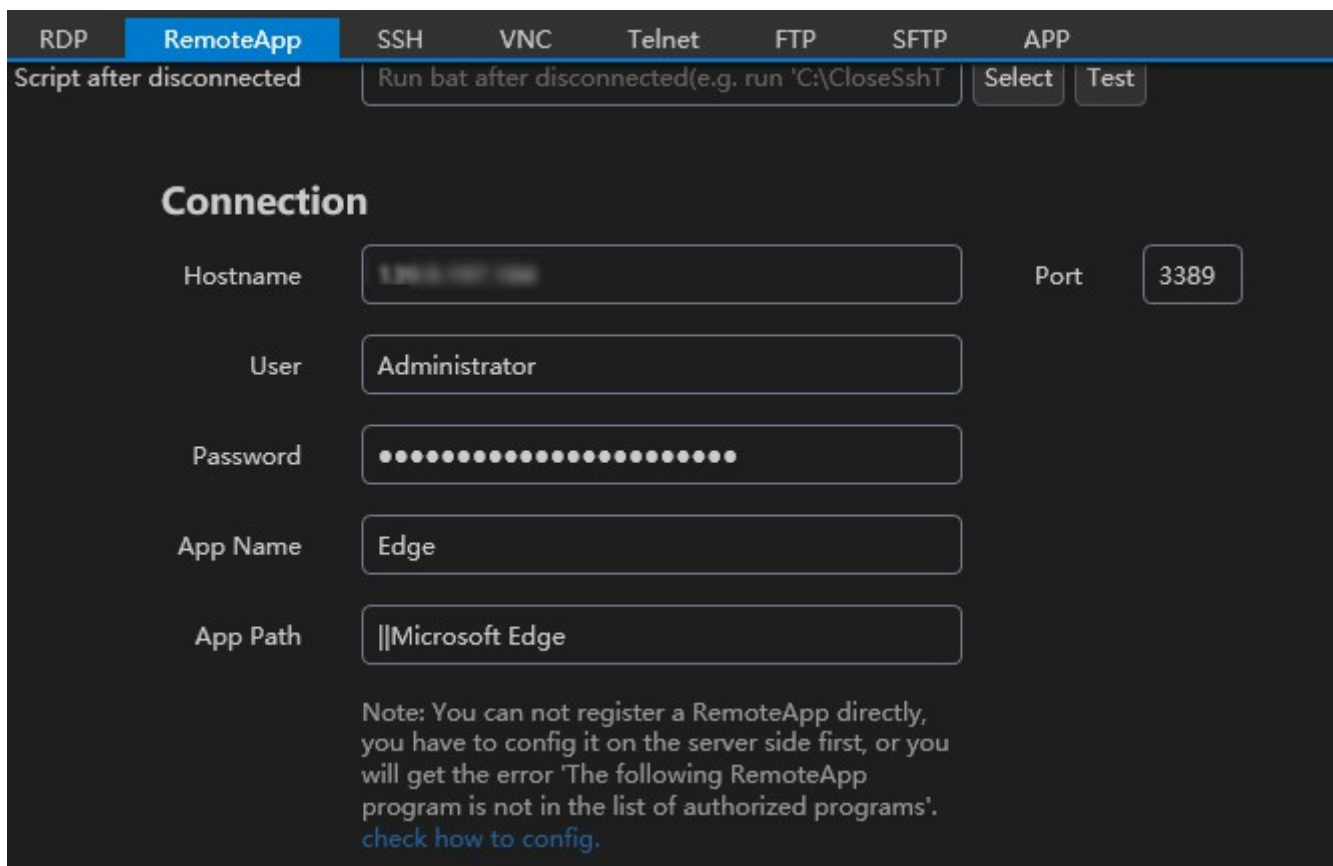

The screenshot shows the 'RemoteApp' configuration tab in the 1Remote application. The interface is dark-themed. At the top, there are tabs for RDP, RemoteApp (selected), SSH, VNC, Telnet, FTP, SFTP, and APP. Below the tabs, there are two buttons: 'Script after disconnected' and 'Run bat after disconnected(e.g. run 'C:\CloseSshT'. To the right of these buttons are 'Select' and 'Test' buttons. The main section is titled 'Connection' and contains several input fields: 'Hostname' (with a placeholder IP address), 'Port' (with a value of 3389), 'User' (with the value 'Administrator'), 'Password' (masked with dots), 'App Name' (with the value 'Edge'), and 'App Path' (with the value '||Microsoft Edge'). At the bottom, there is a note: 'Note: You can not register a RemoteApp directly, you have to config it on the server side first, or you will get the error 'The following RemoteApp program is not in the list of authorized programs'. [check how to config.](#)'

Here I run QQ.exe and Edge.exe via RemoteApp:

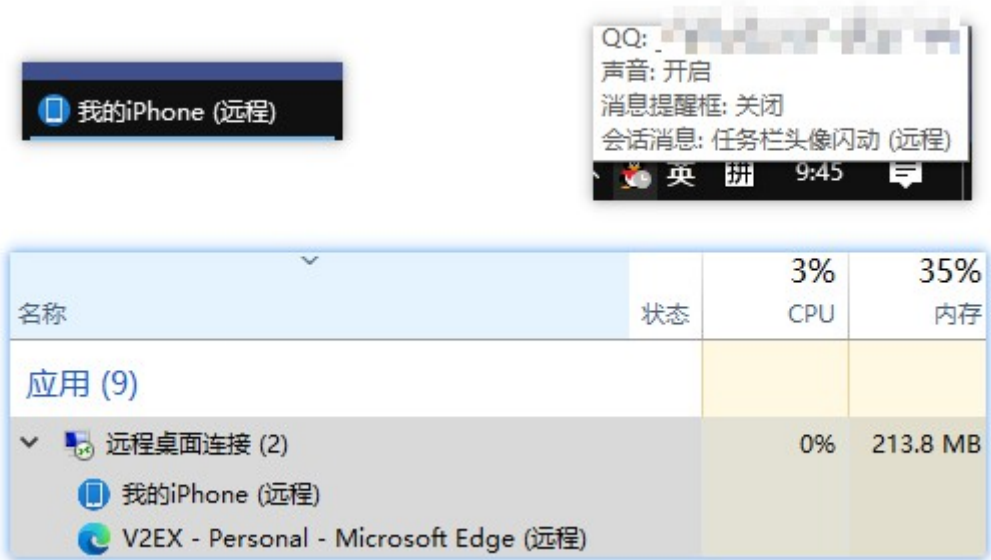

#### Warning

The following RemoteApp program are not in the list of authorized programs

check list:

- <http://sbsfaq.com/the-following-remoteapp-program-is-not-in-the-list-of-authorized-programs-on-windows-essential-server/>
- <https://www.beyondtrust.com/docs/privileged-identity/app-launcher-and-recording/installation/set-up-rds.htm>

 Last Change: 2026-06-04 08:24

 Publication Date: 2026-06-04 08:25

## What is "mstsc.exe mode"


In this mode, rdp session will be start by run command `mstsc.exe xxxx.rdp` in cmd.

## Why "mstsc.exe mode"

When our user using 2 monitors with different scale ratios and wants to go to full-all-screens, we didn't find a solution to handle this 2 different scale ratios on [Remote Desktop ActiveX control](#).

## Scale and layout

Change the size of text, apps, and other items

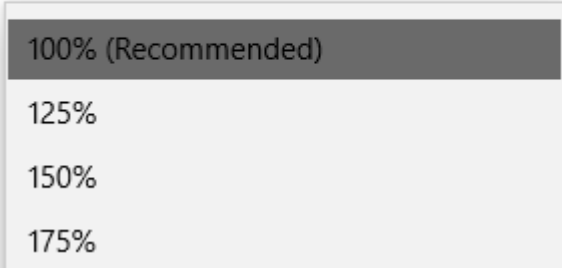

Then we make 1Remote check user's monitor resolution and scale ratios before a multi-monitors full-screen rdp session start. If we found 2 monitors with different scale ratios, a temp file 'xxxx.rdp' will be created and 1Remote will call cmd command `mstsc.exe xxxx.rdp` to start the session.

## Additional settings


In the process of development, we found it in the `.rdp` file there are many settings that [Remote Desktop ActiveX control](#) can't access.

such as:

| setting                | description                                                                                                                                                                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| selectedmonitors:s:0,2 | When you connect 3 monitors, this setting allow you only uses the NO.0 & NO.2 display to display the remote desktop. The NO.1 display will continue to display your local desktop. Using cmd <code>mstsc /?</code> can see the number of the monitors |
| redirectcomports:i:1   | Redirect the COM port of the local machine to the remote session.                                                                                                                                                                                     |
| desktopwidth:i:800     | Specifies the resolution width (in pixels) of the remote session to 800pix.                                                                                                                                                                           |
| desktopheight:i:600    | Specifies the resolution height (in pixels) of the remote session to 600pix.                                                                                                                                                                          |

For example, I have 3 monitors, and I want to use the NO.1 & NO.2 display for remote desktop, and keep NO.0 as my local desktop:



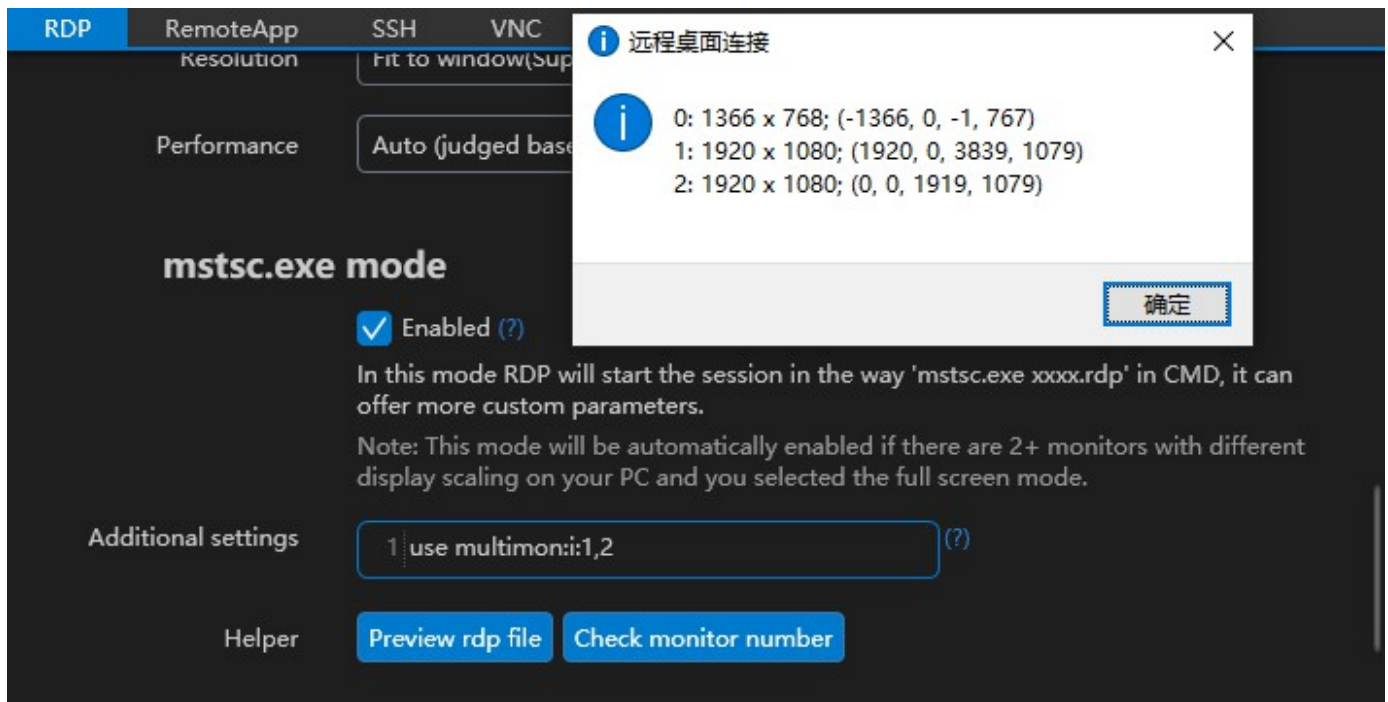

more settings :

- [Microsoft](#)
- [2003/XP](#)

**Last Change:** 2026-06-04 08:24

**Publication Date:** 2026-06-04 08:25

You can set up a SSH tunnel by:

1. download and start Kitty portable
2. enter a hostname and a name in "Saved Sessions/New Folder"
3. click "Connection" -> "SSH" -> "Tunnels"
4. enter a source port, for example 777
5. enter a destination, for example "192.168.1.2:80" - a web interface that is reachable from the host we connect to
6. click "Add"
7. go back to "Session" and click "Save (d)"


Now there is a new file in `..\kitty-portable-win32-0.74.4.13-36\data\config\Sessions\`

8. Open 1Remote and add a SSH server with the hostname and name you entered in step 2, in `KiTTY Session` field, select the file you created in step 7.

Thanks to @BurtGummer from: <https://github.com/1Remote/1Remote/issues/483> for providing the solution.



## Ended: Especial

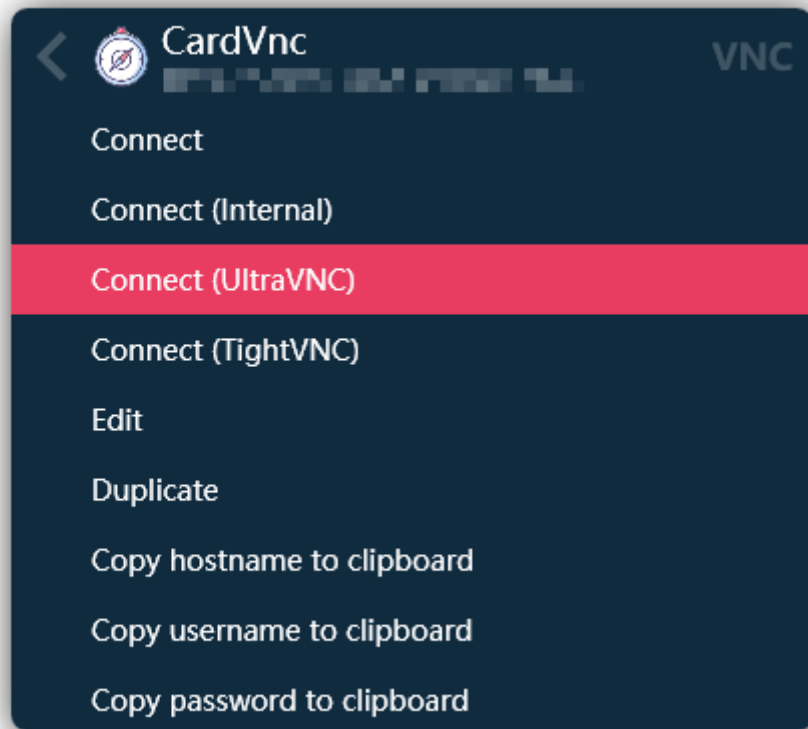

## What is Protocol Runner

**Protocol Runner** Runner is the program that 1Remote uses to open the remote session.

Currently, 1Remote offering some built-in runner for all of the supported protocols:

- RDP Runner based on [Remote Desktop ActiveX control](#)
- SSH Runner is [KiTTY](#),
- VNC Runner based on [VNCSharp](#)

### Warning

VncSharp has been archived for long, and it is not maintained anymore, so it may not work well. I strongly suggest you use [TightVNC](#) as our VNC runner.

- SFTP Runner based on [SSH.NET](#)
- FTP Runner based on [FluentFTP](#)

And you can customize the runners for some of the protocols

## Customize your runner

1Remote supports custom external `Runner` , as long as the external program supports run passing startup parameters through command line or environment variables.

Here are some available CLI tools:

| APP              | Type | Arguments                                                                                                 |
|------------------|------|-----------------------------------------------------------------------------------------------------------|
| WinSCP           | SFTP | sftp://%USERNAME%:%PASSWORD%@%HOSTNAME%:%PORT%                                                            |
| FileZilla<br>FTP | SFTP | sftp://%USERNAME%:%PASSWORD%@%HOSTNAME%                                                                   |
| FileZilla<br>FTP | FTP  | ftp://%USERNAME%:%PASSWORD%@%HOSTNAME%                                                                    |
| Kitty            | SSH  | -ssh %HOSTNAME% -P %PORT% -l %USERNAME% -pw %PASSWORD% -<br>%SSH_VERSION% -cmd ""%STARTUP_AUTO_COMMAND%"" |
| TightVNC         | VNC  | %HOSTNAME%:%PORT% -password=%PASSWORD% -scale=auto                                                        |
| UltraVNC         | VNC  | %HOSTNAME%:%PORT% -password %PASSWORD%                                                                    |

## How to create a new Runner(example by WinSCP)


To demonstrate, here we add WinSCP as a SFTP runner.

### Example

WinSCP is a free SFTP, SCP, Amazon S3, WebDAV, and FTP client for Windows, it can open new session through command line.


```
winscp.exe sftp://username:password@example.com:22/  
winscp.exe ftps://username:password@ftp.example.com/
```

1. First you have to install WinSCP on your computer;
2. In the setting page of 1Remote , click `Protocol` -> `SFTP` -> `+` , and set the name of the new Runner;

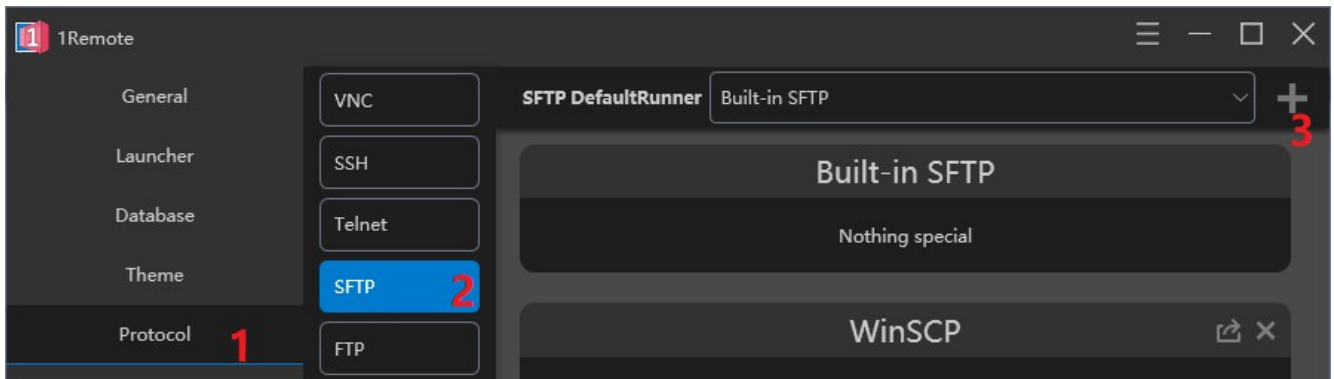

3. Click `select` button, select WinSCP.exe path

4. Click `i` button, the Macros will be prompted.

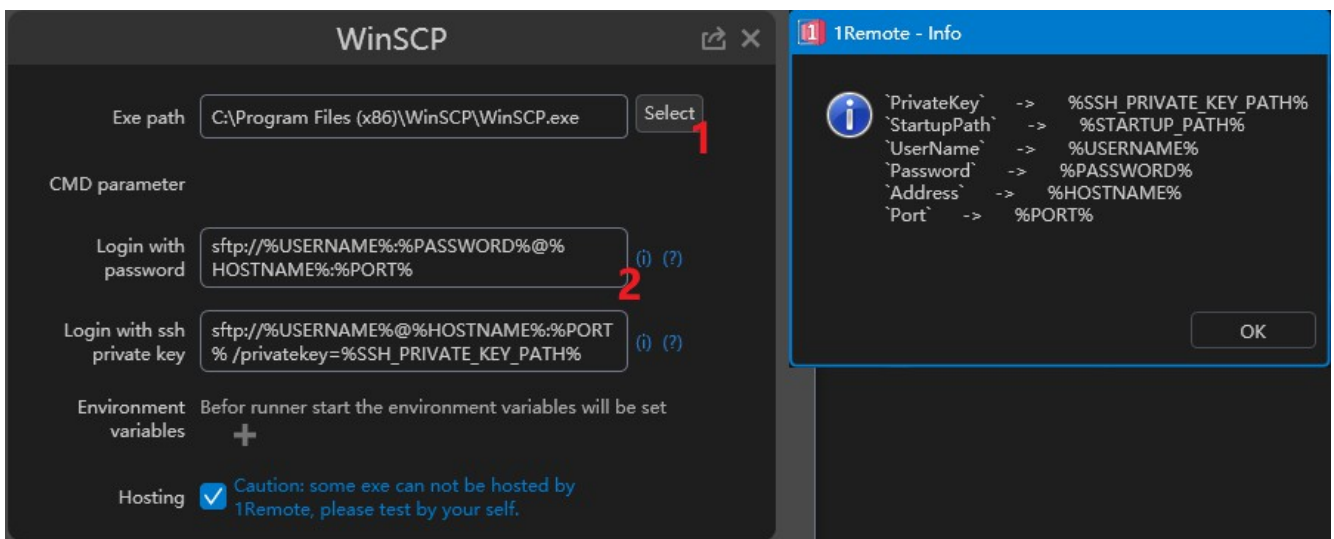


5. Set CMD parameter


since the demo is `sftp://username:password@example.com:22/`

then we set parameter to `sftp://%USERNAME%:%PASSWORD%@%HOSTNAME%:%PORT%`

6. Change the default Runner to WinSCP

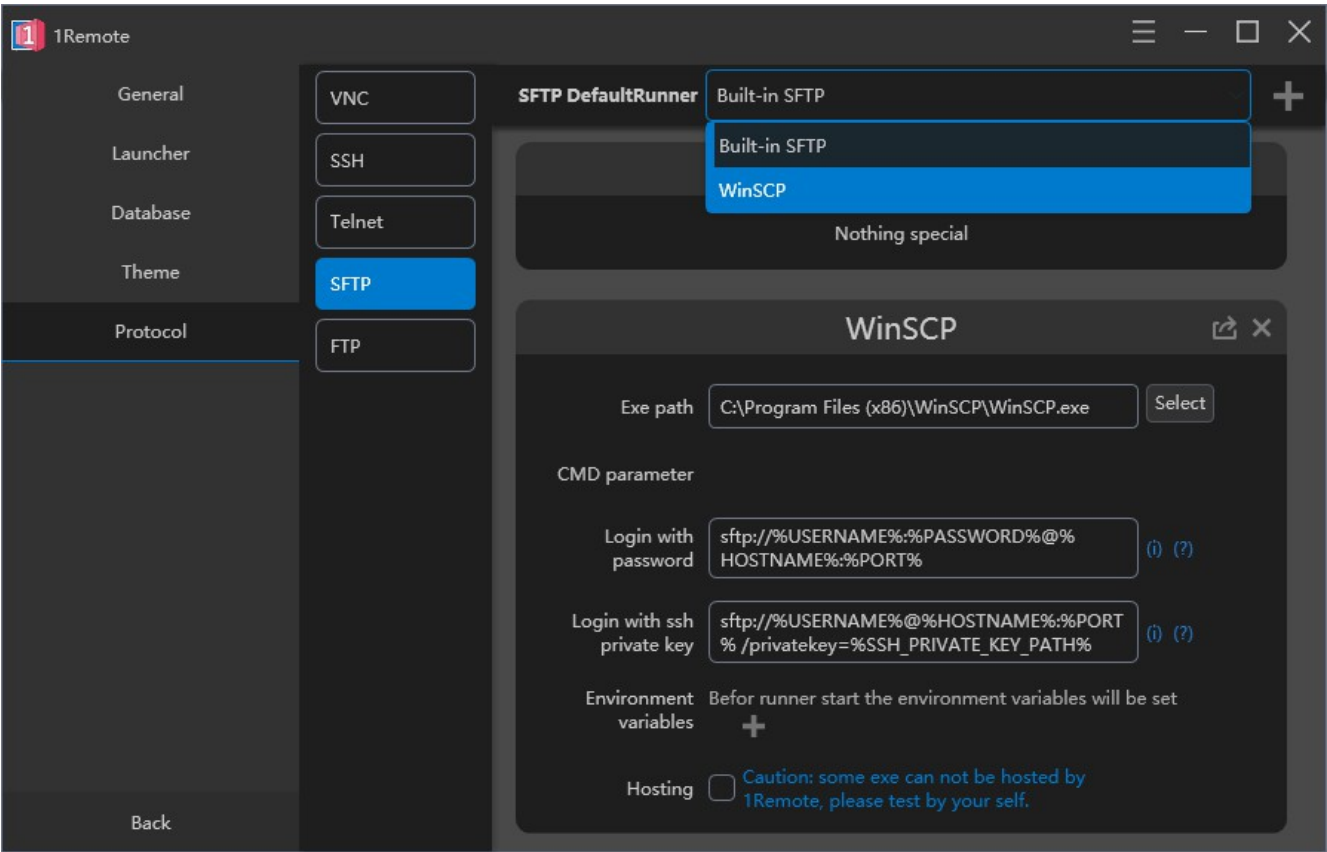

7. Then all the SFTP session will be opened by WinSCP

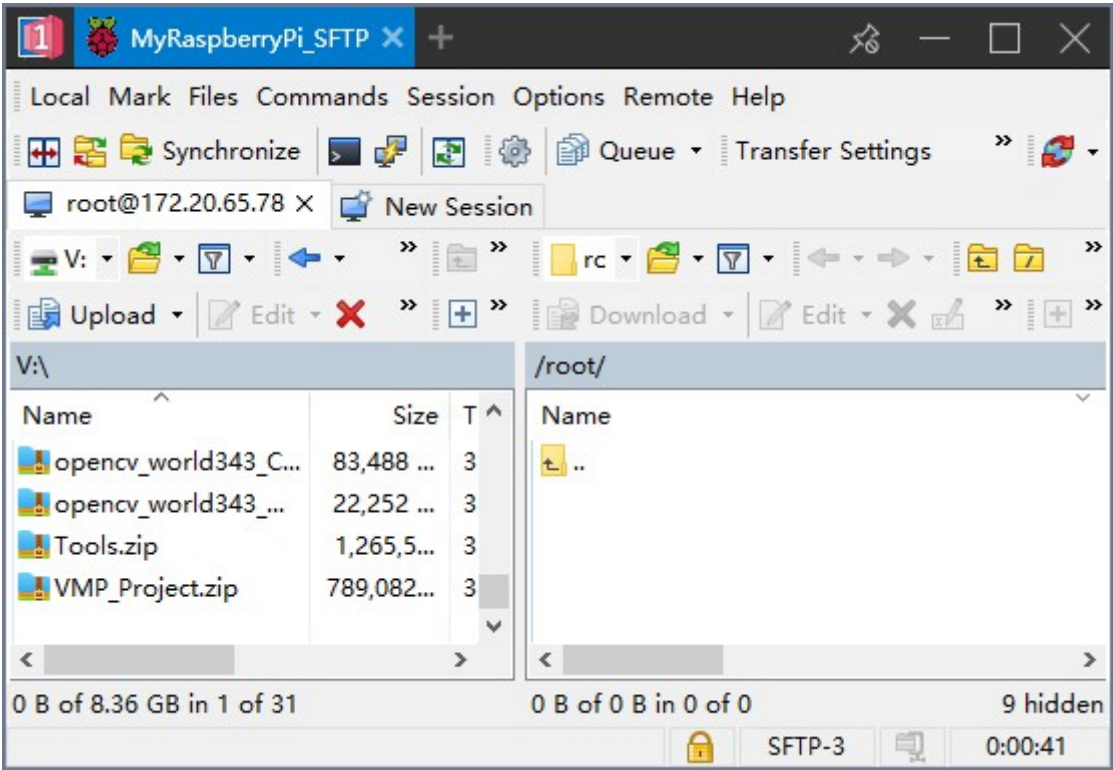

# Ended: Protocol


## Team (experimental)

### Why

Assuming you are the team leader. In your company, you may have several servers to manage, AI Servers are for the AI team, while Web Servers are for the Web team.

A typical use case is:

- Only you and your boss have the permission to add and modify servers, while other colleagues can only view the servers listed, they are not able to edit them or see the password.
- AI team member can only access the AI servers, while Web team member can only access the Web servers.

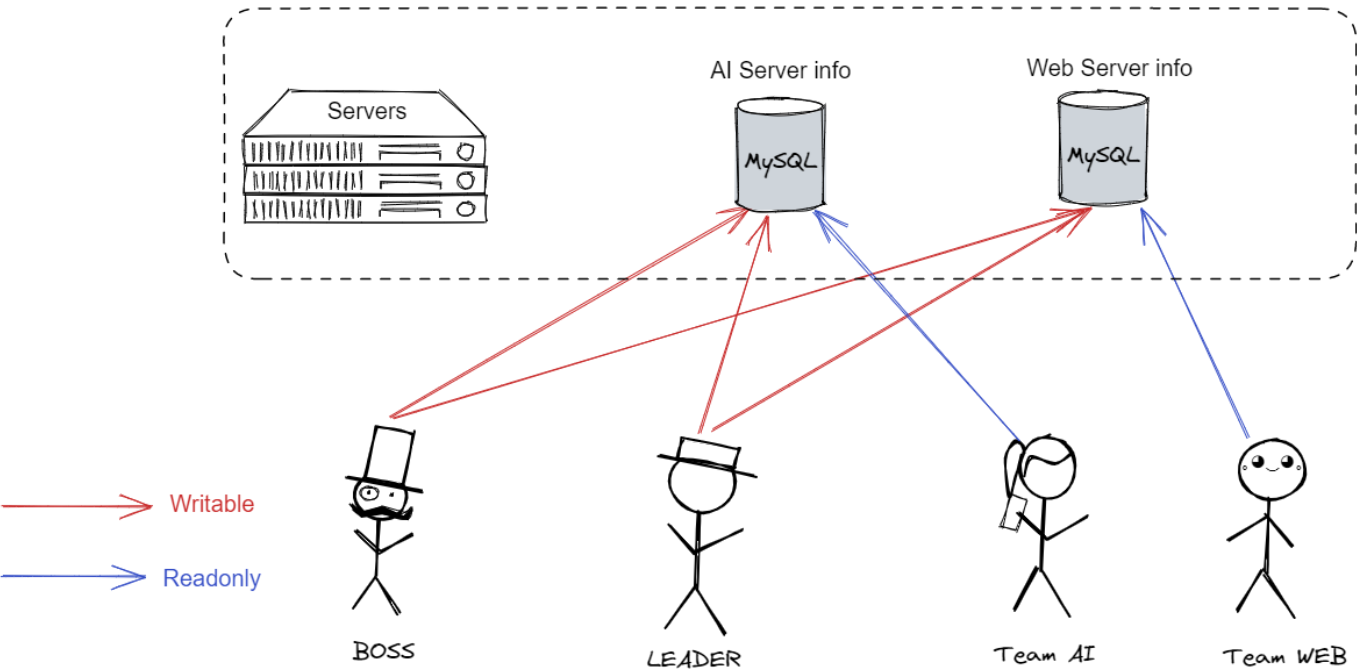

1Remote can help you manage these servers flexibly with `Team sharing` feature.

In this feature, you can create two accounts in MySQL, giving them different permissions:

| Account                | Connect | View address | Edit | Delete | View password |
|------------------------|---------|--------------|------|--------|---------------|
| Select permission only | ✓       | ✓            | ✗    | ✗      | ✗             |

| Account         | Connect | View address | Edit | Delete | View password |
|-----------------|---------|--------------|------|--------|---------------|
| Full permission | ✓       | ✓            | ✓    | ✓      | ✓             |

Your team members can connect to the same database with read-only permission, they can only view the servers, but they are not able to edit them.

You can connect to the same database with full permission, you can add, edit and delete servers.

 **Note**

Please note that the Team sharing feature offers only very basic access control, and is not designed to provide individualized access control for each team member.

How

- 1. Create two accounts in MySQL, giving them different permissions:

|           |                |      |       |         |              |       |        |             |            |        |           |         |        |
|-----------|----------------|------|-------|---------|--------------|-------|--------|-------------|------------|--------|-----------|---------|--------|
| test      | Name           | Drop | Event | Execute | Grant Option | Index | Insert | Lock Tables | References | Select | Show View | Trigger | Update |
| Tables    | ``@`%`         | ✓    | ✓     | ✗       | ✗            | ✗     | ✗      | ✗           | ✗          | ✗      | ✗         | ✗       | ✗      |
| Views     | `readonly`@`%` | ✗    | ✗     | ✗       | ✗            | ✗     | ✗      | ✗           | ✗          | ✗      | ✗         | ✗       | ✗      |
| Functions | `writable`@`%` | ✓    | ✓     | ✓       | ✓            | ✓     | ✓      | ✓           | ✓          | ✓      | ✓         | ✓       | ✓      |

In database "test", account 'writable' can insert and update data, while account 'readonly' can only select data.

- 2. You can connect to `test` database with account `writable` , and import servers into the database.
- 3. Your team member connect to `test` database with account `readonly` , they will not able to edit the servers, but they can view the servers and connect to them.

Connection shows `Readonly` :

General

Launcher

Database

**Name**

Local

test (Readonly)

Sqlite

MySQL

.\1Remote.db

server=172.20...;database=test;

Edit button of team member is disabled:

test

RDP

RDP

Nginx

Copy hostname to clipboard

#Web

#Work

#Back

#Work

192.178.6.13:3389 (Admin

xxx.xxx.xx.xxx:3389 (Admin

Cancel

Number of selected items: 2

Connect

Edit

Delete

Export

4. Once you edit the servers, the team member will see the changes in a few seconds.

#### Warning

This app does not use concurrency locks on data editing, so if you modify the database on 2 devices at the same time, data loss may occur. Please try to avoid this situation.

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25

#### Warning


Before deploy this app to your team, you need to set up a MySQL database for your team and create some user for your team members.

Assuming you are the IT administrator and you have already import servers into MySQL database, you can follow the steps below to deploy this app to your team.

1. Exit your MySQL admin account and login as a normal user in 1Remote. Make sure the database is Readonly :

| General  | Name                                                                                                       |        |                                    |
|----------|------------------------------------------------------------------------------------------------------------|--------|------------------------------------|
| Launcher |  Local                  | Sqlite | .\1Remote.db                       |
| Database |  <u>test (Readonly)</u> | MySQL  | server=172.20.10.10;database=test; |

2. Open explorer and navigate to the folder where you have installed 1Remote. Here is how the folder looks like:

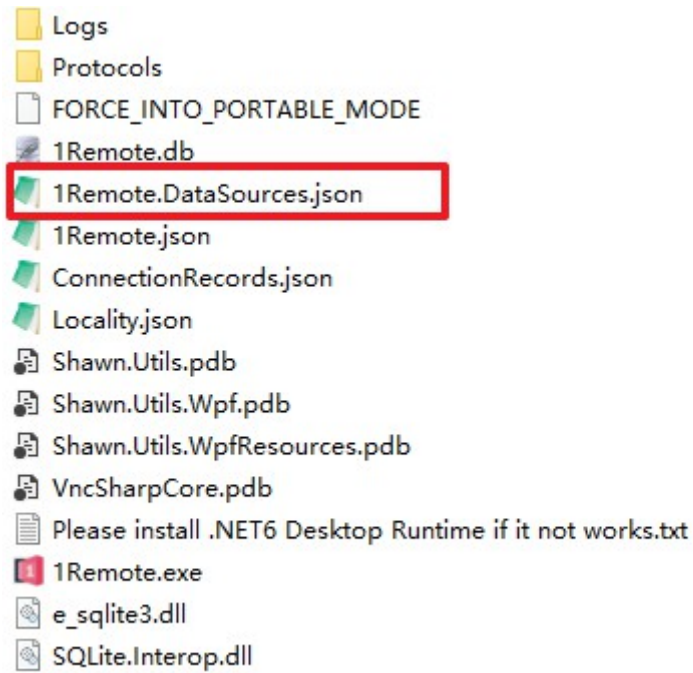

3. `1Remote.DataSources.json` is where we keep MySQL connection string, share this file with your team members, placed it in the same folder with `1Remote.db`.

 Last Change: 2026-06-04 08:24


 Publication Date: 2026-06-04 08:25

## Ended: Team (experimental)

### Misc


Highline A Server can makes it easy to find your "VIP" servers.

All you need to do is set the color next to Logo:

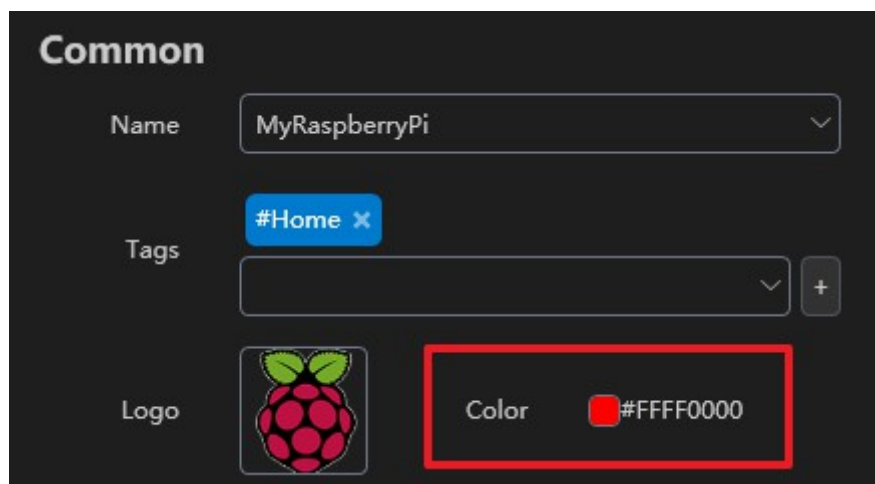



Then your "VIP" servers will be highlighted:

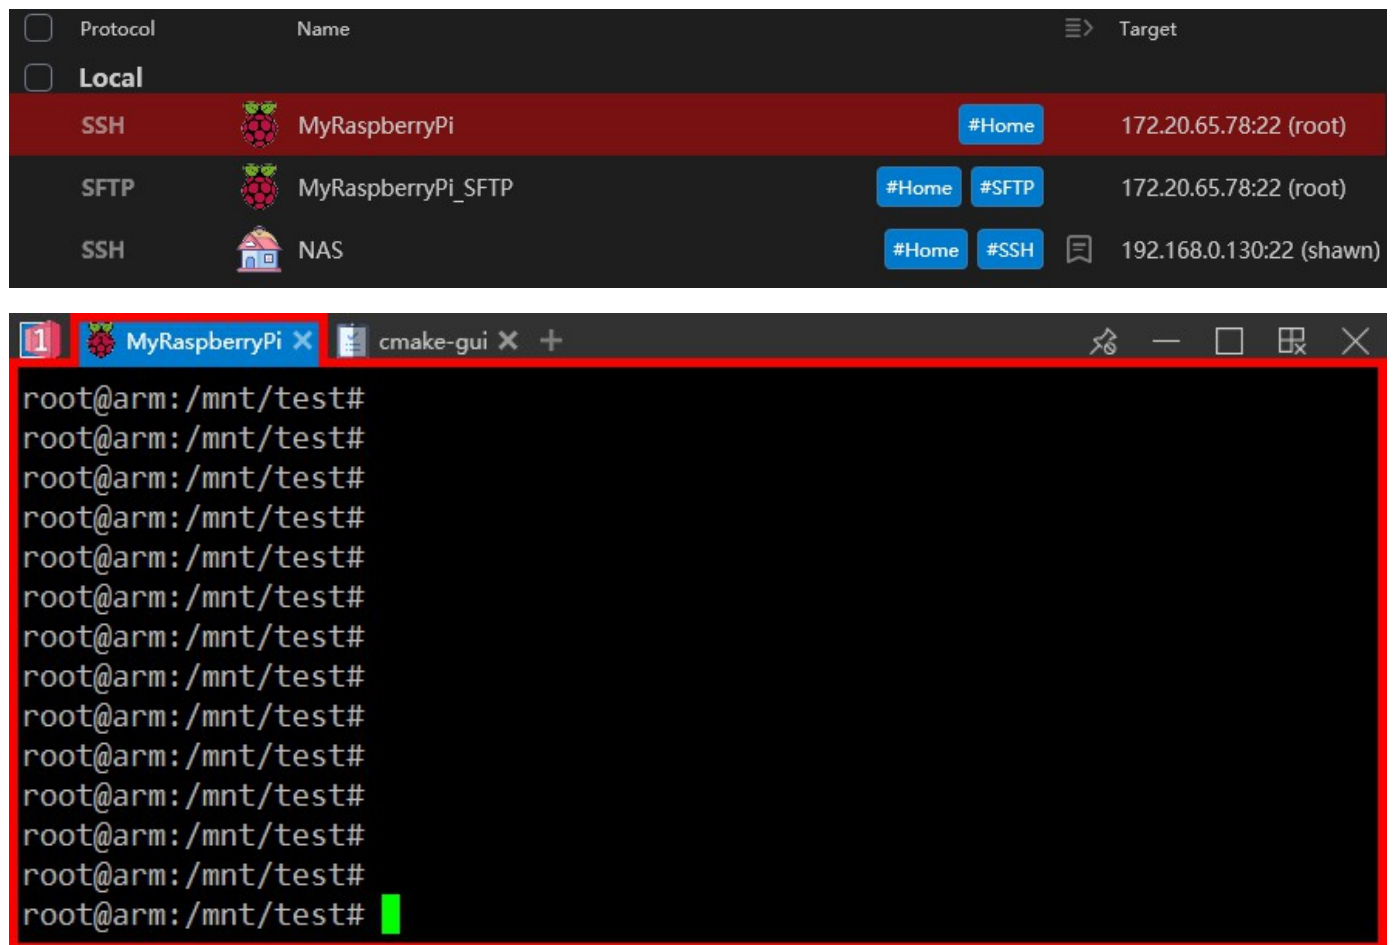


Last Change: 2026-06-04 08:24

Publication Date: 2026-06-04 08:25

Streamline by pre/post connect script

## Using Pre- and Post-Connection Scripts in 1Remote

1Remote is a remote access application that allows users to establish connections to remote computers. One of its features is the ability to run pre- and post-connection scripts. These scripts can be written in `cmd(.bat)`, `PowerShell(.ps1)` or `Python(*.py)` and can be used to perform various tasks before a connection is established or after it disconnected.

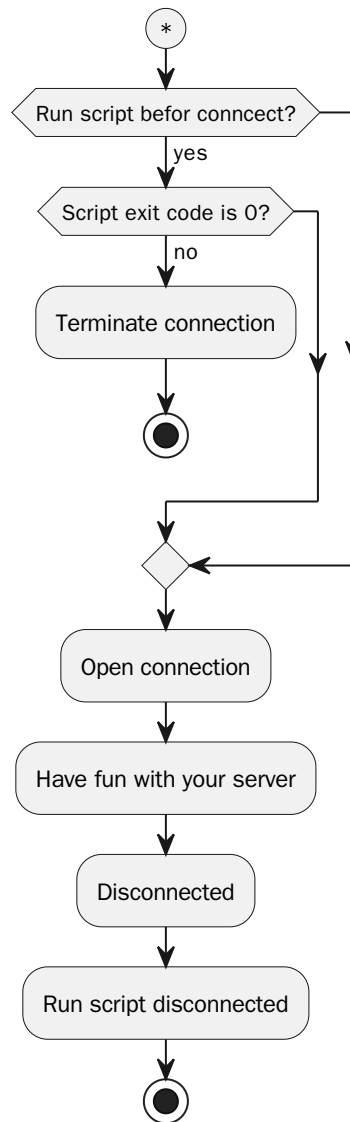

To facilitate the script in identify each sessions, 1Remote will start the script with `SESSION_ID` , `SERVER_ID` , `SERVER_NAME` , and `SERVER_HOST` as environment variables.

#### Note


Noted : For the same server, the **SESSION\_ID** for each session is different, while **SERVER\_ID**, **SERVER\_NAME**, and **SERVER\_HOST** remain the same.

## Setting Up Scripts


To set up a script in 1Remote:

1. Find a place to keep your script files, and create scripts there.
2. Navigate to the `Edit` page of your server in 1Remote.

3. Click the **Select** button and select the script file you want.

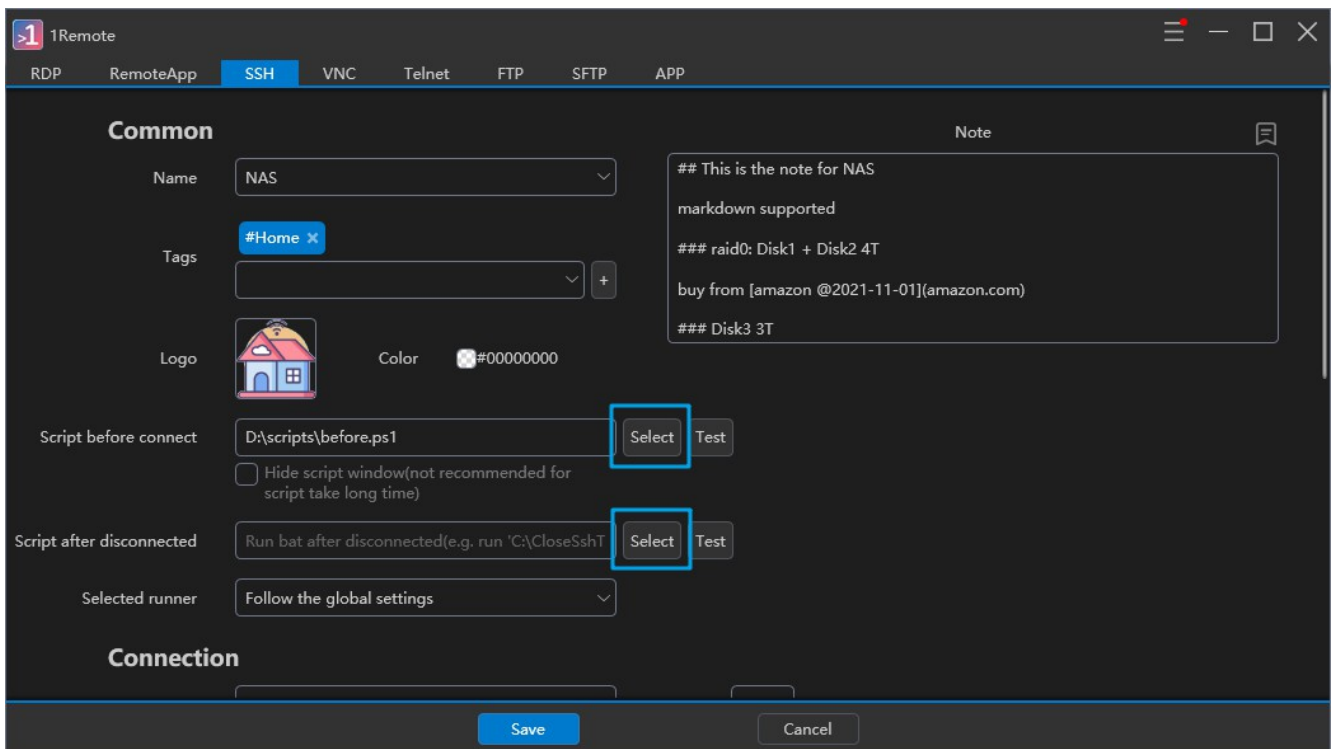

4. Click **Test** button to test the script, the debug info will popup.

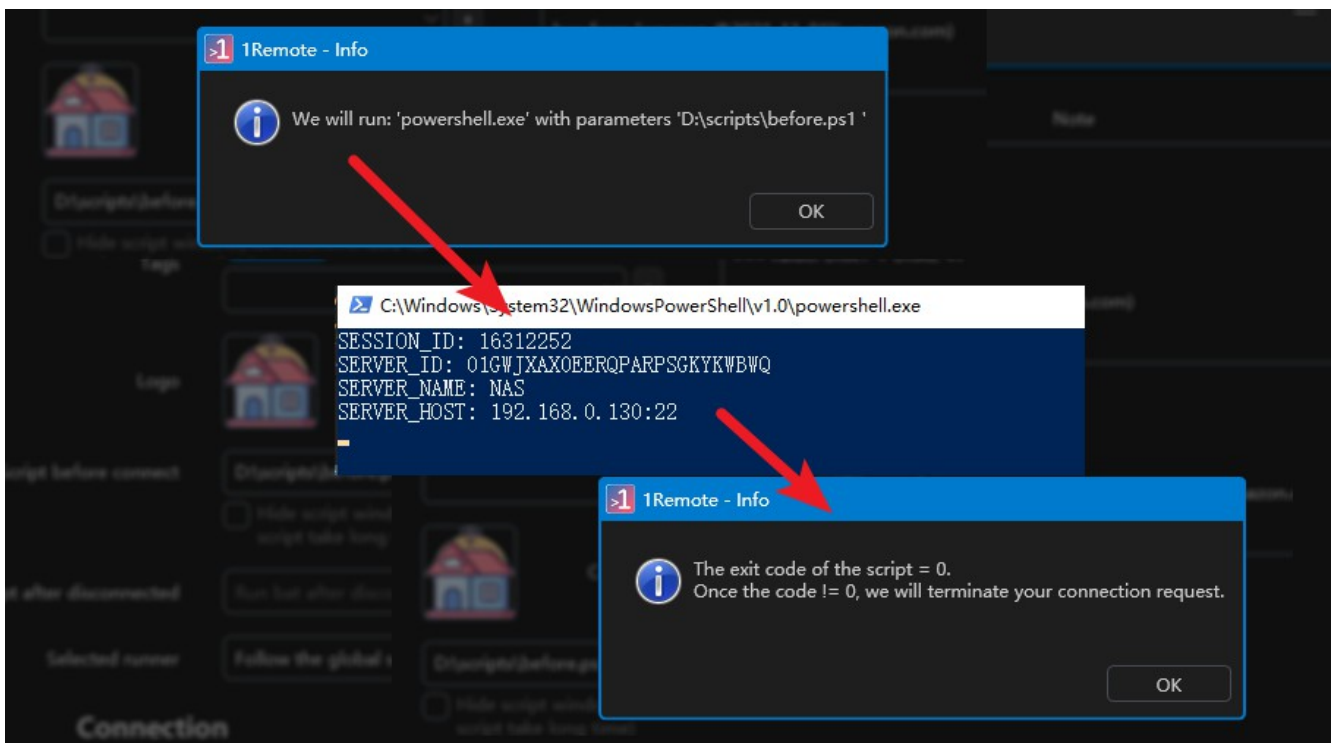

5. If it is all green, click **Save** button to save.

6. Then your script will be run every time you start this server.

## Example Pre-Connection Script

Here is an example of a script. The script will be executed in the directory where the script file is.

```
$sessionID = $env:SESSION_ID
$serverID = $env:SERVER_ID
$serverName = $env:SERVER_NAME
$serverHost = $env:SERVER_HOST
$serverTags = $env:SERVER_TAGS

echo "SESSION_ID: $sessionID"
echo "SERVER_ID: $serverID"
echo "SERVER_NAME: $serverName"
echo "SERVER_HOST: $serverHost"
echo "SERVER_TAGS: $serverTags"

Set-Content -Path "temp.txt" -Value "SESSION_ID: $sessionID`r`nSERVER_ID:
$serverID`r`nSERVER_NAME: $serverName`r`nSERVER_HOST: $serverHost`r`nSERVER_TAGS: $serverTags"

# in the script before connect:
# TODO: save $sessionID into file in pre-connect script
# TODO: if $serverTags contains "HOME" then open VPN1
# TODO: if $serverTags contains "WORK" then open VPN2

# in the script after disconnected:
# TODO: read $sessionID from file in post-connect script
# TODO: if $sessionID == "12345" then close VPN1
# TODO: if $sessionID == "ABCDE" then close VPN2

# do some long time jobs, like opening a VPN
sleep 3

# exit with non-zero will terminate your connection request.
exit 0
```

A typical application is to open a VPN before establishing a remote connection, and automatically close the VPN after terminating the remote connection.

[Learn more](#)

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25

Maybe your server needs a VPN connection before you can connect to it. 1Remote can help you open a VPN connection before connecting to the server.

One of my windows servers is behind VPN. So I have to connect the VPN tunnel first, wait until it's connected, then run the RDP connection. I'm trying to automate this with 1Remote using OpenVPN 2.5.8.

You can open vpn in `Script before connect` and close it in `Script after disconnected`

|                                                                                        |                  |        |      |
|----------------------------------------------------------------------------------------|------------------|--------|------|
| Script before connect                                                                  | D:\open_vpn.ps1  | Select | Test |
| <input type="checkbox"/> Hide script window(not recommended for script take long time) |                  |        |      |
| Script after disconnected                                                              | D:\close_vpn.ps1 | Select | Test |

open-vpn.ps1:

```
"C:\Program Files\OpenVPN\bin\openvpn-gui.exe" --command myconnection.ovpn

Write-Host "Checking VPN connection" -NoNewLine
$i = 0
while(1) {
    Write-Host -NoNewLine ' .'
    $portOpened = Test-Port $Env:PRM_HOST $Env:PRM_PORT | ? { $_.PortOpened }
    if ($portOpened -or $i -gt 60) { break } else { Start-Sleep 1; $i++ }
}
if ($i -gt 60) { Write-Error 'timeout' }
```

close-vpn.ps1:



```
"C:\Program Files\OpenVPN\bin\openvpn-gui.exe" --command disconnect myconnection.ovpn
```

 Last Change: 2026-06-04 08:24

 Publication Date: 2026-06-04 08:25


## Ended: Streamline by pre/post connect script

We support markdown note to help you remember some important information. The note will be displayed in the connection list and the connection detail page.

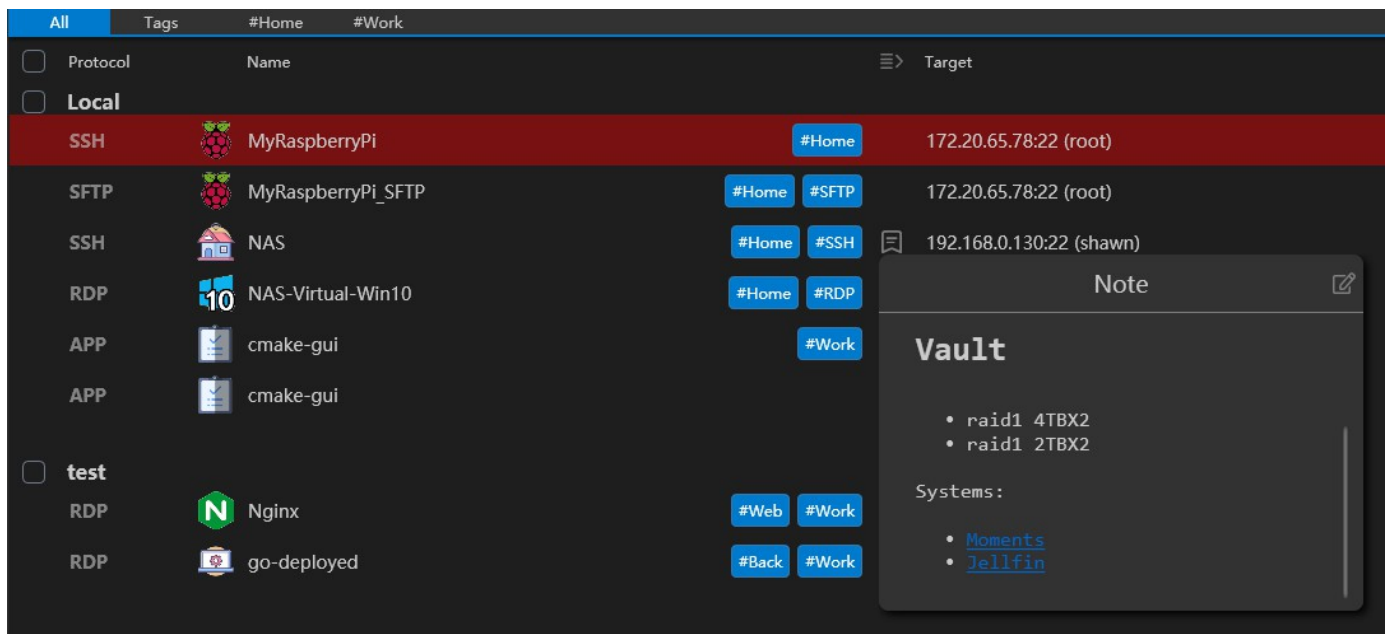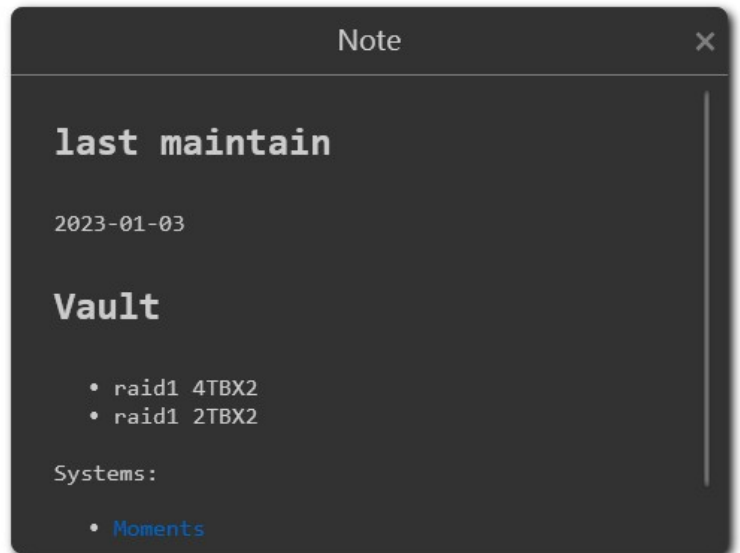

You can edit the note in the edit page or click the edit button on top-right of the note.

We support link, image and others markdown syntax.

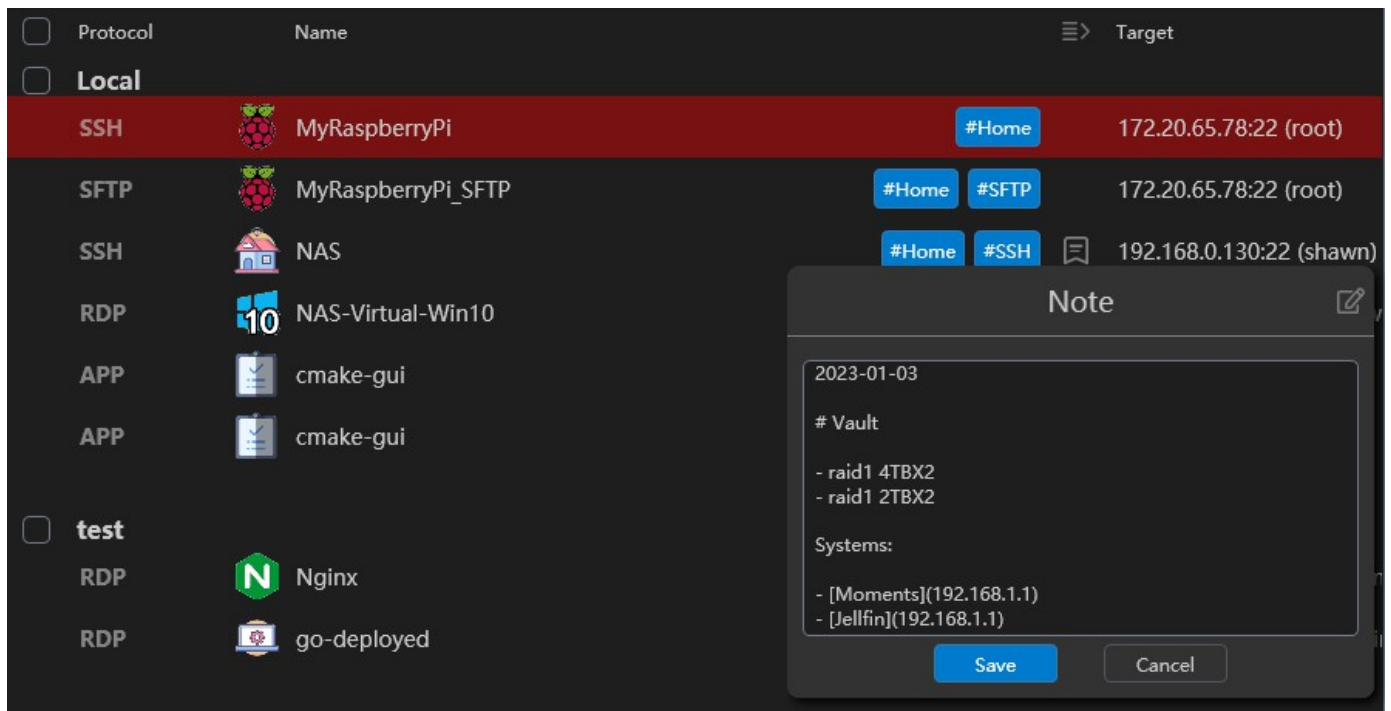

Last Change: 2026-06-04 08:24

Publication Date: 2026-06-04 08:25

## CLI Usage

The 1Remote also supports CLI commands. This documentation provides an overview of the available CLI commands and their usage.

## Installation and Uninstallation

To install or uninstall the 1Remote tool, use the following commands:

- `--install` : Performs the installation of the 1Remote tool.
- `--uninstall` : Removes the 1Remote tool and its associated files.

## Desktop Shortcut Management

You can manage the desktop shortcut for the 1Remote tool using the following commands:

- `--install-desktop-shortcut` : Installs the desktop shortcut for quick access to the 1Remote tool.
- `--uninstall-desktop-shortcut` : Removes the desktop shortcut.

## Startup Entry Management

The CLI provides commands to manage the registry startup entry for the 1Remote tool:

- `--install-startup` : Sets the 1Remote tool to start automatically on system boot by adding a registry startup entry.
- `--uninstall-startup` : Removes the registry startup entry for the 1Remote tool.

## Running the App Minimized

If you want to run the 1Remote app in a minimized state, use the following command:

- `--start-minimized` : Launches the 1Remote app minimized.

## Executing Connections or Focusing Tags

You can execute specific connections or focus on tags using the following command formats:

- `ULID:<connection-id>` : Runs the 1Remote app and immediately executes and/or focuses on the connection with the specified ID.
- `<connection-name>` : Runs the 1Remote app and immediately executes and/or focuses on the connection with the specified name.
- `#<tag-name>` : Runs the 1Remote app and immediately start the connections associated with the specified tag.

You can also create shortcuts for ULID, connection name, and tags by right-clicking on a connection in the GUI interface.


## Creating Desktop shortcut for connections

Thanks to our [CLI feature](#), 1Remote finally supports adding desktop shortcuts for sessions.


You can create desktop shortcuts for **individual servers**, **multiple servers**, or all servers under a specific **Tag**. Simply right-click on the corresponding item and select "Create Desktop Shortcut."

### individual servers




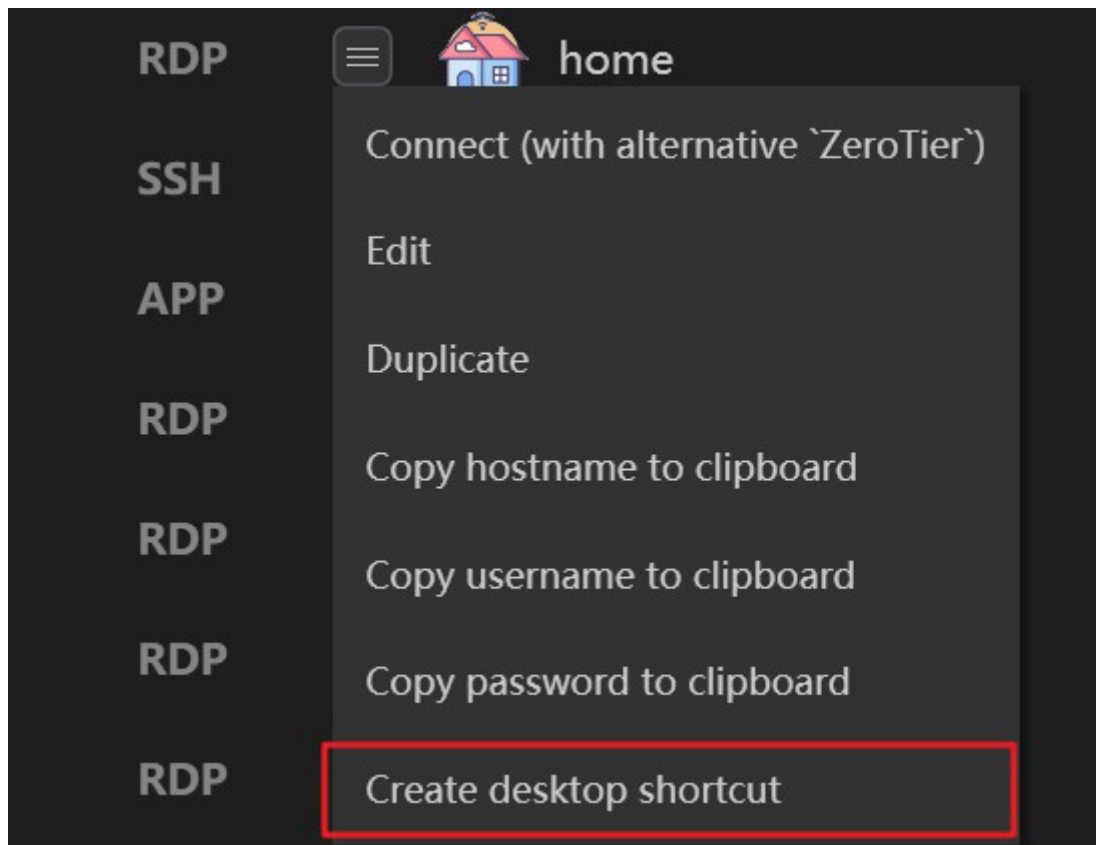


multiple servers

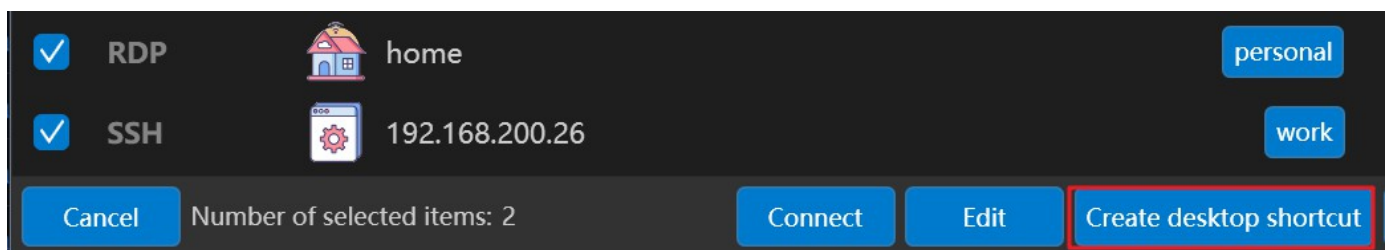

Tag

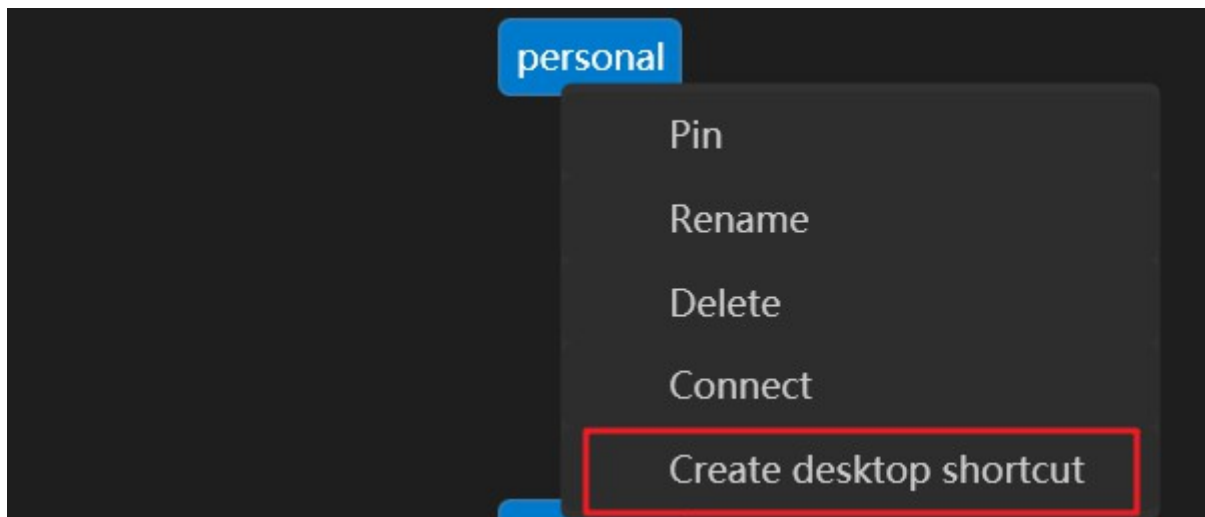

## Shortcut demonstration

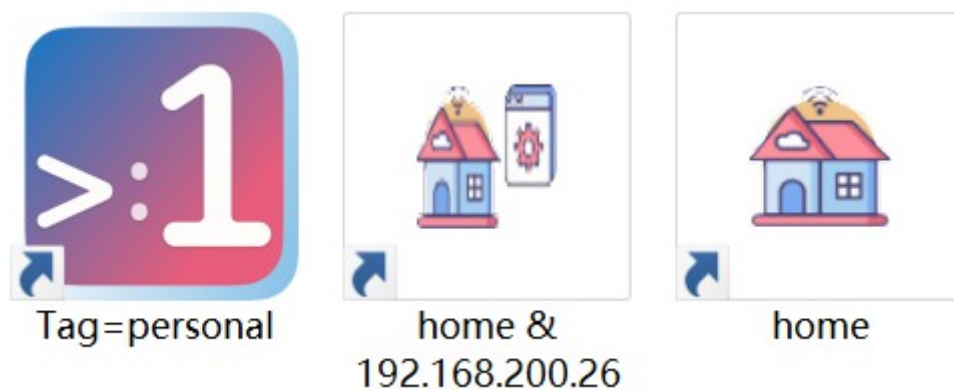

It would be really awesome to offer **1Remote** in many different languages! So you're really Welcome to translate **1Remote** in your (native) language, but don't worry there are just a few strings.

## How to translate

1. fork and clone
2. open file `readme.md` in `Ui\Resources\Languages` and follow the instructions to create a new glossary file for your language.

### Note

- You may have to edit or remove the proxy in `glossary_maker.py`
- Do not edit any `.xaml` / `.cs` files directly, they are auto generated from glossary csv file.

**See all this below were generated, do not edit any of them.**

| Path                                                                                                                                                                                        | Extension | Status   | Lines added | Lines removed |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|-------------|---------------|
| Modified Files                                                                                                                                                                              |           |          |             |               |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/LanguagesList.cs                               | .cs       | Modified | 1           | 0             |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/de-de.xml                                      | .xml      | Modified | 1           | 1             |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/en-us.xml                                      | .xml      | Modified | 1           | 1             |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/fr-fr.xml                                      | .xml      | Modified | 1           | 1             |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/glossary_for_PRemoteM_translated_by_google.csv | .csv      | Modified | 260         | 255           |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/ja-jp.xml                                      | .xml      | Modified | 1           | 1             |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/pt-br.xml                                      | .xml      | Modified | 1           | 1             |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/zh-cn.xml                                      | .xml      | Modified | 1           | 1             |
| Not Versioned Files                                                                                                                                                                         |           |          |             |               |
| <input checked="" type="checkbox"/>  Ui/Resources/Languages/cs-cz.xml                                      | .xml      | Unknown  |             |               |

5. push the glossary file back:
6. send the new file to me([veckshaw@gmail.com](mailto:veckshaw@gmail.com))
7. (recommend) Start a new pull requests.
8. Edit this page, add your name :)

See also [Readme.md](#)

## Current contributors

If you'd like to help out, please add your name and how we can contact you to this list. And thank you!

### Arabic

- ☒ ar-DZ
- ☒ ar-SA
- ☒ ...

### Bangla

- ☒ bn-BD
- ☒ bn-IN

### Chinese

- ☒ zh-CN (@[Shawn](#))
- ☒ zh-TW (@[yrctw](#))
- ☒ zh-HK

### Czech

- ☒ cs-CZ (@[p-bo](#))

## Dutch

☒ nl-BE

☒ nl-NL

## English

☒ en-US (@[Shawn](#) @[majkinetor](#) @[luki1412](#))

☒ ...

## French

☒ fr-FR(@[Vincent](#))

☒ ...

## Galego

☒ gl-ES (Hugo Alexandre Perez)

## German

☒ de-DE (@[NAV-Management](#))

☒ ...

## Italian

☒ it-IT

☒ ...

## Japanese

☒ ja-JP (@[Itagaki](#))

## Korean

☒ ko-KR

## Spanish

☒ es-ES

☒ es-MX

☒ es-AR (@[adssi-local](#))

☒ ...

## Portuguese

☒ pt-BR (@[KernelGM](#))

## Swedish

☒ sv-SE

## Ukrainian

☒ uk-UA

---

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25

## Polish

☒ pl-PL (@[Jokerowatowy](#))

Ended: Misc

Ended: Usage

Download

Make 1Remote Stronger

If you like **1Remote**, help us make it stronger by doing any of the following:

1. [Simply star the repository](#)
2. [Help translation](#)
3. [Join DE](#)
4. [Buy me a coffee](#)

(Thank you all for your generous donations. I apologize for not listing the names of the donors here. The donations will be used for various expenses related to app development, such as server costs, domain registration, Windows Hello hardware for testing, luckin coffee, electricity bills, late-night takeaway, etc. :)

## 帮助改进项目

若你有意愿参与到 **1Remote**, 的改进，这些是你可以做到的：

- 1. [给个 star 让更多人看到这个项目](#)
- 2. [帮助翻译](#)
- 3. [参与开发](#)
- 4. [加入 QQ 群讨论 \(168542318\)](#)
- 5. 请我喝杯咖啡



(感谢大家慷慨捐赠，请恕我不列出捐赠者名单，捐赠将用于APP开发相关的支出。以下是一些典型用例：服务器、域名、测试用的Windows hello硬件、瑞幸咖啡、空调电费、夜宵外卖等😊)

## Installation

Latest Version: 1.1.0

|                | 1Remote<br>Preview build            | 1Remote<br>Stable EXE build | 1Remote<br>Microsoft Store build |
|----------------|-------------------------------------|-----------------------------|----------------------------------|
| Auto update    | ⊖                                   | ⊖                           | ✓                                |
| Other features | ✓ + 🌟 New Features                  | ✓                           | ✓                                |
| Price          | Free                                | Free                        | Free                             |
| Download       | <a href="#">From GitHub Nightly</a> | <a href="#">From GitHub</a> | <a href="#">Microsoft Store</a>  |

|           | 1Remote<br>Preview build           | 1Remote<br>Stable EXE build        | 1Remote<br>Microsoft Store build    |
|-----------|------------------------------------|------------------------------------|-------------------------------------|
| Installer | <code>choco install 1remote</code> | <code>choco install 1remote</code> | <code>winget install 1remote</code> |

 **Warning**

- Require Windows10 17763 and above to run this app.
- Windows7, Windows8, Windows Server 2008 and Windows Server 2012 are not supported to run this app.

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25

# Privacy Policy

VShawn built this app as an Open Source app. This SERVICE is provided by VShawn at no cost with exe published and is intended for use as is.

This page is used to inform visitors regarding my policies with the collection, use, and disclosure of Personal Information if anyone decided to use my Service.

If you choose to use my Service, then you agree to the collection and use of information in relation to this policy. The Personal Information that I collect is used for providing and improving the Service. I will not use or share your information with anyone except as described in this Privacy Policy.

The terms used in this Privacy Policy have the same meanings as in our Terms and Conditions, which is accessible at 1Remote unless otherwise defined in this Privacy Policy.

## Information Collection and Use

This service will not require any of your personal information.

## Log Data

I want to inform you that whenever you use my Service, in a case of an error in the app I collect data and information (through third party products) on your device called Log Data. This Log Data may include information such as your device Internet Protocol ("IP") address, device name, operating system version, the configuration of the app when utilizing my Service, the time and date of your use of the Service, and other statistics.

## Cookies

Cookies are files with a small amount of data that are commonly used as anonymous unique identifiers. These are sent to your browser from the websites that you visit and are stored on your device's internal memory.

This Service does not use "cookies" explicitly. However, the app may use third party code and libraries that use "cookies" to collect information and improve their services. You have the option to either accept or refuse these cookies and know when a cookie is being sent to your device. If you choose to refuse our cookies, you may not be able to use some portions of this Service.

## Service Providers

I may employ third-party companies and individuals due to the following reasons:

To facilitate our Service; To provide the Service on our behalf; To perform Service-related services; or To assist us in analyzing how our Service is used. I want to inform users of this Service that these third parties have access to your Personal Information. The reason is to perform the tasks assigned to them on our behalf. However, they are obligated not to disclose or use the information for any other purpose.

## Security

I value your trust in providing us your Personal Information, thus we are striving to use commercially acceptable means of protecting it. But remember that no method of transmission over the internet, or method of electronic storage is 100% secure and reliable, and I cannot guarantee its absolute security.

## Links to Other Sites

This Service may contain links to other sites. If you click on a third-party link, you will be directed to that site. Note that these external sites are not operated by me. Therefore, I strongly advise you to review the Privacy Policy of these websites. I have no control over and assume no responsibility for the content, privacy policies, or practices of any third-party sites or services.

## Children's Privacy

These Services do not address anyone under the age of 13. I do not knowingly collect personally identifiable information from children under 13. In the case I discover that a child under 13 has provided me with personal information, I immediately delete this from our servers. If you are a parent or guardian and you are aware that your child has provided us with personal information, please contact me so that I will be able to do necessary actions.



## Changes to This Privacy Policy

I may update our Privacy Policy from time to time. Thus, you are advised to review this page periodically for any changes. I will notify you of any changes by posting the new Privacy Policy on this page.

This policy is effective as of 2020-11-30

## Contact Us

If you have any questions or suggestions about my Privacy Policy, do not hesitate to contact me at [veckshaw@gmail.com](mailto:veckshaw@gmail.com).

---

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25

## About me



Hi there,

I'm Shawn. the author of 1Remote. I'm a software developer from China, a big fan of remote desktop software, user of C++/C/C#/Python/Pytorch/Go/typescript. I'm also a big fan of open source software. I hope that 1Remote can help you manage your remote connections well and find this app useful. If you would like to support my work, you can buy me a coffee or give a nice review. Thanks!

- [Buy a coffee](#)
- [请杯咖啡](#)

If you have any questions/suggestions please feel free to let me know. [veckshaw@gmail.com](mailto:veckshaw@gmail.com) is my email in case you want to contact me.

## Make 1Remote Stronger

If you like this app, please help us make it stronger by doing any of the following:

1. [Simply star it on github](#)
2. [Help translation](#)
3. [Buy a coffee](#)
4. [Join DEV](#)

---

 **Last Change:** 2026-06-04 08:24

 **Publication Date:** 2026-06-04 08:25