



S.B. JAIN INSTITUTE OF TECHNOLOGY MANAGEMENT & RESEARCH, NAGPUR

Practical 02

Aim: To understand and demonstrate the use of basic commands in different operating systems (Windows, Linux, and UNIX) for managing files, directories, permissions, and user interactions through a terminal or command-line interface.

Name: Yash Chitmalwar

USN: CM24057

Semester / Year: 4th/2nd

Academic Session: 2025-26

Date of Performance: 20-01-26

Date of Submission: 27-01-26

- ❖ **Aim:** To understand and demonstrate the use of basic commands in different operating systems (Windows, Linux, and UNIX) for managing files, directories, permissions, and user interactions through a terminal or command-line interface.

❖ **Objectives:**

1. To learn and practice fundamental command-line operations for file and directory management.
2. To explore and utilize user and permission management commands effectively.
3. To enhance system administration skills by working with commands across different operating systems.

❖ **Requirements:**

Hardware Requirements:

- **Processor:** Multi-core CPU, Intel Core i3 (3.0 GHz) or higher
- **RAM:** Minimum 4 GB (8 GB recommended for optimal performance)
- **Storage:** 100 GB HDD or SSD (Solid State Drive) for faster access
- **Network Interface:** Ethernet or Wi-Fi adapter for connectivity



Software Requirements:

- **Operating System:** Windows 10/11, Linux (Ubuntu 20.04/CentOS 8), UNIX-based OS
- **Command-line Interface:** PowerShell or Command Prompt (Windows), Terminal (Linux/UNIX)
- **Text Editor:** Nano, Vim, or Visual Studio Code for file editing
- **Administrative Privileges:** Superuser (Linux/UNIX) or Administrator (Windows) access

❖ **Theory:**

In system administration, command-line interfaces (CLI) are essential tools for managing and interacting with operating systems like Windows, Linux, and UNIX. Commands allow users to perform various tasks such as navigating directories, managing files, controlling permissions, and monitoring system performance. Each operating system provides a set of built-in commands, such as 'man', 'ls', 'cd', 'mkdir', and 'chmod', to facilitate efficient system management. Understanding these commands and their syntax is crucial for automating tasks, enhancing security, and ensuring optimal system functionality. This practical aims to develop foundational skills in executing and applying basic commands across different platforms.

❖ **Commands:**

1. Display User Manual of a Command

- Functionality: Shows the manual page with details about a command's usage, options, and arguments.
- Syntax: `man <command>`
- Example: `man ls`

2. Change Current Working Directory.

- Functionality: Changes the terminal's current working directory.
- Syntax: `cd <directory-path>`
- Example: `cd /home/user/Documents.`

3. List Contents of the Current Directory.

- Functionality: Lists all files and directories in the current location.
- Syntax: `ls`
- Example: `ls`

4. Read/Modify/Concatenate Text Files.

- Functionality: Displays or manipulates file content.
- Syntax:
 - Read: `cat <filename>`
 - Modify: `'nano <filename>`
 - Concatenate: `cat <file1> <file2> > <outputfile>`

5. Create a New Directory.

- Functionality: Creates a new directory at the specified path.
- Syntax: `mkdir <directory-name>`
- Example: `mkdir newdir`

6. Display Current Working Directory.

- Functionality: Prints the current directory path.
- Syntax: `pwd`
- Example: `pwd`

7. Write Arguments to Standard Output.

- Functionality: Prints the provided string or variables.
- Syntax: `echo <arguments>`
- Example: `echo Hello World`

8. Remove a File.

- Functionality: Deletes a specified file.
- Syntax: `rm <filename>`
- Example: `rm file.txt`

9. Delete a Directory.

- Functionality: Removes an empty directory.
- Syntax: `rmdir <directory-name>`
- Example: `rmdir olddir`

10. Copy a File or Directory.

- Functionality: Copies a file or directory to a destination.
- Syntax: `cp <source> <destination>`
- Example: `cp file.txt backup/`

11. Switch to Root User.

- Functionality: Gains root privileges temporarily.
- Syntax: `sudo su`
- Example: `sudo s`

12. Move Files or Directories.

- Functionality: Moves or renames files and directories.
- Syntax: `mv <source> <destination>`
- Example: `mv file.txt newdir/`

13. Search for a String in a File.

- Functionality: Searches for a specific word or pattern in a file.
- Syntax: `grep "<string>" <file>`
- Example: `grep "error" log.txt`

14. Print Top N Lines of a File.

- Functionality: Displays the first N lines of a file.
- Syntax: `head -n <N> <file>`
- Example: `'head -n 10 file.txt'`

15. Print Last N Lines of a File.

- Functionality: Displays the last N lines of a file.
- Syntax: `tail -n <N> <file>`
- Example: `'tail -n 10 file.txt'`

16. Remove Read Permission from Owner.

- Functionality: Revokes the owner's read permission for a file.
- Syntax: `chmod u-r <filename>`
- Example: `chmod u-r file.txt`

17. Change Specific Permissions.

- Functionality: Sets or removes specific file permissions.
- Syntax: `chmod u+r,w-x,g+w <filename>`
- Example: `chmod u+r,w-x,g+w file.txt`

18. Add Write Permission to Owner, None to Others.

- Functionality: Allows write access for the owner only.
- Syntax: `chmod u+w,o-rwx <filename>`
- Example: `chmod u+w,o-rwx file.txt`

19. Assign Permissions to Users.

- Functionality: Modifies file access for users, groups, and others.
- Syntax: `chmod u+rwx,g+rx,o+r <filename>`
- Example: `'chmod u+rwx,g+rx,o+r file.txt`

20. Assign R/W/X to Others.

- Functionality: Gives read, write, and execute permissions to others.
- Syntax: `chmod o+rwx <filename>`
- Example: `chmod o+rwx file.txt`

21. Remove All Permissions from All Users.

- Functionality: Clears all permissions on a file.
- Syntax: `'chmod a-rwx <filename>`
- Example: `'chmod a-rwx file.txt`

22. Remove Read Permission Using Absolute Mode.

- Functionality: Uses numeric mode to restrict read access.
- Syntax: `chmod 700 <filename>`
- Example: `chmod 700 file.txt`

23. Set R/W for Owner, None for Group/Other.

- Functionality: Assigns permissions in numeric mode.
- Syntax: `chmod 600 <filename>`
- Example: `chmod 600 file.txt'`

24. Add Execute for Owner, Read for Group/Others.





- Functionality: Adds execution and read access.
- Syntax: `chmod u+x,g+r,o+r <filename>`

- Example: `chmod u+x,g+r,o+r file.txt`

25. Add Execute Permission to All Users.

- Functionality: Enables execution by everyone.
- Syntax: `chmod a+x <filename>`
- Example: `chmod a+x script.sh`

Output:

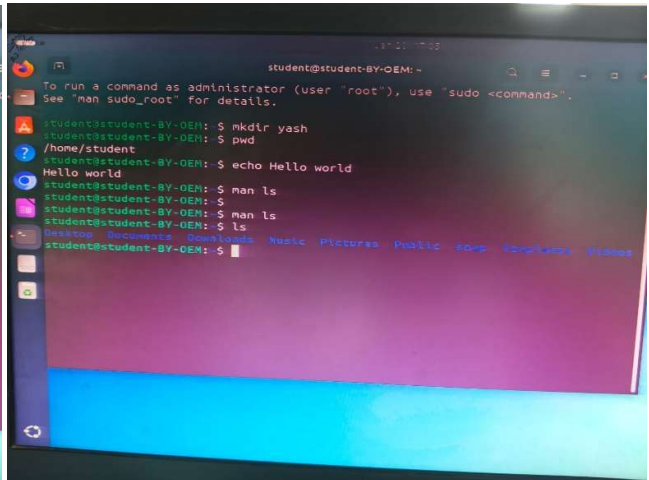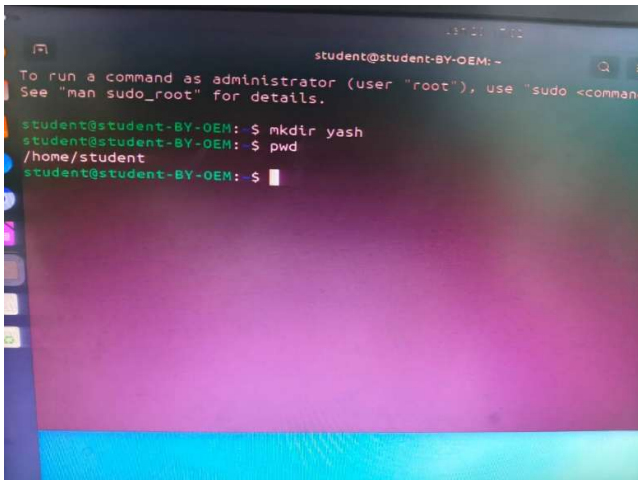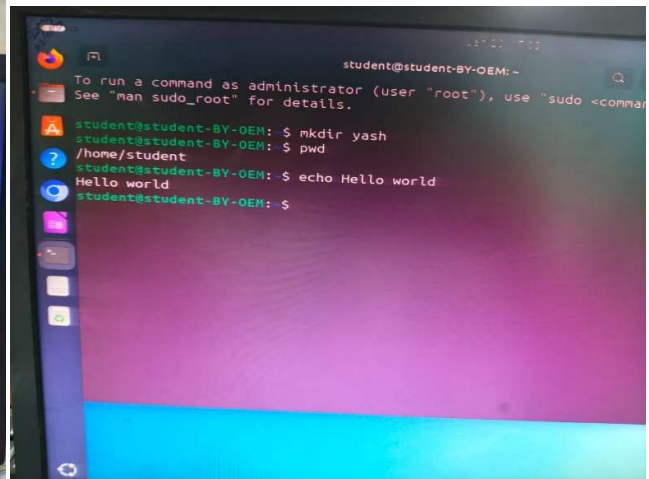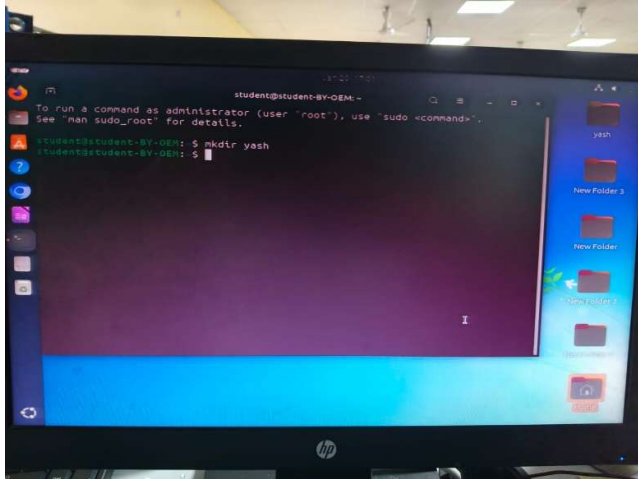

Operating System Lab (N-PCCCM401P)

```
student@student-BV-OEM: ~/Desktop/yash
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BV-OEM: $ mkdir yash
student@student-BV-OEM: $ pwd
/home/student
student@student-BV-OEM: $ echo Hello world
Hello world
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $ ls
Desktop Documents Downloads Music Pictures Public snap Templates
student@student-BV-OEM: $ cd /home/student/Desktop/yash
student@student-BV-OEM: ~/Desktop/yash$
```

```
student@student-BV-OEM: ~/Desktop/yash
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BV-OEM: $ mkdir yash
student@student-BV-OEM: $ pwd
/home/student
student@student-BV-OEM: $ echo Hello world
Hello world
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $ ls
Desktop Documents Downloads Music Pictures Public snap Templates
student@student-BV-OEM: $ cd /home/student/Desktop/yash
student@student-BV-OEM: ~/Desktop/yash$ ls
file.txt
student@student-BV-OEM: ~/Desktop/yash$
```

```
student@student-BV-OEM: ~/Desktop/yash
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BV-OEM: $ mkdir yash
student@student-BV-OEM: $ pwd
/home/student
student@student-BV-OEM: $ echo Hello world
Hello world
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $ ls
Desktop Documents Downloads Music Pictures Public snap Templates
student@student-BV-OEM: $ cd /home/student/Desktop/yash
student@student-BV-OEM: ~/Desktop/yash$ ls
file.txt
student@student-BV-OEM: ~/Desktop/yash$ cat file.txt
cat: file.txt: Is a directory
student@student-BV-OEM: ~/Desktop/yash$
```

```
student@student-BV-OEM: ~/Desktop/yash
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BV-OEM: $ mkdir yash
student@student-BV-OEM: $ pwd
/home/student
student@student-BV-OEM: $ echo Hello world
Hello world
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $
student@student-BV-OEM: $ man ls
student@student-BV-OEM: $ ls
Desktop Documents Downloads Music Pictures Public snap Templates
student@student-BV-OEM: $ cd /home/student/Desktop/yash
student@student-BV-OEM: ~/Desktop/yash$ ls
file.txt
student@student-BV-OEM: ~/Desktop/yash$ cat file.txt
cat: file.txt: Is a directory
student@student-BV-OEM: ~/Desktop/yash$ rmdir file.txt
student@student-BV-OEM: ~/Desktop/yash$ ls
student@student-BV-OEM: ~/Desktop/yash$ rm file.txt
rm: cannot remove 'file.txt': No such file or directory
student@student-BV-OEM: ~/Desktop/yash$
```


Operating System Lab (N-PCCCM401P)

```
student@student-BY-OEM: ~/Desktop/OS
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BY-OEM: $ cd /home/student/Desktop/OS
student@student-BY-OEM: $ LS
LS: command not found
student@student-BY-OEM: ~/Desktop/OS$ ls
pr1  pr2
student@student-BY-OEM: ~/Desktop/OS$
```

```
student@student-BY-OEM: ~/Desktop/OS
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.


student@student-BY-OEM: $ cd /home/student/Desktop/OS
student@student-BY-OEM: $
student@student-BY-OEM: $
```


```
student@student-BY-OEM: ~/Desktop/OS
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BY-OEM: $ cd /home/student/Desktop/OS
student@student-BY-OEM: ~/Desktop/OS$ LS
LS: command not found
student@student-BY-OEM: ~/Desktop/OS$ ls
pr1  pr2
student@student-BY-OEM: ~/Desktop/OS$ touch pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ cat pr2.txt
practical 23
student@student-BY-OEM: ~/Desktop/OS$
```


```
student@student-BY-OEM: ~/Desktop/OS
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

student@student-BY-OEM: $ cd /home/student/Desktop/OS
student@student-BY-OEM: ~/Desktop/OS$ LS
LS: command not found
student@student-BY-OEM: ~/Desktop/OS$ ls
pr1  pr2
student@student-BY-OEM: ~/Desktop/OS$ touch pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ cat pr2.txt
practical 23
student@student-BY-OEM: ~/Desktop/OS$
```

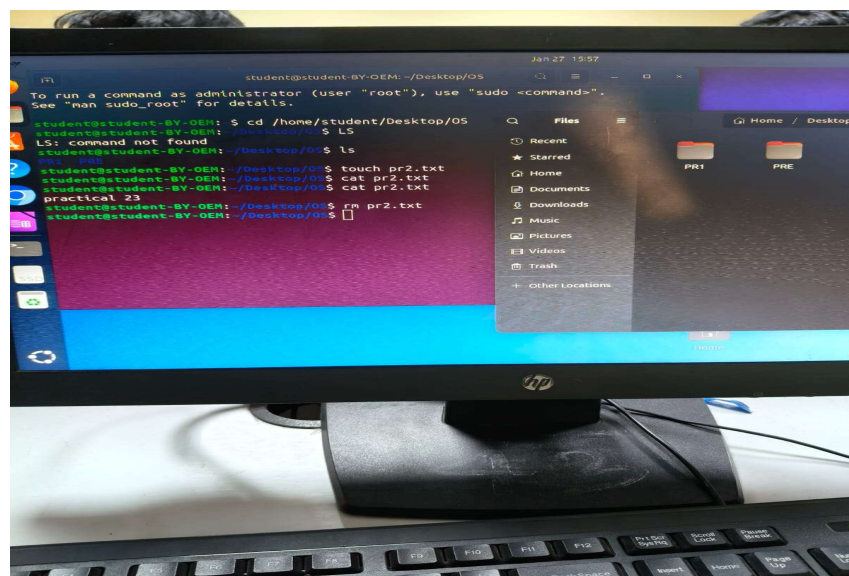

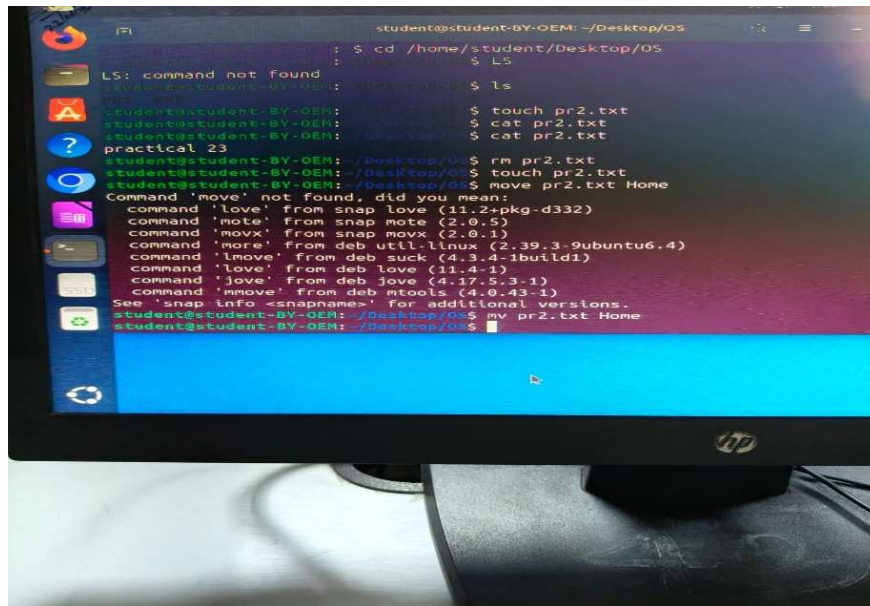

```
student@student-BY-OEM: ~/Desktop/OS
$ cd /home/student/Desktop/OS
$ ls
LS: command not found
student@student-BY-OEM: ~/Desktop/OS$ ls
practical 23
student@student-BY-OEM: ~/Desktop/OS$ touch pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ cat pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ cat pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ rm pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ touch pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ move pr2.txt Home
Command 'move' not found, did you mean:
command 'love' from snap love (11.2+pkg-d332)
command 'mote' from snap mote (2.0.5)
command 'movx' from snap movx (2.0.1)
command 'more' from deb util-linux (2.39.3-9ubuntu6.4)
command 'lmove' from deb suck (4.3.4-1build1)
command 'love' from deb love (11.4-1)
command 'jove' from deb jove (4.17.5.3-1)
command 'mmove' from deb mtools (4.0.43-1)
See 'snap info <snapname>' for additional versions.
student@student-BY-OEM: ~/Desktop/OS$ mv pr2.txt Home
student@student-BY-OEM: ~/Desktop/OS$
```

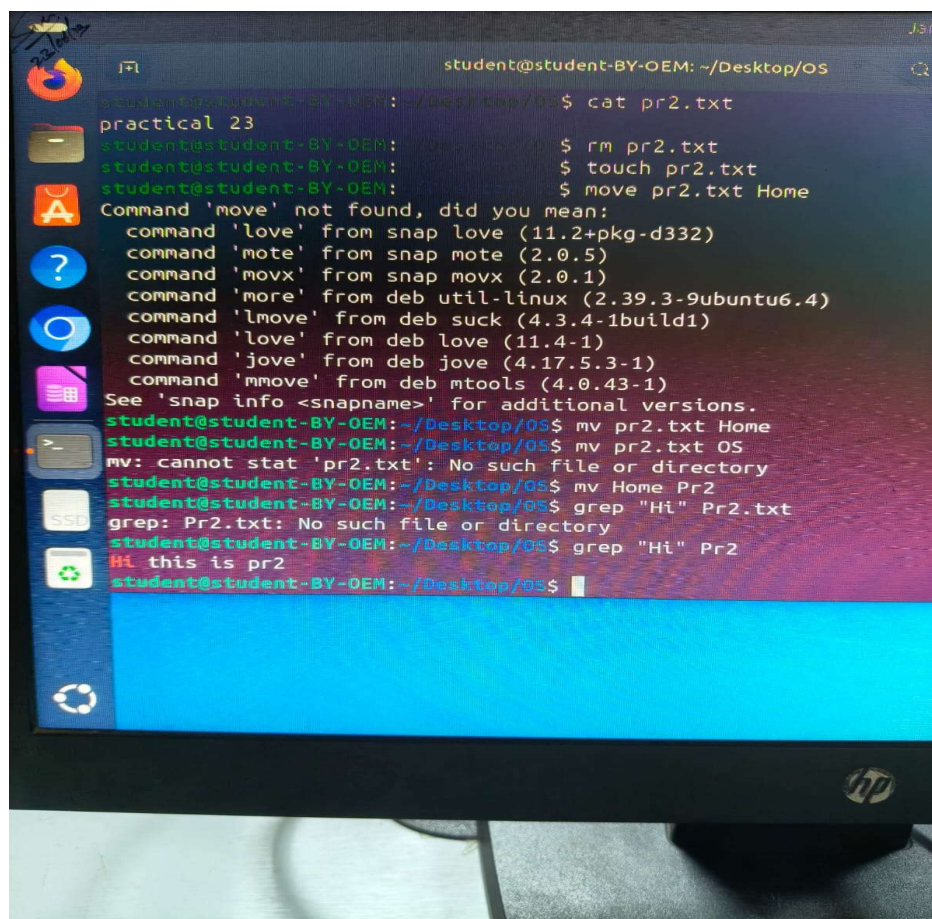

```
student@student-BY-OEM: ~/Desktop/OS
$ cat pr2.txt
practical 23
student@student-BY-OEM: ~/Desktop/OS$ rm pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ touch pr2.txt
student@student-BY-OEM: ~/Desktop/OS$ move pr2.txt Home
Command 'move' not found, did you mean:
command 'love' from snap love (11.2+pkg-d332)
command 'mote' from snap mote (2.0.5)
command 'movx' from snap movx (2.0.1)
command 'more' from deb util-linux (2.39.3-9ubuntu6.4)
command 'lmove' from deb suck (4.3.4-1build1)
command 'love' from deb love (11.4-1)
command 'jove' from deb jove (4.17.5.3-1)
command 'mmove' from deb mtools (4.0.43-1)
See 'snap info <snapname>' for additional versions.
student@student-BY-OEM: ~/Desktop/OS$ mv pr2.txt Home
student@student-BY-OEM: ~/Desktop/OS$ mv pr2.txt OS
mv: cannot stat 'pr2.txt': No such file or directory
student@student-BY-OEM: ~/Desktop/OS$ mv Home Pr2
student@student-BY-OEM: ~/Desktop/OS$ grep "Hi" Pr2.txt
grep: Pr2.txt: No such file or directory
student@student-BY-OEM: ~/Desktop/OS$ grep "Hi" Pr2
Hi this is pr2
student@student-BY-OEM: ~/Desktop/OS$
```

❖ **Conclusion:** In conclusion, understanding and using essential operating system commands like ‘ls’, ‘cd’, ‘cp’, ‘mv’, and ‘chmod’ enables efficient file management, navigation, and permission control. Tools like ‘grep’, ‘head’, and ‘tail’ enhance data processing. Mastery of these commands improves system administration, task automation, and overall system security and performance.

❖ **Discussion Questions:**

1. What is the significance of the pwd command in a Linux environment?
2. Explain the function of the cp command and its common options.
3. How does chmod 700 affect file permissions, and what does each digit represent?
4. Describe the difference between head and tail commands in Linux.
5. What is the purpose of the grep command, and how is it used with regular expressions?

❖ **References:**

<https://ubuntu.com/tutorials/command-line-for-beginners#1-overview>
<https://www.geeksforgeeks.org/25-basic-ubuntu-commands/>

Date: 27/01/2026

Signature

Course Coordinator
B.Tech CSE(AIML)
Sem: 4 / 2025-26