

A Morphology-Adaptive Random Feature Method for Inverse Source Problem of the Helmholtz Equation

Xinwei Hu^{*a,b}, Jingrun Chen^{†a,b,c}, and Haijun Yu^{‡d,e}

^aSchool of Mathematical Sciences, University of Science and Technology of China, Hefei, China

^bSuzhou Institute for Advanced Research, University of Science and Technology of China, Suzhou, China

^cSuzhou Big Data & AI Research and Engineering Center, Suzhou, China

^dState Key Laboratory of Mathematical Sciences (SKLMS) & LSEC, Institute of Computational Mathematics and Scientific/Engineering Computing, Academy of Mathematics and Systems Science, Chinese Academy of Sciences, Beijing 100190, China

^eSchool of Mathematical Sciences, University of Chinese Academy of Sciences, Beijing 100049, China

Abstract

The inverse source problem for the Helmholtz equation poses significant challenges, particularly when sources exhibit complex or discontinuous geometries. Traditional numerical methods suffer from prohibitive computational costs, while machine learning-based approaches such as physics-informed neural networks (PINN) and the random feature method (RFM), though computationally efficient for inverse problems, lack the intrinsic machinery to handle the sharp morphological features in such singular problems, leading to inaccurate solutions. To address this issue, we propose the morphology-adaptive random feature method (MA-RFM), a novel two-stage framework designed to adaptively identify critical regions and incorporate morphology-aware activation functions to tackle the multi-frequency inverse source problem with complex geometry. Our framework recasts the ill-posed inverse problem into a well-posed, strictly convex optimization problem by reformulating the governing Helmholtz equation as a Tikhonov-regularized integral equation via its fundamental solution. In the first stage, the integral adaptive RFM (IA-RFM) employs an adaptive algorithm to rapidly localize the source support, thereby reducing computational overhead and accelerating convergence. In the second stage, posterior geometric information is progressively integrated into the solver via hybrid basis functions, enabling a precise reconstruction of complex morphologies. The MA-RFM extends the capabilities of RFM to handle partial differential equations with singular solutions while preserving its mesh-free efficiency. We demonstrate the superior performance of our approach on ample challenging 2-D and 3-D benchmark problems, including scenarios with limited and noisy measurements, highlighting its robustness and accuracy in reconstructing intricate and discontinuous sources.

Keywords: Helmholtz equation, inverse source problem, random feature method, morphology-adaptive basis, iterative adaptive integral mesh, multi-frequency, physics-informed neural networks.

*huxinwei@mail.ustc.edu.cn

†jingrunchen@ustc.edu.cn

‡hyu@lsec.cc.ac.cn (corresponding author)

1 Introduction

The inverse source problem of identifying an unknown scalar source in the Helmholtz equation arises in applications such as medical imaging, antenna synthesis, acoustic tomography, and pollution of the environment [1–9]. In this work, we consider the Helmholtz equation in a homogeneous medium. Let Ω be a bounded domain in $\mathbb{R}^d$, with boundary Γ . Assume that the source function $S(\mathbf{x})$ is compactly supported with support volume $\tau \subset \Omega \subset \mathbb{R}^d$ satisfying $\text{dist}(\tau, \Gamma) := \min\{|\mathbf{x} - \mathbf{y}| : \mathbf{x} \in \tau, \mathbf{y} \in \Gamma\} > 0$. For a radial frequency ω , the radiating field $u(\mathbf{x})$ generated by the source $S(\mathbf{x})$ satisfies the following Helmholtz equation with the Sommerfeld radiation condition:

$$\begin{cases} -\Delta u - k^2 u = S, & \text{in } \mathbb{R}^d, \\ \lim_{r \rightarrow \infty} r^{\frac{d-1}{2}} (\partial_r u - iku) = 0, & r = |\mathbf{x}|, \end{cases} \quad (1)$$

where $k = \omega/c_0$ is the wave number, c_0 is the speed of sound. The Sommerfeld radiation condition ensures that the solution of the forward problem (that is, given S , solve (1) for u) is unique. In the inverse problem, we need to determine S using only the (full or partial) observation of u on the boundary Γ .

A classical approach to solving this inverse problem is to formulate it mathematically as an integral equation, which was originally proposed by Porter [10, 11] and later independently derived in [8]. By Green's formula and the radiation condition, the analytic solution to (1) is given by

$$u(\mathbf{x}) = \int_{\tau} \Phi_k(\mathbf{x}, \mathbf{y}) S(\mathbf{y}) d\mathbf{y}, \quad (2)$$

$$\Phi_k(\mathbf{x}, \mathbf{y}) = \begin{cases} \frac{i}{4} H_0^1(k|\mathbf{x} - \mathbf{y}|), & d = 2, \\ \frac{e^{ik|\mathbf{x} - \mathbf{y}|}}{4\pi|\mathbf{x} - \mathbf{y}|}, & d = 3, \\ \frac{i}{4} \left(\frac{k}{2\pi|\mathbf{x} - \mathbf{y}|} \right)^{\frac{d}{2}-1} H_{\frac{d}{2}-1}^{(1)}(k|\mathbf{x} - \mathbf{y}|), & d \geq 4, \end{cases} \quad (3)$$

where $\Phi_k(\mathbf{x}, \mathbf{y})$ is the fundamental solution for the Helmholtz equation, and the function H_0^1 denotes the Hankel function of the first kind of order zero.

Bleistein and Cohen [12] investigated the properties of this integral equation at a fixed frequency and demonstrated that its solution is non-unique. Similarly, Isakov established a conditional uniqueness theorem [13] for the spatial dependence of the source function. In [14], Bao proved that the inverse problem admits a unique solution when multi-frequency data are available. Furthermore, under suitable regularity assumptions on S , stability increases with higher $k_{\max}$, and the Hölder type stability estimate can be obtained if $k_{\max}$ is sufficiently large compared to the size of τ . Traditional solution methods for solving multi-frequency inverse source problems can generally be categorized into iterative and non-iterative approaches. In [15], Bao, Lin, and Triki proposed a continuation method along the wavenumber, applying Landweber iteration from low to high frequencies. In contrast, non-iterative methods avoid the time-consuming iterative process by expanding the source function in terms of specific basis functions and directly solving for the expansion coefficients. Eller and Valdivia proposed a direct method based on eigenfunction expansion of the Laplace operator [16], utilizing multi-frequency data corresponding to eigenvalues to recover the expansion coefficients. In [17], Zhang and Guo proposed a Fourier expansion method to compute the source coefficients from data at prescribed wavenumbers. However, the computational cost is substantial because these methods require discretizing the integral equation on a fine, uniform grid. Furthermore, their effectiveness is limited when dealing with complex problems.

In recent years, with the rapid development of deep learning, employing neural network models to solve partial differential equations (PDEs) has become an increasingly active research field. Such approaches, such as physics-informed neural networks (PINN [18]), deep Galerkin method (DGM [19]), deep Ritz method (DRM [20]), and their variants (see e.g. [21–24]), need to approximate both $u(\mathbf{x})$ and $S(\mathbf{x})$, which face several challenges when applied to inverse source problems:

1. *Representational limitations of neural networks:* Standard feedforward neural networks [25] exhibit a well-documented “spectral bias”, an inherent tendency to learn low-frequency functions more readily than high-frequency ones [26,27]. This makes it difficult to approximate the highly oscillatory solutions $u(\mathbf{x})$ of the Helmholtz equation, especially for large wavenumbers. Furthermore, since automatic differentiation computes the required high-order derivatives, it drastically magnifies any initial representation errors in $u(\mathbf{x})$. Accurately capturing such oscillatory behavior would necessitate a network with a vast number of parameters, leading to prohibitive computational costs and often yielding poor performance.
2. *Insufficient utilization of physical laws:* These conventional frameworks are difficult to balance the governing PDEs and the Sommerfeld condition, which is considered as soft constraints via penalty terms in the loss function. This represents a superficial use of the underlying physics and does not incorporate the problem’s intrinsic mathematical structure. Potent physical priors, such as the fundamental solution, which analytically describes the relationship between the source and the field, are entirely neglected.

To overcome the above limitations, new methodologies have emerged. The boundary integral neural network (BI-Net) [28] draws on classical potential theory, utilizes the fundamental solution of the PDE as a kernel to transform the problem into an integral equation, and then approximates the density function therein with a neural network. Recent advances in solving PDEs have been driven by randomized neural networks, notably the extreme learning machine (ELM) [29,30] and the random feature method (RFM) [31]. The ELM architecture, which consists of a single hidden layer with randomly assigned and fixed parameters, offers remarkable computational efficiency. By determining the output weights through a simple least-squares fit, it bypasses the costly iterative training required by conventional deep neural networks. This potential has been further realized in variants such as the physics-informed ELM (PIELM) [31,32]. Building upon this foundation, the RFM proposed by Chen et al. enhances the approach by integrating random feature functions with a partition of unity (PoU) [31] framework, showing spectral accuracy in many areas with complex domains, such as interface problems [33]. This strategy effectively recasts the non-convex optimization problem inherent in many neural network methods into a convex one, thereby ensuring a unique solution and efficient convergence. However, in regions with high gradients or singularities, the fixed random basis functions of RFM may lack the local expressive power necessary to capture the solution accurately. An adaptive feature capture method based on RFM was recently proposed in [34], whose main idea is similar to r -refinement. It is able to adaptively adjust the basis functions as well as the collocation points at high gradients to enhance the expressive ability of neural networks. Traditional numerical methods, such as h -refinement, p -refinement, hp -refinement, and r -refinement [35–40], dynamically concentrate on computational points in critical areas based on adjusting basis functions. Consequently, transferring such powerful adaptive strategies into the context of neural network-based solvers is logical and highly desirable.

Inspired by the above work, we develop in this paper a new framework to solve the inverse source problem of the Helmholtz equation. To this end, we propose a morphology-adaptive random feature method (MA-RFM) and combine it with the idea of the integral equation of BI-Net to obtain efficient approximations. Specifically, we first utilize the fundamental solution of the Helmholtz equation as an integral kernel to transform the original differential equation problem into an integral equation. Subsequently, we employ MA-RFM, a two-phase framework that adaptively locates critical regions and adds morphology basis functions. In its first stage, MA-RFM leverages norms of both the gradient and value of the source function to iteratively update the integral mesh. We call this process integral adaptive RFM (IA-RFM). Building upon this, the second stage expands the approximation space by increasing the basis functions of the corresponding morphology to capture local information, based on posterior information obtained from the rough solution and its gradient. The innovation of this paper is mainly:

1. *Physics-informed integral equation framework:* The governing differential equation is reformulated into an integral equation with the fundamental solution as its kernel. By replacing high-order differentiation with convolution, this framework embeds physical laws into the model, which enforce the Sommerfeld radiation condition rigorously as a hard constraint and thereby improve numerical stability and robustness.

2. *Dual-criterion iterative adaptive integration strategy*: The RFM with adaptive integration is proposed, driven by a dual criterion: the gradient and value of the solution in the last iteration, which accurately identifies and densely samples critical regions, significantly reducing computational complexity while maintaining accuracy.
3. *Morphology hybrid-basis enhancement*: A hybrid-basis enhancement method is designed to achieve high-fidelity reconstruction. This framework introduces auxiliary basis functions capable of capturing local morphological features of the source term, effectively compensating for the deficiency of a global basis in representing intricate details.

The remainder of this paper is structured as follows. Section 2 introduces the multi-frequency inverse source problem, covering the uniqueness theory. Section 3 demonstrates the framework of the MA-RFM, including the IA-RFM, the morphology-adaptive hybrid basis enhancement, and the uniqueness and stability of the Tikhonov regularization solution. Section 4 demonstrates the effectiveness of the proposed method with reconstruction results for challenging 2-D and 3-D inverse source problems, including those with complex geometries and limited aperture data. Section 5 concludes with remarks and future directions.

2 Mathematical results on multi-frequency inverse source problems

In this section, we present the mathematical foundations of the multi-frequency inverse source problem. We firstly establish the uniqueness results for the continuous problem under certain assumptions. Subsequently, we formulate the corresponding discrete linear system and analyze the stability with the Tikhonov regularization, which provides the theoretical basis for the numerical method proposed in Section 3.

2.1 Uniqueness for the continuous inverse source problem

In this section, we define the multi-frequency inverse source problem for the Helmholtz equation and transform the original differential equations into integral equations by using its fundamental solution. This framework allows the Sommerfeld radiation condition to be used as a hard constraint. Firstly, we introduce the uniqueness theorem for the multi-frequency inverse source problem.

Motivated by uniqueness and stability results [12, 14, 16], we present a uniqueness result for the multi-frequency inverse source problem under weaker assumptions. It extends the classical result of Bao et al. [14], generalizing the geometry of the domain Ω , and reducing the observation data from the full boundary Γ to an arbitrarily small open subset Γ_0 .

Theorem 2.1. *Consider the inverse source problem corresponding to the Helmholtz equation (1), i.e. determine S using full or partial observations of u on the boundary Γ . Suppose that S_1 and S_2 be two sources with compact supports τ_1, τ_2 in Ω . Let Γ_0 be an open subset of the boundary $\Gamma = \partial\Omega$. Suppose that equation (1) holds for a set of wave numbers $\{k_j\}_{j=1}^{\infty}$ having an accumulation point for the source and solution pairs $\{S_1, u_1(k_j, x)\}$ and $\{S_2, u_2(k_j, x)\}$. Then $S_1 = S_2$ if the corresponding radiating fields $u_1(k_j, \mathbf{x})$ and $u_2(k_j, \mathbf{x})$ satisfy one of following conditions:*

$$(a) \ u_1 = u_2, \text{ on } \Gamma, \tag{4}$$

$$(b) \ \partial_\nu u_1 = \partial_\nu u_2, \text{ on } \Gamma, \tag{5}$$

$$(c) \ u_1 = u_2, \quad \text{on } \Gamma_D, \quad \partial_\nu u_1 = \partial_\nu u_2, \text{ on } \Gamma_N, \quad \Gamma = \Gamma_D \cup \Gamma_N, \tag{6}$$

$$(d) \ u_1 = u_2, \quad \partial_\nu u_1 = \partial_\nu u_2, \text{ on } \Gamma_0. \tag{7}$$

The proof of Theorem 2.1 is listed in Appendix A.

Remark 1. The inverse source problem is fundamentally a linear inverse problem subject to a compact support constraint. At a single frequency, this linear problem is intrinsically ill-posed due to the existence of non-radiating sources. It is the combination of the compact support constraint

and multi-frequency data that eliminates the non-radiating sources. Consequently, Theorem 2.1 establishes uniqueness for multi-frequency problems with Dirichlet, Neumann, mixed boundary, and also the finite aperture data, which provides a theoretical basis for numerical algorithms.

The unbounded domain presents challenges for both traditional numerical methods and neural network methods. A practical exercise is to use an artificially truncated bounded domain together with a proper boundary condition. To inscribe Sommerfeld conditions on bounded regions, we can make use of the Dirichlet-to-Neumann (DtN) mapping relation. To do this, construct an artificial truncated domain Ω_ρ to be a ball of radius ρ , with ρ large enough such that $\Omega \subset \Omega_\rho$. Thus, the artificial boundary $\Gamma_\rho = \partial\Omega_\rho$ divides $\mathbb{R}^d$ into two parts. In the outer region $\mathbb{R}^d \setminus \overline{\Omega}_\rho$, there is the Helmholtz outer problem:

$$\begin{cases} -\Delta u - k_j^2 u = 0, & \text{in } \mathbb{R}^d \setminus \overline{\Omega}_\rho, \\ \lim_{r \rightarrow \infty} r^{\frac{d-1}{2}} (\partial_r u - i k_j u) = 0, & r = |\mathbf{x}|, \\ u = g, & \text{on } \Gamma_\rho. \end{cases} \quad (8)$$

For this external problem, u can be uniquely determined by the Dirichlet data on its boundary Γ_ρ [41]. The DtN mapping $\mathcal{T}$ describes exactly this relationship and maps the Dirichlet data on the boundary Γ_ρ to its corresponding Neumann data $\partial_\nu u|_{\Gamma_\rho}$. Specifically, the DtN operator $\mathcal{T}$ is defined as follows.

$$\mathcal{T} : u|_{\Gamma_\rho} \mapsto \partial_\nu u|_{\Gamma_\rho}. \quad (9)$$

This operator $\mathcal{T}$ contains exactly the information about the radiation conditions at infinity and can be efficiently calculated (see, e.g., [41]). By imposing this DtN boundary condition on the artificial boundary Γ_ρ , we can transform the original problem (1) in the unbounded domain into an equivalent problem within the bounded region Ω_ρ :

$$\begin{cases} -\Delta u - k_j^2 u = S, & \text{in } \Omega_\rho, \\ \partial_\nu u = \mathcal{T}(u), & \text{on } \Gamma_\rho, \\ u = u(\mathbf{x}, k_j), \quad \mathbf{x} \in \Gamma_D, \quad \partial_\nu u = \partial_\nu u(\mathbf{x}, k_j), \quad \mathbf{x} \in \Gamma_N. \end{cases} \quad (10)$$

The above formulation is commonly used in traditional numerical methods. However, it is not efficient in designing neural network methods. Next, we induce the integral equation framework so that the Sommerfeld condition is naturally satisfied. Based on the fundamental solution of the Helmholtz equations (3), (1) or (10) can be transformed into an integral equation (2). For a fixed wavenumber k , the radiation operators $L_k^{(1)}$ and $L_k^{(2)}$, mapping from $L^2(\tau)$ to $L^2(\Gamma)$, are defined as follows:

$$L_k^{(1)}(S)(\mathbf{x}) = \int_\tau \Phi_k(|\mathbf{x} - \mathbf{y}|) S(\mathbf{y}) d\mathbf{y}, \quad (11)$$

$$L_k^{(2)}(S)(\mathbf{x}) = \int_\tau \partial_{\nu(\mathbf{x})} \Phi_k(|\mathbf{x} - \mathbf{y}|) S(\mathbf{y}) d\mathbf{y}, \quad (12)$$

where $\nu(\mathbf{x})$ represents the normal derivative. Denote $L_k = (L_k^{(1)}, L_k^{(2)})^\top$, $g(\mathbf{x}, k) = (u(\mathbf{x}, k), \partial_\nu u(\mathbf{x}, k))^\top$, $\mathbf{x} \in \Gamma^*$, $\Gamma^* \subseteq \Gamma$. Consequently, the inverse source problem can be defined as minimizing the following objective functional $J(S)$ to reconstruct the optimal S^* by measurement $\{g(\mathbf{x}, k)\}_{k=k_{\min}}^{k_{\max}}$:

$$\min_S J(S) := \int_{k_{\min}}^{k_{\max}} \|L_k(S) - g(\cdot, k)\|_{L^2(\Gamma^*)}^2 dk. \quad (13)$$

2.2 Discretization and Tikhonov regularization

In this section, we discuss the discretization of the continuous inverse problem and the stability analysis with the Tikhonov regularization method.

Define a discrete set of wavenumbers $k_{\min} = k_1 < k_2 < \dots < k_{N-1} < k_N = k_{\max}$, and denote U_k and $\partial_\nu U_k$ as the observational Dirichlet and Neumann data on Γ^* for the k -th frequency. For the linear representation of the source function

$$S_M(\mathbf{x}) = \sum_{m=1}^M s_m \phi_m(\mathbf{x}), \quad (14)$$

denote $\mathbf{s} = (s_1, s_2, \dots, s_M)^\top \in \mathbb{R}^M$ as the vector of unknown expansion coefficients or trainable weights in the neural network, representing the M degrees of freedom in the source approximation. Define $\Psi_k^{(1)}$ and $\Psi_k^{(2)}$ as the discretization matrices corresponding to operators $L_1^{(k)}$ and $L_2^{(k)}$ acting on the basis functions. Consequently, the discrete form of the loss function in (13) is given by

$$\mathcal{L}_{\text{data}}(\mathbf{s}) = \sum_{k=k_1}^{k_N} \left(\|\Psi_k^{(1)} \cdot \mathbf{s} - U_k\|_2^2 + \|\Psi_k^{(2)} \cdot \mathbf{s} - \partial_\nu U_k\|_2^2 \right). \quad (15)$$

To reformulate this summation into a compact linear system, we aggregate the data and operators across all frequencies. Define the global observation vectors U_D, U_N and the global operator matrices Ψ_D, Ψ_N as follows:

$$U_D = \begin{bmatrix} U_{k_1} \\ \vdots \\ U_{k_N} \end{bmatrix}, \quad U_N = \begin{bmatrix} \frac{\partial U_{k_1}}{\partial \nu} \\ \vdots \\ \frac{\partial U_{k_N}}{\partial \nu} \end{bmatrix}, \quad \Psi_D = \begin{bmatrix} \Psi_{k_1}^{(1)} \\ \vdots \\ \Psi_{k_N}^{(1)} \end{bmatrix}, \quad \Psi_N = \begin{bmatrix} \Psi_{k_1}^{(2)} \\ \vdots \\ \Psi_{k_N}^{(2)} \end{bmatrix}.$$

We construct the final real-valued system by separating the real and imaginary parts. Define the global data vector U and the system matrix Ψ_M as:

$$U = \begin{bmatrix} \text{Re}(U_D) \\ \text{Im}(U_D) \\ \text{Re}(U_N) \\ \text{Im}(U_N) \end{bmatrix} \in \mathbb{R}^{n \times 1}, \quad \Psi_M = \begin{bmatrix} \text{Re}(\Psi_D) \\ \text{Im}(\Psi_D) \\ \text{Re}(\Psi_N) \\ \text{Im}(\Psi_N) \end{bmatrix} \in \mathbb{R}^{n \times M}.$$

Thus, the discrete inverse problem can be equivalently expressed as the linear system:

$$\Psi_M \mathbf{s} = U. \quad (16)$$

Typically, such problems are ill-posed, as Ψ_M has a large condition number, making the solution highly sensitive to noise in the data. Assume that the measured data U^δ relates to the true, noise-free data as $(U^\delta)_i = (1 + \delta\epsilon) \cdot (U_{\text{true}})_i$, $\epsilon \sim \text{Uniform}(-1, 1)$, or $U^\delta = U_{\text{true}} + e$, where e represents measurement noise. A direct inversion, as shown through singular value decomposition (SVD) $\Psi_M = Q_1 \Sigma Q_2^\top$, where $\Sigma = \text{diag}(\sigma_1, \dots, \sigma_M)$, $Q_1 = (\hat{u}_1, \hat{u}_2, \dots, \hat{u}_n)$, $Q_2 = (\hat{v}_1, \hat{v}_2, \dots, \hat{v}_M)$, would yield a solution:

$$\mathbf{s}^\delta = \sum_{i=1}^M \frac{\hat{u}_i^* U^\delta}{\sigma_i} \hat{v}_i = \sum_{i=1}^M \left(\frac{\hat{u}_i^* U_{\text{true}}}{\sigma_i} + \frac{\hat{u}_i^* e}{\sigma_i} \right) \hat{v}_i.$$

The term $\hat{u}_i^* e / \sigma_i$ demonstrates that small singular values σ_i can drastically amplify the noise component, corrupting the solution. To counteract this effect, we employ Tikhonov regularization, which seeks to find a solution by minimizing a composite objective function:

$$\mathcal{L}_{\text{reg}}(\mathbf{s}^\delta) = \|\Psi_M \mathbf{s}^\delta - U^\delta\|_2^2 + \lambda_{\text{reg}}^2 \|\mathbf{s}^\delta\|_2^2. \quad (17)$$

The regularization parameter $\lambda_{\text{reg}} > 0$ balances the trade-off between fitting the data and controlling the norm of the solution. The solution becomes:

$$\mathbf{s}^\delta = \sum_{i=1}^M f_i \left(\frac{\hat{u}_i^* U_{\text{true}}}{\sigma_i} + \frac{\hat{u}_i^* e}{\sigma_i} \right) \hat{v}_i, \quad f_i = \frac{\sigma_i^2}{\sigma_i^2 + \lambda_{\text{reg}}^2}. \quad (18)$$

The filter factors f_i suppress the influence of noise associated with small singular values ($\sigma_i \ll \lambda_{\text{reg}}$), thus stabilizing the solution. The choice of λ_{reg} is critical: a value too large introduces excessive bias, while a value too small fails to adequately suppress noise. The following theorem provides the uniqueness and stability of the Tikhonov regularization solution.

Theorem 2.2 (Uniqueness and stability of Tikhonov regularization solution).

- (a) For any regularization parameter $\lambda_{\text{reg}} > 0$, objective function $\mathcal{L}_{\text{reg}}(\mathbf{s}^\delta) = \|\Psi_M \mathbf{s}^\delta - U^\delta\|_2^2 + \lambda_{\text{reg}}^2 \|\mathbf{s}^\delta\|_2^2$, is strictly convex. Therefore, the minimization problem has a unique solution.
- (b) Let $S_M^*(\mathbf{x}) = \sum s_m^* \phi_m(\mathbf{x})$ be the best approximation of the true source in the finite space $\text{span}\{\phi_m(\mathbf{x}), m = 1, \dots, M\}$, with coefficient vector $\mathbf{s}^*$. Let S_M^δ be the regularized solution obtained from data U^δ with a coefficient vector $\mathbf{s}^\delta = (\Psi_M^\top \Psi_M + \lambda_{\text{reg}}^2 I)^{-1} \Psi_M^\top U^\delta$. Assume the noise level $\|U_{\text{true}} - U^\delta\|_2 \leq \delta \|U_{\text{true}}\|_2 \leq \delta_{\text{all}}$ and the model inconsistency is $\eta_M = \|\Psi_M \mathbf{s}^* - U_{\text{true}}\|_2$. If the source condition $\mathbf{s}^* = (\Psi_M^\top \Psi_M)^\nu w$ holds for some vector w , $0 < \nu \leq 1$, then the error is bounded by

$$\|\mathbf{s}^\delta - \mathbf{s}^*\|_2 \leq \frac{1}{2\lambda_{\text{reg}}} (\delta_{\text{all}} + \eta_M) + C_\nu \lambda_{\text{reg}}^{2\nu} \|w\|_2. \quad (19)$$

Furthermore, choosing the optimal parameter $\lambda_{\text{reg}}^2 = \left(\frac{\delta_{\text{all}} + \eta_M}{4\nu C_\nu \|w\|_2} \right)^{\frac{2}{2\nu+1}}$ yields the minimum error bound:

$$\|\mathbf{s}^\delta - \mathbf{s}^*\|_2 \leq \left[(2\nu + 1) \cdot (4\nu)^{-\frac{2\nu}{2\nu+1}} \cdot (C_\nu \|w\|_2)^{\frac{1}{2\nu+1}} \right] (\delta_{\text{all}} + \eta_M)^{\frac{2\nu}{2\nu+1}}. \quad (20)$$

where C_ν is a positive constant that depends only on ν .

The proof of Theorem 2.2 is given in Appendix B.

Remark 2. Statement (a) demonstrates a key benefit of Tikhonov regularization: it formulates the inverse problem as a strictly convex optimization, which ensures both the existence and uniqueness of the solution, thereby establishing a solid foundation for the subsequent numerical algorithm. Statement (b) establishes an optimal $\mathcal{O}((\delta_{\text{all}} + \eta_M)^{\frac{2\nu}{2\nu+1}})$ convergence rate for the coefficients and provides an a priori estimate for the optimal regularization parameter λ_{reg} .

3 The morphology-adaptive random feature method

3.1 Integral adaptive random feature method

To describe our method and the baseline methods, we first consider the inverse problem (10). The standard PINN and RFM for this problem is to approximate the unknown scalar field $u(\mathbf{x})$ and $S(\mathbf{x})$ at the same time. Let $u_M(\mathbf{x})$ and $S_M(\mathbf{x})$ be the output approximated by the fully connected neural network:

$$u_M(\mathbf{x}) = \sum_{m=1}^{M_u} u_m \phi_{m,1}(\mathbf{x}), \quad S_M(\mathbf{x}) = \sum_{m=1}^{M_S} s_m \phi_{m,2}(\mathbf{x}). \quad (21)$$

In RFM, each random feature function $\phi_{m,1}, \phi_{m,2}$ is constructed by

$$\phi_m(\mathbf{x}) = \sigma(\mathbf{k}_m \cdot \mathbf{x} + b_m), \quad (22)$$

where σ is the activation function, $\mathbf{k}_m, b_m$ are initialized randomly, i.e. $\mathbf{k}_m \sim \text{Uniform}(-R_m, R_m)^d$, $b_m \sim \text{Uniform}(-R_m, R_m)$, and remain fixed throughout the training process. Therefore, only the outer parameters $\{u_m\}_{m=1}^{M_u}, \{s_m\}_{m=1}^{M_S}$ need to be determined. In RFM, the domain Ω is partitioned

into N_p subdomains $\{\Omega_n, n = 1, \dots, N_p\}$, each centered at $\mathbf{x}_n$, such that $\Omega = \cup_{n=1}^{N_p} \Omega_n$. For each Ω_n , taking cubic-type subdomains as examples, RFM applies a standardization:

$$\tilde{\mathbf{x}}^{(n)} = \left(\frac{x_1 - x_{n1}}{r_{n1}}, \frac{x_2 - x_{n2}}{r_{n2}}, \dots, \frac{x_d - x_{nd}}{r_{nd}} \right)^\top, \quad n = 1, \dots, N_p, \quad (23)$$

to map $\Omega_n = \prod_{k=1}^d [x_{nk} - r_{nk}, x_{nk} + r_{nk}]$ into $[-1, 1]^d$, where r_n represents the radius of Ω_n . We take the following PoU functions in the one-dimensional case:

$$\psi(x) = \mathbb{I}_{[-\frac{5}{4}, -\frac{3}{4}]}(x) \cdot \frac{1 + \sin(2\pi x)}{2} + \mathbb{I}_{[-\frac{3}{4}, \frac{3}{4}]}(x) + \mathbb{I}_{[\frac{3}{4}, \frac{5}{4}]}(x) \cdot \frac{1 - \sin(2\pi x)}{2}. \quad (24)$$

For $d \geq 1$, the PoU function $\psi_n(\mathbf{x})$ is defined as $\psi_n(\mathbf{x}) = \prod_{i=1}^d \psi_n(x_i)$, where $\psi_n(x_i) = \psi(\tilde{x}_i^{(n)})$. Then,

$$u_M(\mathbf{x}) = \sum_{n=1}^{N_p} \psi_{n,1}(\mathbf{x}) \sum_{j=1}^{J_{n,1}} u_{nj} \phi_{nj,1}(\mathbf{x}), \quad S_M(\mathbf{x}) = \sum_{n=1}^{N_p} \psi_{n,2}(\mathbf{x}) \sum_{j=1}^{J_{n,2}} s_{nj} \phi_{nj,2}(\mathbf{x}). \quad (25)$$

Here, the subscripts 1 and 2 to indicate that different PoUs and basis functions can be used for u and S , where $J_{n,1}$ and $J_{n,2}$ denote the number of basis functions used on the n -th partition for approximating u and S , respectively. Let C_I , C_B , C_D , and C_N represent inner points, DtN boundary points, Dirichlet and Neumann observation points, respectively. The loss function for problem (10) is

$$\begin{aligned} \mathcal{L}_{\text{RFM}} = & \sum_{k=k_1}^{k_N} \left(\lambda_I \sum_{\mathbf{x}_i \in C_I} |-(\Delta + k^2)u_M^k(\mathbf{x}_i) - S_M(\mathbf{x}_i)|^2 + \lambda_B \sum_{\mathbf{x}_j \in C_B} |\partial_\nu u_M^k(\mathbf{x}_j) - \mathcal{T}^k(u_M^k(\mathbf{x}_j))|^2 \right. \\ & \left. + \lambda_D \sum_{\boldsymbol{\xi}_j \in C_D} |u_M^k(\boldsymbol{\xi}_j) - u^k(\boldsymbol{\xi}_j)|^2 + \lambda_N \sum_{\boldsymbol{\xi}_j \in C_N} |\partial_\nu u_M^k(\boldsymbol{\xi}_j) - \partial_\nu u^k(\boldsymbol{\xi}_j)|^2 \right). \end{aligned} \quad (26)$$

This approach needs $N+1$ neural networks to approximate the field and the source $\{\{u_M^k\}_{k_{\min}}^{k_{\max}}, S_M\}$. The number of parameters is huge, and the boundary condition is a kind of soft constraint. Moreover, one has to tune λ_I , λ_B , λ_D , and λ_N to balance the PDE, the boundary condition, and the observation data, which is not an easy task.

To this end, we propose the integral random feature method (IRFM) based on (11)-(12), which naturally satisfies the Sommerfeld condition and requires only one network to approximate the source S in (11)-(12), which takes the form:

$$S_M(\mathbf{x}) = \sum_{n=1}^{N_p} \psi_n(\mathbf{x}) \sum_{j=1}^{J_n} s_{nj} \phi_{nj}(\mathbf{x}), \quad (27)$$

where J_n denotes the number of basis functions used on the n -th partition for approximating S . The next step concentrates on the integral discretization. Since the support τ is not known, to make things simple, we do numerical integration inside a larger box (cube for 3-D) denoted by V_0 that contains τ . IRFM employs a tensor-product Gauss-Legendre quadrature to integrate (11)-(12), and then solve for $\mathbf{s}$ by minimizing

$$\mathcal{L}_{\text{IRFM}} = \sum_{k=k_1}^{k_N} \left(\lambda_D \sum_{\boldsymbol{\xi}_j \in C_D} |\hat{L}_k^{(1)}(S_M)(\boldsymbol{\xi}_j) - u^k(\boldsymbol{\xi}_j)|^2 + \lambda_N \sum_{\boldsymbol{\xi}_j \in C_N} |\hat{L}_k^{(2)}(S_M)(\boldsymbol{\xi}_j) - \partial_\nu u^k(\boldsymbol{\xi}_j)|^2 \right), \quad (28)$$

which is a discretized version of (13). Here, $\hat{L}_k^{(1)}$ and $\hat{L}_k^{(2)}$ denote the operators defined in (11)-(12) with the integrations approximated by numerical quadratures.

However, the tensor-product Gaussian integration deteriorates for non-smooth functions. To effectively reduce computational costs, we employ an adaptive mesh refinement strategy. During the n -th iteration, for the i -th quadrature cell C_i , we calculate

$$I_i^{\text{abs}} = \left(\sum_{\ell} |S_M^{(n)}(\mathbf{x}_\ell^i)|^2 \omega_\ell^i \right)^{1/2}, \quad I_i^{\nabla} = \left(\sum_{\ell} |\nabla S_M^{(n)}(\mathbf{x}_\ell^i)|^2 \omega_\ell^i \right)^{1/2}, \quad (29)$$

where $\{\mathbf{x}_\ell^i, \omega_\ell^i\}$ are the Gaussian quadrature nodes and weights on quadrature cell C_i . A cell is marked for refinement if it meets either of the following criteria:

- *Intensity criterion:* To adequately resolve the source support, we refine regions with high local magnitude: $I_i^{\text{abs}} / \sum_i I_i^{\text{abs}} > \eta_{\text{abs}}$.
- *Gradient criterion:* To accurately capture boundaries and sharp transitions, we refine regions with high local gradient: $I_i^{\nabla} / \sum_i I_i^{\nabla} > \eta_{\text{grad}}$.

The thresholds η_{abs} and η_{grad} are inversely proportional to the number of quadrature cells. The details of the iterative adaptive random feature method (IA-RFM) are shown in Algorithm 1.

Algorithm 1 The Iterative Adaptive Random Feature Method (IA-RFM)

Require: Quadrature domain V_0 , initial network $\mathcal{N}_0$, initial mesh set $\mathcal{C}_0$, n^d Gauss points.

Require: Thresholds η_{grad} , η_{abs} , tolerance $\varepsilon_{\text{IA-RFM}}$, max refine level `max_level`, max iterations `max_iter`.

Ensure: Final adaptive mesh $\mathcal{C}_{\text{final}}$ and numerical solution S_M^{final} .

- 1: *Step 1:* Compute initial solution $S_M^{(0)}$ on mesh $\mathcal{C}_0$ based on $\mathcal{N}_0$ using IRFM. Set $n = 0$.
- 2: *Step 2:* Initialize $\mathcal{C}_{n+1} = \emptyset$, then:
 - 2.1: Calculate indicators I_i^{abs} , I_i^{∇} for each $C_i \in \mathcal{C}_k$ by (29).
 - 2.2: For each cell $C_i \in \mathcal{C}_k$, mark C_i if $\text{level}(C_i) < \text{max_level}$ and the following is satisfied:

$$I_i^{\text{abs}} / \sum_i I_i^{\text{abs}} > \eta_{\text{abs}} \quad \text{or} \quad I_i^{\nabla} / \sum_i I_i^{\nabla} > \eta_{\text{grad}}. \quad (30)$$

If marked, divide C_i into sub-cells, then add all sub-cells to $\mathcal{C}_{n+1}$; otherwise, add C_i to $\mathcal{C}_{n+1}$.

- 5: *Step 3:* Compute refined solution $S_M^{(n+1)}$ on $\mathcal{C}_{n+1}$ using IRFM.
 - 6: *Step 4:* Calculate iterative relative error $\Delta S_M^{(n)} = \|S_M^{(n+1)} - S_M^{(n)}\|_2 / \|S_M^{(n)}\|_2$.
If $\Delta S_M^{(n)} < \varepsilon_{\text{IA-RFM}}$ or $n \geq \text{max_iter}$, jump to Step 5;
Else set $n \leftarrow n + 1$, and repeat Steps 2-4.
 - 7: *Step 5:* Set $\mathcal{C}_{\text{final}} = \mathcal{C}_{n+1}$ and $S_M^{\text{final}} = S_M^{(n+1)}$, then stop.
-

Remark 3. Although the general RFM framework allows for a static domain decomposition into N_p subdomains (as defined in Eq. (27)), the framework proposed in this work is designed with a dynamic refinement strategy. For simplicity, we initialize the solver with a single global representation (setting $N_p = 1$ and $\Omega_1 = \Omega$, the extension to $N_p > 1$ is straightforward). Consequently, the parameter J_n corresponds to the total number of basis functions to approximate S , denoted as M_0 in our numerical experiments.

$$S_M(\mathbf{x}) = \sum_{j=1}^{M_0} s_j \phi_j(\mathbf{x}). \quad (31)$$

As subsequently detailed in Section 3.2, instead of increasing N_p geometrically, the method adaptively expands the approximation space by adding morphology-aware basis functions, resulting in a total basis count of $M_{\text{total}} = M_0 + \sum_{i=1}^{I_{\text{max}}} \sum_{k=1}^{K_i} M_k^{(i)}$.

Substituting the global representation (31) into (11) and (12), and applying the quadrature rule from Algorithm 1, the integral operators (11), (12) can be discretized as

$$L_k^{(1)}(S_M)(\mathbf{X}) \approx \hat{L}_k^{(1)}(s)(\mathbf{X}) = \Psi_k^{(1)} \cdot \mathbf{s}, \quad L_k^{(2)}(S_M)(\mathbf{X}) \approx \hat{L}_k^{(2)}(s)(\mathbf{X}) = \Psi_k^{(2)} \cdot \mathbf{s}, \quad (32)$$

where

$$(\Psi_k^{(1)})_{n,m} = \sum_{C_i \in \mathcal{C}_{\text{final}}} \sum_{\mathbf{j} \in Z_n^d} \Phi_k(|\mathbf{x}_n - \mathbf{y}_{\mathbf{j}}^i|) \phi_m(\mathbf{y}_{\mathbf{j}}^i) \omega_{\mathbf{j}}^i, \quad (33)$$

$$(\Psi_k^{(2)})_{n,m} = \sum_{C_i \in \mathcal{C}_{\text{final}}} \sum_{\mathbf{j} \in Z_n^d} \partial_{\nu(\mathbf{x}_n)} \Phi_k(|\mathbf{x}_n - \mathbf{y}_{\mathbf{j}}^i|) \phi_m(\mathbf{y}_{\mathbf{j}}^i) \omega_{\mathbf{j}}^i. \quad (34)$$

Here the index set $Z_n^d := \{1, \dots, n\}^d$ refers to all d -dimensional multi-indices i.e., $\mathbf{j} = (j_1, \dots, j_d)^\top$ with each $j_k \in Z_n := \{1, \dots, n\}$. $\{\mathbf{y}_{\mathbf{j}}^i\}$, $\{\omega_{\mathbf{j}}^i\}$ denote the quadrature points and associated quadrature weights in $C_i \in \mathcal{C}_{\text{final}}^i$ generated by Algorithm 1. With the unknown coefficient vector defined as $\mathbf{s} = (s_1, s_2, \dots, s_M)^\top$ and these discretized operators, we can explicitly formulate the $\mathcal{L}_{\text{data}}(\mathbf{s})$ previously defined in (15).

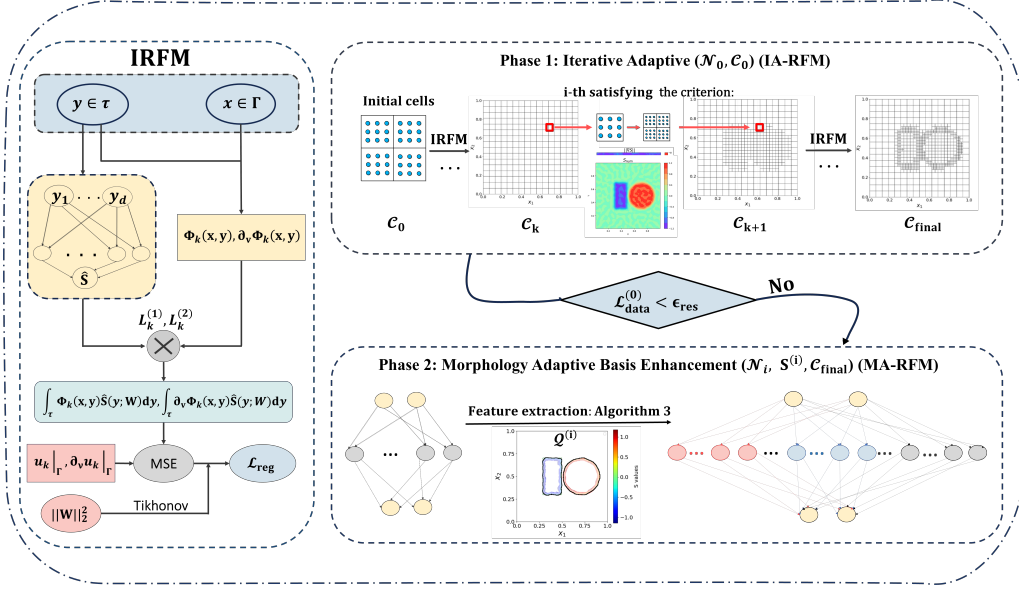


Figure 1: Integral Random Feature method (IRFM), Integral Adaptive Random Feature Method (IA-RFM), Morphology-Adaptive Random Feature Method (MA-RFM).

3.2 Morphological adaptive hybrid basis enhancement

The numerical method proposed in this section centers on adaptively enhancing the representational capacity of RFM. The hidden layer of RFM can be viewed as a function basis set. The entire RFM defines an approximation space V spanned by these basis functions

$$V = \text{span}\{\phi_1(\mathbf{x}), \phi_2(\mathbf{x}), \dots, \phi_M(\mathbf{x})\}. \quad (35)$$

From this perspective, RFM uses the activation functions from neural networks as basis functions, combining the advantages of neural networks and spectral methods. To overcome the limitation of the standard RFM, whose fixed basis functions struggle to capture complex local features, we propose an adaptive basis functions enhancement strategy based on posterior information, such as the initial solution and its gradient, to locate local features, critical regions in the problem, and then add new, morphological basis functions.

For discontinuous features along specific boundaries or curves, the geometric regions where these features reside can be implicitly defined with level set functions $\psi_\alpha(\mathbf{x})$, which divide the space into two regions (inside and outside the interface):

$$\Omega_\alpha := \{\mathbf{x} \in \mathbb{R}^2 \mid \psi_\alpha(\mathbf{x}) \leq 0\}, \quad \alpha = 1, \dots, K, \quad (36)$$

where K is the number of non-overlapping regions. Based on this, the idea is to design a family of basis functions that can simulate jump behavior while being smooth everywhere. Its general form is as follows:

$$\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) = \sigma_\alpha \left(K_\alpha^{(j)} \cdot d_{\mathcal{T}_\alpha}^{(j)}(\mathbf{x}; \boldsymbol{\theta}_\alpha^{(j)}) \right), \quad \alpha = 1, \dots, K, \quad j = 1, \dots, M_\alpha. \quad (37)$$

$\phi_\alpha^{(j)}$ represents the j -th basis function added to the α -th group. $\boldsymbol{\theta}$ are uniformly sampling fixed shape parameters. The signed distance function (SDF) $d_{\mathcal{T}_\alpha}(\mathbf{x})$, which is closely related to $\psi_\alpha(\mathbf{x})$, represents the distance to the interface and $\mathcal{T}_\alpha$ specifies the geometric type. σ_α typically is chosen as *tanh*, *sigmoid*, or similar S-shaped functions to simulate the interface. The soft boundary parameters $K_\alpha^{(j)}$ are used to control the “hardness” of the transition across the boundary. Ultimately, we use a smooth and differentiable “soft” function to effectively approximate a discontinuous “hard” geometric boundary, allowing it to integrate into gradient-based optimization algorithms, which traditional hard boundary models cannot achieve.

To determine which Scenario to apply and to estimate the corresponding shape parameters $\boldsymbol{\theta}_\alpha$, we employ a data-driven strategy. The process relies on the point cloud $\mathcal{Q}_{\text{grad}}$ or $\mathcal{Q}_{\text{abs}}$.

$$\mathcal{Q}_{\text{abs}}(S_M) = \left\{ \mathbf{x} \in P_{\text{test}}, \frac{|S_M(\mathbf{x})|}{\|S_M\|_\infty} \geq t_{\text{abs}} \right\}, \quad \mathcal{Q}_{\text{grad}}(S_M) = \left\{ \mathbf{x} \in P_{\text{test}}, \frac{|\nabla S_M(\mathbf{x})|}{\|\nabla S_M\|_\infty} \geq t_{\text{grad}} \right\}, \quad (38)$$

where $t_{\text{abs}}, t_{\text{grad}} \in (0, 1)$ are hyperparameters. We firstly employ the DBSCAN algorithm [42] to partition the candidate point set $\mathcal{Q} \subseteq \mathcal{Q}_{\text{grad}} \cup \mathcal{Q}_{\text{abs}}$ into K disjoint clusters **with adaptive neighborhood radius**

$$\varepsilon_{\text{clu}} = c_\varepsilon h, \quad h = \max_i (\Delta x_i),$$

and minimum core-point size $N_{\text{min}}^{\text{clu}}$. These clusters serve as the distinct support regions for the K sources,

$$\mathcal{Q} = \bigcup_{\alpha=1}^K C_\alpha, \quad C_i \cap C_j = \emptyset, \quad \forall i \neq j.$$

We categorize the identified clusters based on a prior shape library, which classifies geometries into three primary families: *ellipsoidal* (including circle/ellipse-like shapes), *rectangular* (cubic/box-like shapes), and *general* (irregular shapes). To implement the classification, we firstly extract a set of geometric descriptors and fitting metrics from the cluster C_α and its boundary $\hat{\Gamma}_\alpha = \{\mathbf{x}^{(j)}\}_{j=1}^{|\hat{\Gamma}_\alpha|}$. Starting with the spatial extent and radial distribution, we define the centroid $\mathbf{c}_\alpha$ and compute the Euclidean distances from the center to all points in C_α , denoted as $D_\alpha(\mathbf{x}) = \|\mathbf{x} - \mathbf{c}_\alpha\|_2$. These distances are sorted in non-decreasing order into a sequence $\{D_{(j)}\}_{j=1}^{|C_\alpha|}$ (where $D_{(1)} \leq \dots \leq D_{(|C_\alpha|)}$) to facilitate robust geometric estimation.

$$\mathbf{c}_\alpha = \frac{1}{|C_\alpha|} \sum_{\mathbf{x} \in C_\alpha} \mathbf{x}, \quad L_{\alpha,i} = \frac{1}{2} \left(\max_{\mathbf{x} \in C_\alpha} (x_i) - \min_{\mathbf{x} \in C_\alpha} (x_i) \right), \quad i = 1, \dots, d. \quad (39)$$

Finally, to distinguish between the *rectangular* and *ellipsoidal* families, we compute the fitting residuals $\mathcal{E}$, which measure the deviation of the boundary points from an ideal box or ellipsoid parameterized by $(\mathbf{c}_\alpha, L_{\alpha,i})$:

$$\mathcal{E}_{\text{rect}}^{(\alpha)} = \frac{1}{|\hat{\Gamma}_\alpha|} \sum_{j=1}^{|\hat{\Gamma}_\alpha|} \left| \max_{\ell \in \{1, \dots, d\}} \bar{x}_\ell^{(j)} - 1 \right|, \quad \mathcal{E}_{\text{ellip}}^{(\alpha)} = \frac{1}{|\hat{\Gamma}_\alpha|} \sum_{j=1}^{|\hat{\Gamma}_\alpha|} \left| \sqrt{\sum_{\ell=1}^d (\bar{x}_\ell^{(j)})^2} - 1 \right|, \quad \bar{x}_\ell^{(j)} = \frac{x_\ell^{(j)} - c_{\alpha,\ell}}{L_{\alpha,\ell}}. \quad (40)$$

Remark 4. The prior library is topology-aware rather than fixed. In two dimensions, we consider $\mathcal{T}_\alpha \in \{\text{rectangle, ellipsoid, general}\}$, whereas in three dimensions we augment the candidate set to $\mathcal{T}_\alpha \in \{\text{rectangle, ellipsoid, torus, general}\}$. For three-dimensional clusters exhibiting toroidal topology, we additionally evaluate a torus-type fitting error and compare it with the rectangle- and ellipsoid-type residuals to determine the geometric label $\mathcal{T}_\alpha$. The explicit definition of the torus residual is given in Appendix C.1.

Next, we classify the basis function construction into two distinct scenarios. The first scenario addresses canonical geometries, allowing for efficient parametric fitting. The second scenario addresses general, irregular geometries where no prior shape knowledge is assumed, necessitating a robust, data-driven numerical level set approach.

3.2.1 Scenario I: canonical geometries

For sources exhibiting canonical geometries (e.g., spheres, cubes, or tori), we construct the basis functions by fitting geometric primitives.

For example, for the indicator function of a circular boundary $\mathbb{I}_{\mathbf{x} \in B(c, r)}$, choose

$$\psi_\alpha^{(j)}(\mathbf{x}; \boldsymbol{\theta}_\alpha^{(j)}) = -d_{\text{circle}}^{(j)}(\mathbf{x}, \boldsymbol{\theta}_\alpha^{(j)}) = |\mathbf{x} - \mathbf{c}_\alpha^{(j)}|^2 - (r_\alpha^{(j)})^2, \quad j = 1, \dots, M_\alpha,$$

where $\boldsymbol{\theta}_\alpha^{(j)} = (\mathbf{c}_\alpha^{(j)}, r_\alpha^{(j)})$. Use the sigmoid function for approximation:

$$\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) = \sigma_\alpha \left(K_\alpha^{(j)} \cdot ((r_\alpha^{(j)})^2 - |\mathbf{x} - \mathbf{c}_\alpha^{(j)}|^2) \right), \quad \mathbf{c}_\alpha^{(j)} \in \mathbb{R}^d,$$

or equivalently,

$$\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) = \sigma_\alpha \left(\tilde{K}_\alpha^{(j)} \cdot \left(1 - \left| \frac{\mathbf{x} - \mathbf{c}_\alpha^{(j)}}{r_\alpha^{(j)}} \right|^2 \right) \right), \quad \mathbf{c}_\alpha^{(j)} \in \mathbb{R}^d,$$

where $\tilde{K}_\alpha^{(j)} = (r_\alpha^{(j)})^2 K_\alpha^{(j)}$, and the shape parameters are sampled from uniform distributions around the detected estimates: $K_\alpha^{(j)} \sim \text{Uniform}(K_{\alpha, \min}, K_{\alpha, \max})$, $r_\alpha^{(j)} \sim \text{Uniform}((1 - \epsilon_r)\hat{r}_\alpha, (1 + \epsilon_r)\hat{r}_\alpha)$, $c_{\alpha, l}^{(j)} \sim \text{Uniform}(\hat{c}_{\alpha, l} - \epsilon_c |\hat{c}_{\alpha, l}|, \hat{c}_{\alpha, l} + \epsilon_c |\hat{c}_{\alpha, l}|)$. Here, $l = 1, 2, \dots, d$, is the l -th component, and $\hat{r}_\alpha$, $\hat{\mathbf{c}}_\alpha$ denote the posterior shape parameters derived from the geometry detection (39). The terms ϵ_r and ϵ_c serve as perturbation tolerances, introduced to account for potential inaccuracies in the geometric estimation and to enhance the robustness of the basis set. More generally, it can be generalized to the form of an ellipsoid and rectangle,

$$\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) = \sigma_\alpha \left(\tilde{K}_\alpha^{(j)} \cdot \left(1 - \sum_{i=1}^d \left| \frac{x_i - c_{\alpha, i}^{(j)}}{L_{\alpha, i}^{(j)}} \right|^2 \right) \right), \quad \mathbf{c}_\alpha^{(j)} \in \mathbb{R}^d, \quad (41)$$

$$\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) = \sigma_\alpha \left(\hat{K}_\alpha^{(j)} \cdot \left(1 - \max_{i \in \{1, \dots, d\}} \left| \frac{x_i - c_{\alpha, i}^{(j)}}{L_{\alpha, i}^{(j)}} \right| \right) \right), \quad \mathbf{c}_\alpha^{(j)} \in \mathbb{R}^d. \quad (42)$$

where $\tilde{K}_\alpha^{(j)} = (\prod_{i=1}^d L_{\alpha, i})^{2/d} K_\alpha^{(j)}$, $\hat{K}_\alpha^{(j)} = (\prod_{i=1}^d L_{\alpha, i})^{1/d} K_\alpha^{(j)}$.

This adaptive idea is equally applicable to other types of local features, such as Gaussian-type source terms with $\boldsymbol{\theta}_\alpha^{(j)} = (\mathbf{c}_\alpha^{(j)}, v_\alpha^{(j)})$:

$$\phi_\alpha^{(j)}(\mathbf{x}; \boldsymbol{\theta}_\alpha^{(j)}) = \exp \left(-\tilde{v}_\alpha^{(j)} \cdot \sum_{i=1}^d \left| \frac{x_i - c_{\alpha, i}^{(j)}}{L_{\alpha, i}^{(j)}} \right|^2 \right), \quad (43)$$

where $\tilde{v}_\alpha^{(j)} = (\prod_{i=1}^d L_{\alpha, i})^{2/d} v_\alpha^{(j)}$. The center $\mathbf{c}_\alpha^{(j)}$ and the decay rate $v_\alpha^{(j)}$, can be determined through posterior information and random sampling. See Figure 2 for diverse morphological basis functions.

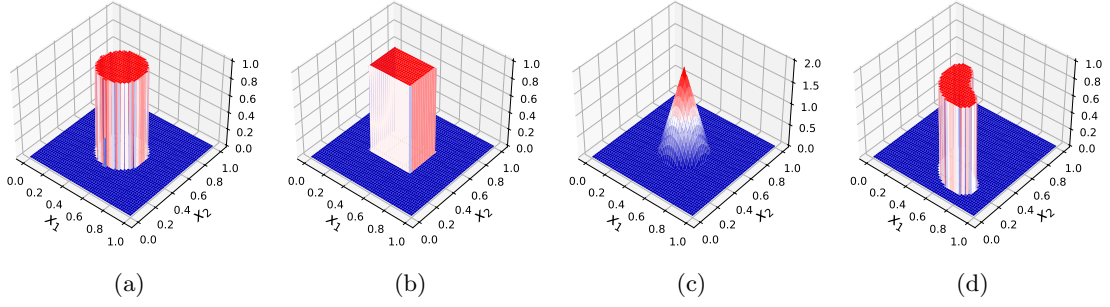


Figure 2: Visualization of morphological basis functions. (a) sigmoid $(K \cdot (r^2 - \|\mathbf{x} - \mathbf{c}\|_2^2))$. Circular domain with $K = 5 \times 10^4$, $r = 0.2$, $\mathbf{c} = (0.5, 0.5)^\top$. (b) sigmoid $(K \cdot \max_{l=1,2} \{L_L - (x_l - c_l)\})$. Rectangular domain with $K = 5 \times 10^4$, $\mathbf{c} = (0.5, 0.5)^\top$, $\mathbf{L} = (L_1, L_2)^\top = (0.15, 0.2)^\top$. (c) ReLU $(K \cdot (r - \|\mathbf{x} - \mathbf{c}\|_2))$. Conical with $K = 2$, $r = 0.2$, $\mathbf{c} = (0.5, 0.5)^\top$. (d) sigmoid $(K \cdot d(\mathbf{x}; \boldsymbol{\theta}))$. Bean domain using SDF in (45) with $K = 5 \times 10^4$.

3.2.2 Scenario II: general, irregular geometries

For complex geometries exhibiting non-convex features, we extract the discrete numerical boundary: $\hat{\Gamma}_\alpha$ corresponding to the α -th source cluster C_α from $\mathcal{Q}$, establishing this boundary as the level set of the implicit function ψ_α :

$$\hat{\Gamma}_\alpha = \partial C_\alpha = \{\mathbf{x} \mid \psi_\alpha(\mathbf{x}) = 0\}.$$

Then generate a family of perturbed interfaces by expanding or contracting $\hat{\Gamma}_\alpha$ along its unit outward normal $\mathbf{n}(\mathbf{x})$,

$$\mathbf{x}^{(j)} = \mathbf{x} + \rho_\alpha^{(j)} \mathbf{n}(\mathbf{x}), \quad \forall \mathbf{x} \in \hat{\Gamma}_\alpha, \quad (44)$$

where $\rho_\alpha^{(j)} \sim U(\rho_{\min}^{(j)}, \rho_{\max}^{(j)})$. where $\rho_\alpha^{(j)} \sim U(\rho_{\min}^{(j)}, \rho_{\max}^{(j)})$. In practice, when the subsequent screening set is chosen as $\mathcal{Q}_{\text{grad}}$, we take $\rho_{\min}^{(j)} < 0 < \rho_{\max}^{(j)}$ so that the detected curve can be perturbed both inward and outward. The intersection with $\mathcal{Q}_{\text{grad}}$ reduces the effective local region, and bidirectional offsets help preserve a sufficiently informative neighborhood of the interface. If only one-sided $\mathcal{Q}_{\text{grad}}$ or $\mathcal{Q}_{\text{abs}}$ is used, we set $\rho_{\min}^{(j)} = 0$, so that the offset is restricted to a single direction.

Each $\rho^{(j)}$ defines a new, slightly deformed boundary, thereby generating a family of new level set functions $\psi_\alpha^{(j)}(\mathbf{x}; \rho_\alpha^{(j)})$ and $\hat{\Gamma}_\alpha^{(j)} = \{\mathbf{x} \mid \psi_\alpha^{(j)}(\mathbf{x}; \rho_\alpha^{(j)}) = 0\}$. Next, we explicitly define the region polarity using a simple approximated SDF

$$d_{\text{general}}^{(j)}(\mathbf{x}; \rho^{(j)}) = \begin{cases} 1, & \psi_\alpha^{(j)}(\mathbf{x}; \rho^{(j)}) \leq 0, \\ -1, & \psi_\alpha^{(j)}(\mathbf{x}; \rho^{(j)}) > 0. \end{cases} \quad (45)$$

When we select a larger K , the basis function (37) $\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)})$ can clearly distinguish between the interior and exterior of the interface, thereby functioning as a local basis function. Figure 2d shows the morphological basis functions of non-convex regions. In the numerical experiments, local circular basis functions are introduced to compensate for the limited interface-capturing capability.

$$\phi_{\text{circular}}^{(j)}(\mathbf{x}; K^{(j)}, \boldsymbol{\theta}^{(j)}) = \text{sigmoid}\left(K^{(j)} \cdot \left((r^{(j)})^2 - \|\mathbf{x} - \mathbf{c}^{(j)}\|_2^2\right)\right), \quad j = 1, \dots, M_{\text{circular}}.$$

Their centers $\mathbf{c}^{(j)}$ are randomly sampled from a set of candidate points $\{\mathbf{x}^{(j)}\}$, and the radius $r^{(j)}$ are determined by the mesh scale.

Based on the descriptors defined and two scenarios above, we perform the shape classification and basis initialization through the following steps:

1. Shape classification and SDF selection ($d_{\mathcal{T}_\alpha}$):

- *Scenario 1: If $\min(\mathcal{E}_{\text{rect}}^{(\alpha)}, \mathcal{E}_{\text{ellip}}^{(\alpha)}) \leq t_{\text{reg}}$, the boundary is regular*, we compare the residuals. If $\mathcal{E}_{\text{rect}}^{(\alpha)} < \mathcal{E}_{\text{ellip}}^{(\alpha)}$, we select the rectangular SDF; otherwise, we select the ellipsoidal SDF.
 - *Scenario 2: If $\min(\mathcal{E}_{\text{rect}}^{(\alpha)}, \mathcal{E}_{\text{ellip}}^{(\alpha)}) > t_{\text{reg}}$, the boundary is irregular*, we assign the *general* type and construct a numerical SDF directly from $\hat{\Gamma}_\alpha$.
2. *Basis type selection (σ_α)*: We determine the activation function based on the coefficient of variation ($\text{CV}_\alpha = \frac{\sigma(S_{\text{num}})}{\mu(|S_{\text{num}}|)}$) of the source value: selecting *sigmoid* for flat-top sources (low CV) and *exponential* for peak-like sources (high CV).
 3. *Basis assembly*: With the determined shape type $\mathcal{T}_\alpha$ and basis type σ_α , the final basis functions are initialized as:

$$\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) = \sigma_\alpha(K_\alpha^{(j)} \cdot d_{\mathcal{T}_\alpha}^{(j)}(\mathbf{x}; \boldsymbol{\theta}_\alpha^{(j)})), \quad j = 1, \dots, M_\alpha.$$

The detailed implementation and parameter thresholds for this automatic generation process are summarized in *Algorithm 2*.

Algorithm 2 Shape detection and basis initialization

Require: Approximate solution S_{num} , $\mathcal{Q}_{\text{grad}}$, $\mathcal{Q}_{\text{abs}}$, **cluster parameters** $\varepsilon_{\text{clu}} = 5h, N_{\text{min}}^{\text{clu}} = 20$, thresholds of CV $t_{\text{CV}} = 0.7$, **regular shape** $t_{\text{reg}} = 0.05$.

Ensure: Set of new basis functions $\mathcal{B}_{\text{new}}$ with initialized parameters.

- 1: Partition $\mathcal{Q} \subseteq \mathcal{Q}_{\text{grad}} \cap \mathcal{Q}_{\text{abs}}$ into disjoint clusters $\{C_\alpha\}_{\alpha=1}^K$ using DBSCAN. $\mathcal{B}_{\text{new}} \leftarrow \emptyset$.
- 2: **for** each cluster C_α in $\{C_1, \dots, C_K\}$ **do**
- 3: Compute center $\mathbf{c}_\alpha$, half axis-aligned lengths $L_{\alpha,i}$, aspect ratio AR_α , distance $D_\alpha(\mathbf{x})$.
- 4: **if** $\min(\mathcal{E}_{\text{rect}}^{(\alpha)}, \mathcal{E}_{\text{ellip}}^{(\alpha)}) > t_{\text{reg}}$ **then** $\mathcal{T}_\alpha \leftarrow \text{general}$, $\boldsymbol{\theta}_\alpha \leftarrow \{\mathbf{c}_\alpha\}$.
- 5: **else if** $\mathcal{E}_{\text{rect}}^{(\alpha)} \leq \mathcal{E}_{\text{ellip}}^{(\alpha)}$ **then** $\mathcal{T}_\alpha \leftarrow \text{Rectangle}$, $\boldsymbol{\theta}_\alpha \leftarrow \{\mathbf{c}_\alpha, \{L_{\alpha,i}\}_{i=1}^d\}$.
- 6: **else** $\mathcal{T}_\alpha \leftarrow \text{Ellipsoid}$, $\boldsymbol{\theta}_\alpha \leftarrow \{\mathbf{c}_\alpha, \{L_{\alpha,i}\}_{i=1}^d\}$.
- 7: Calculate Coefficient of Variation: $\text{CV}_\alpha = \frac{\sigma(S_{\text{num}})}{\mu(|S_{\text{num}}|)}$.
- 8: **if** $\text{CV}_\alpha \geq t_{\text{CV}}$ **then** $\sigma_\alpha \leftarrow \text{Exp}$ (or ReLU) **else** $\sigma_\alpha \leftarrow \text{Sigmoid}$.
- 9: **if** $\mathcal{T}_\alpha == \text{general}$ **then** *Scenario 2*: Construct SDF $d_{\text{general}}^{(j)}$ from $\hat{\Gamma}_\alpha^{(j)}$ (Eq. 45).
- 10: **else** *Scenario 1*: Sample M_α parameter sets $\boldsymbol{\theta}_\alpha^{(j)} = (\theta_{\alpha,1}^{(j)}, \dots, \theta_{\alpha,d_\theta}^{(j)})^\top$ uniformly around $\hat{\boldsymbol{\theta}}_\alpha$ with tolerances ϵ_l :

$$\boldsymbol{\theta}_\alpha^{(j)} \in \prod_{l=1}^{d_\theta} U\left(\hat{\theta}_{\alpha,l}^{(j)} - \epsilon_l |\hat{\theta}_{\alpha,l}^{(j)}|, \hat{\theta}_{\alpha,l}^{(j)} + \epsilon_l |\hat{\theta}_{\alpha,l}^{(j)}|\right).$$

- 11: Update $\mathcal{B}_{\text{new}} \leftarrow \mathcal{B}_{\text{new}} \cup \left\{ \sigma_\alpha \left(K_\alpha^{(j)} \cdot d_{\mathcal{T}_\alpha}^{(j)}(\mathbf{x}; \boldsymbol{\theta}_\alpha^{(j)}) \right) \right\}_{j=1}^{M_\alpha}$.
 - 12: **Return** $\mathcal{B}_{\text{new}}$.
-

In summary, MA-RFM acts as a two-stage adaptive enhancement process. Firstly, an initial coarse solution is obtained in the baseline space V using IA-RFM. A posterior analysis is then performed on this solution and its gradient field to identify geometric features. Based on these features, specialized morphological basis functions are generated to expand the approximation space from V to a more robust space $V' = V_0 \oplus V_{\text{expansion}}$, where

$$\begin{aligned} V_0 &= \text{span}\{\phi_0^{(j)}(\mathbf{x}; \mathbf{k}_0, b_0), j = 1, \dots, M_0\}, \\ V_{\text{expansion}} &= \text{span}\{\phi_\alpha^{(j)}(\mathbf{x}; K_\alpha^{(j)}, \boldsymbol{\theta}_\alpha^{(j)}) \mid \alpha = 1, \dots, K, j = 1, \dots, M_\alpha\}. \end{aligned} \quad (46)$$

The final system matrix $\Psi_M := \Psi_{M_{\text{total}}}$ is constructed by augmenting the initial basis matrix Ψ_{M_0} with the K adaptive block matrices corresponding to the detected regions, and the vector of unknown coefficients is also expanded to align with this block structure. Consequently, the final reconstruction is achieved by solving the Tikhonov regularization problem governed by $\mathcal{L}_{\text{reg}}$ within

this enriched space V' . To save computational resources, a stopping criterion is added, which will terminate the iteration if $\mathcal{L}_{\text{data}}$ is less than a given threshold ϵ_{res} . The complete two-phase MA-RFM algorithm is outlined in Figure 1 and Algorithm 3.

Algorithm 3 Morphology-Adaptive Random Feature Method (MA-RFM)

Require: Quadrature domain V_0 , initial mesh $\mathcal{C}_0$, initial network $\mathcal{N}_0$, initial number of basis functions M_0 , n^d Gauss points in the reference cell, refinement threshold $\eta_{\text{grad}} = 1/300$, $\eta_{\text{abs}} = 1/100$, max division level `max_level`, max iteration `max_iter`, number of measurement points N_s , **cluster parameter** $\epsilon_{\text{clu}} = 5h$, $N_{\text{min}}^{\text{clu}} = 20$, threshold $t_{\text{grad}}, t_{\text{abs}} = 1/3$, $t_{\text{reg}} = 0.05$, $t_{\text{CV}} = 0.7$, test points P_{test} , max enhancement iteration I_{max} , residual tolerance ϵ_{res} .

Ensure: Final network $\mathcal{N}_{\text{final}}$ and solution S_{final} .

- 1: Train $\mathcal{N}_0$ by IA-RFM to obtain coefficients $s^{(0)}$, initial hidden layer $H^{(0)}$, final number of integral points n_{integral} , final integral points $\mathcal{P}_{\text{final}}$ and $\mathcal{C}_{\text{final}}$. Compute $S^{(0)}$ and $\nabla S^{(0)}$ on P_{test} . Calculate data loss $\mathcal{L}_{\text{data}}^{(0)}(s^{(0)}, \mathcal{P}_{\text{final}})$.
 - 2: **if** $\mathcal{L}_{\text{data}}^{(0)} < \epsilon_{\text{res}}$ **then** $i = 0$. **else**
 - 3: **for** $i = 1$ to I_{max} **do**
 - 4: Filter out the point sets $\mathcal{Q} \subseteq \mathcal{Q}_{\text{grad}}^{(i)} \cup \mathcal{Q}_{\text{abs}}^{(i)}$ with $t_{\text{grad}}, t_{\text{abs}}$.
 - 5: Get disjoint cluster $\{C_{\alpha}^{(i)}\}_{\alpha=1}^K$ and new basis functions using Algorithm 3,
$$\phi_{\alpha}^{(i,j)}(\mathbf{x}; K^{(i,j)}, \theta_{\alpha}^{(i,j)}) = \left\{ \sigma_{\alpha} \left(K_{\alpha}^{(j)} d_{\mathcal{T}_{\alpha}}^{(j)}(\mathbf{x}; \theta_{\alpha}^{(i,j)}) \right) \right\}_{j=1}^{M_{\alpha}^{(i)}}$$
 - 6: Construct the enhanced network $\mathcal{N}_i$ by incorporating new basis functions $\{\phi_{\alpha}^{(i,j)}\}_{\alpha=1, j=1}^{K^{(i)}, M_{\alpha}^{(i)}}$:
$$H^{(i)} = H^{(i-1)} + \{\phi_{\alpha}^{(i,j)}\}_{\alpha=1, j=1}^{K^{(i)}, M_{\alpha}^{(i)}}, \quad \mathcal{N}_i(\mathbf{x}) = f_{\text{out}} \circ H^{(i)}(\mathbf{x}).$$
 - 7: Retrain to obtain $s^{(i)}$ and $S^{(i)}$ through $\mathcal{N}_i$.
 - 8: Calculate the data loss $\mathcal{L}_{\text{data}}^{(i)}(s^{(i)}, \mathcal{P}_{\text{final}})$.
 - 9: **if** $\mathcal{L}_{\text{data}}^{(i)} < \epsilon_{\text{res}}$ **then break**.
 - 10: $\mathcal{N}_{\text{final}} \leftarrow \mathcal{N}_i, S_{\text{final}} \leftarrow S^{(i)}$.
 - 11: **Return** $\mathcal{N}_{\text{final}}, S_{\text{final}}$.
-

4 Numerical experiments

In this section, we present several 2-D and 3-D numerical examples, including continuous sources, discontinuous sources, and complex geometric sources, to evaluate the robustness and flexibility of the proposed algorithm.

Baseline Models. To show that we can better reconstruct the source with our framework, we set up baseline models. In addition to the IA-RFM, MA-RFM we derived before, we consider the IRFM which uses fixed training integral points in V_0 , as well as the PINN which approximates $\{\{u_{\theta}^k\}_{k_{\min}}^{k_{\max}}, S_{\theta}\}$ based on the differential equation (10).

Date Generation. The artificial data can be generated by evaluating the observation operators (11)-(12) on given source. Random noise is added to the artificial data in the magnitude and phase angle of the radiation field,

$$u_k^{\delta} := u_k + \delta \epsilon_1 |u_k| e^{i\pi \epsilon_2}, \quad \partial_{\nu} u_k^{\delta} := \partial_{\nu} u_k + \delta \epsilon_1 |\partial_{\nu} u_k| e^{i\pi \epsilon_2}, \quad \epsilon_1, \epsilon_2 \sim \text{Uniform}(-1, 1), \quad (47)$$

where δ is the noise level. The observation data $\{u_k, \partial_{\nu} u_k\}$ are acquired on Γ for $k \in [k_{\min}, k_{\max}]$. In the following numerical examples, unless otherwise specified, we set $k_{\min} = 1$, $k_{i+1} = k_i + k_{\delta}$ for $i = 1, \dots, N - 1$ with a uniform increment $k_{\delta} = 4$. By default, observations are performed on

a rectangular boundary. Let $\Omega = [a, b] \times [c, d]$, and the sample step size is $h_x = \frac{b-a}{N_s-1}$, $h_y = \frac{d-c}{N_s-1}$,

$$\mathcal{P}_{\text{mea}} = \bigcup_{i=0}^{N_s-1} \{(a, y) \cup (b, y) \mid y = c + ih_y\} \cup \{(x, c) \cup (x, d) \mid x = a + ih_x\},$$

$$\{u(k_i, x_s) \mid k_i \in \{k_1, \dots, k_N\}, x_s \in \mathcal{P}_{\text{mea}}\}, \quad \left\{ \partial_\nu u(k_i, x_s) \mid k_i \in \{k_1, \dots, k_N\}, x_s \in \mathcal{P}_{\text{mea}} \right\}.$$

The unspecified N_s refers to the number of observation points on one side of a rectangle or 1/4 of an arc. The IA-RFM threshold and max division level, max iteration is fixed as $\epsilon_{\text{IA-RFM}} = 1 \times 10^{-3}$, `max_level=4`, `max_iter=5` for all experiments. The accuracy of the reconstruction is evaluated on a test set P_{test} , which consists of a 300×300 uniform grid on V_0 . The relative $\|\cdot\|_2$ error and piece-wise absolute error of S are given by:

$$E_{l^2}(S_M) = \frac{\sqrt{\frac{1}{n} \sum_{i=1}^n [S_M(\mathbf{x}_i) - S_{\text{ex}}(\mathbf{x}_i)]^2}}{\sqrt{\frac{1}{n} \sum_{i=1}^n S_{\text{ex}}^2(\mathbf{x}_i)}}, \quad e(\mathbf{x}_i) = |S_M(\mathbf{x}_i) - S_{\text{ex}}(\mathbf{x}_i)|, \quad \text{for } \mathbf{x}_i \in P_{\text{test}}. \quad (48)$$

In the following experiments, we denote by $E_{l^2}(S^{(0)})$ and $E_{l^2}(S_{\text{final}})$ the relative errors of the solutions obtained from the IA-RFM phase and the MA-RFM phase, respectively. To select λ_{reg} , we adopt the posterior L-curve [43] method, which was initially proposed by Lawson and extended by Hansen, and the optimal regularization parameter corresponds to the corner of the curve.

Remark 5. It is worth noting that while Algorithm 2 allows for multiple iteration ($I_{\text{max}} > 1$), the stopping criterion is satisfied after only a single iteration for all numerical examples in this work. This efficiency is largely attributed to the robust feature extraction procedure outlined in Algorithm 3.

Example 4.1. Prior parameters

In this example, we construct the source to validate Theorem 2.2.

Firstly, we create a random vector w , and directly compute $\mathbf{s}^* = (\Psi_M^\top \Psi_M)^\nu w$, $S_M^*(\mathbf{x}) = \sum s_m^* \phi_m(\mathbf{x})$ after generating a random feature space that defines the operator Ψ_M . Secondly, we generate U_{true} with a precisely controlled model inconsistency η_M . The idea is based on the orthogonal decomposition of a vector space. $\forall U \in \mathbb{R}^n$ can be decomposed into the direct sum of the column space of the operator Ψ_M , denoted as $\text{col}(\Psi_M)$, and its left null space $\ker(\Psi_M^\top)$.

$$\mathbb{R}^n = \text{col}(\Psi_M) \oplus \ker(\Psi_M^\top). \quad (49)$$

Utilizing SVD, we have $\Psi_M = U \Sigma V^\top$. If $\text{rank}(\Psi_M) = r$, the first r columns of $U \in \mathbb{R}^{n \times n}$ form the orthonormal basis for $\text{col}(\Psi_M)$, while the last $n - r$ columns, denoted as U_{null} form the orthonormal basis for $\ker(\Psi_M^\top)$. $\boldsymbol{\eta}_{\text{vec}}$ is constructed as a random linear combination of the basis for the left null space: $\boldsymbol{\eta}_{\text{vec}} = U_{\text{null}} \cdot \mathbf{c}$, where $\mathbf{c} \in \mathbb{R}^{n-r}$ is a vector of random coefficients. To precisely control its norm to a target error value η_M we normalize and scale it:

$$\boldsymbol{\eta}_{\text{vec}} \leftarrow \frac{\boldsymbol{\eta}_{\text{vec}}}{\|\boldsymbol{\eta}_{\text{vec}}\|_2} \times \eta_M, \quad (50)$$

Finally, the synthetic data is generated by adding the explainable part $\Psi_M \cdot \mathbf{s}^*$

$$U_{\text{true}} = \Psi_M \cdot \mathbf{s}^* + \boldsymbol{\eta}_{\text{vec}}.$$

Experimental setup: $V_0 = [0, 2]^2$, $\Omega = [-0.5, 2.5]^2$. Randomly generate vector w , $N_s = 15$, $\nu = 1$, $C_\nu = 1$, $\eta_M = 10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1$, $\delta = 5\%$, $k_{\min} = 1$, $k_{\max} = 89$.

Hyperparameter settings: The activation function used for IRFM is $\sin$, $R_m = 20$, $M_0 = 3200$, initial integral mesh $N_{x_1} = N_{x_2} = 1$ with $n_{x_1} = n_{x_2} = 100$ Gauss points per cell.

The selection of the regularization parameter is guided by Theorem 2.2. Figure 3 illustrates that both the total error δ_{all} and regularization term λ_{reg}^2 increase with η_M . Meanwhile, the actual

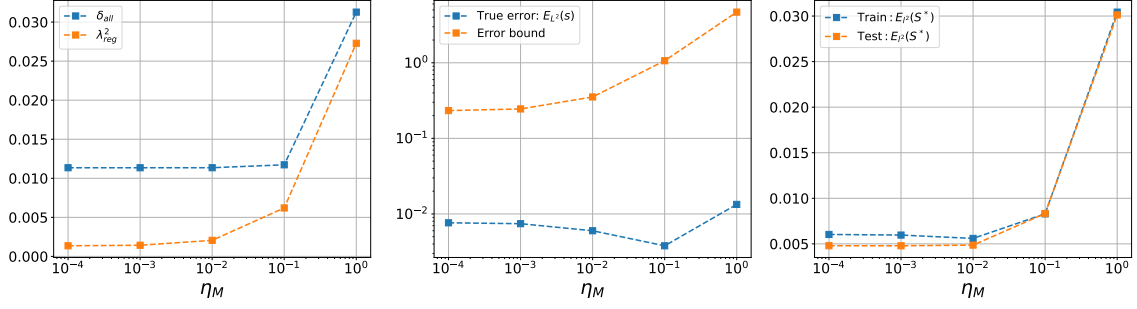


Figure 3: Example 4.1: **Left)** Prior parameters: η_M versus δ_{all} ; **Middle)** λ_{reg}^2 , $\|\mathbf{s}^\delta - \mathbf{s}^*\|_2$ and the theoretical error bounds; **Right)** $\|\mathbf{s}^\delta - \mathbf{S}_M^*\|_2$ for the training set versus the test set.

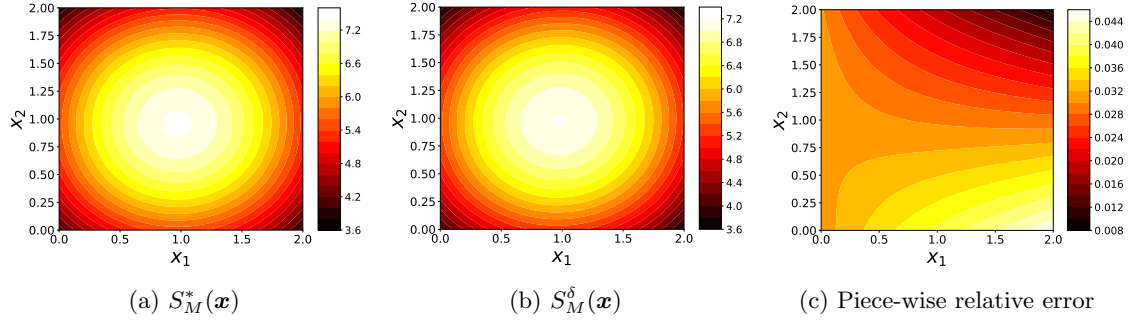


Figure 4: Example 4.1: Prior parameters: IRFM results with $\eta_M = 1$, $\nu = 1$, $\delta = 5\%$, $\delta_{\text{all}} = 3.1 \times 10^{-2}$, $M_0 = 3200$, $N_s = 15$, yield 3.01% $E_{l^2}(S)$.

reconstruction error $\|\mathbf{s}^\delta - \mathbf{s}^*\|_2$ is approximately one order of magnitude below the theoretical upper bound. The close correspondence between the training and test set errors demonstrates the framework's strong generalization capability. Figure 4 shows the reconstructed solution when $\eta_M = 1$ with $E_{l^2}(S) = 3.01\%$.

Example 4.2. Mountain shape source function

In the example, we aim to reconstruct a mountain-shaped source function

$$S(x_1, x_2) = 1.1e^{-200((x_1-0.01)^2 + (x_2-0.12)^2)} - 100(x_2^2 - x_1^2)e^{-90(x_1^2 + x_2^2)}.$$

We adopt the data generation procedure which generates Cauchy data on $\rho > R$ based on Dirichlet observations on $x = R$ based on an exterior extension from [17] to compare.

$$\nu^\delta(k, x) = \sum_{n \in \mathbb{Z}} \frac{H_n^{(1)}(k\rho)}{H_n^{(1)}(kR)} \hat{u}_{k,n}^\delta e^{in\theta}, \quad \partial_\nu \nu^\delta(k, x) = \sum_{n \in \mathbb{Z}} k \frac{H_n^{(1)'}(k\rho)}{H_n^{(1)}(kR)} \hat{u}_{k,n}^\delta e^{in\theta}, \quad x \in \Gamma_\rho, \rho > R. \quad (51)$$

$\hat{u}_{k,n}^\delta$ is the Fourier coefficient of the data $u^\delta(k, R, \theta)$. All other parameters, such as wavenumbers $K_N \cup \{k^*\}$ and the truncation number $N = 2[\delta^{-1/3}]$, where $[X]$ denotes the largest integer that is smaller than $X + 1$, are chosen to be identical to those in [17] (Thm 3.3, Rem 3.1). Here we use N_R, N_ρ to denote the total number of observations on Γ_R , and the total number of data points generated on Γ_ρ via the exterior extension (51), respectively.

Experimental setup: $V_0 = [-0.3, 0.3]^2$, $\Omega = B_{0.5}(0, 0)$, $\rho = 0.6$. The observation region is the circular arc $\Gamma_R = \partial\Omega$, and the generated region is Γ_ρ , $\delta = 5\%$, truncation number $N = 6$.

Hyperparameter settings: The activation function used for IRFM and IA-RFM is *sine*, $R_m = 20$, $M_0 = 3200$, $N_\rho = 400$, initial integral mesh $N_{x_1} = N_{x_2} = 5$ with $n_{x_1} = n_{x_2} = 5$ per cell, $\epsilon_{\text{res}} = 0.5\delta$.

In order to understand the reason for the failure of PINN, we analyze its prediction for the inverse source problem with a loss function similar to (26). To simplify the Loss and reduce the

difficulty caused by the penalty term, set the observation position and the artificial boundary to be Γ_ρ , and then use the paradigm triangulation inequality to get $\mathcal{L}_{\text{PINN}}$ as follows:

$$\begin{aligned} \mathcal{L}_{\text{PINN}} = & \sum_{k=k_1}^{k_N} \left(\lambda_I \sum_{\mathbf{x}_i \in V_0} |-(\Delta + k^2)u_{\text{NN}}^k(\mathbf{x}_i) - S_{\text{NN}}(\mathbf{x}_i)|^2 + \lambda_D \sum_{\mathbf{x}_j \in \Gamma_\rho} |u_{\text{NN}}^k(\mathbf{x}_j) - u^k(\mathbf{x}_j)|^2 \right. \\ & \left. + \lambda_B \sum_{\mathbf{x}_j \in \Gamma_\rho} |\mathcal{T}^k(u_{\text{NN}}^k(\mathbf{x}_j)) - \partial_\nu u^k(\mathbf{x}_j)|^2 \right). \end{aligned} \quad (52)$$

The structures of u_{NN} and S_{NN} are $[2, 50, 50, 2]$ and $[2, 50, 50, 1]$, respectively. Set $n_{\text{pde}} = 100^2$, $\lambda_I = 1$, $\lambda_B = 10$, $\lambda_D = 10$, and we perform noise-free experiments, with the other parameters consistent with the settings above. Training is first performed using 30,000 ADAM iterations, then the subsequent training is performed using 5,000 L-BFGS iterations. From results shown in Figure 5, we observe that PINN fails to reconstruct the source. Since in this framework, not only do we need $N + 1$ networks to approximate the scattered fields u and S , which is a very large number of parameters and difficult to balance with a multitude of penalties, but also u is more oscillatory as k gets larger, yet neural networks have difficulty in approximating high frequency.

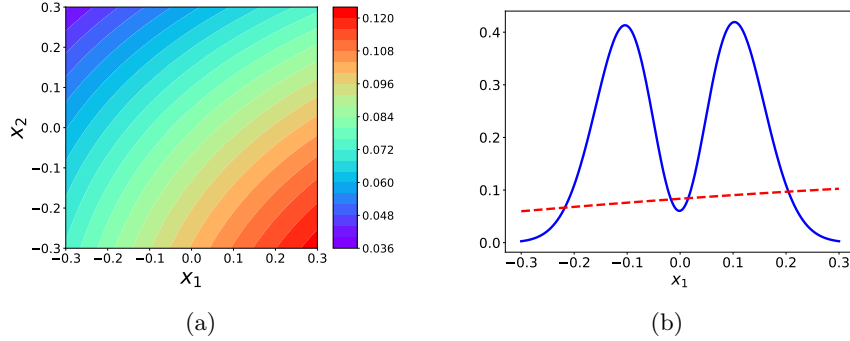


Figure 5: Example 4.2: Mountain shape source function: (a). PINN solution with u_{NN} : $[2, 50, 50, 2]$ and S_{NN} : $[2, 50, 50, 1]$. (b). The true solution (—) and PINN solution (---) at $(x_1, 0)$.

According to Table 1, IA-RFM shows an overwhelming advantage in computational efficiency compared with the conventional Fourier method (FM) and IRFM. The number of generated points N_ρ and integration points n_{integral} are reduced by one and two orders of magnitude, respectively. Through its adaptive integration, it saves approximately 80% of the integration computations compared with IRFM, while simultaneously achieving a comparable or even superior l^2 error. Subsequently, with noise level $\delta = 10\%$ and $N_\rho = 100$, and all other parameters remaining the same, the $E_{l^2}(S)$ is 1.38% with IA-RFM, which is shown in Figure 6.

In addition, it is worth mentioning that this experiment satisfies the convergence condition ($\epsilon_{\text{res}} < \delta$) in the first stage of the algorithm, and does not enable the basis function enhancement in the second stage, which suggests that IA-RFM is sufficient for solving this problem.

Example 4.3. Discontinuous source

In the following numerical experiments, a more challenging scenario is considered where the support of the source τ , is a proper subset of V_0 , $\tau \subsetneq V_0$, which means the source is discontinuous within the region V_0 .

$$S(x_1, x_2) = \mathcal{X}_{B_r}, \quad B_r(0.5, 0.5) = \{(x_1, x_2) | (x_1 - 0.5)^2 + (x_2 - 0.5)^2 \leq r^2, r = 0.2\}.$$

Experimental setup: $V_0 = [0, 1]^2$, $\Omega = [-0.5, 1.5]^2$. $k_{\min} = 1$, $k_{\max} = 89$, $N_s = 15$.

Hyperparameter settings: The activation function Tanh is used for IRFM and IA-RFM. Tanh, sigmoid are used for MA-RFM. $R_m = 20$, $M_1 = M_0$, $M_{\text{total}} = M_0 + M_1$,

$$\phi_1^{(j)}(\mathbf{x}; K_1^{(j)}, \theta_1^{(j)}) = \text{sigmoid} \left(\tilde{K}_1^{(j)} \cdot \left(1 - \sum_{i=1}^2 \left| \frac{x_i - c_{1,i}^{(j)}}{L_{1,i}^{(j)}} \right|^2 \right) \right), \quad j = 1, 2, \dots, M_1.$$

Table 1: Comparison of FM, IRFM, and IA-RFM with $N = 6$, $\delta = 5\%$ for mountain shape source.

Method	N_R	N_ρ	n_{integral}	$E_{l^2}(S)$
FM	50	5000	800^2	1.620%
	100	5000	800^2	1.150%
	200	5000	800^2	0.824%
	400	5000	800^2	0.629%
IRFM	50	400	100^2	0.735%
	100	400	100^2	0.638%
	200	400	100^2	0.580%
	400	400	100^2	0.560%
IA-RFM	50	400	2500	0.726%
	100	400	2500	0.803%
	200	400	2500	0.562%
	400	400	2500	0.550%

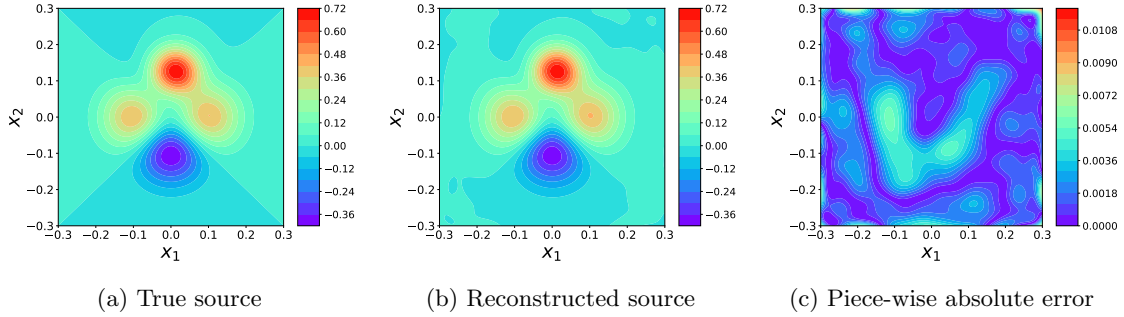


Figure 6: Example 4.2: Mountain shape source function: IA-RFM results with $\delta = 10\%$, $M_0 = 3200$, $N_s = 50$, $N_\rho = 100$, $\lambda_{\text{reg}}^2 = 1 \times 10^{-2}$ yield 1.38% $E_{l^2}(S)$.

The initial integral mesh $N_{x_1} = N_{x_2} = 4$ with $n_{x_1} = n_{x_2} = 3$, $K_1^{(j)} \sim U(1000, 20000)$, $\epsilon_c = 5\%$, $\epsilon_L = 5 - 10\%$, $\epsilon_{\text{res}} = 0.5\delta$.

Table 2 presents a quantitative comparison among IRFM, IA-RFM, and MA-RFM. With the same number of basis functions, IA-RFM achieves a comparable error level while using much fewer integration points than IRFM. However, both single-phase methods eventually exhibit error saturation around 19%, confirming that mesh refinement alone cannot capture the strong discontinuity. In contrast, the proposed MA-RFM breaks this accuracy barrier, achieving an error of around 13.50%. Notably, MA-RFM with $M = 800$ outperforms the finest IRFM result ($M = 6400$) in accuracy, while requiring computational time (8.5s vs. 35.9s), demonstrating the necessity and efficiency of the two-phase strategy.

To further validate robustness, we conducted a noise-resistance experiment with parameters set as follows: $M_0 = 1600$, $M_1 = 1600$, $\epsilon_c = 5\%$, $\epsilon_r = 5\% - 10\%$. As shown in Table 3, the inclusion of morphology-adaptive basis functions leads to a relative accuracy improvement of 40% compared to the IA-RFM baseline. Visual details are provided in Figure 8, which demonstrate that the final adaptive mesh $\mathcal{C}_{\text{final}}$ and the gradient field $\mathcal{Q}_{\text{grad}}$ precisely align with the true boundary of the source, while the L-curve confirms the appropriate selection of the regularization parameter. Moreover, the results for MA-RFM shown in Figure 7 under noise levels δ reveal that even with a high noise level of $\delta = 10\%$, the relative error is only 13.96%.

Example 4.4. Two circle sources

Consider the reconstruction of the discontinuous source function defined in the rectangular

Table 2: Example 4.3: Comparison for discontinuous source with $\delta = 5\%$ with $t_{\text{grad}} = t_{\text{abs}} = 1/3$.

Method	M_{total}	n_{integral}	λ_{reg}^2	$E_{l^2}(S)$	Time(second)
IRFM	800	100^2	1.00e-4	22.29%	5.2
	1600	100^2	1.00e-4	20.56%	8.1
	3200	100^2	1.00e-4	19.26%	15.8
	6400	100^2	1.00e-4	18.55%	35.9
IA-RFM	400	6948	1.00e-4	26.67%	5.9
	800	6678	1.00e-4	22.45%	10.2
	1600	6273	1.00e-4	20.00%	18.4
	3200	6165	1.00e-4	19.10%	38
MA-RFM	800	6948	1.00e-4	13.53%	8.5
	1600	6678	1.00e-5	13.51%	20.7
	3200	6273	1.00e-5	13.24%	41.7
	6400	6165	1.00e-4	13.48%	120.2

Table 3: Example 4.3: The shape parameters and reconstruction errors with $t_{\text{grad}} = t_{\text{abs}} = 1/3$.

δ	0.5%	1%	5%	10%	20%
n_{integral}	6327	6408	6165	6192	6165
$\hat{\mathbf{c}}$	(5.00e-1, 5.00e-1)	(5.00e-1, 5.00e-1)	(5.00e-1, 5.00e-1)	(5.00e-1, 5.00e-1)	(5.00e-1, 5.01e-1)
$\hat{\mathbf{L}}$	(2.05e-1, 2.05e-1)	(2.03e-1, 2.03e-1)	(2.03e-1, 2.03e-1)	(2.03e-1, 2.05e-1)	(2.03e-1, 2.03e-1)
$E_{l^2}(S^{(0)})$	20.38%	20.03%	20.03%	20.28%	19.94%
$\lambda_{\text{MA-RFM}}^2$	1.00e-5	1.00e-4	1.00e-3	1.00e-3	1.00e-2
$E_{l^2}(S_{\text{final}})$	13.43%	13.61%	14.02%	13.96%	14.50%

domain V_0 .

$$S(x_1, x_2) = \begin{cases} 0.5 \exp(-550r_1^2), & \text{in } B_r(\hat{x}_0, 0), \\ 0.5 \exp(-550r_2^2), & \text{in } B_r(\bar{x}_0, 0), \\ 0, & \text{elsewhere.} \end{cases}$$

$$r_1 = \sqrt{(x_1 - \hat{x}_0)^2 + x_2^2}, \quad r_2 = \sqrt{(x_1 - \bar{x}_0)^2 + x_2^2} \quad \text{and} \quad B_r(x_0, 0) = \{\mathbf{x} : (x_1 - x_0)^2 + x_2^2 \leq r^2\}.$$

Experimental setup: $V_0 = [-0.30, 0.30]^2$, $\Omega = [-0.35, 0.35]^2$, $\hat{x}_0 = -0.06$, $\bar{x}_0 = 0.08$, $r = 0.06$, $N_s = 20$, $k_{\min} = 1$, $k_{\max} = 77$.

Hyperparameter settings: The initial activation function for MA-RFM is Tanh with $R_m = 5$, added by two families of truncated Gaussian basis function.

$$\phi_{\alpha}^{(j)}(\mathbf{x}; K_{\alpha}^{(j)}, \boldsymbol{\theta}_{\alpha}^{(j)}) = \text{sigmoid} \left(\tilde{K}_{\alpha}^{(j)} \cdot \left(1 - \sum_{i=1}^2 \left| \frac{x_i - c_{\alpha,i}^{(j)}}{L_{\alpha,i}^{(j)}} \right|^2 \right) \right) \cdot \exp \left(-\tilde{v}_{\alpha}^{(j)} \cdot \sum_{i=1}^2 \left| \frac{x_i - c_{\alpha,i}^{(j)}}{L_{\alpha,i}^{(j)}} \right|^2 \right)$$

$$\alpha = 1, 2, \quad j = 1, 2, \dots, M_{\alpha}.$$

The exponential component shapes the morphology of the source, with the parameter v controlling its decay rate. $K_{\alpha}^{(j)} \sim U(1000, 20000)$, $v_{\alpha}^{(j)} \sim U(0, 1000)$. $M_0 = 2400$, $M_1 = 2000$, $M_2 = 2000$, initial integral mesh $N_{x_1} = N_{x_2} = 4$ with $n_{x_1} = n_{x_2} = 3$, $\epsilon_c = 3\%$, $\epsilon_L = 3 - 10\%$.

Table 4 summarizes the estimated shape parameters, the L-curve-selected regularization parameter, and the relative error. Figure 9 depicts the mesh evolution of IA-RFM, highlighting adaptive refinement near jumps and high solution magnitudes. The final reconstruction performance is visualized as heatmaps in Figure 10, which shows that MA-RFM maintains a low relative error $E_{l^2}(S) = 7.08\%$ even with $\delta = 20\%$.

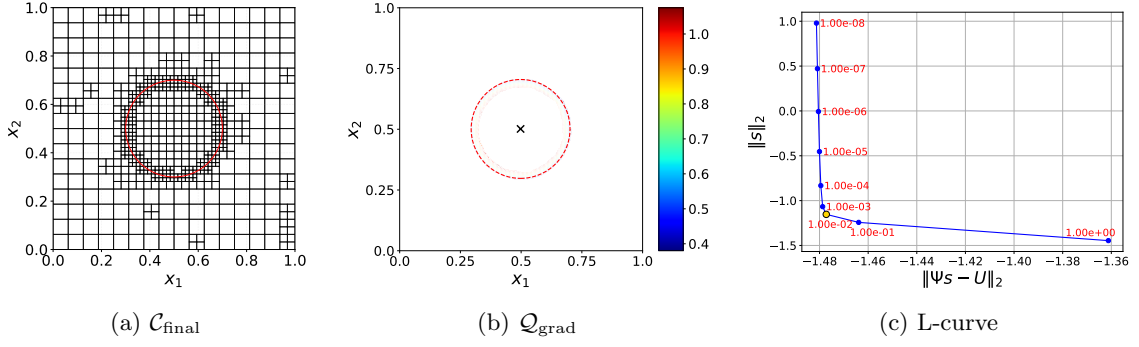


Figure 7: Example 4.3: Discontinuous source: (a) shows the $\mathcal{C}_{\text{final}}$ with IA-RFM, and the red line represents the true interface. (b) displays the $\mathcal{Q}_{\text{grad}}$ with $t_{\text{grad}} = t_{\text{abs}} = 1/3$. The red dashed lines indicate the detected boundary, while the “ $\times$ ” symbols denote the detected center obtained by Algorithm 3. (c) records the L-curve $\log_{10}(\|\Psi \cdot \mathbf{s} - \mathbf{U}\|_2) - \log_{10}(\|\mathbf{s}\|_2)$ with different λ_{reg}^2 .

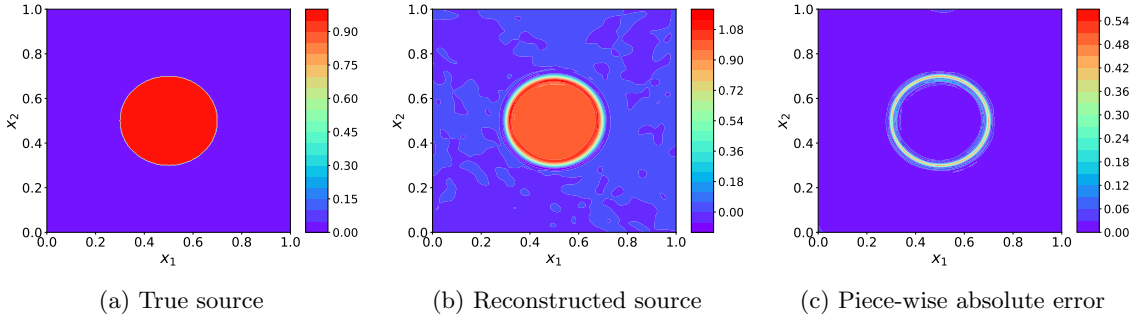


Figure 8: Example 4.3: Discontinuous source: MA-RFM results with $\delta = 10\%$, $M_{\text{total}} = 3200$, $N_s = 15$, $\lambda_{\text{reg}}^2 = 1 \times 10^{-3}$ yield 13.96% $E_{l^2}(S)$.

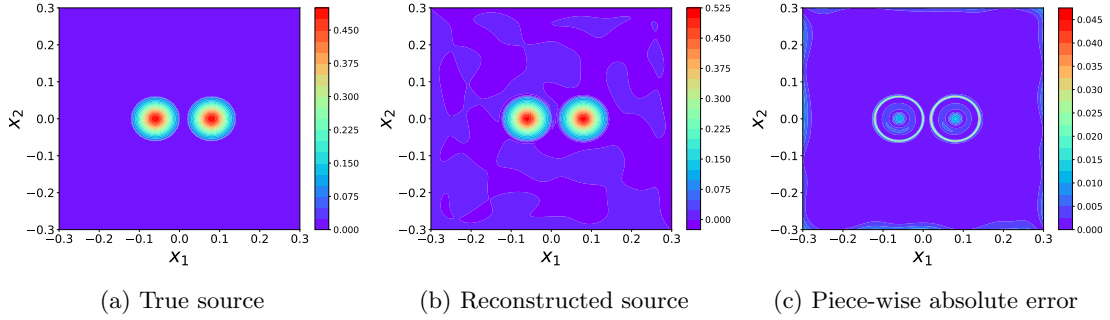


Figure 10: Example 4.4: Two circle sources: MA-RFM results with $\delta = 10\%$, $M_{\text{total}} = 6400$, $N_s = 20$ and $\lambda_{\text{reg}}^2 = 1 \times 10^{-3}$ yield an 6.44% $E_{l^2}(S)$.

Example 4.5. One rectangle and one circle

The spatial proximity of two sources poses a significant challenge for the inverse source problem. This difficulty arises because the fine, high-frequency details of the small gap between them are smoothed away during wave propagation. In what follows, we consider a numerical example with closely spaced sources

$$S(x_1, x_2) = \mathcal{X}_B - \mathcal{X}_C,$$


$$B = \{(x_1, x_2) \mid (x_1 - 0.71)^2 + (x_2 - 0.5)^2 \leq r^2, r = 0.2\}, C = \{(x_1, x_2) \mid 0.29 \leq x_1 \leq 0.49, 0.3 \leq x_2 \leq 0.7\}.$$

Experimental setup: $V_0 = [0, 1]^2$, $\Omega = [-0.5, 1.5]^2$. $k_{\min}=1$, $k_{\max} = 89$, $N_s=10$, $\delta = 5\%$.

Hyperparameters settings: The activation function for IRFM and IA-RFM is Tanh with $R_m =$

Table 4: The shape parameters and reconstruction errors for two circle sources.

δ	0.5%	1%	5%	10%	20%
n_{integral}	2844	2952	3006	3006	3870
$\hat{c}_1$	(-6.08e-2, 1.47e-5)	(-6.04e-2, 8.27e-5)	(-6.06e-2, 1.24e-4)	(-6.04e-2, 4.29e-5)	(-6.03e-2, 1.09e-4)
$\hat{c}_2$	(8.04e-2, -4.06e-5)	(8.06e-2, -2.28e-4)	(8.04e-2, 9.14e-6)	(8.07e-2, 3.59e-4)	(8.04e-2, -3.53e-4)
$\hat{L}_1$	(6.40e-2, 6.60e-2)	(6.40e-2, 6.60e-2)	(6.40e-2, 6.60e-2)	(6.40e-2, 6.60e-2)	(6.40e-2, 6.40e-2)
$\hat{L}_2$	(6.40e-2, 6.60e-2)	(6.40e-2, 6.60e-2)	(6.40e-2, 6.60e-2)	(6.40e-2, 6.50e-2)	(6.40e-2, 6.60e-2)
$E_{l^2}(S^{(0)})$	9.92%	9.77%	10.06%	10.54%	12.89%
$\lambda_{\text{MA-RFM}}^2$	1.00e-6	1.00e-5	1.00e-4	1.00e-3	1.00e-3
$E_{l^2}(S_{\text{final}})$	4.72%	5.42%	6.04%	6.44%	7.08%

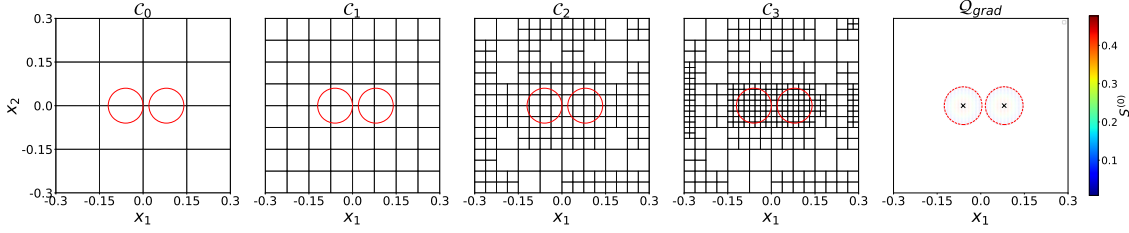
 Figure 9: Example 4.4: Two circle sources: grid division diagram for IA-RFM with $\delta = 10\%$, $M_0 = 2400$, Tanh, $R_m = 5$. The last one shows the $\mathcal{Q}_{\text{grad}}$ with $t_{\text{grad}}=1/3$. The red dashed lines indicate the detected boundary, while the “x” symbols denote the detected center.

20, and for MA-RFM, the basis functions are Tanh and sigmoid, corresponding to circular and rectangular shape functions, respectively. $M_1^{(i)} = M_2^{(i)} = 0.5M_0$.

$$\phi_1^{(j)}(\mathbf{x}; K_1^{(j)}, \theta_1^{(j)}) = \text{sigmoid} \left(\tilde{K}_1^{(j)} \cdot \left(1 - \sum_{i=1}^2 \left| \frac{x_i - c_{1,i}^{(j)}}{L_{1,i}^{(j)}} \right|^2 \right) \right), \quad j = 1, 2, \dots, M_1.$$

$$\phi_2^{(j)}(\mathbf{x}; K_2^{(j)}, \theta_2^{(j)}) = \text{sigmoid} \left(\hat{K}_\alpha^{(j)} \left(1 - \max_{i \in \{1,2\}} \left| \frac{x_i - c_{2,i}^{(j)}}{L_{2,i}^{(j)}} \right| \right) \right), \quad j = 1, 2, \dots, M_2.$$

For the phase 2, instead of purely accumulating basis functions, we employ a refinement strategy referred to Remark 3. $M_1^{(i)} = M_2^{(i)} = 0.5M_0$. $\epsilon_c = 5\%$, $\epsilon_L = 5 - 10\%$. The initial mesh is $N_{x_1} = N_{x_2} = 4$ with $n_{x_1} = n_{x_2} = 3$, $K_1^{(j)}, K_2^{(j)} \sim U(1000, 20000)$.

It is worth noting that in this instance, we take $\mathcal{Q} = \mathcal{Q}_{\text{grad}} \cap \mathcal{Q}_{\text{abs}}$ with $t_{\text{grad}} = t_{\text{abs}} = 1/3$, in order to distinguish between two sources that are particularly close in distance yet differ significantly in value. Consistent with the results in Table 5, MA-RFM demonstrates superior performance even for this complex configuration with close proximity. While single phase methods saturate around 20% error, MA-RFM effectively breaks this barrier achieving 15.27% when $M = 1600$.

A noise experiment is conducted to test the stability and robustness of MA-RFM. Set $M_0 = 1600$, $M_1^{(1)} = M_2^{(1)} = 2400$. The mesh evolution, $\mathcal{Q}_{\text{grad}}$ and MA-RFM reconstruction results with $\delta = 5\%$ are illustrated in Figure 11 and Figure 12, respectively. Table 6 summarizes the results for different noise. Despite the complex geometry, the adaptive algorithm accurately retrieves the shape parameters and maintains a stable mesh size $n_{\text{integral}} \approx 7200$ and reduces the relative error from a saturated level of 23% to 14%–16%.

Example 4.6. Composite kidney source

Now consider complex geometries to test the generality of MA-RFM. Consider the kidney-shaped line with the contour implicit function expression

$$((x - x_0)^2 + (y - y_0)^2 - 4a^2)^3 = 108a^4(y - y_0)^2. \quad (53)$$

Table 5: Compare of IRFM and MA-RFM with $\delta = 5\%$ for one rectangle and one circle.

Method	M_{total}	n_{integral}	λ^2	$E_{l^2}(S)$	Time(s)
IRFM	800	100^2	1.00e-4	25.79%	4.8
	1600	100^2	1.00e-5	22.44%	7.9
	3200	100^2	1.00e-6	21.15%	14.6
	6400	100^2	1.00e-6	20.25%	34.9
IA-RFM	400	6381	1.00e-4	29.60%	6.2
	800	7029	1.00e-4	25.84%	11.5
	1600	7245	1.00e-4	23.16%	20.1
	3200	7245	1.00e-4	21.14%	38.4
MA-RFM	800	6381	1.00e-3	15.11%	10.1
	1600	7029	1.00e-4	15.27%	32.5
	3200	7245	1.00e-4	15.04%	66.2
	6400	7245	1.00e-4	14.84%	198.4

Table 6: The shape parameters and reconstruction errors for one rectangle and one circle.

δ	0.5%	1%	5%	10%	20%
n_{integral}	7083	7461	7245	7245	7137
$\hat{\mathbf{c}}_1$	(3.90e-1,4.98e-1)	(3.90e-1,5.01e-1)	(3.90e-1,5.01e-1)	(3.90e-1,5.01e-1)	(3.89e-1,4.97e-1)
$\hat{\mathbf{c}}_2$	(7.11e-1,4.99e-1)	(7.10e-1,5.00e-1)	(7.10e-1,5.00e-1)	(7.10e-1,4.99e-1)	(7.11e-1,4.99e-1)
$\hat{\mathbf{L}}_1$	(2.17e-1,4.10e-1)	(2.17e-1,4.07e-1)	(2.20e-1,4.10e-1)	(2.13e-1,4.10e-1)	(2.13e-1,4.13e-1)
$\hat{\mathbf{L}}_2$	(2.02e-1,2.02e-1)	(1.98e-1,2.03e-1)	(2.02e-1,2.05e-1)	(2.02e-1,2.02e-1)	(2.02e-1,2.00e-1)
$E_{l^2}(S^{(0)})$	23.44%	23.68%	23.04%	22.69%	23.08%
$\lambda_{\text{MA-RFM}}^2$	1.00e-5	1.00e-5	1.00e-3	1.00e-3	1.00e-2
$E_{l^2}(S_{\text{final}})$	14.46%	14.84%	15.28%	15.34%	15.79%

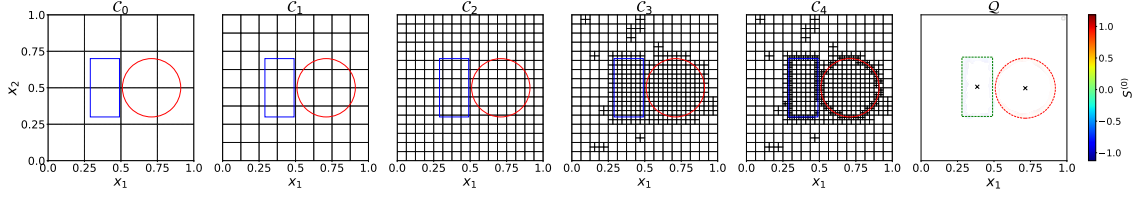


Figure 11: Example 4.5: One rectangle and one circle: grid division diagram for IA-RFM with $\delta = 5\%$, $M_0 = 2400$, Tanh, $R_m = 2$. The last one shows the $\mathcal{Q} = \mathcal{Q}_{\text{abs}} \cap \mathcal{Q}_{\text{grad}}$, with $t_{\text{grad}} = t_{\text{abs}} = 1/3$. The red and green dashed lines indicate the detected boundary, while the “ $\times$ ” symbols denote the detected center obtained by Algorithm 3.

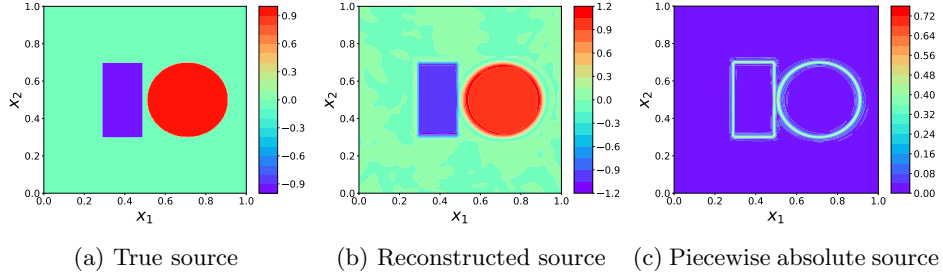


Figure 12: Example 4.5: One rectangle and one circle: Reconstruction with $\delta = 5\%$, $M_0 = 1600$, $M_1 = M_2 = 2400$, $N_s = 10$ and $\lambda_{\text{reg}}^2 = 1 \times 10^{-3}$ yielding 15.28% $E_{l^2}(S)$ using MA-RFM.

Use the level set function $\psi(x, y)$ to represent regions,

$$\psi(x, y) = ((x - x_0)^2 + (y - y_0)^2 - 4a^2)^3 - 108a^4(y - y_0)^2,$$

$\tau = \{(x, y) | \psi(x, y) \leq 0\}$, introduce the radial parameter r , parameterize the region to calculate the measurement data.

$$\begin{cases} x(s, \varphi) = r(3a \cos \varphi - a \cos 3\varphi), \\ y(s, \varphi) = r(3a \sin \varphi - a \sin 3\varphi), \end{cases} \quad r \in [0, 1], \quad \phi \in [0, 2\pi]. \quad (54)$$

Consider a composite source that combines a continuous source and a discontinuous source.

$$\begin{aligned} S(x_1, x_2) &= S_{\text{kidney}}(x_1, x_2) + S_{\text{gauss}}(x_1, x_2), \\ S_{\text{kidney}}(x_1, x_2) &= \mathcal{X}_{\{(x_1, x_2): \psi(x_1, x_2) \leq 0\}}, \\ S_{\text{gauss}}(x_1, x_2) &= 1.2 \exp(-125((x_1 - 0.3)^2 + (y - 0.6)^2)). \end{aligned}$$

Experimental setup: $V_0 = [0, 1]^2$, $\Omega = [-0.5, 1.5]^2$, $x_0 = 0.6$, $y_0 = 0.25$, $a = 0.05$. $k_{\min} = 1$, $k_{\max} = 101$, $N_s = 20$, $\delta = 5\%$.

Hyperparameter settings: The activation function for IA-RFM is Tanh, $R_m = 20$, $\epsilon_{\text{res}} = 0.5\delta$. The basis function used in MA-RFM is sigmoid, comprising a general form and a supplementary circle basis function to compensate for the undesirable position of the detected boundary at the interface jump obtained using the continuous basis function Tanh.

$$\begin{aligned} \phi_{1, \text{general}}^{(j)}(\mathbf{x}; K_1^{(j)}, \theta_1^{(j)}) &= \text{sigmoid}\left(K_1^{(j)} \cdot d_1^{(j)}(\mathbf{x}; \rho^{(j)})\right), \quad j = 1, \dots, M_{1, \text{general}}. \\ \phi_{1, \text{circular}}^{(j)}(\mathbf{x}; K_2^{(j)}, \theta_2^{(j)}) &= \text{sigmoid}\left(K_1^{(j)} \cdot \left((r_1^{(j)})^2 - \|\mathbf{x} - \mathbf{c}_1^{(j)}\|_2^2\right)\right), \quad j = 1, \dots, M_{1, \text{circular}}. \end{aligned}$$

$\rho^{(j)} \sim U(-10h, 0)$, $K_1^{(j)} \sim U(1000, 30000)$, $r_1^{(j)} \sim U(0, 10h)$, $t_{\text{grad}} = 1/3$, $M_{1, \text{general}} = M_0 = 1600$, $M_{1, \text{circular}} = 800$, $\phi_2^{(j)}$ is the local circular basis function. The initial mesh $N_{x_1} = N_{x_2} = 4$ with $n_{x_1} = n_{x_2} = 3$.

Figure 13 illustrates the $\mathcal{C}_{\text{final}}$ using IA-RFM and numerical scaled interface and real interface. Figure 14 shows the reconstruction using MA-RFM with $\delta = 5\%$.

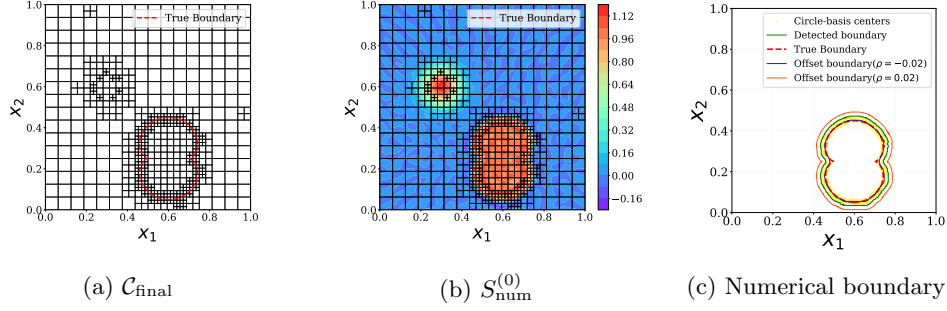


Figure 13: Example 4.6: **Composite kidney source**: (a)-(b) Final adaptive mesh ($\mathcal{C}_{\text{final}}$) and reconstruction obtained via IA-RFM, yielding a relative error of $E_{l^2}(S) = 19.74\%$ with $n_{\text{integral}} = 6354$. (c) Numerical boundary reconstruction. The true boundary (red dashed) is compared with the nominal boundary extracted from $\mathcal{Q}_{\text{grad}}$ with $t_{\text{grad}} = 1/3$ (green solid). The orange and purple contours represent the perturbed numerical level sets ($\rho = \pm 0.02$).

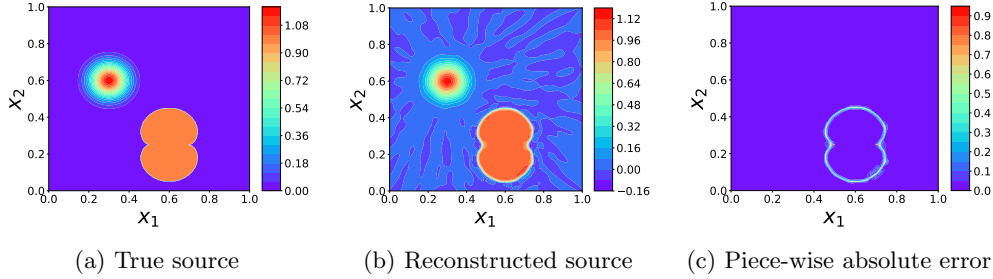


Figure 14: Example 4.6: **Composite kidney source**: MA-RFM results with $\delta = 5\%$, $M_0 = 1600$, $M_1 = 1600$, $M_2 = 800$, $\lambda_{\text{reg}}^2 = 1 \times 10^{-3}$ yield 14.00% $E_{l^2}(S)$.

Example 4.7. Irregular source

Next, we consider more general and irregular source with specific details given in Figure (15c). *Experimental setup*: $V_0 = [0, 1]^2$, $\Omega = [-0.5, 1.5]^2$. $k_{\min}=1$, $k_{\max} = 101$, $N_s=20$, $\delta = 5\%$. *Hyperparameter settings*: The activation function for IA-RFM is Tanh, $R_m = 20$, $\epsilon_{\text{res}} = 0.5\delta$. The basis function used in MA-RFM is sigmoid, comprising a general form and a supplementary circle basis function to compensate for the undesirable position of the detected boundary at the interface jump obtained using the continuous basis function Tanh.

$$\phi_{\alpha, \text{general}}^{(j)}(\mathbf{x}; K_{\alpha}^{(j)}, \theta_{\alpha}^{(j)}) = \text{sigmoid} \left(K_{\alpha}^{(j)} \cdot d_{\alpha}^{(j)}(\mathbf{x}; \rho_{\alpha}^{(j)}) \right), \quad \alpha = 1, \dots, 4, \quad j = 1, \dots, M_{\alpha, \text{general}},$$

$$\phi_{\alpha, \text{circular}}^{(j)}(\mathbf{x}; K_{\alpha}^{(j)}, \theta_{\alpha}^{(j)}) = \text{sigmoid} \left(K_{\alpha}^{(j)} \cdot \left((r_{\alpha}^{(j)})^2 - \|\mathbf{x} - \mathbf{c}_{\alpha}^{(j)}\|_2^2 \right) \right), \quad \alpha = 1, \dots, 4, \quad j = 1, \dots, M_{\alpha, \text{circular}}.$$

$\rho_{\alpha}^{(j)} \sim U(-10h, 10h)$, $K_{\alpha}^{(j)} \sim U(1000, 30000)$, $r_{\alpha}^{(j)} \sim U(0, 10h)$, $t_{\text{grad}} = t_{\text{abs}}=1/3$, $M_0 = 1600$, $M_{\alpha, \text{general}} = 1000$, $M_{\alpha, \text{circular}} = 800$. The initial mesh $N_{x_1} = N_{x_2} = 4$ with $n_{x_1} = n_{x_2} = 3$.

Figure 15 illustrates the $\mathcal{C}_{\text{final}}$ using IA-RFM, the centers of circle enhancement basis functions with colored scattering points, and the reconstruction using MA-RFM with $\delta = 5\%$.

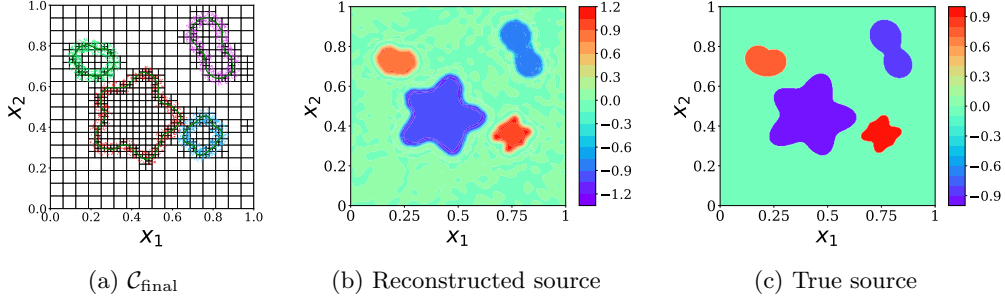


Figure 15: Example 4.7: Irregular source: (a): Final adaptive mesh ($\mathcal{C}_{\text{final}}$) obtained via IA-RFM, yielding 25.05%, with colored circle basis centers and the nominal boundary (green solid). (b) MA-RFM results with $\delta = 5\%$, $M_0 = 1600$, $M_{\alpha, \text{general}} = 1000$, $M_{\alpha, \text{circular}} = 800$, $\lambda_{\text{reg}}^2 = 1 \times 10^{-5}$ yield 17.84% $E_{l^2}(S)$.

Example 4.8. Three-dimensional C^0 source

Consider $S(\mathbf{x}) = S^{\mathbf{a}}(\mathbf{x}) - S^{\mathbf{b}}(\mathbf{x})$

$$S^{\mathbf{y}}(\mathbf{x}) = \begin{cases} 0.2 - r_{\mathbf{y}}, & \text{if } r_{\mathbf{y}} < 0.2, \\ 0, & \text{if } r_{\mathbf{y}} \geq 0.2, \end{cases}$$

where $r_{\mathbf{y}} = \sqrt{(x_1 - y_1)^2 + (x_2 - y_2)^2 + (x_3 - y_3)^2}$, $\mathbf{a} = (0.3, 0.5, 0.3)$, $\mathbf{b} = (0.5, 0.5, 0.8)$.

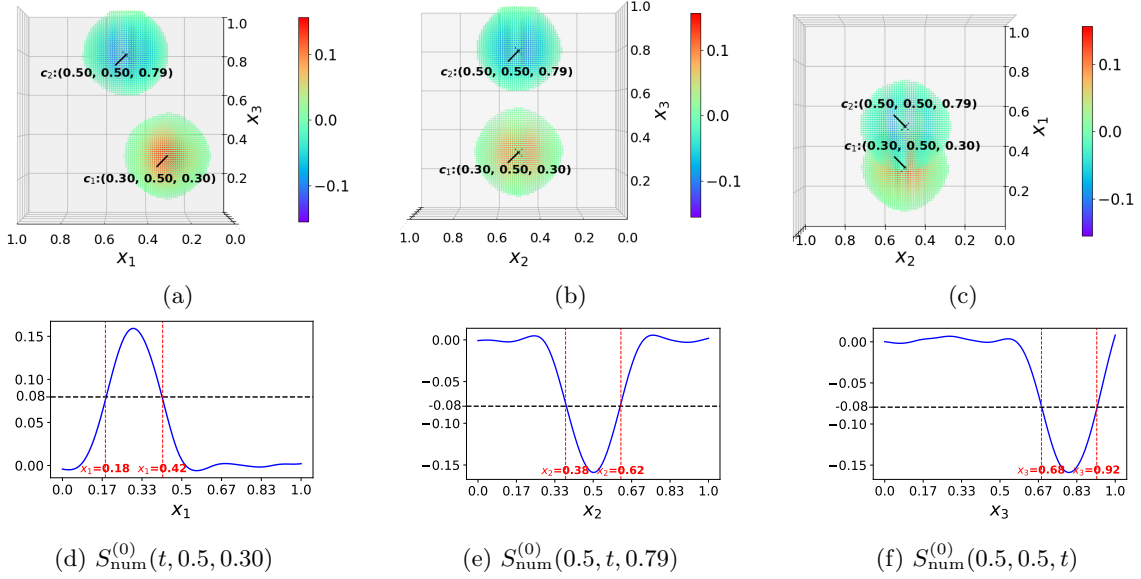


Figure 16: Example 4.8: Three-dimensional C^0 source: (a),(b),(c) show the $\mathcal{Q} = \mathcal{Q}_{\text{grad}}$ with $t_{\text{grad}} = 1/3$ from different perspectives. The symbol "x" represents the center $\hat{\mathbf{c}}_1 = (0.2990, 0.4997, 0.3002)$, $\hat{\mathbf{c}}_2 = (0.5010, 0.5001, 0.8026)$, and $\hat{\mathbf{L}}_1 = (0.205, 0.200, 0.205)$, $\hat{\mathbf{L}}_2 = (0.205, 0.205, 0.200)$ detected by Algorithm 3. (d),(e),(f) show the numerical solution $g_i(t)$ for the slice $S_{\text{num}}^{(0)}$ (blue solid line). The horizontal black and vertical red lines indicate the I_{half} and the corresponding position, respectively.

Experimental setup: $V_0 = [0, 1]^3$, $\Omega = [-0.5, 1.5]^3$, $k_{\min}=1$, $k_{\max} = 81$, $N_s=10$, $\delta = 5\%$.

Hyperparameter settings: $V_0 = [0, 1]^3$, $\Omega = [-0.5, 1.5]^3$, $k_{\min}=1$, $k_{\max} = 81$, $N_s=10$, $\delta = 5\%$. The activation function for IA-RFM is Tanh, $R_m = 10$, $\epsilon_{\text{res}} = 0.05\delta$. The basis functions in MA-RFM

are of a conical type, using ReLU and Gaussian functions as follows:

$$\phi_{\alpha, \text{ReLU}}^{(j)}(\mathbf{x}; \boldsymbol{\theta}_{\alpha}^{(j)}) = \text{ReLU} \left(r_{\alpha}^{(j)} - \|\mathbf{x} - \mathbf{c}_{\alpha}^{(j)}\|_2 \right), \quad \alpha = 1, 2, \quad j = 1, 2, \dots, M_{\alpha, \text{ReLU}},$$

$$\phi_{\alpha, \text{exp}}^{(j)}(\mathbf{x}; \boldsymbol{\theta}_{\alpha}^{(j)}) = \exp \left(\tilde{v}_{\alpha}^{(j)} \cdot \left(1 - \sum_{i=1}^3 \left| \frac{x_i - c_{\alpha, i}^{(j)}}{L_{\alpha, i}^{(j)}} \right|^2 \right) \right), \quad \alpha = 1, 2, \quad j = 1, 2, \dots, M_{\alpha, \text{exp}}.$$

The decay rate $v_{\alpha}^{(j)}$ is determined using the Full Width at Half Maximum (FWHM) method. Let $\mathbf{x}^* = (x_1^*, x_2^*, x_3^*)$ denote the global peak location of the initial solution magnitude $|S_{\text{num}}^{(0)}|$. We define the 1-D slice function $g_i(t)$ by varying the i -th coordinate while fixing the other two coordinates at their peak values:

$$g_1(t) := S_{\text{num}}^{(0)}(t, x_2^*, x_3^*), \quad g_2(t) := S_{\text{num}}^{(0)}(x_1^*, t, x_3^*), \quad g_3(t) := S_{\text{num}}^{(0)}(x_1^*, x_2^*, t).$$

The FWHM for each dimension $i \in \{1, 2, 3\}$ is then determined by:

$$t_{\max} := \arg \max_t |g_i(t)|, \quad I_{\text{half}} = \frac{1}{2} g_i(t_{\max}),$$

$$\text{FWHM}_i := \sup\{t \mid g_i(t) \geq I_{\text{half}}\} - \inf\{t \mid g_i(t) \geq I_{\text{half}}\},$$

$$v_{\min} = \frac{2.355^2}{2 \cdot \max_i \text{FWHM}_i}, \quad v_{\max} = \frac{2.355^2}{2 \cdot \min_i \text{FWHM}_i},$$

$v_{\alpha}^{(j)} \sim U(0.5v_{\min}, 2v_{\max})$. $c_{\alpha}^{(j)}$ are selected based on the peak locations of $S_{\text{num}}^{(0)}$, as illustrated in Figure 16. $M_0 = 3600$, $M_{\alpha, \text{ReLU}} = M_{\alpha, \text{exp}} = 900$, $v_{\alpha}^{(j)} \sim U(5.775, 25.2)$, $\epsilon_L = \epsilon_r = 5\%$. The initial mesh $N_{x_1} = N_{x_2} = N_{x_3} = 4$ with $n_{x_1} = n_{x_2} = n_{x_3} = 3$.

See Figure 16 for the Cell division and detection details. And Figure 17 shows the reconstruction using MA-RFM.

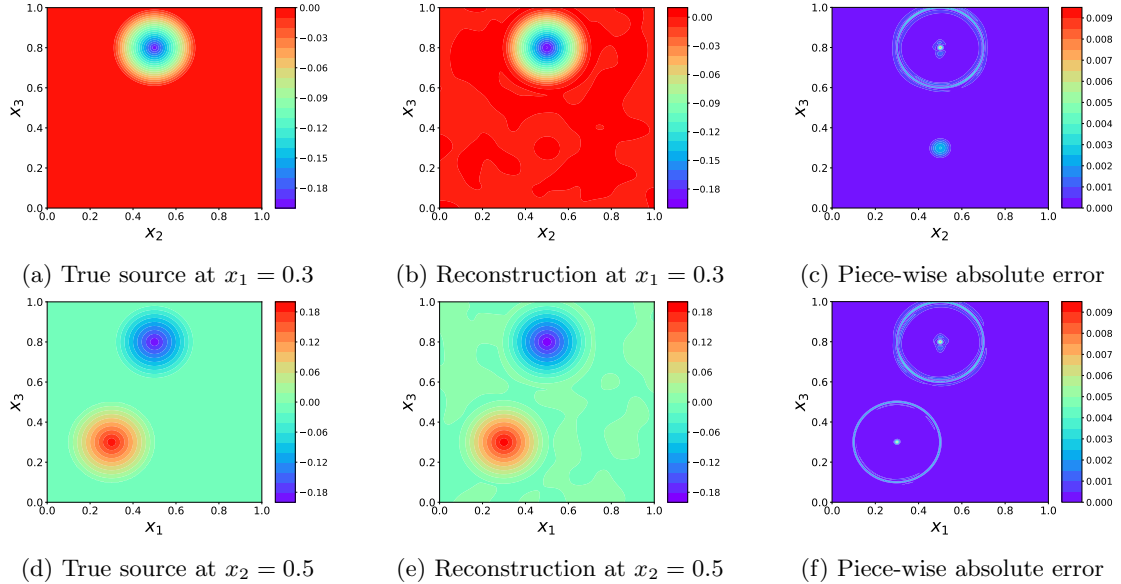


Figure 17: Example 4.8: Three-dimensional C^0 source: MA-RFM results with $\delta = 5\%$, $M_0 = 3600$, $M_{\alpha, \text{ReLU}} = M_{\alpha, \text{exp}} = 900$, $\lambda_{\text{reg}}^2 = 1 \times 10^{-2}$ yield 1.22% $E_{l^2}(S)$.

Example 4.9. *A doubly-connected source*

Consider a 3-D “donut” segment source, which can be parameterized as follows:

$$\begin{cases} x_1(u, v, w) = (R + wr \cos v) \cos u, & 0 \leq u \leq 2\pi, \\ x_2(u, v, w) = (R + wr \cos v) \sin u, & 0 \leq v \leq 2\pi, \\ x_3(u, v, w) = wr \sin v, & 0 \leq w \leq 1. \end{cases} \quad (55)$$

The source function is defined as 1 inside the donut and 0 outside with $r = 0.15$ and $R = 0.25$.

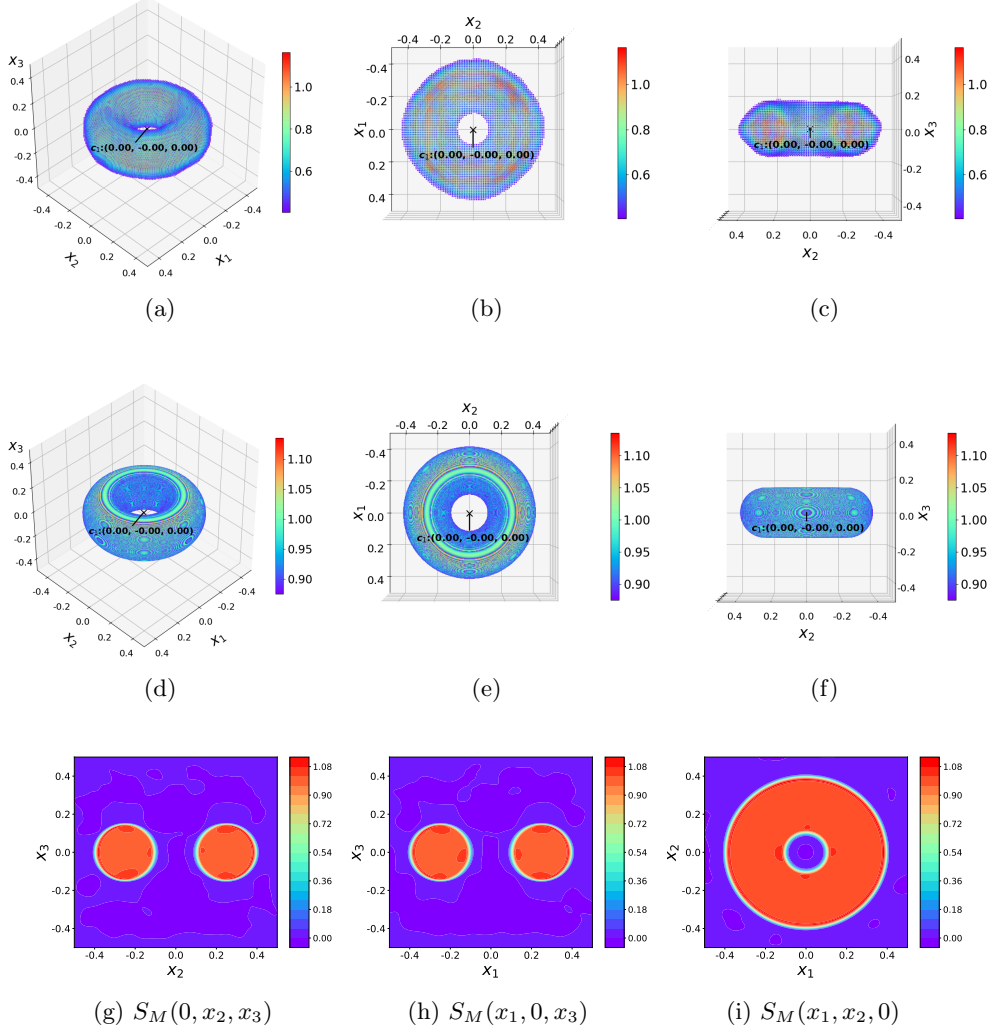


Figure 18: Example 4.9: Three-dimensional donut: (a),(b),(c) show the $\mathcal{Q} = \mathcal{Q}_{\text{grad}}$ with $t_{\text{grad}} = 1/3$ from different perspectives. The symbol “x” represents the center $\mathbf{c} = [-6.73\text{e-}5, -2.68\text{e-}3, 1.53\text{e-}3]^\top$, and $R_1 = 0.2535$, $r_1 = 0.1489$ detected by Algorithm 3. (d),(e),(f) show the reconstruction using MA-RFM from different perspectives, and (g),(h),(i) show the 2-D cross section results with $M_0 = 3600$, $M_1 = 1600$, $\delta = 5\%$ and $\lambda_{\text{reg}}^2 = 1 \times 10^{-2}$, yielding $E_{l^2}(S) = 15.41\%$.

Experimental setup: $V_0 = [-0.5, 0.5]^2$, $\Omega = [-0.75, 0.75]^2$. $k_{\min}=1$, $k_{\max} = 81$, $N_s=10$, $\delta = 5\%$. Dirichlet data only.

Hyperparameter settings: The activation function for IA-RFM is Tanh, $R_m = 20$. The basis

function used in MA-RFM is sigmoid.

$$d_1^{(j)}(\mathbf{x}; \boldsymbol{\theta}_1^{(j)}) = -\psi_1^{(j)}(\mathbf{x}; \boldsymbol{\theta}_1^{(j)}) = (r_1^{(j)})^2 - \left(\left(\sqrt{(x_1 - c_1)^2 + (x_2 - c_2)^2} - R_1^{(j)} \right)^2 + (x_3 - c_3)^2 \right),$$

$$\phi_1^{(j)}(\mathbf{x}; K_1^{(j)}, \boldsymbol{\theta}_1^{(j)}) = \text{sigmoid} \left(K_1^{(j)} \cdot d_1^{(j)}(\mathbf{x}; \boldsymbol{\theta}_1^{(j)}) \right), \quad j = 1, \dots, M_1.$$

$M_0=3600$, $M_1 = 1600$. Figures 18a-18c illustrate $\mathcal{Q} = \mathcal{Q}_{\text{grad}} \cap \mathcal{Q}_{\text{abs}}$ with $t_{\text{grad}} = t_{\text{abs}} = 1/3$. $\epsilon_c = \epsilon_r = \epsilon_R = 5\%$, $\mathbf{c}_1^{(j)} \sim \prod_{l=1}^3 U(c_{1,l} - \epsilon_c |c_{1,l}|, c_{1,l} + \epsilon_c |c_{1,l}|)$. $r_1^{(j)} \sim U(r_1 - \epsilon_r |r_1|, r_1 + \epsilon_r |r_1|)$, $R_1^{(j)} \sim U(R_1 - \epsilon_R |R_1|, R_1 + \epsilon_R |R_1|)$, $K_1^{(j)} \sim U(2000, 50000)$. The initial mesh $N_{x_1} = N_{x_2} = N_{x_3} = 4$ with $n_{x_1} = n_{x_2} = n_{x_3} = 3$.

Example 4.10. Limited aperture

In practical applications, only partial data may be available. To simulate this condition, we directly test the IA-RFM in a scenario where only partial measurement data is acquired. We consider the problem of reconstructing a source function consisting of four Gaussian peaks:

$$S(x_1, x_2) = e^{-300((x_1-0.15)^2 + (x_2-0.15)^2)} + e^{-300((x_1+0.15)^2 + (x_2-0.15)^2)} \\ + e^{-300((x_1+0.15)^2 + (x_2+0.15)^2)} + e^{-300((x_1-0.15)^2 + (x_2+0.15)^2)}.$$

Experimental setup: $V_0 = [-0.3, 0.3] \times [-0.3, 0.3]$, $\Omega = B_{0.55}(0, 0)$, $\Gamma = \partial\Omega$, $k_{\min}=1$, $k_{\max} = 101$, $\delta = 1\%$. The number of measurement points on each quarter-arc of the boundary is $N_s = 25$. Dirichlet data only.

Hyperparameter settings: The activation function for IA-RFM is sin, $R_m = 20$, $M_0 = 3200$. The initial mesh $N_{x_1} = N_{x_2} = 4$ with $n_{x_1} = n_{x_2} = 3$.

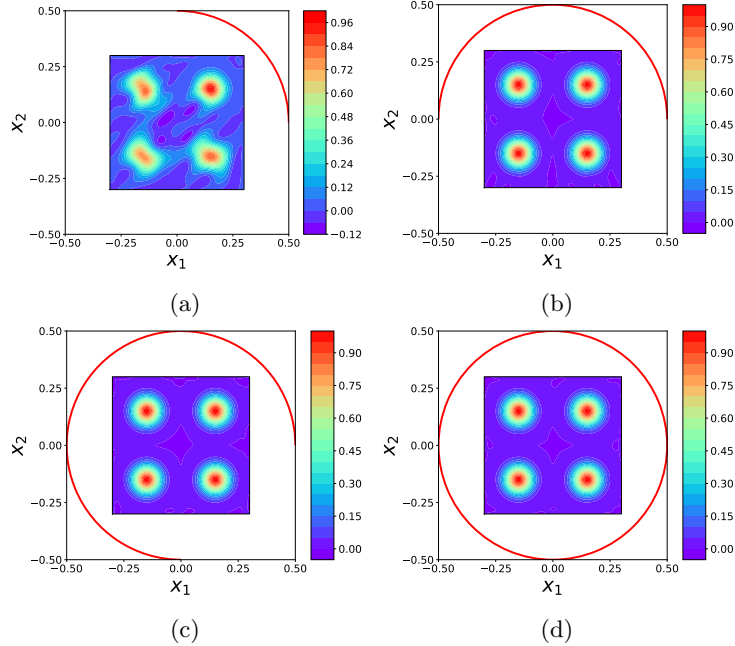


Figure 19: Example 4.10: Limited aperture: effect of the measurement aperture $\theta_{\max}$ on the source reconstruction. (a) $\theta_{\max} = \pi/2$, (b) $\theta_{\max} = \pi$, (c) $\theta_{\max} = 3\pi/4$, and (d) $\theta_{\max} = 2\pi$ with $\delta = 1\%$. The measurement locations are indicated by the red outer arc.

Table 7 and Figure 19 show the $E_{l^2}(S)$ for different apertures with noise level $\delta = 1\%$. It can be observed that when $\theta_{\max} = \pi$, the error is already very small. For $\theta_{\max} = \pi/2$, we can still roughly determine the locations of the sources. This result indicates that the proposed algorithm exhibits good performance and effectiveness under limited aperture conditions.

Table 7: $E_{l^2}(S)$ with aperture $[0, \theta_{\max}]$ and $\delta = 1\%$, $M = 3200$ using IA-RFM for limited aperture.

$\theta_{\max}$	2π	$3\pi/2$	π	$\pi/2$
n_{integral}	1872	1872	1899	2142
$E_{l^2}(S)$	0.30%	0.33%	0.66%	24.47%

For further validation on multiply-connected geometries, we present an experiment involving an annulus-shaped (donut-like) source in Appendix D. This case confirms that MA-RFM can robustly handle topological variations, such as identifying holes within the support. Additionally, we have included a comparison between IA-RFM and MA-RFM with equivalent degrees of freedom M_{total} , along with shape parameters and corresponding indicators for some examples.

5 Conclusion

In conclusion, we have proposed a novel, efficient framework that successfully tackles the long-standing challenge of complex source geometries in the Helmholtz inverse source problem. The core of our method is a synergistic combination of spectral methods and neural networks. Specifically, we employ an integral equation formulation to satisfy the radiation condition as a hard constraint. Concurrently, we propose the MA-RFM, which uses the posterior information to design targeted basis functions of neural networks, enabling precise capture of local singular features of the source. Extensive numerical experiments conducted on a series of sources with complex situations validate the superior performance of our framework. The results show that the proposed method not only achieves high accuracy in all test cases but also reduces the number of integration points by two to three orders of magnitude compared to traditional uniform grid methods, significantly alleviating the matrix assembly burden while maintaining the same level of precision. Furthermore, we believe that the underlying concept of morphology-based adaptive basis function enhancement holds significant promise for broader applications in other complex scientific and engineering computing problems.

Acknowledgments

The work is partially supported by the NSFC Major Research Plan (Interpretable and General-purpose Next-generation Artificial Intelligence) No. 92370205, NSFC grants 12494543, 12425113, the Strategic Priority Research Program of the Chinese Academy of Sciences (grant no. XDA0480504), and the Key Laboratory of the Ministry of Education for Mathematical Foundations and Applications of Digital Technology, University of Science and Technology of China.

Appendix

A Proof of Theorem 2.1

Proof. Assume $S = S_1 - S_2$ and $u = u_1 - u_2$. The source of u is S , and its support is contained in $\tau_1 \cup \tau_2$. In situation (a), (b), (c), u is a radiating solution to the homogeneous Helmholtz equation in the exterior domain $\mathbb{R}^d \setminus \bar{\Omega}$, which implies $u(k_j, \mathbf{x}) = 0$ for all $\mathbf{x} \in \mathbb{R}^d \setminus \bar{\Omega}$ from Theorem 9.10 in [39]. And for (d), we can deduce $u(k_j, \mathbf{x}) = 0$ from Holmgren's uniqueness theorem [44]. All of the situations imply that

$$u(k_j, \mathbf{x}) = 0 \quad \text{and} \quad \partial_\nu u(k_j, \mathbf{x}) = 0, \quad \forall \mathbf{x} \in \Gamma. \quad (56)$$

Now, let w_{k_j} be any solution to the homogeneous Helmholtz equation $\Delta w_{k_j} + k_j^2 w_{k_j} = 0$ in Ω . Applying Green's formula,

$$\int_{\Omega} S(\mathbf{x}) w_{k_j}(\mathbf{x}) d\mathbf{x} = \int_{\Omega} (\Delta u + k_j^2 u) w_{k_j}(\mathbf{x}) d\mathbf{x} \quad (57)$$

$$= \int_{\Omega} u(\Delta w_{k_j} + k_j^2 w_{k_j}) d\mathbf{x} + \int_{\Gamma} (w_{k_j} \partial_{\nu} u - u \partial_{\nu} w_{k_j}) d\mathbf{x}. \quad (58)$$

Since w_{k_j} is a solution to the homogeneous equation, the first volume integral on the right-hand side is zero. Furthermore, due to the boundary conditions in (56), the boundary integral also vanishes. Therefore, $\int_{\Omega} S(\mathbf{x}) w_{k_j}(\mathbf{x}) d\mathbf{x} = 0$. Choose $w_{k_j}(\mathbf{x})$ to be a plane wave. For any $\boldsymbol{\xi} \in \mathbb{R}^d$ with magnitude $|\boldsymbol{\xi}| = k_j$, $w_{k_j}(\mathbf{x}) = e^{-i\boldsymbol{\xi} \cdot \mathbf{x}}$ is a solution to $\Delta w_{k_j} + k_j^2 w_{k_j} = 0$. Substituting this into the integral, we obtain the Fourier transform of S :

$$\hat{S}(\boldsymbol{\xi}) = \int_{\Omega} S(\mathbf{x}) e^{-i\boldsymbol{\xi} \cdot \mathbf{x}} d\mathbf{x} = 0, \quad \text{for all } \boldsymbol{\xi} \in \mathbb{R}^d \text{ with } |\boldsymbol{\xi}| = k_j. \quad (59)$$

Since Ω is bounded, the source S has compact support. By the Paley-Wiener theorem, its Fourier transform $\hat{S}(\boldsymbol{\xi})$ can be uniquely extended to an entire function on $\mathbb{C}^d$. Consider the restriction of $\hat{S}(\boldsymbol{\xi})$ to a line, the function $f(z) = \hat{S}(z, 0, \dots, 0)$ is an entire function of one complex variable. It is zero at the points $z = k_j$, which have an accumulation point. From unique continuation for analytic functions, $\hat{S}(\boldsymbol{\xi})$ is zero on the whole complex domain $\mathbb{C}^d$. Since the Fourier transform is identically zero and the transform is invertible, the function $S(\mathbf{x})$ must be identically zero. Therefore, $S_1(\mathbf{x}) = S_2(\mathbf{x})$. $\square$

B Proof of Theorem 2.2

Proof. (a). Rewrite $\mathcal{L}_{\text{reg}}$:

$$\begin{aligned} \mathcal{L}_{\text{reg}}(\mathbf{s}^{\delta}) &= (\Psi_{\text{M}} \mathbf{s}^{\delta} - U^{\delta})^{\top} (\Psi_{\text{M}} \mathbf{s}^{\delta} - U^{\delta}) + \lambda_{\text{reg}}^2 (\mathbf{s}^{\delta})^{\top} \mathbf{s}^{\delta} \\ &= (\mathbf{s}^{\delta})^{\top} \Psi_{\text{M}}^{\top} \Psi_{\text{M}} \mathbf{s}^{\delta} - (\mathbf{s}^{\delta})^{\top} \Psi_{\text{M}}^{\top} U^{\delta} - (U^{\delta})^{\top} \Psi_{\text{M}} \mathbf{s}^{\delta} + (U^{\delta})^{\top} U^{\delta} + \lambda_{\text{reg}}^2 (\mathbf{s}^{\delta})^{\top} \mathbf{s}^{\delta} \\ &= (\mathbf{s}^{\delta})^{\top} (\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I) \mathbf{s}^{\delta} - 2(U^{\delta})^{\top} \Psi_{\text{M}} \mathbf{s}^{\delta} + \|U^{\delta}\|_2^2. \end{aligned}$$

Compute the Hessian matrix:

$$H(\mathcal{L}_{\text{reg}}) = 2(\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I) \succ 0.$$

(b). Applying the triangle inequality,

$$\begin{aligned} \|\mathbf{s}^{\delta} - \mathbf{s}^*\|_2 &= \|(\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} \Psi_{\text{M}}^{\top} U^{\delta} - \mathbf{s}^*\|_2 \\ &= \|(\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} [\Psi_{\text{M}}^{\top} U^{\delta} - (\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I) \mathbf{s}^*]\|_2 \\ &= \|(\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} \Psi_{\text{M}}^{\top} (U^{\delta} - \Psi_{\text{M}} \mathbf{s}^*) - \lambda_{\text{reg}}^2 (\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} \mathbf{s}^*\|_2 \\ &\leq \|(\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} \Psi_{\text{M}}^{\top}\|_2 \cdot \|U^{\delta} - \Psi_{\text{M}} \mathbf{s}^*\|_2 + \|\lambda_{\text{reg}}^2 (\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} \mathbf{s}^*\|_2. \quad (60) \end{aligned}$$

Let $\Psi_{\text{M}} = U \Sigma V^{\top}$ be the singular value deposition of Ψ_{M} , where σ_i are the singular values of Ψ_{M} . For the first term, we bound the operator norm:

$$\begin{aligned} \|(\Psi_{\text{M}}^{\top} \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1} \Psi_{\text{M}}^{\top}\|_2 &= \|(V \Sigma^{\top} \Sigma V^{\top} + \lambda_{\text{reg}}^2 I)^{-1} V \Sigma^{\top} U^{\top}\|_2 \\ &= \|V (\Sigma^{\top} \Sigma + \lambda_{\text{reg}}^2 I)^{-1} \Sigma^{\top} U^{\top}\|_2 \\ &= \max_i \frac{\sigma_i}{\sigma_i^2 + \lambda_{\text{reg}}^2} \leq \frac{1}{2\lambda_{\text{reg}}}. \end{aligned}$$

The residual term $\|U^{\delta} - \Psi_{\text{M}} \mathbf{s}^*\|_2$ is bounded by the sum of data noise and model inconsistency:

$$\|U^{\delta} - \Psi_{\text{M}} \mathbf{s}^*\|_2 \leq \|U^{\delta} - U_{\text{true}}\|_2 + \|U_{\text{true}} - \Psi_{\text{M}} \mathbf{s}^*\|_2 \leq \delta_{\text{all}} + \eta_{\text{M}}.$$

Thus, the first term in (60) is bounded by $\frac{1}{2\lambda_{\text{reg}}}(\delta_{\text{all}} + \eta_{\text{M}})$.

$$\|(\Psi_{\text{M}}^{\top}\Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1}\Psi_{\text{M}}^{\top}\|_2 \cdot \|U^{\delta} - \Psi_{\text{M}}\mathbf{s}^*\|_2 \leq \frac{1}{2\lambda_{\text{reg}}}(\delta_{\text{all}} + \eta_{\text{M}}).$$

For the second term, we use the source condition $\mathbf{s}^* = \Psi_{\text{M}}^T \Psi_{\text{M}} w$:

$$\begin{aligned} \|\lambda_{\text{reg}}^2(\Psi_{\text{M}}^T \Psi_{\text{M}} + \lambda_{\text{reg}}^2 I)^{-1}\mathbf{s}^*\| &= \lambda_{\text{reg}}^2 \|(V\Sigma^{\top}\Sigma V^{\top} + \lambda_{\text{reg}}^2 I)^{-1}(V\Sigma^{\top}\Sigma V^{\top})^{\nu} w\|_2 \\ &= \lambda_{\text{reg}}^2 \|(V\Sigma^{\top}\Sigma V^{\top} + \lambda_{\text{reg}}^2 I)^{-1}V(\Sigma^{\top}\Sigma)^{\nu}V^{\top} w\|_2 \\ &\leq \lambda_{\text{reg}}^2 \|V(\Sigma^2 + \lambda_{\text{reg}}^2 I)^{-1}\Sigma^{2\nu}V^{\top}\|_2 \cdot \|w\|_2 \\ &\leq \max_i \frac{\lambda_{\text{reg}}^2 \sigma_i^{2\nu}}{\sigma_i^2 + \lambda_{\text{reg}}^2} \|w\|_2 \leq \sup_{\sigma \geq 0} \frac{\lambda_{\text{reg}}^2 \sigma^{\nu}}{\sigma + \lambda_{\text{reg}}^2} \|w\|_2. \end{aligned}$$

By performing a change of variables with $\sigma = \lambda_{\text{reg}}^2 t$ (for $t \geq 0$), $\frac{(\lambda_{\text{reg}}^2 t)^{\nu}}{t+1} = \lambda_{\text{reg}}^{2\nu} \frac{t^{\nu}}{t+1}$. For smoothness parameter $0 < \nu \leq 1$, $\frac{t^{\nu}}{t+1}$ is bounded for all $t \geq 0$. Therefore, there exists a constant C_{ν} such that

$$\sup_{\sigma \geq 0} \frac{\lambda_{\text{reg}}^2 \sigma^{\nu}}{\sigma + \lambda_{\text{reg}}^2} = \lambda_{\text{reg}}^{2\nu} \sup_{t \geq 0} \frac{t^{\nu}}{t+1} \leq C_{\nu} \lambda_{\text{reg}}^{2\nu}.$$

Substituting this result back into the overall error estimate, we obtain:

$$\|\mathbf{s}^{\delta} - \mathbf{s}^*\|_2 \leq \frac{1}{2\lambda_{\text{reg}}}(\delta_{\text{all}} + \eta_{\text{M}}) + C_{\nu} \lambda_{\text{reg}}^{2\nu} \|w\|_2.$$

The bound is minimized by selecting the regularization parameter λ_{reg} according to the following a priori rule:

$$\lambda_{\text{reg}}^2 = \left(\frac{\delta_{\text{all}} + \eta_{\text{M}}}{4\nu C_{\nu} \|w\|_2} \right)^{\frac{2}{2\nu+1}}.$$

With this choice, we establish the optimal convergence rate for the Tikhonov-regularized solution:

$$\|\mathbf{s}^{\delta} - \mathbf{s}^*\|_2 \leq \left[(2\nu + 1) \cdot (4\nu)^{-\frac{2\nu}{2\nu+1}} \cdot (C_{\nu} \|w\|_2)^{\frac{1}{2\nu+1}} \right] (\delta_{\text{all}} + \eta_{\text{M}})^{\frac{2\nu}{2\nu+1}}.$$

□

C Additional numerical results

C.1 Torus residual

For a three-dimensional cluster $C_{\alpha} = \{\mathbf{x}_j\}_{j=1}^{|C_{\alpha}|}$, we test the three coordinate directions as candidate torus axes. For each $m \in \{1, 2, 3\}$, let $\Pi_m : \mathbb{R}^3 \rightarrow \mathbb{R}^2$ denote the orthogonal projection onto the plane perpendicular to the x_m -axis, and let $\mathbf{c}_{\alpha}^{(m)}$ be the corresponding candidate torus center. Writing

$$\bar{\mathbf{c}}_{\alpha}^{(m)} = \Pi_m(\mathbf{c}_{\alpha}^{(m)}), \quad c_{\alpha,m}^{(m)} = (\mathbf{c}_{\alpha}^{(m)})_m,$$

we define

$$\rho_{\alpha,j}^{(m)} = \left\| \Pi_m(\mathbf{x}_j) - \bar{\mathbf{c}}_{\alpha}^{(m)} \right\|_2, \quad z_{\alpha,j}^{(m)} = x_{j,m} - c_{\alpha,m}^{(m)}.$$

Let $\rho_{\alpha,\text{in}}^{(m)}$ and $\rho_{\alpha,\text{out}}^{(m)}$ be the 1% and 99% empirical quantiles of $\{\rho_{\alpha,j}^{(m)}\}_{j=1}^{|C_{\alpha}|}$, respectively, and set

$$R_{\alpha}^{(m)} = \frac{\rho_{\alpha,\text{out}}^{(m)} + \rho_{\alpha,\text{in}}^{(m)}}{2}, \quad r_{\alpha}^{(m)} = \frac{\rho_{\alpha,\text{out}}^{(m)} - \rho_{\alpha,\text{in}}^{(m)}}{2}.$$

The torus residual is then defined by

$$\mathcal{E}_{\text{tori}}^{(\alpha)}(m) = \frac{1}{|C_{\alpha}|} \sum_{j=1}^{|C_{\alpha}|} \left| \frac{\sqrt{(\rho_{\alpha,j}^{(m)} - R_{\alpha}^{(m)})^2 + (z_{\alpha,j}^{(m)})^2}}{r_{\alpha}^{(m)}} - 1 \right|,$$

and we take

$$\mathcal{E}_{\text{tori}}^{(\alpha)} = \min_{m \in \{1,2,3\}} \mathcal{E}_{\text{tori}}^{(\alpha)}(m)$$

as the torus fitting error.

C.2 Quantitative comparison (IA-RFM vs. MA-RFM)

Table 8: Comparison between the IA-RFM stage ($S^{(0)}$) and the MA-RFM stage (S_{final}).

	δ	M_{total}	$E_{l^2}(S^{(0)})$	$E_{l^2}(S_{\text{final}})$	Error reduction
Ex 4.3	5%	3200	20.03%	14.02%	30.00%
Ex 4.4	5%	6400	10.06%	6.04%	40.03%
Ex 4.5	5%	6400	23.04%	15.28%	33.69%
Ex 4.6	5%	4800	19.74%	13.94%	29.41%
Ex 4.7	5%	7200	25.05%	17.84%	28.79%
Ex 4.8	5%	7200	9.84%	1.22%	87.59%
Ex 4.9	5%	5200	36.44%	15.41%	57.72%

C.3 Geometric parameters and basis type

Table 9: Extracted geometric parameters and statistical indicators with $\delta = 5\%$ by Algorithm 3.

Ex	Cluster k	$\mathbf{c}_k$	$\mathbf{L}_k$	$\mathcal{E}_{\text{rect}}^{(k)}$	$\mathcal{E}_{\text{ellip}}^{(k)}$	$\mathcal{E}_{\text{torus}}^{(k)}$	$\mathcal{T}_k$	σ_k
Ex 4.3	1	(5.00e-01, 5.00e-01)	(2.03e-01, 2.03e-01)	0.0885	0.0138	-	Ellipsoid	Sigmoid
Ex 4.4	1	(-6.06e-02, 1.24e-04)	(6.40e-02, 6.60e-02)	0.0789	0.0379	-	Ellipsoid	Exp
	2	(8.04e-02, 9.14e-06)	(6.40e-02, 6.60e-02)	0.0801	0.0364	-	Ellipsoid	Exp
Ex 4.5	1	(3.90e-01, 5.01e-01)	(1.10e-01, 2.05e-01)	0.0304	0.1284	-	Rectangle	Sigmoid
	2	(7.11e-01, 5.00e-01)	(2.02e-01, 2.05e-01)	0.0922	0.0108	-	Ellipsoid	Sigmoid
Ex 4.6	1	(6.01e-01, 2.51e-01)	-	0.0698	0.0613	-	general	Sigmoid
Ex 4.7	1	(2.12e-01, 7.13e-01)	-	0.1113	0.0675	-	general	Sigmoid
	2	(4.20e-01, 4.49e-01)	-	0.1938	0.1211	-	general	Sigmoid
	3	(7.49e-01, 3.59e-01)	-	0.1823	0.1102	-	general	Sigmoid
	4	(7.96e-01, 7.89e-01)	-	0.2065	0.2152	-	general	Sigmoid
Ex 4.8	1	(3.01e-01, 4.99e-01, 3.00e-01)	(2.00e-01, 2.05e-01, 2.05e-01)	0.1737	0.0347	0.5461	Ellipsoid	Exp/ReLU
	2	(5.00e-01, 4.99e-01, 8.01e-01)	(2.05e-01, 2.05e-01, 2.05e-01)	0.1714	0.0340	0.5487	Ellipsoid	Exp/ReLU
Ex 4.9	1	(-6.73e-05, -2.68e-03, 1.53e-03)	$r_1=1.49e-01$ $R_1=2.54e-01$	0.2854	0.1702	0.0402	<i>Tori</i>	Sigmoid

References

- [1] Richard Albanese and Peter B Monk. The inverse source problem for Maxwell’s equations. *Inverse Problems*, 22(3):1023, 2006.
- [2] Simon R Arridge. Optical tomography in medical imaging. *Inverse Problems*, 15(2):R41, 1999.
- [3] AS Fokas, Y Kurylev, and V Marinakis. The unique determination of neuronal currents in the brain via magnetoencephalography. *Inverse Problems*, 20(4):1067, 2004.
- [4] Mark A Anastasio, Jin Zhang, Dimple Modgil, and Patrick J La Rivière. Application of inverse source concepts to photoacoustic tomography. *Inverse Problems*, 23(6):S21, 2007.
- [5] Anthony J Devaney, Edwin A Marengo, and Mei Li. Inverse source problem in nonhomogeneous background media. *SIAM Journal on Applied Mathematics*, 67(5):1353–1378, 2007.
- [6] Alexander G Ramm. Multidimensional inverse scattering problems. In *DIPED-99. Direct and Inverse Problems of Electromagnetic and Acoustic Wave Theory. Proceedings of 4th International Seminar/Workshop (IEEE Cat. No. 99TH8402)*, page 22. IEEE, 1999.

- [7] Plamen Stefanov and Gunther Uhlmann. Thermoacoustic tomography with variable sound speed. *Inverse Problems*, 25(7):075011, 2009.
- [8] NN Bojarski. Inverse scattering. *Sect. II, Third Quarterly Company Report, Naval Air Systems Command Contract N00019-73-C-0312*, pages 19–73, 1973.
- [9] Fan-Chi Lin and Michael H Ritzwoller. Helmholtz surface wave tomography for isotropic and azimuthally anisotropic structure. *Geophysical Journal International*, 186(3):1104–1120, 2011.
- [10] RP Porter. Image formation with arbitrary holographic type surfaces. *Physics Letters A*, 29(4):193–194, 1969.
- [11] Robert P Porter. Diffraction-limited, scalar image formation with holograms of arbitrary shape. *Journal of the Optical Society of America*, 60(8):1051–1059, 1970.
- [12] Norman Bleistein and Jack K Cohen. Nonuniqueness in the inverse source problem in acoustics and electromagnetics. *Journal of Mathematical Physics*, 18(2):194–201, 1977.
- [13] Victor Isakov. *Inverse Source Problems*. Number 34 in CBMS-NSF Regional Conference Series in Applied Mathematics. SIAM, Philadelphia, PA, 1990.
- [14] Gang Bao, Junshan Lin, and Faouzi Triki. A multi-frequency inverse source problem. *Journal of Differential Equations*, 249(12):3443–3465, 2010.
- [15] Gang Bao, Junshan Lin, Faouzi Triki, et al. Numerical solution of the inverse source problem for the Helmholtz equation with multiple frequency data. *Contemp. Math*, 548:45–60, 2011.
- [16] Matthias Eller and Nicolas P Valdivia. Acoustic source identification using multiple frequency information. *Inverse Problems*, 25(11):115005, 2009.
- [17] Deyue Zhang and Yukun Guo. Fourier method for solving the multi-frequency inverse source problem for the Helmholtz equation. *Inverse Problems*, 31(3):035007, 2015.
- [18] Maziar Raissi, Paris Perdikaris, and George E Karniadakis. Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations. *Journal of Computational Physics*, 378:686–707, 2019.
- [19] Justin Sirignano and Konstantinos Spiliopoulos. DGM: A deep learning algorithm for solving partial differential equations. *Journal of Computational Physics*, 375:1339–1364, 2018.
- [20] Weinan E and Bing Yu. The deep Ritz method: A deep learning-based numerical algorithm for solving variational problems. *Commun. Math. Stat.*, 6(1):1–12, 2018.
- [21] Ameya D Jagtap and George Em Karniadakis. Extended physics-informed neural networks (XPINNs): A generalized space-time domain decomposition based deep learning framework for nonlinear partial differential equations. *Commun. Comput. Phy.*, 28(5), 2020.
- [22] Ehsan Kharazmi, Zhongqiang Zhang, and George Em Karniadakis. hp-VPINNs: Variational physics-informed neural networks with domain decomposition. *Comput. Meth. Appl. M.*, 374:113547, 2021.
- [23] Yulei Liao and Pingbing Ming. Deep Nitsche method: Deep Ritz method with essential boundary conditions. *Commun. Comput. Phy.*, 29(5):1365–1384, 2021.
- [24] Haijun Yu and Shuo Zhang. A natural deep Ritz method for essential boundary value problems. *Journal of Computational Physics*, 537:114133, 2025.
- [25] Rui Sheng, Peiying Wu, Jerry Zhijian Yang, and Cheng Yuan. Solving the inverse source problem of the fractional Poisson equation by MC-fPINNs. *arXiv:2407.03801*, 2024.

- [26] Nasim Rahaman, Aristide Baratin, Devansh Arpit, Felix Draxler, Min Lin, Fred A. Hamprecht, Yoshua Bengio, and Aaron Courville. On the spectral bias of neural networks. In *Proceedings of the 36th ICML*, volume 97, pages 5301–5310. PMLR, 2019.
- [27] Zhi-Qin John Xu, Yaoyu Zhang, Tao Luo, Yanyang Xiao, and Zheng Ma. Frequency principle: Fourier analysis sheds light on deep neural networks. *Commun. Comput. Phys.*, 28(5):1746–1767, 2020.
- [28] Guochang Lin, Fukai Chen, Pipi Hu, Xiang Chen, Junqing Chen, Jun Wang, and Zuoqiang Shi. Bi-GreenNet: learning Green’s functions by boundary integral network. *Commun. Math. Stat.*, 11(1):103–129, 2023.
- [29] Suchuan Dong and Zongwei Li. Local extreme learning machines and domain decomposition for solving linear and nonlinear partial differential equations. *Comput. Meth. Appl. M.*, 387:114129, 2021.
- [30] Yiran Wang and Suchuan Dong. An extreme learning machine-based method for computational PDEs in higher dimensions. *Comput. Meth. Appl. M.*, 418:116578, 2024.
- [31] Jingrun Chen, Xurong Chi, Zhouwang Yang, et al. Bridging traditional and machine learning-based algorithms for solving PDEs: the random feature method. *Journal of Machine Learning*, 1(3):268–298, 2022.
- [32] Vikas Dwivedi and Balaji Srinivasan. Physics-informed extreme learning machine (PIELM)—a rapid method for the numerical solution of partial differential equations. *Neurocomputing*, 391:96–118, 2020.
- [33] Xurong Chi, Jingrun Chen, and Zhouwang Yang. The random feature method for solving interface problems. *Comput. Meth. Appl. M.*, 420:116719, 2024.
- [34] Yangtao Deng, Qiaolin He, and Xiaoping Wang. Adaptive feature capture method for solving partial differential equations with low regularity solutions. *arXiv:2507.12941*, 2025.
- [35] Wen-zhuang Gui and Ivo Babuška. The h , p and hp versions of the finite element method in 1 dimension: Part I. the error analysis of the p -version. *Numer. Math.*, 49(6):577–612, 1986.
- [36] Wen-zhuang Gui and Ivo Babuška. The h , p and hp versions of the finite element method in 1 dimension: Part II. the error analysis of the h -and hp versions. *Numer. Math.*, 49(6):613–657, 1986.
- [37] Ivo Babuska, Barna A Szabo, and I Norman Katz. The p -version of the finite element method. *SIAM Journal on Numerical Analysis*, 18(3):515–545, 1981.
- [38] Ivo Babuška and Manil Suri. The p -and hp versions of the finite element method, an overview. *Comput. Meth. Appl. M.*, 80(1-3):5–26, 1990.
- [39] William Charles Hector McLean. *Strongly Elliptic Systems and Boundary Integral Equations*. Cambridge University Press, 2000.
- [40] Paul A Zegeling. r -refinement for evolutionary PDEs with finite elements or finite differences. *Applied Numerical Mathematics*, 26(1-2):97–104, 1998.
- [41] Jie Shen and Li-Lian Wang. Analysis of a spectral-Galerkin approximation to the Helmholtz equation in exterior domains. *SIAM J. Numer. Anal.*, 45(5):1954–1978, 2007.
- [42] Martin Ester, Hans-Peter Kriegel, and Xiaowei Xu. A density-based algorithm for discovering clusters in large spatial databases with noise. In *KDD-96 Proceedings*, 1996.
- [43] Per Christian Hansen. Analysis of discrete ill-posed problems by means of the L-curve. *SIAM Review*, 34(4):561–580, 1992.
- [44] Haakan Hedenmalm. On the uniqueness theorem of Holmgren. *Mathematische Zeitschrift*, 281(1):357–378, 2015.