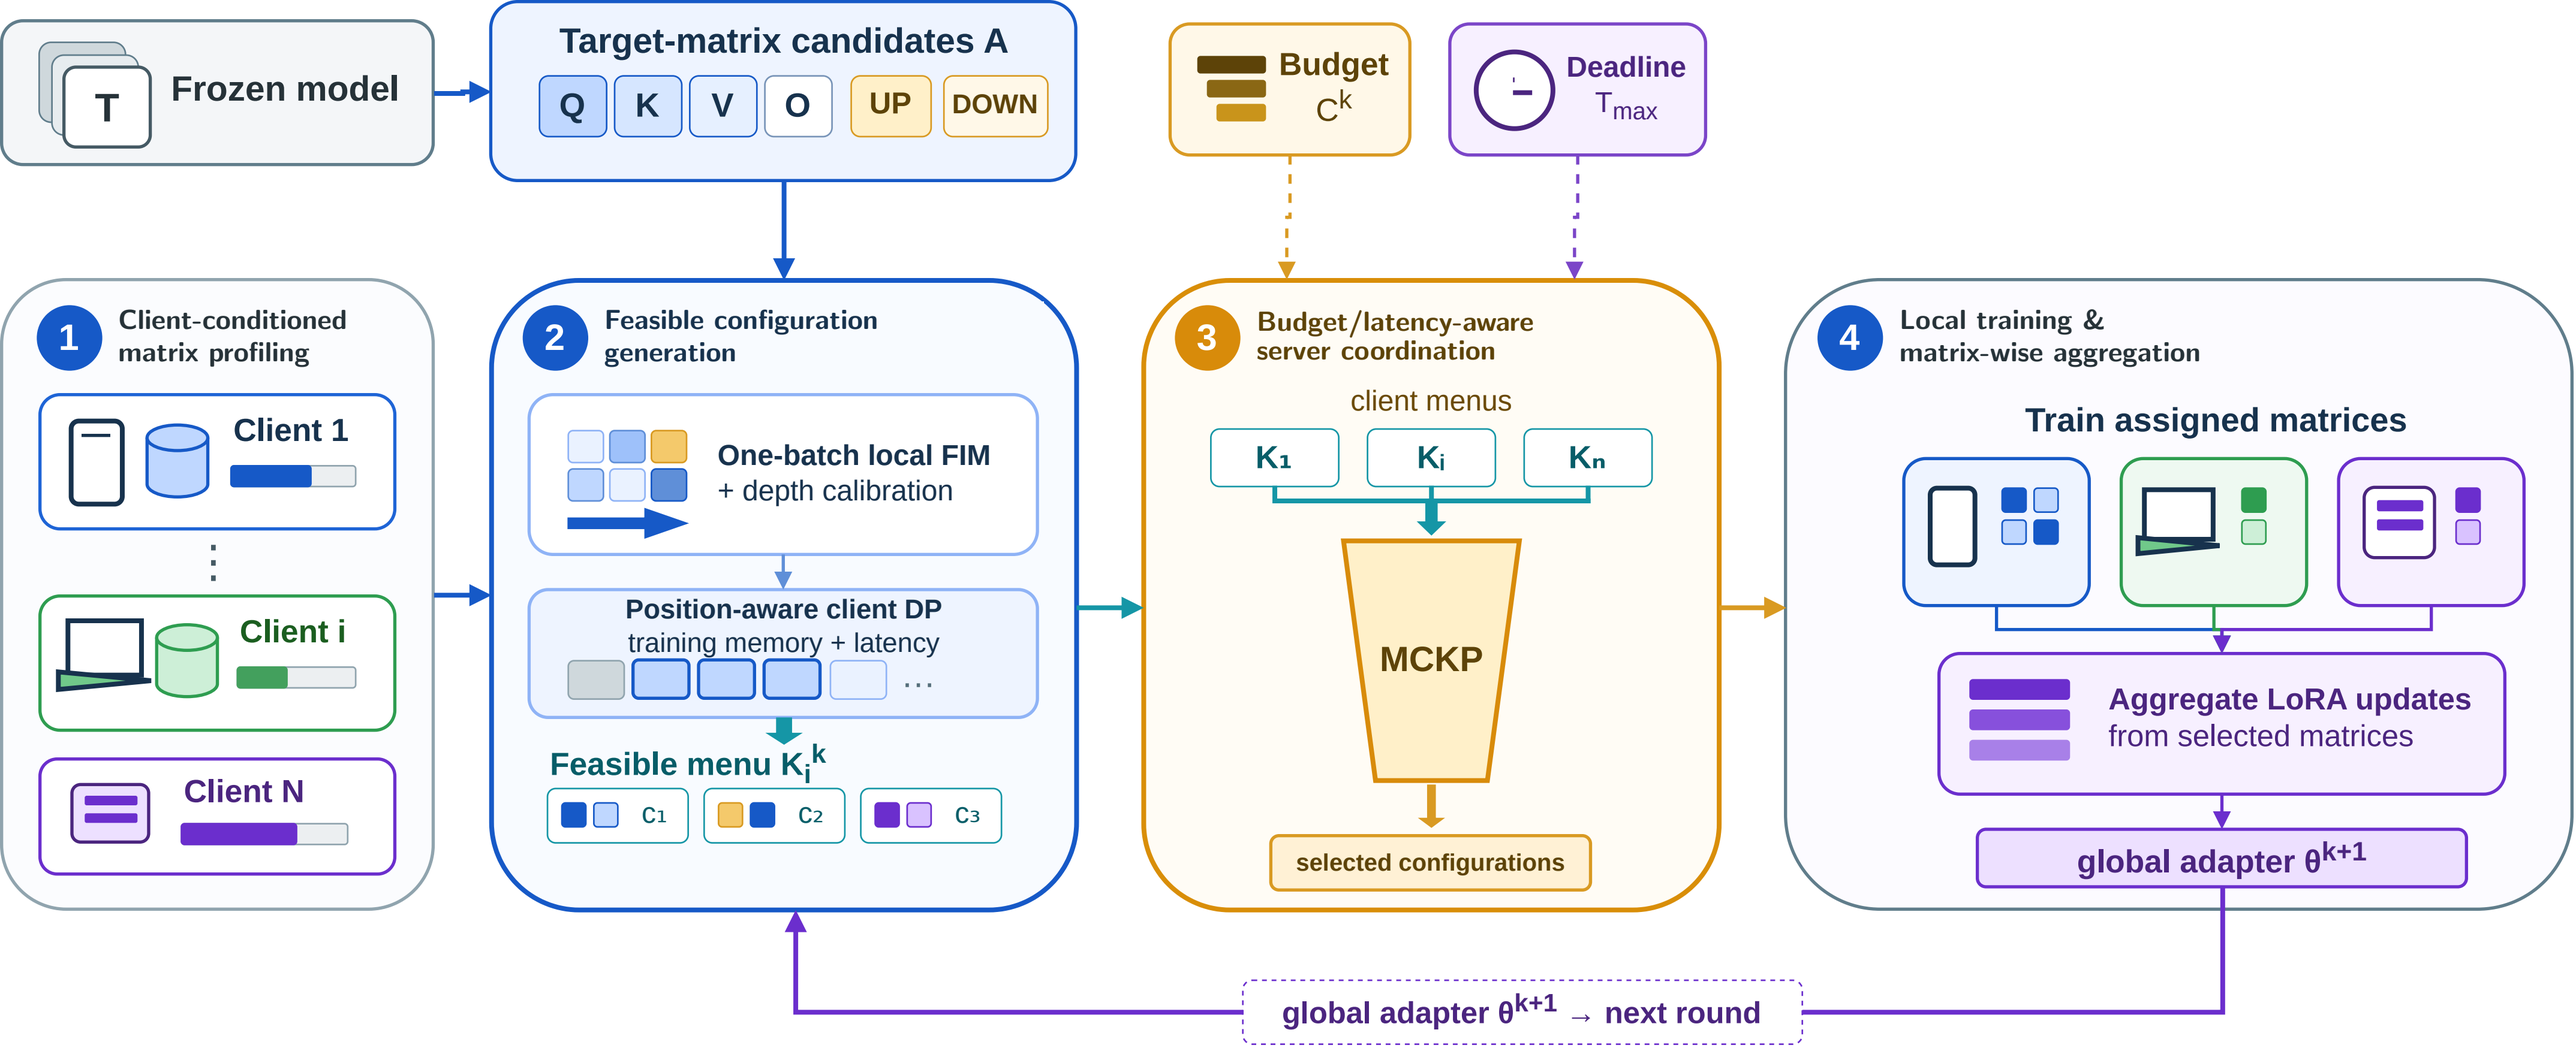

T
Frozen model
Target-matrix candidates A
Q
K
V
O
UP
DOWN
Budget
C^k
Deadline
T_{max}
1
Client-conditioned matrix profiling
Client 1
Client i
Client N
2
Feasible configuration generation
One-batch local FIM
+ depth calibration
Position-aware client DP
training memory + latency
Feasible menu K_i^k
C_1
C_2
C_3
3
Budget/latency-aware server coordination
client menus
K_1
K_i
K_n
MCKP
selected configurations
4
Local training & matrix-wise aggregation
Train assigned matrices
Aggregate LoRA updates
from selected matrices
global adapter θ^{k+1}
global adapter θ^{k+1} → next round