



ABAP SDK

Implementation guide for Azure Active Directory

<https://github.com/Microsoft/ABAP-SDK-for-Azure>

Author: Microsoft SAP Team

Version: 1.0

Contents

What is Azure Active Directory?	3
Prerequisites	3
How to setup Azure Active Directory in Azure?	3
Generate keys for your application	5
Steps to use AAD authentication from SAP using ABAP SDK for Azure	8
Creation of RFC destination to Azure Active Directory	8
STRUST Setup	10
Configuration	11
ZREST_CONFIG	11
ZREST_CONF_MISC	12
ZADF_CONFIG	12
DEMO Program	13
ABAP SDK Monitor	13
Auto re-processing of failed messages	14

What is Azure Active Directory?

Azure Active Directory (Azure AD) provides an easy way for businesses to manage identity and access, both in the cloud and on-premises. Your users can use the same work or school account for single sign-on to any cloud and on-premises web application. Users can use their favourite devices, including iOS, Mac OS X, Android, and Windows. An Organization can protect sensitive data and applications both on-premises and in the cloud with integrated multi-factor authentication ensuring secure local and remote access. Azure AD extends your on-premises directories so that information workers can use a single organizational account to securely and consistently access their corporate resources. Azure AD also offers comprehensive reports, analytics, and self-service capabilities to reduce costs and enhance security. The Azure AD SLA ensures that your business always runs smoothly and can be scaled to enterprise levels.

For more details on Azure Active directory, visit [Microsoft Azure Active Directory](https://docs.microsoft.com/en-gb/azure/active-directory/)

Prerequisites

Make sure you have installed ABAP SDK for Azure in your SAP system. Refer document 'ABAP SDK for Azure – GitHub' for more details, Visit <https://github.com/Microsoft/ABAP-SDK-for-Azure>


How to setup Azure Active Directory in Azure?

Login to [Microsoft Azure portal](https://portal.azure.com/).


Note: If you do not have an account already. please create a new [Azure account](#). You can start free

Once you are logged into portal, go to all services and search for Azure Active Directory and Select


“Azure Active Directory” as shown below.

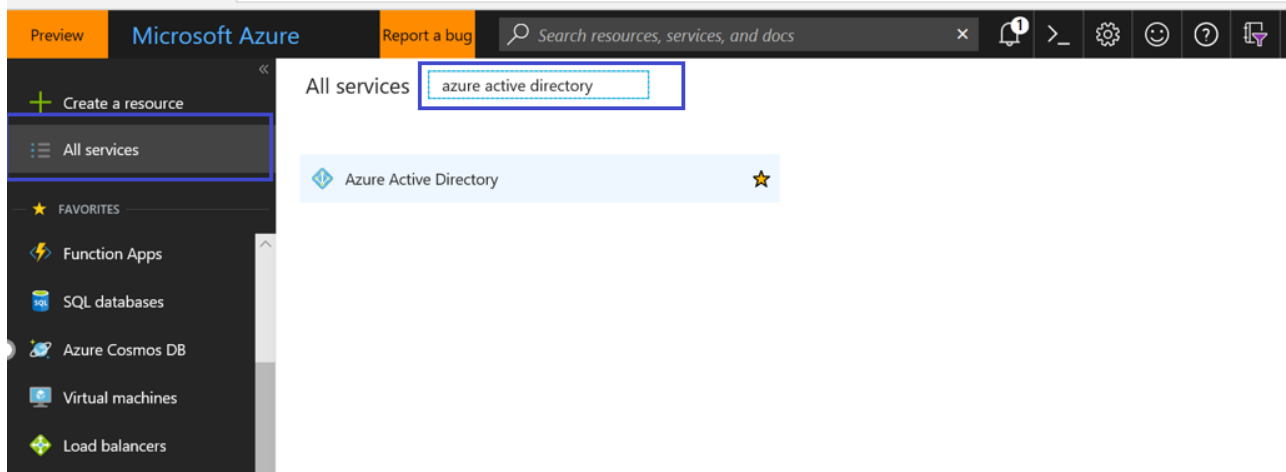


Click on App Registrations on left side menu as shown below and click the button New application Registration

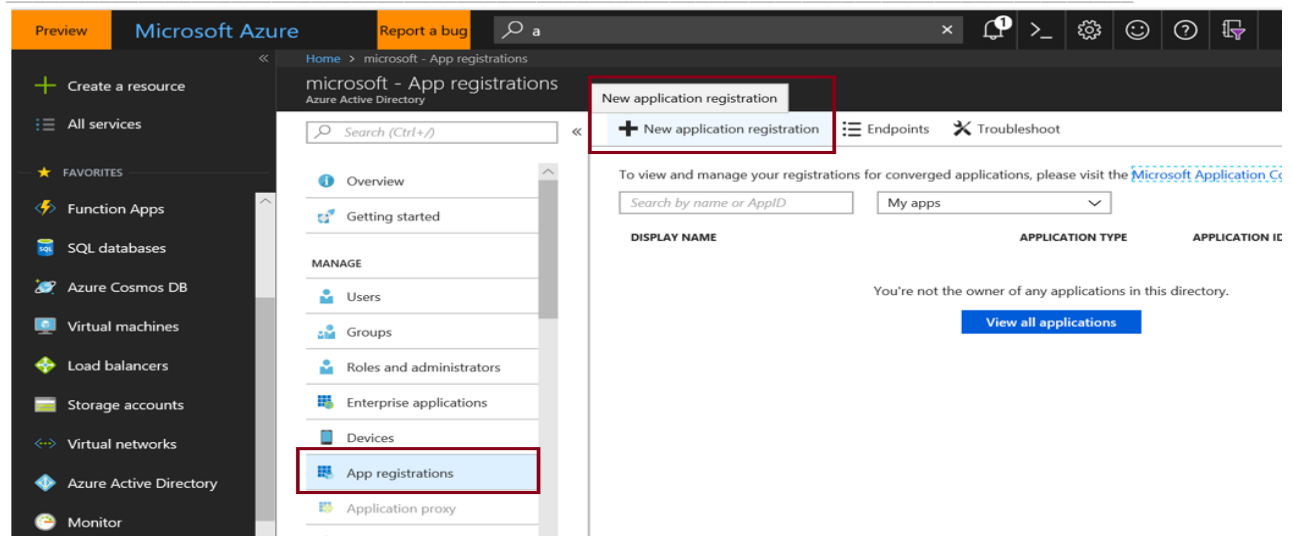

Specify details of your Application and press create button.

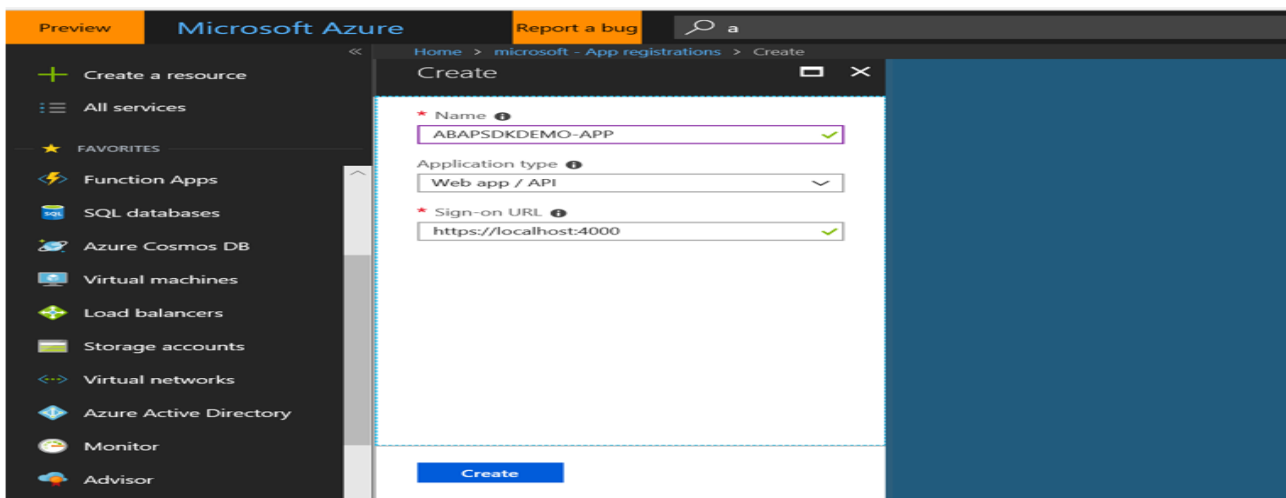


Application is created successfully.

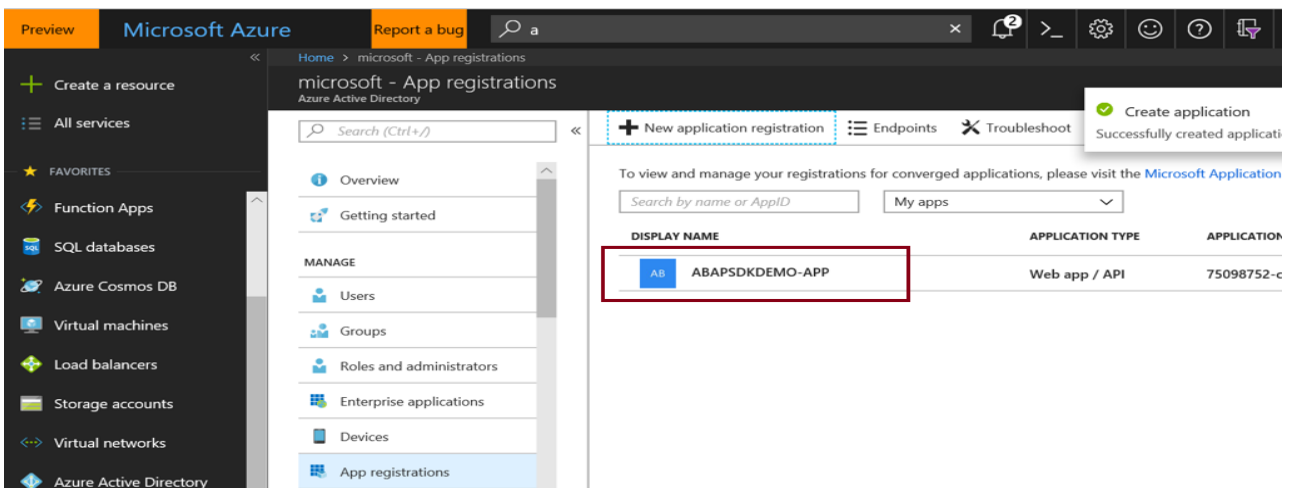


Generate keys for your application


1. Once your application is created, go to your application by clicking on it.
Copy the application id which will be required in the implementation of code in ABAP SDK. This application id is client Id.

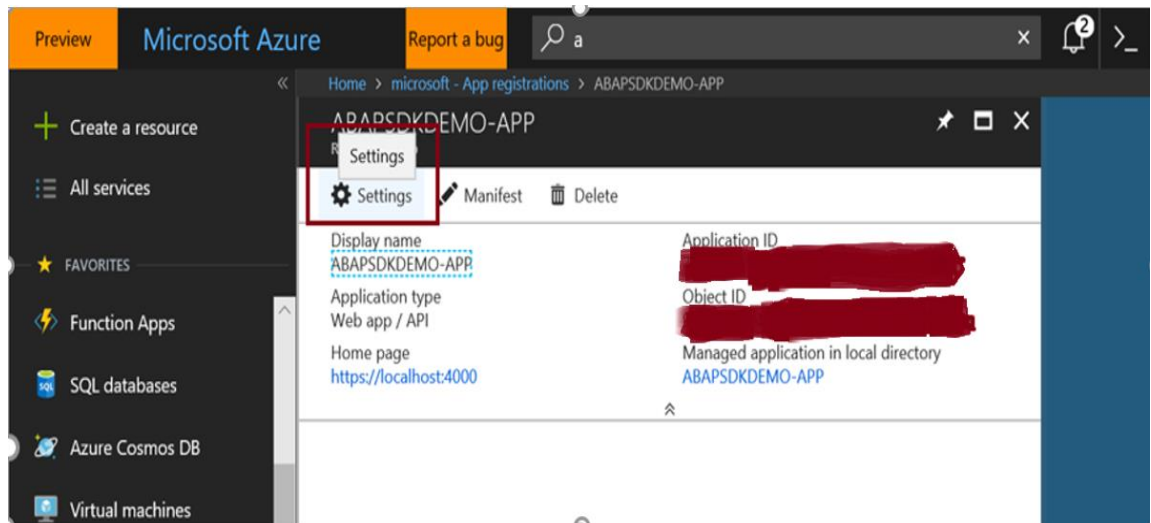


Click on 'Settings' in the above screen, go to the 'Required Permissions' under API Access as shown below.

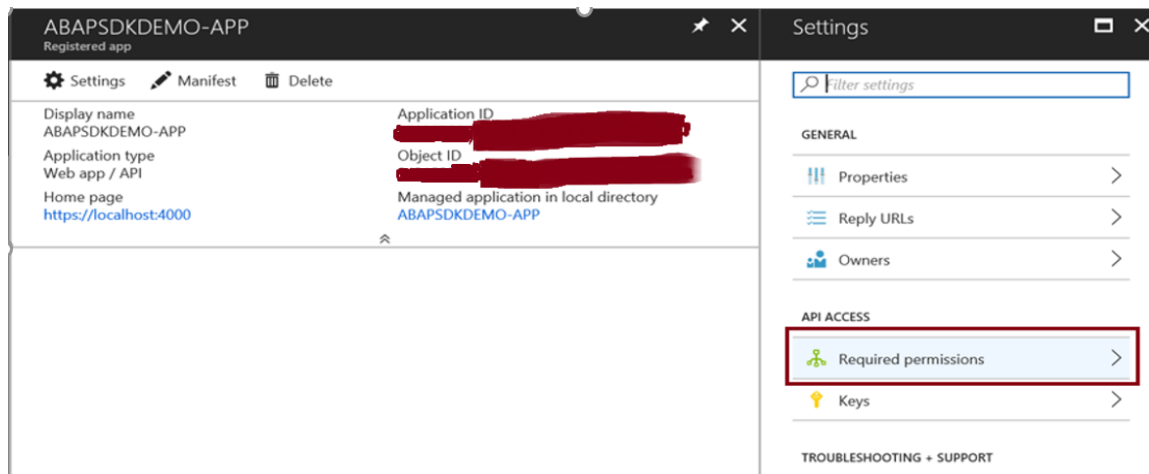


2. Then click on 'Add' button as shown in the below screen.

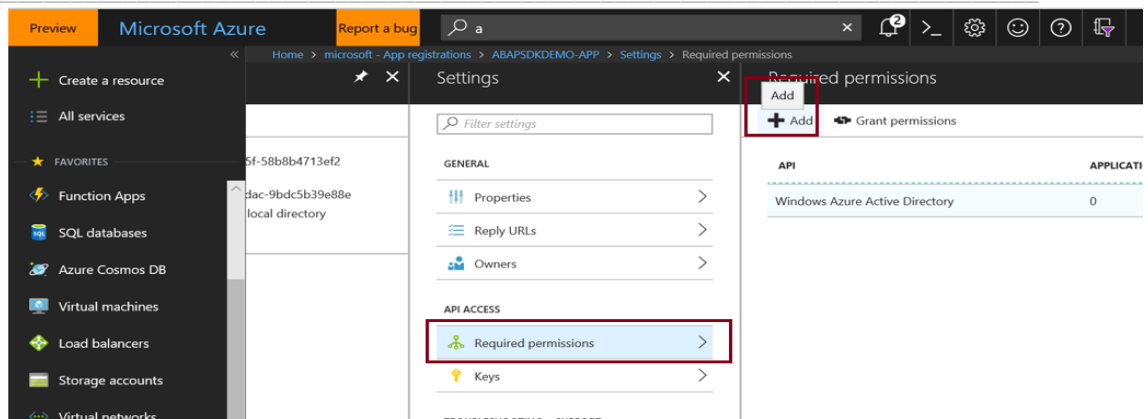


- Under 'Add API access' section click on select an API and Search Azure Key Vault and Select the same as shown below.

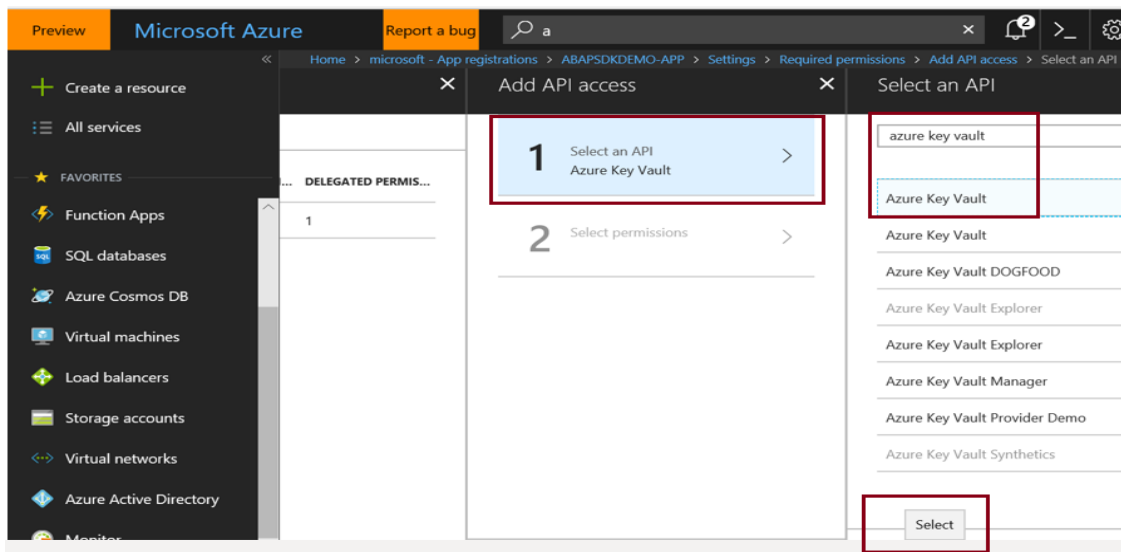


- Under Add API access section, click on 'Select permissions' and enabled the checkbox for 'Delegated Permissions' as shown below.

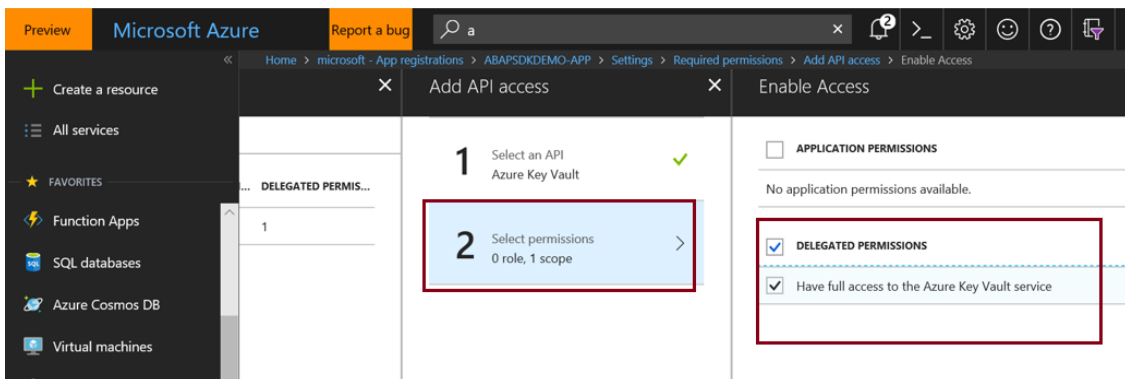


Then click on 'Done' button to complete the Required permissions activity.

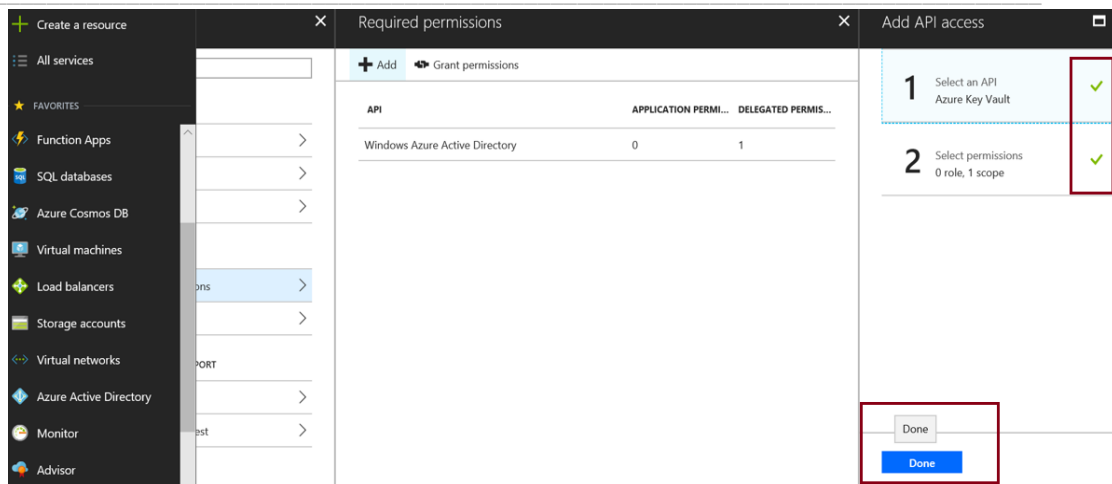


- Click on 'Grant permissions' and press 'Yes' button as shown below.

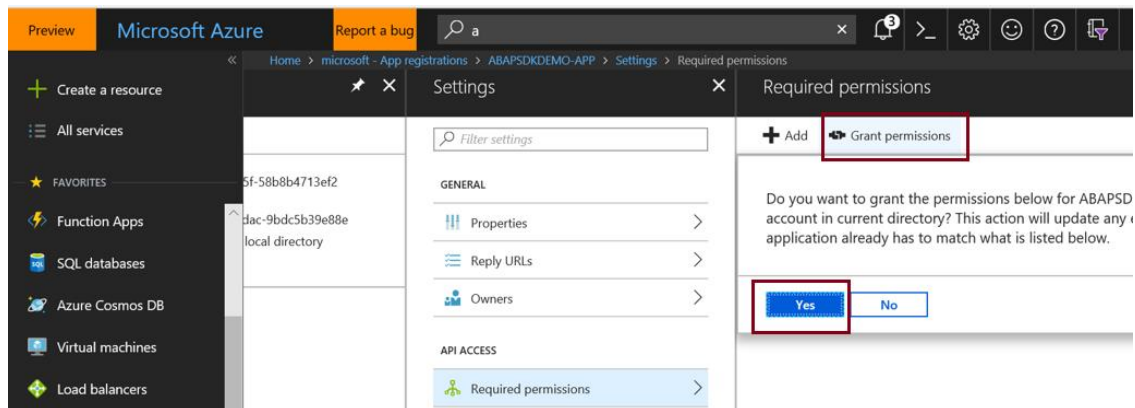


- Click on 'Keys' section and provide key description and expiry Duration in the below screen. Under 'EXPIRES' dropdown list, you can select the expiry duration.

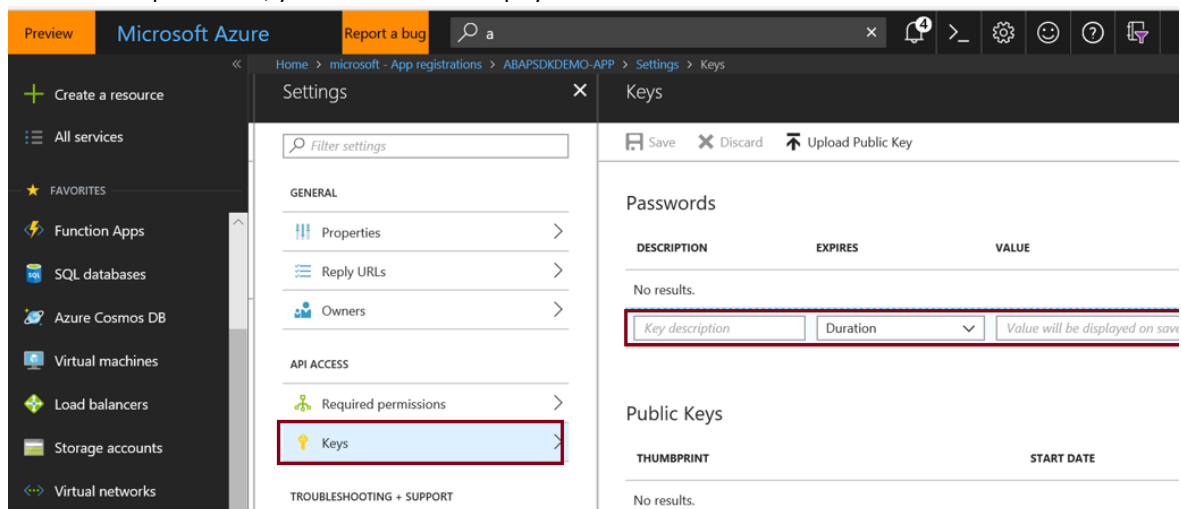

Here key description is provided as client_secret and it expires on 8/2/2019.

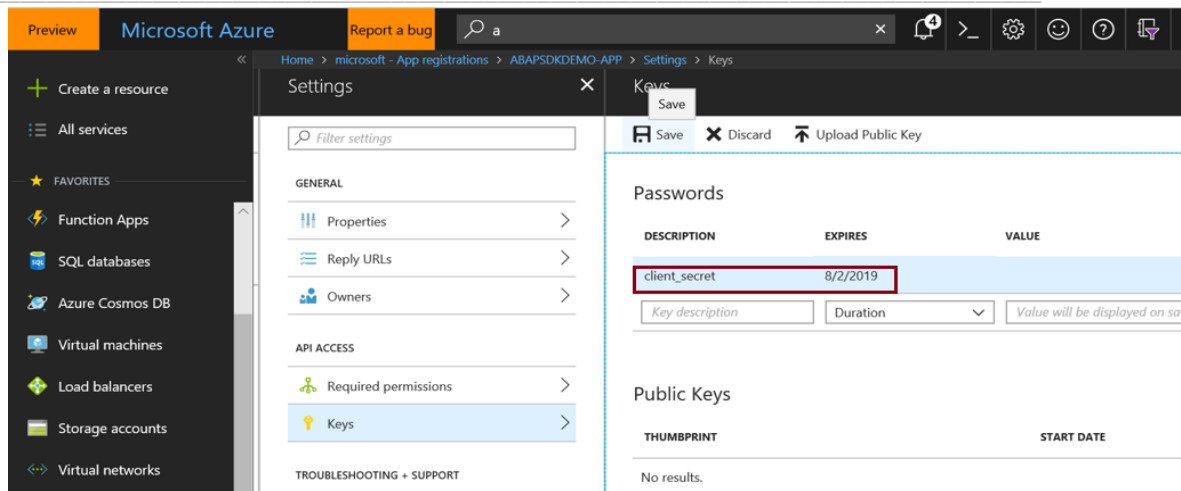

- Click on 'Save' button to generate secret key. **Copy this key and it will be used in ABAP SDK implementation. Please remember you won't be able to retrieve this key once you leave the screen.**

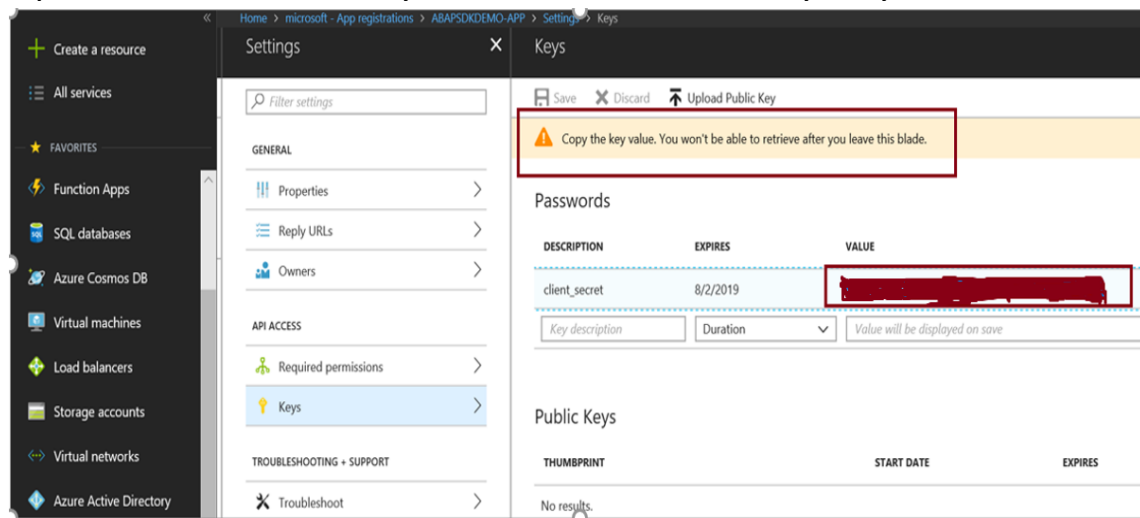

Steps to use AAD authentication from SAP using ABAP SDK for Azure

Creation of RFC destination to Azure Active Directory


Go to transaction SM59 in your SAP system and create new RFC destination of type 'G'. Maintain your Azure Active directory endpoint in the Target host and path prefix for authorization token as shown below.

Target host: **login.microsoftonline.com**

Port: **443**

Path Prefix: **/72f988bf-86f1-41af-91ab-2d7cd011db47/oauth2/token**

RFC Destination AZURE_ABAPSDKKDEMO-AAD

Connection Test 

RFC Destination	AZURE_ABAPSDKKDEMO-AAD		
Connection Type	<input type="radio"/> G	HTTP Connection to External Serv	Description

Description

Description 1	Destination to Azure AAD
Description 2	
Description 3	

Administrati Technical Settings Logon & Security Special Options

Target System Settings

Target Host	login.microsoftonline.com	Service No.	443
Path Prefix	/72f988bf-86f1-41af-91ab-2d7cd011db47/oauth2/token		


HTTP Proxy Options

Global Configuration

Proxy Host	
Proxy Service	
Proxy User	
Proxy PW Status	is initial

Now go to 'Logon & Security' tab and choose radio button SSL 'Active' and select SSL certificate 'DFAULT SSL Client (Standard)'.

RFC Destination AZURE_ABAPSDKKDEMO-AAD

Connection Test 

RFC Destination	AZURE_ABAPSDKKDEMO-AAD		
Connection Type	<input type="radio"/> G	HTTP Connection to External Serv	Description

Description

Description 1	Destination to Azure AAD
Description 2	
Description 3	

Administrati Technical Settings Logon & Security Special Options

System ID Client

Security Options


Status of Secure Protocol

SSL ☐ Inactive ☒ Active

SSL Certificate Cert. List


Authorization for Destination

Do a connection test to make sure it is working. RFC destination is working.

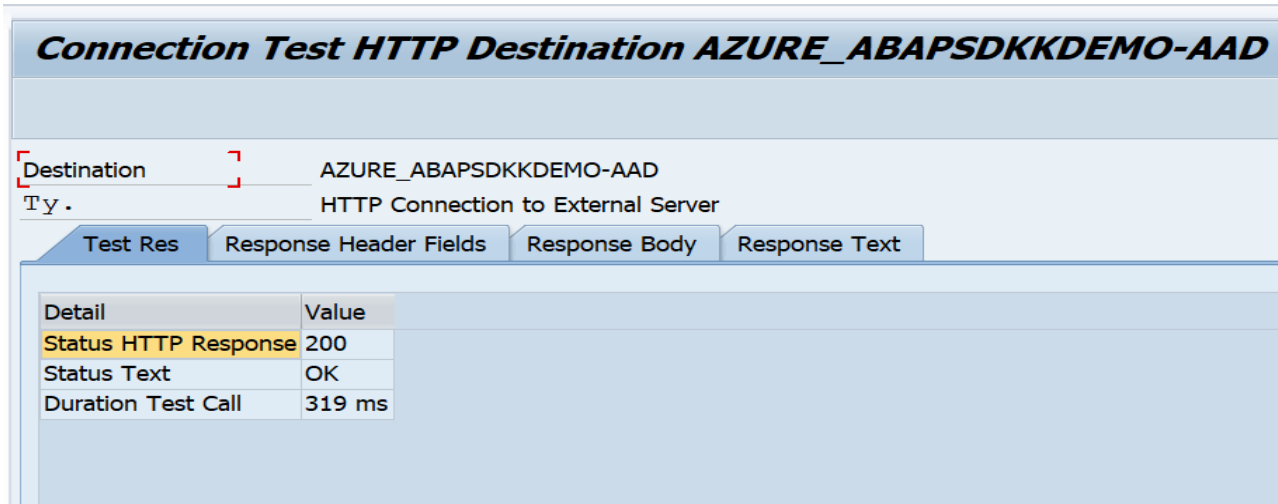


STRUST Setup

We need to import Microsoft's Certificate and import in STRUST for SSL handshake between SAP system and Azure Active Directory over HTTPS protocol. To download the certificate, in your browser, go to URL with the hostname and path prefix you used for creating RFC destination. <https://login.microsoftonline.com/72f988bf-86f1-41af-91ab-2d7cd011db47/oauth2/token>

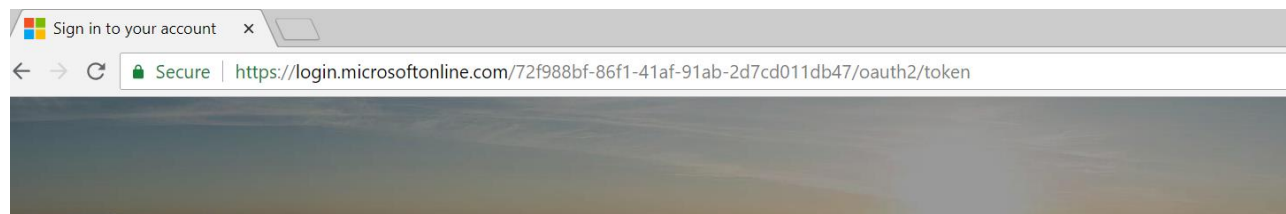


Click on the Lock symbol you find next to refresh button in Chrome browser and select Certificate to view the certificate used for communication

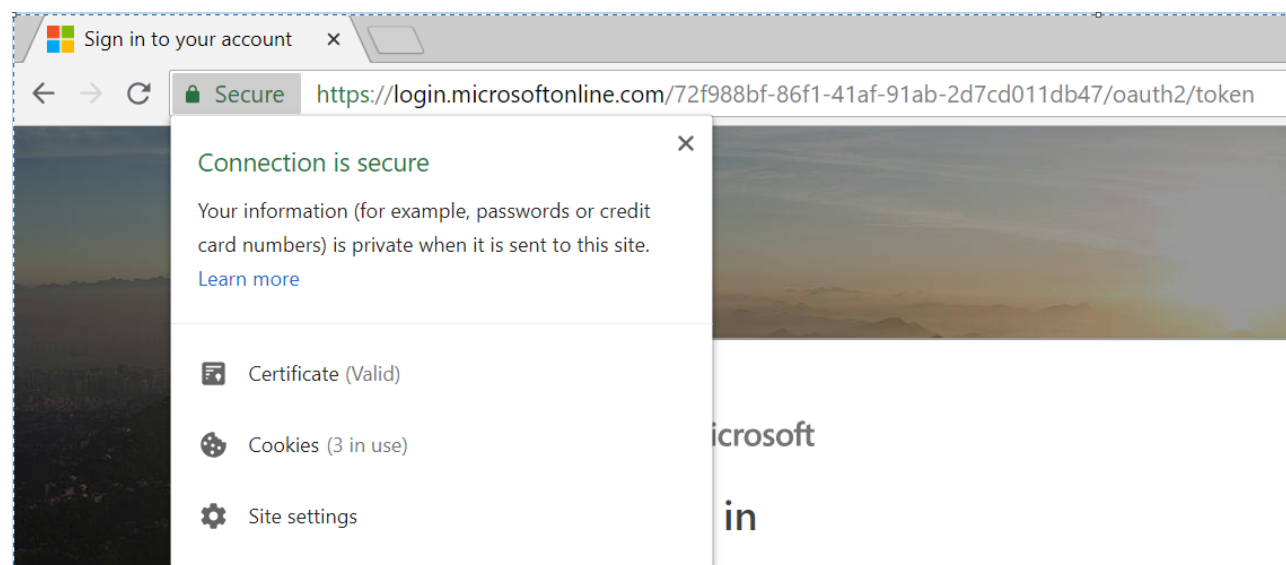

In the certificate, go to Details tab and Choose button 'Copy to File' to download the certificate to your local machine. Repeat the process and download all the certificate until root. In this case, you need to download two certificates.

1. Microsoft IT TLS CA 4
2. Baltimore Cyber Trust Root

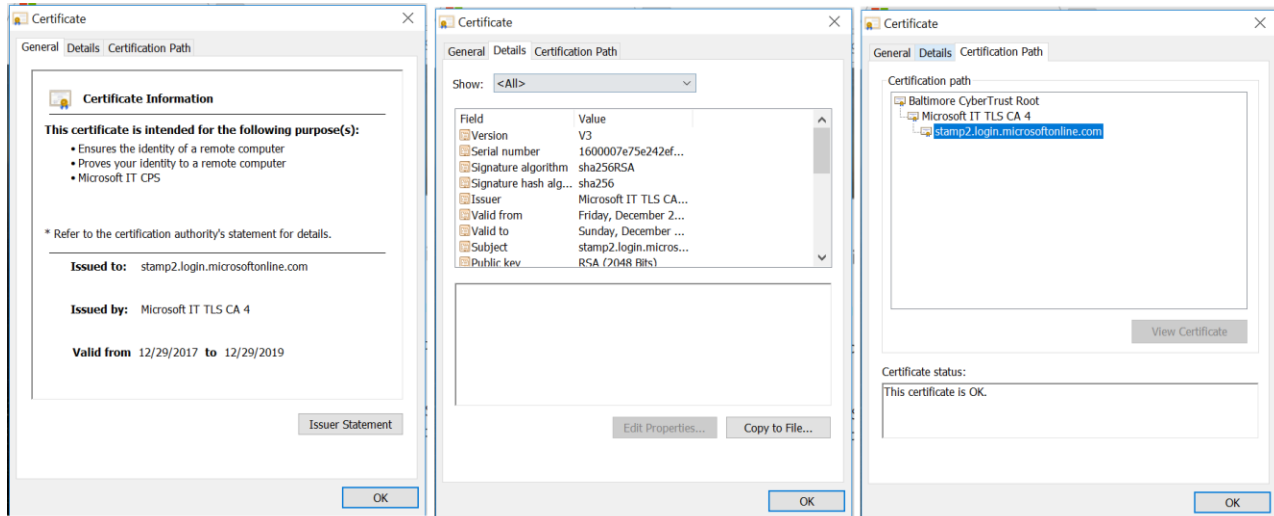

when all the certificates are downloaded, Go to STRUST transaction in your SAP system and Import all these certificates in DFAULT PSE.

Note: We are not going through the process of Importing certificates in STRUST in this document. It is straight forward, and your BASIS team can help you to do this activity.

Configuration

ABAP SDK has following main configuration tables and they need to be maintained. We will create a new Interface ID to establish connection between SAP system and target Azure Active Directory (AAD). A new Interface ID needs to be created for each AAD namespace.

ZREST_CONFIG – Master Table for Interface ID Maintenance. You must define a new Interface name and maintain the RFC destination that was created for target Event hub.


ZREST_CONF_MISC – This is an Interface Miscellaneous table which contains information on Alerts and re-processing of failed messages automatically.

ZADF_CONFIG – This is an Interface extension table. This stores data that is more specific to Azure Services like SAS keys, AAD secrets and processing Method.

ZREST_CONFIG

Create a new Interface ID like 'DEMO_AAD' and Maintain the RFC destination you created earlier.

Change View "Configure Interface URI Destination": Overview

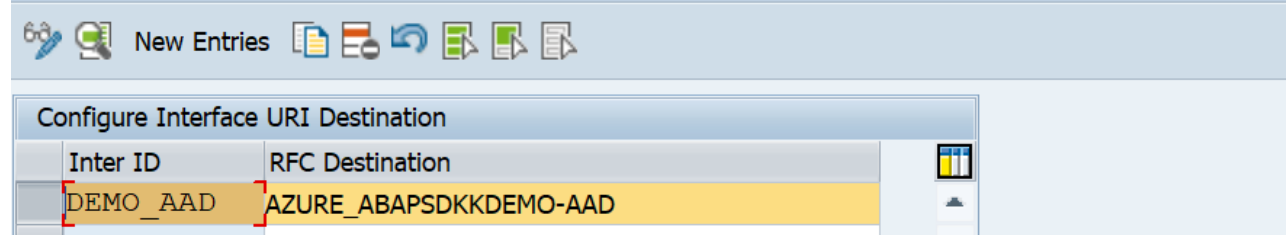

Inter ID	RFC Destination
DEMO_AAD	AZURE_ABAPSDKKDEMO-AAD


ZREST_CONF_MISC

Create an entry in table 'ZREST_CONF_MISC' for the above interface Id 'DEMO_AAD'.

Details of configuration:

- METHOD is 'POST'.
- MAX_RETRY is number of retry in case of service failure.
- EMAIL_ID is the email id for sending alerts.
- MAIL_BODY_TXT is Text Id to be maintained for the mail content.
- RETRY_METHOD is type of retrial (Regular '0' or exponential '1')

Table ZREST_CONF_MISC Display

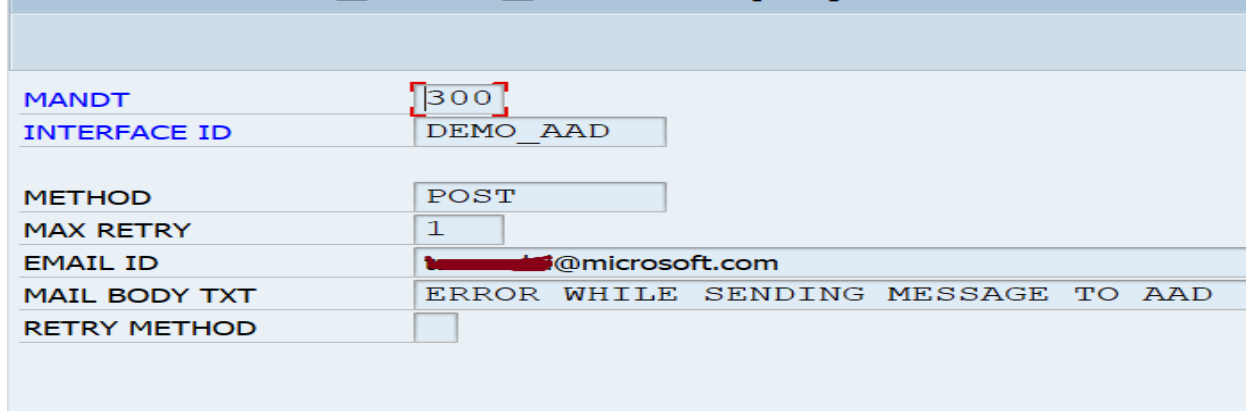

MANDT	300
INTERFACE ID	DEMO_AAD
METHOD	POST
MAX RETRY	1
EMAIL ID	redacted@microsoft.com
MAIL BODY TXT	ERROR WHILE SENDING MESSAGE TO AAD
RETRY METHOD	

ZADF_CONFIG

Create an entry in table 'ZADF_CONFIG' for the above interface Id 'DEMO_AAD'.

Details of configuration:

- INTERFACE_TYPE is 'Azure Active Directory'.
- SAS_KEY is the shared access key. This is the key which generated in AAD under section 'Generate keys for your application' Step 7 (refer Page 8). You need to change this key in this config table whenever key is changed in Azure.
- URI is left blank. This may be required for future versions.
- SERVICE_TYPE can be synchronous(S) or asynchronous(A)
- IS_TRY is a reprocessing flag, maintain as blank. it can be configured for reprocessing in case of failure of services.

Table ZADF_CONFIG Display	
MANDT	300
INTERFACE ID	DEMO_AAD
INTERFACE TYPE	AAD
SAS KEY	*****
URI	
SERVICE TYPE	S
IS TRY	

DEMO Program

Please refer to DEMO program 'ZADF_DEMO_AZURE_AAD' to generate AAD token for AAD based authentication.

Please note that in the demo program, application id generated in step 1 of [Generate keys for your application for your application](#) is used as client id.

Report ZADF_DEMO_AZURE_AAD Active

```

27      iv_business_identifier = gv_message_bid ).
28      oref_aad ?= oref.
29
30  TRY.
31      CALL METHOD oref_aad->get_aad_token
32      EXPORTING
33          iv_client_id = '*****' " Input client id as per implementation guide for AAD
34          iv_resource  = 'https://vault.azure.net' "Resource for Azure Key vault application
35      IMPORTING
36          ev_aad_token = gv_aad_token
37          ev_response  = gv_response.
38  CATCH zcx_interface_config_missing INTO cx_interface.
39      gv_string = cx_interface->get_text( ).
40      MESSAGE gv_string TYPE 'E'.
41  CATCH zcx_http_client_failed INTO cx_http .
42      gv_string = cx_http->get_text( ).
43      MESSAGE gv_string TYPE 'E'.

```


ABAP SDK Monitor

We have provided an Interface Monitor (Transaction ZREST_UTIL), using this monitor you can view history of all the messages that were posted to Azure Services. In case you have a scheduled a background job to post messages to

Azure, you can view the statuses of the messages in this monitor. This Monitor can be used for troubleshooting and re-processing of the message as well.

Go to transaction ZREST_UTIL and provide your Interface ID in the selection screen and execute to view all the messages

Monitor



Interface ID	<div>DEMO_AAD</div> <div></div>	to	<div></div> <div></div>	<div></div> <div></div>
Stores Execution Date	<div>08/05/2018</div> <div></div>	to	<div>08/05/2018</div> <div></div>	<div></div> <div></div>
Stores execution time	<div>00:00:00</div> <div></div>	to	<div>00:00:00</div> <div></div>	<div></div> <div></div>
Stores Completed Date	<div></div> <div></div>	to	<div></div> <div></div>	<div></div> <div></div>
Stores Completed time	<div>00:00:00</div> <div></div>	to	<div>00:00:00</div> <div></div>	<div></div> <div></div>
Http Status	<div></div> <div></div>	to	<div></div> <div></div>	<div></div> <div></div>
Message Id	<div>00000000000000000000...</div> <div></div>	to	<div>00000000000000000000...</div> <div></div>	<div></div> <div></div>
Business Identifier	<div></div> <div></div>	to	<div></div> <div></div>	<div></div> <div></div>

In this monitor, you can view the status of the HTTPs message and its headers, response, payload and so on. In case of errors, you can also re-process the message from this tool.

The screenshot shows the 'Screen' tool interface. At the top, there is a toolbar with icons for various actions like 'Delete', 'Download', 'Headers', 'Retry', 'Payload', and 'Response'. Below the toolbar, a table lists several HTTP requests. The first request is highlighted in yellow. A 'Details' window is open, showing the properties of this selected request.

Exception	Correlation Id	Operation	Status	Httpstatus	Execution date	Execution Time	Completed date	Completed time	Time-ms	Retry	Date	Retry Attempt	Retry Time	Host	URI
	000D3A0180251ED8A69AF7D82497C0E2	POST	OK	200	08/05/2018	10:48:23	08/05/2018	10:48:23	375	000	00:00:00			login.microsoftonline.com	/72f988bf-86f1-41af-91ab-2d7cd011db47/oauth2/token

Group description	Cell Content
Correlation Id	000D3A0180251ED8A69AF7D82497C0E2
Operation	POST
Status	OK
Httpstatus	200
Execution date	08/05/2018
Execution Time	10:48:23
Completed date	08/05/2018
Completed time	10:48:23
Time-ms	375
Host	login.microsoftonline.com
URI	/72f988bf-86f1-41af-91ab-2d7cd011db47/oauth2/token
Interface Id	DEMO_AAD
Calling Program	ZCL_ADF_SERVICE
Calling Method	SEND
User Alias	[REDACTED]
Business Identifier	TEST_AAD

Auto re-processing of failed messages

For auto-processing of messages in case of failures, you must schedule a background job for program 'ZREST_SCHEDULER' as a pre-requisite.