

AdaptixC2 隐匿部署

一、架构流程

客户端--->HTTPS ---> Cloudflare CDN ---> HTTPS ---> VPS Nginx 443 --->


路径匹配/v3/auth ---> AdaptixC2 127.0.0.1:58443 ---> 不匹配路径 302 跳转到

<https://www.baidu.com>

- 1、Cloudflare CDN：隐藏 VPS 真实 IP
- 2、Nginx 路径过滤：只响应 /v3/auth，其他跳转 baidu
- 3、AdaptixC2 本地监听：只监听 127.0.0.1，不暴露端口到公网

二、前置条件

- 1、VPS: hpanel.hostinger.com Kali 2026.2
- 2、域名: www.namesilo.com
- 3、Cloudflare: dash.cloudflare.com (获取 NS 代理、源站证书、请求缓存规则)

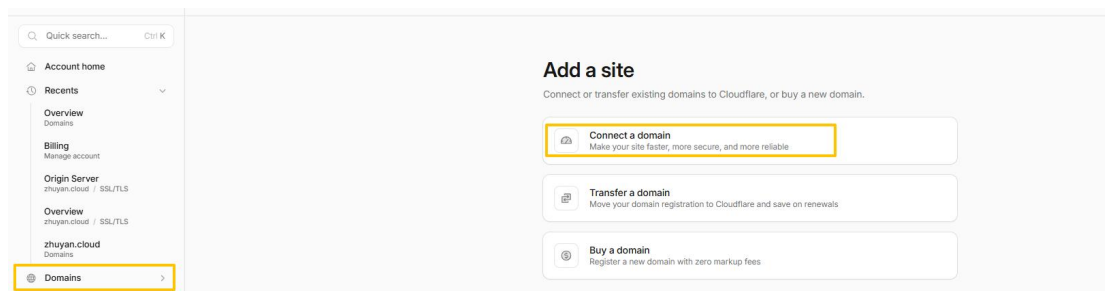

Connect your domain

Make your site faster, more secure, and more reliable.

Domain name

zhuyan.cloud

▼ Configure DNS records import and AI crawler preferences

How should DNS records be imported? ⓘ

Import DNS records automatically Recommended



Control how AI crawlers scrape content for training ⓘ

Block AI crawlers on all pages



☒ Instruct AI bot traffic with robots.txt ⓘ

Continue

[Back to Domains](#)

Overview

Recents

AI Crawl Control

Investigate

Analytics

DNS

Email

SSL/TLS

Overview

Edge Certificates

Client Certificates

Origin Server

Custom Hostnames

Security

Access

Speed

Origin Server

Manage origin certificates and configure how Cloudflare authenticates connections to your origin server.

Origin Certificates

Authenticated Origin Pulks

Origin Certificates

Generate a free Cloudflare-signed TLS certificate to install on your origin server. These certificates are only trusted by Cloudflare - if your origin receives traffic from outside the Cloudflare network, use a publicly trusted certificate instead.

Origin Certificates

+ Create Certificate

Hosts	Expires On
*zhuyan.cloud (1 host)	Jun 25, 2041

Cache Rules

Specify which resources should be cached and for how long.

Show all rule types

Show all

Cache Rules 1 active

Create rule

Order	Name	Match against	Action	Status
1	No Cache for C2	URI contains /v3/auth	Bypass cache	Active

三、配置 AdaptixC2 服务

3.1、安装 AdaptixC2 服务端

```
cd /opt
git clone https://github.com/Adaptix-Framework/AdaptixC2.git AdaptixC2-v1.2
cd AdaptixC2-v1.2
git checkout tags/v1.2
chmod +x pre_install_linux_all.sh
./pre_install_linux_all.sh all
make server-ext
```

```
cp /opt/AdaptixC2-v1.2/dist/adaptixserver /usr/bin/adaptixserver
cp /opt/AdaptixC2-v1.2/dist/profile.yaml /opt/adaptixc2/profile.yaml
mkdir -p /opt/adaptixc2/{certs,logs,static,data,extenders}
cp -r /opt/AdaptixC2-v1.2/dist/extenders/* /opt/adaptixc2/extenders/
rm -rf AdaptixC2-v1.2
```

3.2、生成自签名证书

```
openssl req -x509 -newkey rsa:4096 -keyout /opt/adaptixc2/certs/server.key -out
/opt/adaptixc2/certs/server.crt -days 365 -nodes -subj
"/C=US/ST=California/L=LosAngeles/O=Security/CN=127.0.0.1"
```

```
chmod 600 /opt/adaptixc2/certs/server.key
```

3.3、创建自定义 404 页面

```
cat > /opt/adaptixc2/static/404.html << 'EOF'
<html>
<head><title>404 Not Found</title></head>
<body>
<center><h1>404 Not Found</h1></center>
<hr><center>nginx</center>
</body>
</html>
EOF
```

3.4、修改配置文件

```
more /opt/adaptixc2/profile.yaml
Teamserver:
  interface: "127.0.0.1"
  port: 58443
  endpoint: "/v3/auth"
  password: "123456@2026"
  operators:
    admin: "123456@2026"
  only_password: true
```

cert: "/opt/adaptixc2/certs/server.rsa.crt"
key: "/opt/adaptixc2/certs/server.rsa.key"
extenders:
- "/opt/adaptixc2/extenders/beacon_listener_http/config.yaml"
- "/opt/adaptixc2/extenders/beacon_listener_smb/config.yaml"
- "/opt/adaptixc2/extenders/beacon_listener_tcp/config.yaml"
- "/opt/adaptixc2/extenders/beacon_listener_dns/config.yaml"
- "/opt/adaptixc2/extenders/beacon_agent/config.yaml"
- "/opt/adaptixc2/extenders/gopher_listener_tcp/config.yaml"
- "/opt/adaptixc2/extenders/gopher_agent/config.yaml"
axscripts: []
access_token_live_hours: 12
refresh_token_live_hours: 168

HttpServer:

error:
status: 404
headers:
Content-Type: "text/html; charset=UTF-8"
Server: "nginx"
page: "/opt/adaptixc2/static/404.html"
http:
max_header_bytes: 8192
read_header_timeout_sec: 20
read_timeout_sec: 30
write_timeout_sec: 30
idle_timeout_sec: 60
request_timeout_sec: 60
request_timeout_message: "504 Gateway Timeout"
disable_keep_alives: false
enable_http2: true

tls:

min_version: "TLS1.2"
max_version: "TLS1.3"
prefer_server_cipher_suites: false
cipher_suites:
- "TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256"
- "TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384"
- "TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256"
- "TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384"
- "TLS_RSA_WITH_AES_128_GCM_SHA256"
- "TLS_RSA_WITH_AES_256_GCM_SHA384"

3.5、创建 systemd 服务

```
more /etc/systemd/system/adaptixc2.service
[Unit]
Description=AdaptixC2 Server
After=network.target

[Service]
Type=simple
User=root
WorkingDirectory=/opt/adaptixc2
ExecStart=/usr/bin/adaptixserver -profile /opt/adaptixc2/profile.yaml
Restart=on-failure
RestartSec=10
StandardOutput=append:/opt/adaptixc2/logs/access.log
StandardError=append:/opt/adaptixc2/logs/error.log

[Install]
WantedBy=multi-user.target

systemctl daemon-reload
systemctl enable adaptixc2
systemctl start adaptixc2
systemctl status adaptixc2
```

3.6、日志配置

```
more /etc/logrotate.d/adaptixc2
/opt/adaptixc2/logs/*.log {
    daily
    rotate 7
    dateext
    dateformat -%Y%m%d
    compress
    delaycompress
    missingok
    notifempty
    create 644 root root
    sharedscripts
    postrotate
        systemctl restart adaptixc2 > /dev/null 2>&1 || true
    endscript
}
logrotate -d /etc/logrotate.d/adaptixc2
```

3.7、测试验证

```
netstat -tlnp | grep 58443
```

```
ps aux | grep adaptixserver | grep -v grep
```

四、配置 Nginx 服务

4.1、安装 Nginx 服务端

```
apt install -y nginx curl wget git
```

4.2、部署 Cloudflare 源站证书

```
mkdir -p /etc/nginx/ssl
```

```
vim /etc/nginx/ssl/cloudflare.crt # 粘贴 Origin Certificate
```

```
vim /etc/nginx/ssl/cloudflare.key # 粘贴 Private Key
```

```
chmod 600 /etc/nginx/ssl/cloudflare.key
```

4.3、创建 Nginx 配置文件

```
rm -rf /etc/nginx/sites-enabled/default
```

```
more /etc/nginx/sites-available/adaptix
```

```
log_format adaptix '$http_x_forwarded_for - $remote_user [$time_local] "$request" '
                    '$status $body_bytes_sent "$http_referer" "$http_user_agent";
```

```
server {
    listen 80;
    server_name _;
    return 301 https://www.baidu.com;
}
```

```
server {
    listen 443 ssl;
    listen [::]:443 ssl;
    http2 on;

    server_name app.test.cloud;

    ssl_certificate /etc/nginx/ssl/cloudflare.crt;
    ssl_certificate_key /etc/nginx/ssl/cloudflare.key;
    ssl_protocols TLSv1.2 TLSv1.3;
    ssl_ciphers HIGH:!aNULL:!MD5;
    ssl_prefer_server_ciphers on;

    add_header X-Content-Type-Options "nosniff" always;
    add_header X-Frame-Options "SAMEORIGIN" always;
    add_header Referrer-Policy "no-referrer" always;
```

```
add_header Server "nginx" always;
```

```
access_log /var/log/nginx/adaptix/access.log adaptix;
```

```
error_log /var/log/nginx/adaptix/error.log;
```

```
location ~* ^/v3/auth {
```

```
    proxy_pass https://127.0.0.1:58443;
```

```
    proxy_http_version 1.1;
```

```
    proxy_set_header Upgrade $http_upgrade;
```

```
    proxy_set_header Connection "upgrade";
```

```
    proxy_set_header Host $host;
```

```
    proxy_set_header X-Real-IP $remote_addr;
```

```
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
```

```
    proxy_set_header X-Forwarded-Proto $scheme;
```

```
    proxy_ssl_verify off;
```

```
    proxy_buffering off;
```

```
    add_header Cache-Control "no-cache, no-store, must-revalidate, private" always;
```

```
    add_header Pragma "no-cache" always;
```

```
    add_header Expires "0" always;
```

```
    add_header X-Accel-Expires "0" always;
```

```
    proxy_connect_timeout 60s;
```

```
    proxy_send_timeout 60s;
```

```
    proxy_read_timeout 60s;
```

```
}
```

```
location / {
```

```
    return 302 https://www.baidu.com;
```

```
}
```

```
server_tokens off;
```

```
}
```

```
mkdir -p /var/log/nginx/adaptix
```

```
chown -R www-data:www-data /var/log/nginx/adaptix
```

```
ln -sf /etc/nginx/sites-available/adaptix /etc/nginx/sites-enabled/
```

```
nginx -t
```

```
systemctl start nginx
```

```
systemctl enable nginx
systemctl reload nginx
systemctl status  nginx
```

4.4、 日志配置

```
more /etc/logrotate.d/nginx-adaptix
/var/log/nginx/adaptix/*.log {
    daily
    missingok
    rotate 7
    dateext
    dateformat -%Y%m%d
    compress
    delaycompress
    notifempty
    create 640 www-data adm
    sharedscripts
    postrotate
        if [ -f /var/run/nginx.pid ]; then
            kill -USR1 `cat /var/run/nginx.pid`
        fi
    endscript
}
```

```
logrotate -d /etc/logrotate.d/nginx-adaptix
```

4.5、 验证

```
netstat -antlp | grep nginx
ps aux | grep nginx | grep -v grep
```

五、 编译 AdaptixC2 客户端

5.1、 安装 MSYS2 运行环境


<https://www.msys2.org/>


C:\msys64

5.2、 安装 Qt 运行环境

<https://www.qt.io/download-qt-installer-oss>

自定义安装 C:\Qt

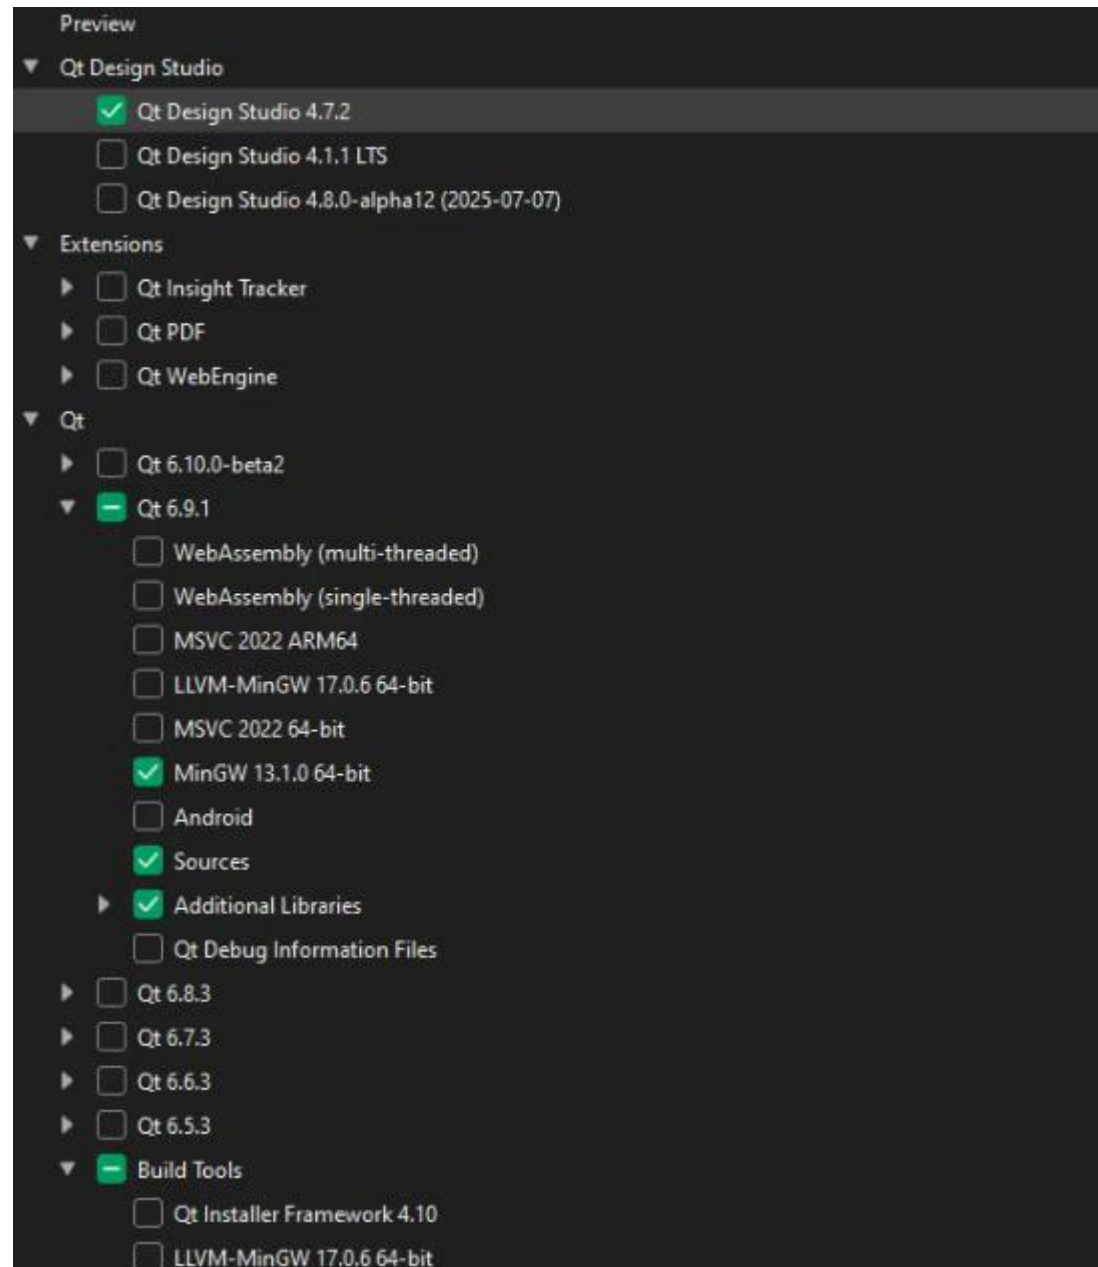

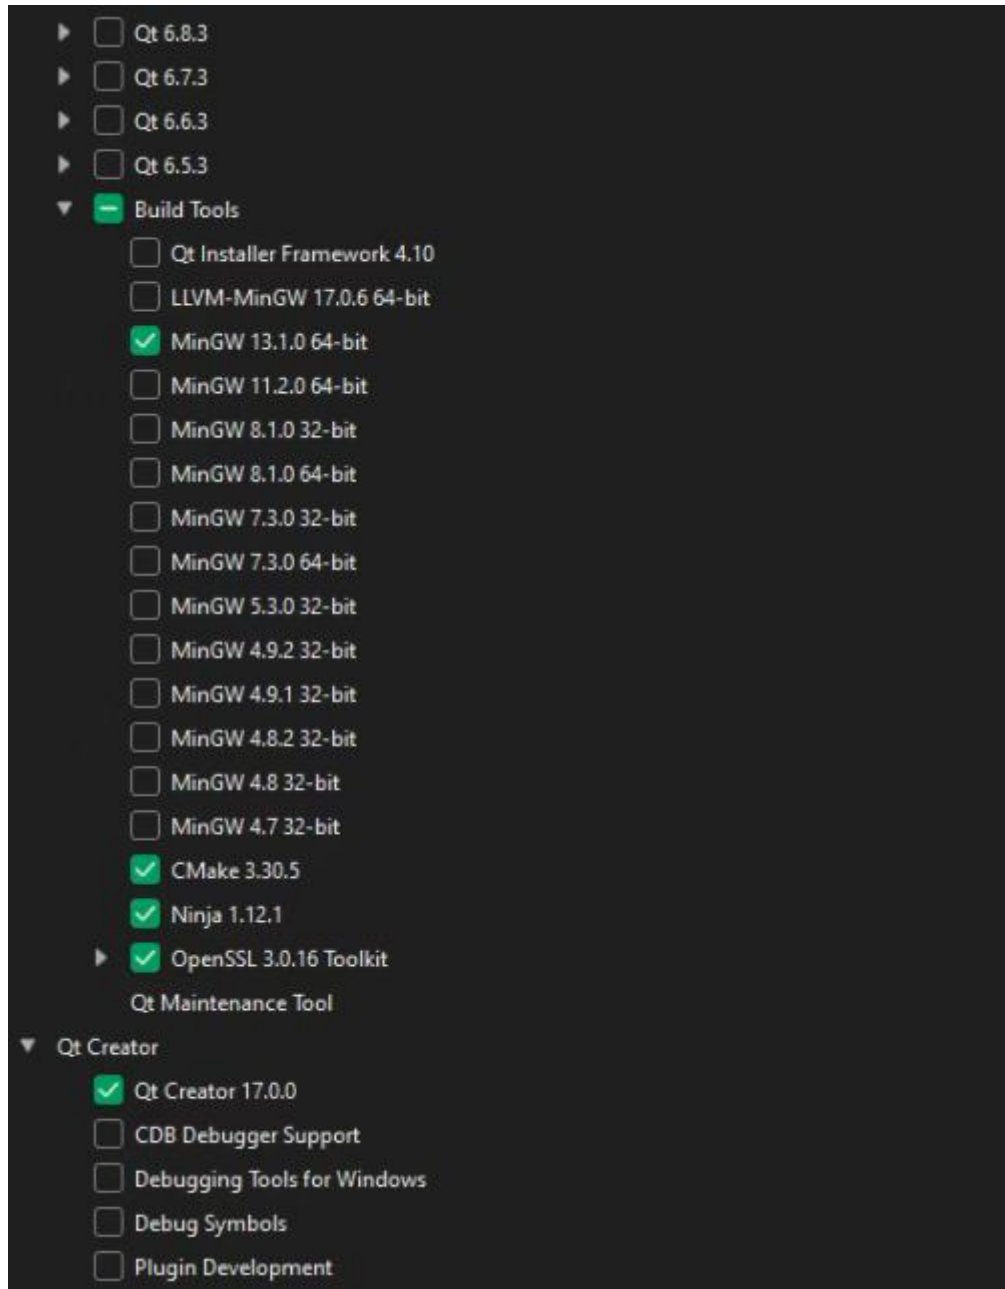

5.2、安装 MSYS2 依赖环境

```
pacman -S mingw-w64-ucrt-x86_64-openssl
```

5.3、下载源码

```
cd D:\
git clone --branch v1.2 https://github.com/Adaptix-Framework/AdaptixC2.git
AdaptixC2-v1.2
```

5.4、编译源码

```
set PATH=C:\Qt\Tools\mingw1310_64\bin;C:\Qt\Tools\CMake_64\bin;%PATH%
```

```
cd AdaptixC2-v1.2\AdaptixClient
```

```
mkdir build_release
```

```
cd build_release
```

```
cmake -G "MinGW Makefiles"
```

```
-DCMAKE_C_COMPILER=C:/Qt/Tools/mingw1310_64/bin/gcc.exe
```

```
-DCMAKE_CXX_COMPILER=C:/Qt/Tools/mingw1310_64/bin/g++.exe
```

```
-DCMAKE_BUILD_TYPE=Release
```

```
-DCMAKE_PREFIX_PATH=C:/Qt/6.11.1/mingw_64
```

```
-DOPENSSL_ROOT_DIR=C:/msys64/ucrt64
```

```
-DOPENSSL_INCLUDE_DIR=C:/msys64/ucrt64/include
```

```
-DOPENSSL_CRYPTO_LIBRARY=C:/msys64/ucrt64/lib/libcrypto.dll.a ..
```

```
cmake --build . --config Release
```

```
cd build_release
```

```
C:\Qt\6.11.1\mingw_64\bin\windeployqt.exe AdaptixClient.exe
```

