




Oracle Trace Files Explained

Attempting to Document the Internals of an Oracle Trace File

Norman Dunbar

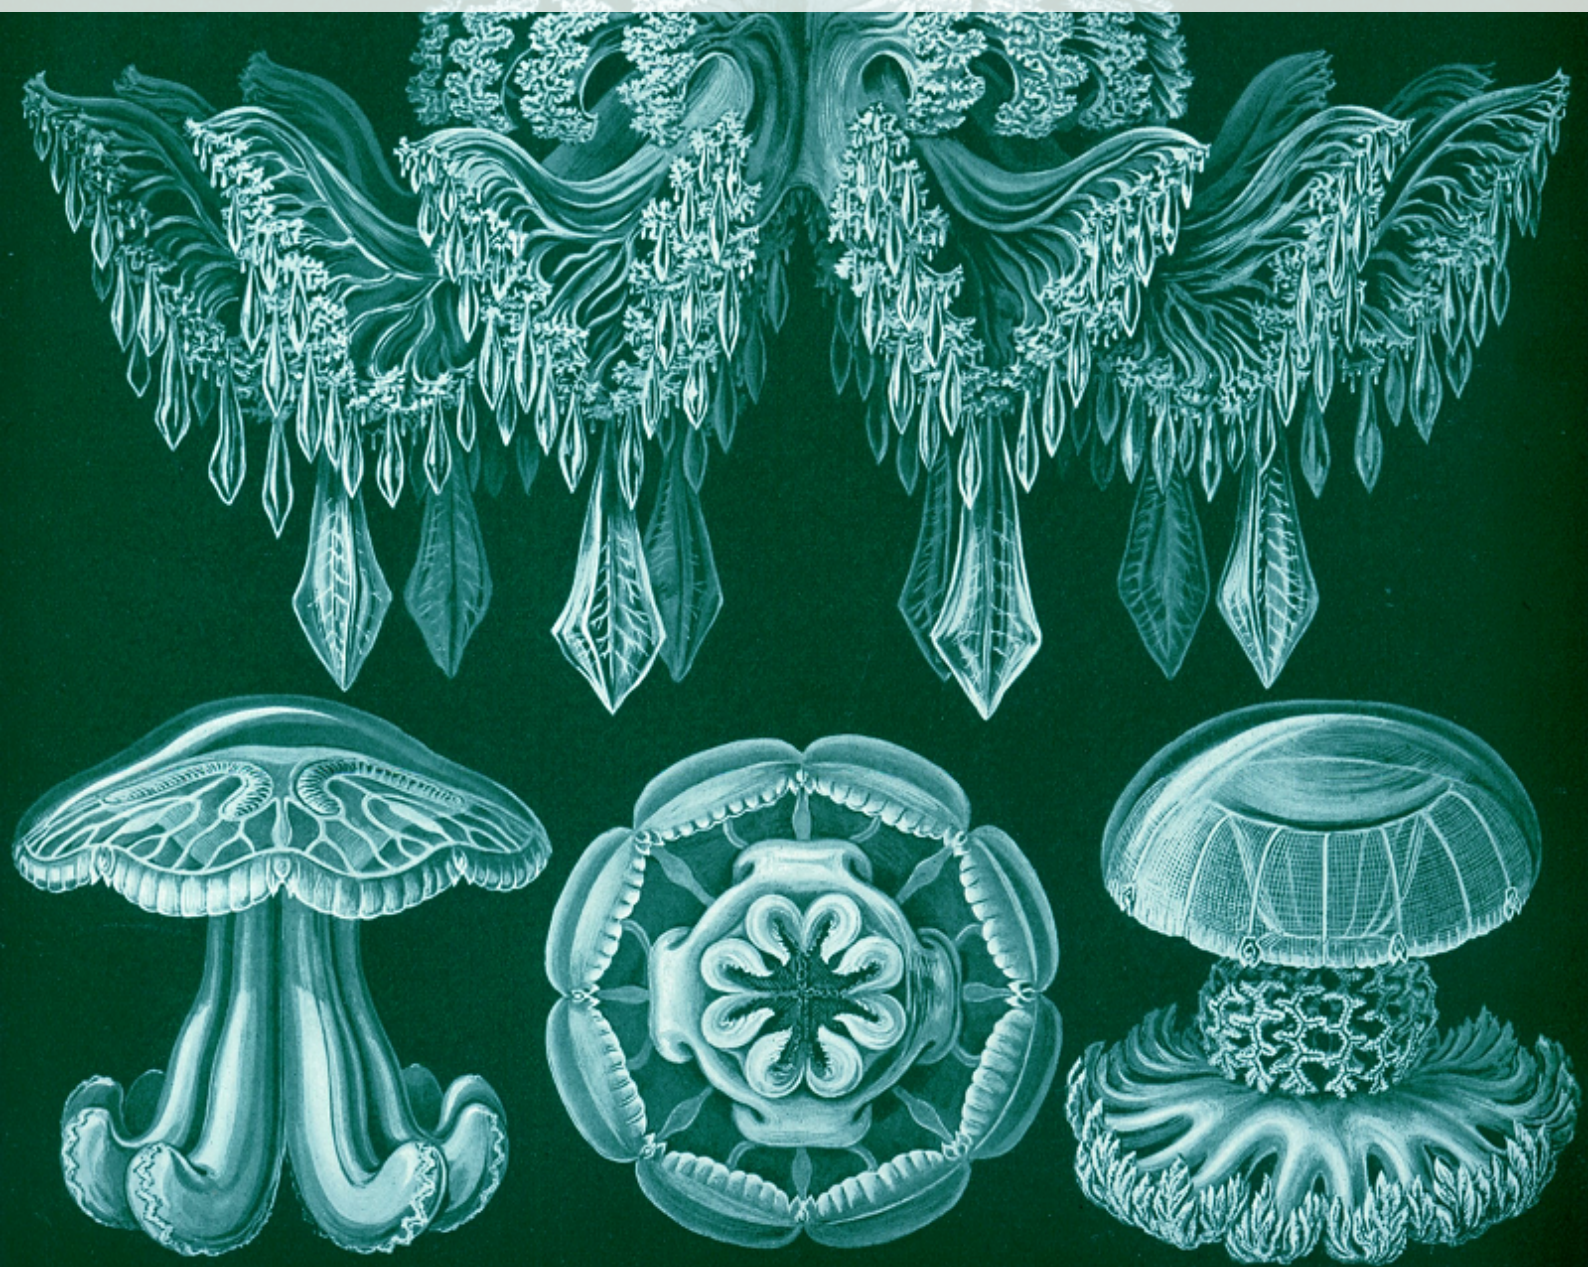

Copyright ©2017 Norman Dunbar

PUBLISHED BY MEMYSELF EYE PUBLISHING ;-)

The latest version of the eBook can be downloaded from [the book's github repository](#).

Licensed under the Creative Commons Attribution-NonCommercial 3.0 Unported License (the “License”). You may not use this file except in compliance with the License. You may obtain a copy of the License at <http://creativecommons.org/licenses/by-nc/3.0>. Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an “AS IS” BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

First printing, July 2017

This pdf document was created on 21/7/2017 at 15:52:06.



Contents

I	Oracle Trace Files	
1	Introduction	11
2	Oracle Trace Files Explained	13
2.1	Trace File Sections	13
2.1.1	The Header	13
2.1.2	Trace Details	14
2.2	Trace File Details	16
3	Trace File Entries	17
3.1	PARSING IN CURSOR	17
3.2	PARSE	19
3.3	PARSE ERROR	21
3.4	EXEC	22
3.5	FETCH	24
3.6	WAIT	25
3.7	ERROR	27

3.8	STAT	28
3.9	CLOSE	30
3.10	XCTEND	31
3.11	BINDS	32
3.11.1	Examples	33
3.12	UNMAP	36

II

Appendices

A	Oracle Data Types	39
B	Oracle Command Codes	41
C	Oracle Characterset Codes	45
D	How this Book Evolved	49
D.1	Why this Book?	49
D.2	Creating the Book	49
E	TraceAdjust Utility	51
F	TraceMiner2 Utility	53
	Index	55



List of Tables

3.1	Parsing in Cursor - Fields. . . <i>continues on next page</i>	17
3.1	Parsing in Cursor - Fields	18
3.2	Parse - Fields	19
3.3	Parse Error - Fields	21
3.4	Exec - Fields	22
3.5	fetch - Fields	24
3.6	Wait - Fields for Oracle 9i	25
3.7	Parse - Fields for Oracle 10g Onwards	26
3.8	Error - Fields	27
3.9	Stat - Fields for Oracle 9i	28
3.10	Stat - Fields for Oracle 10g Onwards	29
3.11	Close - Fields	30
3.12	Xctend - Fields	31
3.13	Binds - Fields for Oracle 9i	32
3.14	Binds - Fields for Oracle 10g Onwards. . . <i>continues on next page</i>	32
3.14	Binds - Fields for Oracle 10g Onwards	33
A.1	Bind Variable data Types. . . <i>continues on next page</i>	39
A.1	Bind Variable data Types	40
B.1	Oracle Command Codes. . . <i>continues on next page</i>	41
B.1	Oracle Command Codes. . . <i>continues on next page</i>	42
B.1	Oracle Command Codes	43
C.1	Oracle Character Set Codes. . . <i>continues on next page</i>	45
C.1	Oracle Character Set Codes. . . <i>continues on next page</i>	46

C.1	Oracle Character Set Codes	47
-----	----------------------------------	----



Listings

2.1	Oracle 11g Trace File Header	13
2.2	Oracle 11g Trace File Header - With Waits etc	14
2.3	Time Stamp Line	15
3.1	Parsing In Cursor Line	17
3.2	Parse Line	19
3.3	Parse Error Line	21
3.4	Exec Line	22
3.5	PL/SQL Exec Example	22
3.6	Fetch Line	24
3.7	Wait Line - Oracle 9i	25
3.8	Extracting Event Names for Oracle 9i	25
3.9	Wait Line - Oracle 10g Onwards	25
3.10	Error Line	27
3.11	Stat Line	28
3.12	Close Line	30
3.13	Commit Statement with Xctend Line	31
3.14	Example of Recursive SQL Statement	33
3.15	Binds Lines	33
3.16	Bind Example - VARCHAR2 with WE8ISO8859P1 Characterset	34
3.17	Bind Example - VARCHAR2 with ALUTF16 Characterset	34

3.18 Bind Example - REF_CURSOR	34
B.1 SQL Query to List Oracle Command Codes	43
C.1 SQL Query to list Character Set Codes and Names	45
C.2 SQL Query to Convert a csi Code to a Charcter Set Name	47
C.3 SQL Query to Convert a Charcter Set Name to a csi Code	47
E.1 TraceAdjust Example - Before Processing	51
E.2 TraceAdjust Example - After Processing	52



Oracle Trace Files

1	Introduction	11
2	Oracle Trace Files Explained	13
2.1	Trace File Sections	
2.2	Trace File Details	
3	Trace File Entries	17
3.1	PARSING IN CURSOR	
3.2	PARSE	
3.3	PARSE ERROR	
3.4	EXEC	
3.5	FETCH	
3.6	WAIT	
3.7	ERROR	
3.8	STAT	
3.9	CLOSE	
3.10	XCTEND	
3.11	BINDS	
3.12	UNMAP	



1. Introduction

Oracle trace files are not greatly documented. This document is an attempt to do so. It is *not* official in any way and is based on a good few years of reading these files to help diagnose various database problems.

A trace file is really the best way to delve into what Oracle is doing, or to discover why something is taking so long - it shows you exactly what happened during the period that the session was being traced.

Even better, when you extract an Explain Plan from a trace file, it is showing you exactly how Oracle retrieved the data from the tables, and exactly where the time was spent in doing so. Running an Explain Plan for ... statement in *SQL*Plus*, *Toad* etc tells you what Oracle *might* do. The two are not always the same.

The trace files used (and abused) in this eBook were all self contained, and extracted from a dedicated session on the database. If you are using shared sessions, then you have the unfortunate problem of having bits of your session trace spread over any number of different trace files. Not fun.

From Oracle 10g onwards, a utility has been supplied, named *trcsess*. This allows you to collect together all the separate files and merge them into one, ready for analysis. Even better, it apparently can also merge Oracle 9i shared server session trace files. Bonus!

Trace File Extracts

In the remainder of this eBook, extracts from trace files will be shown as follows:

```
WAIT #3220341128: nam='db file sequential read' ela= 1023 file#=3 block  
=>#=12 blocks=1 obj#=-1 tim=3520817183625
```


You will notice that long lines from the trace file are wrapped in the example above. However, all such wrapped lines are indicated by a \implies at the start of the continuation line(s). Sometimes though, the break in the lines can be at an awkward position. Sadly, I can't help this, it's all automagically done and I have no input as to how, exactly, \LaTeX decides.

Code Listings

SQL scripts (or any other program listings) will be listed as per the example below. The only difference being line numbers, in case I have to reference a particular point, and syntax highlighting.

```
1 select name, parameter1, parameter2, parameter3
2 from v$event_name
3 where name = 'db file sequential read';
```

Irregular Updates

This eBook is a work in progress, I am always learning, or trying to. As I update it, the latest version will always appear on GitHub as detailed on the Copyright page above. Also on that page, you will be able to see the date and time that the version of the eBook you are reading, was generated. That's done automagically too, so I don't need to remember to update it - thankfully!

Comments

Seen anything blatantly wrong? Something you think needs a better explanation? Too many blatant plugs? You can either create an issue on GitHub, or, [email me](#) with details and I'll do my best to get it fixed.

2. Oracle Trace Files Explained

2.1 Trace File Sections

The trace file is made up of two main sections, the header and the trace details.

2.1.1 The Header

The header is the top of the file and consists of a few lines of text giving details of where the trace file came from, which server (operating System) it was created on, various details about the server and the database and so on.

The following is an example of a trace file created on a Windows server, running Oracle 11.2.0.4. Server, database and other potentially sensitive information has been obfuscated to protect the guilty, me!

```
Trace file C:\ORACLEDATABASE\diag\rdbms\cfg\cfg\trace\  
    => orcl_ora_27680_FREESPACE.trc  
Oracle Database 11g Enterprise Edition Release 11.2.0.4.0 - 64 bit  
    => Production  
Windows NT Version V6.2  
CPU : 8 - type 8664, 8 Physical Cores  
Process Affinity : 0x0x0000000000000000  
Memory (Avail/Total): Ph:29917M/57343M, Ph+PgF:24634M/65535M  
Instance name: orcl  
Redo thread mounted by this instance: 1  
Oracle process number: 373  
Windows thread id: 27680, image: ORACLE.EXE (SHAD)  
  
*** 2017-06-27 13:56:36.872  
*** SESSION ID:(1017.1085) 2017-06-27 13:56:36.872  
*** CLIENT ID:() 2017-06-27 13:56:36.872  
*** SERVICE NAME:(ORCLSRV) 2017-06-27 13:56:36.872
```

```
*** MODULE NAME:(TOAD background query session) 2017-06-27 13:56:36.872
*** ACTION NAME:() 2017-06-27 13:56:36.872
```

```
=====
```

Listing 2.1: Oracle 11g Trace File Header

The last line, consisting of equals signs, is the separator between the header and the following trace details.

In Oracle versions before 10g, the latter chunk of text is not found, the one detailing session, client, module etc, those first appeared at 10g.

Note

Sometimes, you might see a header that has a number of detail lines before the final separator, for example:

```
...
*** 2017-05-08 12:39:13.496
*** SESSION ID:(777.2309) 2017-05-08 12:39:13.496
*** CLIENT ID:() 2017-05-08 12:39:13.496
*** SERVICE NAME:(SYS$USERS) 2017-05-08 12:39:13.496
*** MODULE NAME:(SQL*Plus) 2017-05-08 12:39:13.496
*** ACTION NAME:() 2017-05-08 12:39:13.496

WAIT #523653448: nam='SQL*Net message to client' ela= 1
    => driver id=1111838976 #bytes=1 p3=0 obj#=14232 tim
    => =1743670562625
WAIT #523653448: nam='SQL*Net message from client' ela= 1027
    => driver id=1111838976 #bytes=1 p3=0 obj#=14232 tim
    => =1743670564245
CLOSE #523653448: c=0,e=7,dep=0,type=1,tim=1743670564280
WAIT #0: nam='SQL*Net more data from client' ela= 12 driver
    => id=1111838976 #bytes=10 p3=0 obj#=14232 tim
    => =1743670564312
=====
```

Listing 2.2: Oracle 11g Trace File Header - With Waits etc

In this case, the trace was started after the session had parsed a query, and was in the process of executing it (EXEC and, if necessary FETCH) when the trace started. Oracle has not shown the PARSING IN CURSOR line(s) for the query in question, which is a shame.

Normally, you can ignore the detail lines above the header separator, however, you sometimes see numerous WAIT lines above the separator, in which case, there could be something to investigate. This is more likely to occur when you start tracing a session that is taking a huge amount of time, and is already under way when you begin the trace.

2.1.2 Trace Details

The majority of the trace file consists of the full trace details for the session that was traced. There are numerous lines of text here, each different, each with their own fields of one kind or another.

These are explained in the following sections.

Note

Remember, when Oracle writes a line to the trace file, it is done at the *end* of the process that was indicated by the written line. For example, if you see a FETCH line in the trace file, that

was written at the time (`tim`) that the `FETCH` completed. The trace file should be considered a list of things *that happened* and not *things that are about to happen*.

Timestamp Lines

One line that you should be interested in is this one from the header above:

```
*** 2017-06-27 13:56:36.872
```

Listing 2.3: Time Stamp Line

This is the first timestamp line in the trace file and sets the baseline for all the `tim` fields (these will be explained below) that follow, however, briefly, the `tim` values are in microseconds (millionths of a second) from a specific “epoch” - which depends on the operating system - and there isn’t a consistent, operating system independent, method of converting `tim` values from a huge number of microseconds to an actual date and time that humans will understand.

There are usually a few timestamp lines written to the trace file, depending on how long it has been processing for, and these mean that we can, with a bit of fiddling, relate a `tim` value to an actual time on the clock.

The *first* `tim` value that you see, following a timestamp line, will be the microsecond equivalent to the date and time in the timestamp line.

Recursive SQL

Your SQL statements are normally executed as top-level statements, but Oracle might need to execute some (a lot!) of recursive SQL statements, in order that your statement can be processed.

If, for example, you drop a user in a database with the `drop user xxx cascade` statement, Oracle goes off and executes hundreds of separate SQL statement to find out what objects the user owns, or has privileges to, and undoes all of those before finally dropping the contents of the user and finally the user itself.

Top-level SQL statements are identified by having a depth of zero. This can be seen in many of the trace file lines as `dep=0` in the various lines of the trace file.

Recursive statements, executed in the background, have a depth greater than zero, and some of these require recursive statements of their own, and so on.

This recursion leads to a foible in the trace file, your statement appears last and all the possibly nested, recursive statements will normally appear first. This is simply because in order for your statement to be executed, the recursive statements have to run to completion *first*.

For example, in a trace file I have open in front of me, the first statement with a `dep=0` occurs at line 709 in the file. Everything prior to that runs at `dep=3`, `dep=2` or `dep=1` and complete before I can see my own SQL statement.

Under normal circumstances, a statement that is parsed (executed etc) at `dep=n`, where $n > 0$, has been called recursively, to facilitate a statement, that will follow in the trace file, that is itself parsed (executed etc) at `dep=n - 1`.

Waits

`WAIT` lines in a trace file are similar, in that the `WAIT` must complete, and so is written to the trace file, *before* the statement that incurred the wait. For example, a `FETCH` that had to wait for `db file`

scattered read events, will appear later in the trace file that the individual WAIT lines that the FETCH suffered from.

Cursor Ids

Every time you see a '#' followed by a number, you are looking at a cursor ID. In previous versions of Oracle, these were simply an ever increasing number, starting from 1 and increasing by 1 for each new cursor.

In Oracle 11g, the cursor *appears* to be an address in memory¹, and *will be reused* as cursors are closed and new ones opened. You cannot assume, therefore, that a cursor with a specific ID at the end of the trace file, relates to any other lines with that same ID previously written to the trace file, without checking for any intervening CLOSE lines with the same ID - that's just how it is now!

Active or Inactive

You might want to look in the STATUS column in V\$SESSION to determine if the session is active - doing *something* - or not. However, you must be aware that the STATUS column only gives an active reading when the statement is in a PARSE, EXEC or FETCH phase of execution. If the statement is in a WAIT, for example, it will show as inactive - but it is actually still processing the current statement. Something to bear in mind.

2.2 Trace File Details

As mentioned above, the trace file details, which consists of many different entries, is discussed in the following chapter.

¹But don't quote me on this, I saw it written down somewhere on the Oracle Support web site, but now that I need it, I cannot find it again. Sigh!

3. Trace File Entries

3.1 PARSING IN CURSOR

This is *usually* the first line you will see for a cursor. It shows the full SQL statement between the `PARSING IN CURSOR` line and the `END OF STMT` line. The SQL is displayed exactly as the user (or application) entered it. However, if the statement is invalid, or cannot be parsed, you will not see this, or the `PARSE` line in the trace file, you will only see a `PARSE ERROR` line instead.

This is not the actual `PARSE` for the cursor though, that normally follows on later, usually!

As an example, here is the `PARSING IN CURSOR` line for the SQL query that Toad runs in the background to extract the free space used in the database by various tablespaces, including temporary ones. However, I'm not showing the SQL here:

```
PARSING IN CURSOR #3220341128 len=3081 dep=0 uid=0 oct=3 lid=0 tim
=> =3520788574727 hv=3219027813 ad='7ffcb6778350' sqlid='7
=> bwtj5azxwxv5'
```

Listing 3.1: Parsing In Cursor Line

The various fields defined, and their descriptions can be seen in the table below.

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
len	The size, in bytes? Characters? of the SQL statement.
dep	Recursion level. 0 = Top-level, user, SQL.
uid	The user id of the user parsing the statement.
oct	Oracle Command Code of the SQL Statement. (See Appendices.)
lid	Unknown.

Table 3.1: Parsing in Cursor - Fields... *continues on next page*

Code	Description
tim	Time, in microseconds, that the details were written out to the trace file.
hv	Hash Value for the statement.
ad	Cursor address in memory?
sqlid	The SQL ID for the statement.

Table 3.1: Parsing in Cursor - Fields

The `uid` field references the column `USER_ID` in the views `DBA_USERS`, `ALL_USERS` and `USER_USERS`.

The `lid` field is unknown at present. It's probably an ID of some kind, but for what?

As mentioned, the cursor ID field has a value that may (or may not) be an address in memory. However, that's not the same as the `ad` field, which is (I think) an address in memory for the cursor.

The `sqlid` field is the same as the `SQL_ID` column in `V$SQL`. The `hv` field is the hash value that Oracle used to determine if this statement was to be found in the cache or not. It matches the `SQL_HASH_VALUE` (and `PREV_HASH_VALUE`) column in `V$SESSION` and also the `HASH_VALUE` column in `V$SQL`.

Sometime Oracle will not write these lines to the trace file. If the cursor has been parsed, and subsequently coded, then re-parsed, you will see a `PARSE` line but not a new `PARSING IN CURSOR` for the statement. This *appears* to be only on those occasions where the statement is re-parsed *immediately* after being closed. I have not seen this “feature” when the cursor ID was used by a different statement in between.

3.2 PARSE

Normally, after the `PARSING IN CURSOR` lines, you will see a `PARSE` line for the same cursor ID. This is not always the case, for example, if you started the trace after the statement had been parsed, Oracle will write the `PARSING IN CURSOR` lines, but not the `PARSE`, to the trace file.

A typical `PARSE` line will look like this:

```
PARSE #491311368:c=0,e=452,p=0,cr=0,cu=0,mis=1,r=0,dep=0,og=1,plh
=>=1388734953,tim=97734887542
```

Listing 3.2: Parse Line

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
c	Elapsed CPU time. Microseconds.
e	Elapsed wall clock time, also in microseconds.
p	The number of physical reads (blocks) that were necessary in order to carry out this <code>PARSE</code> .
cr	The number of consistent reads (blocks) that were necessary in order to carry out this <code>PARSE</code> .
cu	The number of current reads (blocks) that were necessary in order to carry out this <code>PARSE</code> .
mis	Whether this statement was found in the cache (0) or not (1). Indicates whether or not a hard parse was required. Seeing a 1 is bad, usually.
r	Rows processed.
dep	Recursion level. 0 = Top-level, user, SQL.
og	Optimiser goal. 1 = <code>ALL_ROWS</code> , 2 = <code>FIRST_ROWS</code> , 3 = <code>RULE</code> , 4 = <code>CHOOSE</code> . Depending on your version of Oracle, you may not see some of the above.
plh	Execution plan hash value.
tim	Time, in microseconds, when the parse for the statement completed. Not the time it took.

Table 3.2: Parse - Fields

The `plh` value is a value that corresponds to the column `PLAN_HASH_VALUE` in `V$SQL_PLAN`, `V$SQL_PLAN_STATISTICS_ALL` and `V$SQLSTATS`. (There may be other views where this value appears, depending on the Oracle version in use.)

Block Details

The `p`, `cr` and `cu` statistics are the usual ones for block reads, viz:

- Physical reads occur when Oracle must read a block, from disc, into the buffer cache. This indicates also an additional `cr` as the block will be used unchanged.
- Consistent reads are the number of blocks of UNDO that Oracle applied to one or more blocks, in order to return the data in those blocks, to the state they were in when the “query” started. The query in this case, would be any or all recursive queries necessary to facilitate

the PARSE.

- Current Reads are blocks that Oracle used without needing to roll them back to the start of the “query”.

The fields for an PARSE are the same as those for an EXEC and a FETCH - see below.

The *r* field is *interesting*. Surely only a FETCH would process some rows? I thought so too, and in all the trace files I’ve come across, I have yet to see (ok, yet to *notice*) a PARSE line with anything other than *r*=0. I wonder why Oracle have it as part of the PARSE? Maybe, because they use the same format of line for the PARSE and EXEC they decided just to use the same one, and set the row count for a PARSE to zero?¹

¹We may never know!

3.3 PARSE ERROR

If a PARSE goes wrong for some reason, the trace file will show something like the following:

```
PARSE ERROR #491311368:len=26 dep=0 uid=755 oct=3 lid=755 tim
    => =97734836031 err=1031
SELECT LIVE_DEV FROM SITE
```

Listing 3.3: Parse Error Line

There will not normally be a PARSING IN CURSOR or a PARSE shown in the trace file for this statement.

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
len	The length of the SQL statement in bytes, maybe characters depending on your character set.
dep	Recursion level. 0 = Top-level, user, SQL.
uid	The user id of the user parsing the statement.
oct	Oracle Command Code of the SQL Statement. (See Appendices.)
lid	Unknown.
tim	Time, in microseconds, when this parse error was detected.
err	The Oracle error code that caused the parse to fail.

Table 3.3: Parse Error - Fields

In this case, there was an error ORA-01031: `insufficient privileges` as the user parsing the statement did not have the required privileges to see the table in question.

The `uid` field references the column `USER_ID` in the views `DBA_USERS`, `ALL_USERS` and `USER_USERS`.

3.4 EXEC

The EXEC phase of a statement's execution is when Oracle dives into the database to build a result set of the desired data. It need not be the complete result set though, so beware of that.

A typical EXEC will resemble the following:

```
EXEC #3220341128:c=0,e=101,p=0,cr=0,cu=0,mis=0,r=0,dep=0,og=1,plh
⇒ =2215247290,tim=3520788606189
```

Listing 3.4: Exec Line

Bear in mind, however, that the EXEC elapsed times do not necessarily bear any resemblance to the entire time it took for the user to get a response. That response time includes the PARSE, EXEC, all the FETCHes and all the WAITs that were encountered.

The fields in an EXEC are as follows:

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
c	Elapsed CPU time. Microseconds.
e	Elapsed wall clock time, also in microseconds.
p	The number of physical reads (blocks) that were necessary in order to carry out this PARSE.
cr	The number of consistent reads (blocks) that were necessary in order to carry out this PARSE.
cu	The number of current reads (blocks) that were necessary in order to carry out this PARSE.
mis	Whether this statement was found in the cache (0) or not (1). Indicates whether or not a hard parse was required. Seeing a 1 is bad, usually.
dep	Recursion level. 0 = Top-level, user, SQL.
r	Rows processed.
og	Optimiser goal. 1 = ALL_ROWS, 2 = FIRST_ROWS, 3 = RULE, 4 = CHOOSE. Depending on your version of Oracle, you may not see some of the above.
plh	Execution plan hash value.
tim	Time, in microseconds, for this statement to be executed. This is not the time it took!

Table 3.4: Exec - Fields

The fields for an EXEC are the same as those for a PARSE (and FETCH - see below).

The *r* field is *interesting*. Surely only a FETCH would process some rows? Not necessarily. Normally, when EXECing a statement, the number of rows processed is indeed zero, but some PL/SQL, for example, returns a row count of 1. In my demonstration trace file I see 4 statements whose EXEC has *r*=1 and all of them are of the format:

```
1 begin
2   do_something ();
```

```
3 end ;
```

Listing 3.5: PL/SQL Exec Example

The “do_something()” call is to `DBMS_MONITOR.START_TRACE`, `DBMS_MONITOR.STOP_TRACE` and calls to `DBMS_OUTPUT.GET_LINE`. These statements have no `FETCH` calls.

You may wish to refer back to page 19 for details of the p, cr and cu block statistics in the EXEC line.

3.5 FETCH

After processing the EXEC call, and any associated WAITs, Oracle may FETCH some, or all, of the rows returned by the query. A FETCH line may resemble the following:

```
FETCH #3220341128:c=1812500,e=28665431,p=11137,cr=50774,cu=316,mis=0,r
⇒ =30,dep=0,og=1,plh=2215247290,tim=3520817271640
```

Listing 3.6: Fetch Line

And anyone paying close attention will notice that the time it took to FETCH 30 rows was a little excessive at 28.66 seconds. In case you are wondering, this is a query against DBA_FREE_SPACE on an 11.2.0.4 database, and it is taking so long as it is hitting the *never to be solved* [Bug 19125876](#) which affects 11.20.4 on AIX on Power Systems. Unfortunately, *this* trace file is from a Windows server. The bug was logged on 30th June 2014, last updated on 26th June 2017, *and is not yet fixed!*

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
c	Elapsed CPU time. Microseconds.
e	Elapsed wall clock time, also in microseconds.
p	The number of physical reads (blocks) that were necessary in order to carry out this FETCH.
cr	The number of consistent reads (blocks) that were necessary in order to carry out this FETCH.
cu	The number of current reads (blocks) that were necessary in order to carry out this FETCH.
mis	Whether this statement was found in the cache (0) or not (1).
r	Rows processed.
dep	Recursion level. 0 = Top-level, user, SQL.
og	Optimiser goal. 1 = ALL_ROWS, 2 = FIRST_ROWS, 3 = RULE, 4 = CHOOSE. Depending on your version of Oracle, you may not see some of the above.
plh	Execution plan hash value.
tim	Time, in microseconds, that this one fetch was completed.

Table 3.5: fetch - Fields

The fields for a FETCH are also the same as those for a PARSE and EXEC.

The *mis* field is *interesting*. Surely only a PARSE would indicate a miss in the cache? Again, I think Oracle are using the same format of a trace line for PARSE, EXEC and FETCH and simply ignoring or defaulting certain, non-applicable, fields.

You may wish to refer back to page [19](#) for details of the p, cr and cu block statistics in the EXEC line.

3.6 WAIT

This is the meat of the trace file, usually. Under normal circumstances, it's usual for the various phases of execution (PARSE, EXEC and FETCH) to encounter some WAIT events. And I would say, personally², that these WAIT states are where the vast majority of the total response time is encountered.

A WAIT line in the trace file will resemble the following example, up until Oracle 9i at the latest:

```
WAIT #3220341128: nam='db file sequential read' ela= 2769 p1=37 p2
=> =12931 p3=1
```

Listing 3.7: Wait Line - Oracle 9i

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
nam	The name of the wait event encountered.
ela	Elapsed wall clock time, in microseconds.
p1	Event parameter 1.
p2	Event parameter 2.
p3	Event parameter 3.

Table 3.6: Wait - Fields for Oracle 9i

The p1, p2 and p3 parameters are different depending on the wait event name. You may require to loom them up in V\$EVENT_NAME to understand what they refer to. For the event above, we see the following:

- p1 is the file number;
- p2 is the (starting) block number;
- p3 is the number of blocks requested.

You may wish to use the following query to determine the various parameters for the WAIT events seen in the trace file:

```
1 select name, parameter1, parameter2, parameter3
2 from v$event_name
3 where name = 'db file sequential read';
```

Listing 3.8: Extracting Event Names for Oracle 9i

Substitute the appropriate event name for your particular WAIT event of course. And, don't forget, it *is* case sensitive - Oracle are seriously inconsistent when it comes to naming events!

In Oracle versions 10g onwards, the format is much easier to understand as the generic p1, p2 and p3 have been replaced by something more meaningful, as follows for the same WAIT event:

```
WAIT #3220341128: nam='db file sequential read' ela= 1023 file#=3 block
=> #=12 blocks=1 obj#=-1 tim=3520817183625
```

Listing 3.9: Wait Line - Oracle 10g Onwards

²Beware of small sample sizes!

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
nam	The name of the wait event encountered.
ela	Elapsed wall clock time, in microseconds.
file#	For this wait, the file number.
block#	For this wait, the (starting) block number.
blocks	For this wait, the number of blocks requested.
obj#	If appropriate, the object in question.
tim	Time, in microseconds, that this one wait was completed.

Table 3.7: Parse - Fields for Oracle 10g Onwards



The above is an example of one particular WAIT event. Other events will have different parameters, as appropriate for the particular event. At least, from 10g onwards, we don't have to look up V\$WAIT_NAME every time we find a new event in our trace file. Oracle 11g added its own fields too.

The obj# refers to a specific object, where one is involved. In the above example, the value is -1, so there is no particular object in this WAIT. We are waiting for a block off of the disc, which *may* be part of an index or a table, etc, but for the sake of this WAIT, Oracle considers that there is not a specific object involved.

Where an obj# is not -1, then the value refers to the OBJECT_ID in the DBA_OBJECTS view.

3.7 ERROR

If an error is detected while tracing a session, the trace file may show something like the following:

```
ERROR #275452960: err=31013 tim=1075688943194
```

Listing 3.10: Error Line

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
err	The Oracle error code that caused the error.
tim	Time, in microseconds, when this error was detected.

Table 3.8: Error - Fields

In this example, the error relates to `ORA-31013: Invalid XPATH expression` and indeed, is what the user saw on their terminal at the time - and was the reason I traced it because the application wasn't good enough in explaining which object caused the problem!

3.8 STAT

In order to see the STAT lines in your trace file, the TIMED_STATISTICS parameter for the database must be set to TRUE.

In Oracle 9i, there are no execution statistics or timings displayed in the op field. These are only present from 10g onwards.

The STAT lines show you *exactly* how Oracle went about getting the data back to you. It is possible for this to be different for the plan displayed by the EXPLAIN PLAN FOR ... statement. In a trace file, it shows what happened, as opposed to what *might* happen!

A typical STAT output could resemble the following:

```
STAT #5141189408 id=1 cnt=1 pid=0 pos=1 obj=20 op='TABLE ACCESS BY
=> INDEX ROWID ICOL$ (cr=4 pr=0 pw=0 time=26 us cost=2 size=54 card
=> =2)'
STAT #5141189408 id=2 cnt=1 pid=1 pos=1 obj=42 op='INDEX RANGE SCAN
=> I_ICOL1 (cr=3 pr=0 pw=0 time=22 us cost=1 size=0 card=2)'
```

Listing 3.11: Stat Line

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
id	The identifier for this row of the explain plan may be referred to by the pid field, in nested STAT lines. Allows a hierarchy to be built.
cnt	The number of rows processed by this step in explain plan.
pid	The parent ID for this step on the plan. Should be zero on the id=1 line.
pos	The position of this step, within the parent steps in the plan.
obj	The object identifier.
op	The operation performed by this step. This will include additional statistical and timing figures from 10g onwards. 9i is sadly deficient in this matter!

Table 3.9: Stat - Fields for Oracle 9i

Although the example STAT lines above show only a couple of lines, it is possible for more than one to be present under a single parent step. In this case, the pid would be the same, but the pos would be different.



Pos *should* be a sequentiality increasing number, showing which step was executed when in order to facilitate the parent step, however, I have seen trace files where there have been more than one row with the same pid *and* the same pos. This is a *bad thing* when trying to figure out what happened when!

In 10g and above, the additional fields in the op field itself, are as follows:

Code	Description
cr	The number of consistent reads.
pr	The number of physical reads.
pw	The number of physical writes.
time	The elapsed time in microseconds.
cost	The cost of this step, as determined by the Cost Based Optimiser.
size	From 11g, an estimate of the size, in bytes, of the data returned by this step.
card	The number of rows processed. 11g onwards.

Table 3.10: Stat - Fields for Oracle 10g Onwards

3.9 CLOSE

An example of a CLOSE line from a trace file is as follows:

```
CLOSE #3220452784: c=0, e=13, dep=0, type=0, tim=3520822918452
```

Listing 3.12: Close Line

Code	Description
#nnnn	The cursor ID. This may be reused if for future cursors if this one is closed, and another opened.
c	Elapsed CPU time. Microseconds.
e	Elapsed wall clock time, also in microseconds.
dep	Recursion level. 0 = Top-level, user, SQL.
type	Close type.
tim	Time, in microseconds, that this statement was closed. This is the time it was actually closed not when the close started.

Table 3.11: Close - Fields

This line is written when a cursor used for an SQL statement, is no longer required and has been closed. The elapsed times relate to the time it took to close the cursor.

The `type` field is used to determine how the cursor was closed. It takes the following values:

- 0 if the cursor was hard closed. This indicates that the cursor was not saved in the server side closed cursor cache for later reuse. This can be because:
 - The statement is a DDL statement. DDL statements are never cached.
 - `SESSION_CACHED_CURSORS` is set to zero, and no caching is permitted.
 - The statement could be cached, but as it has not been executed often enough (three times minimum), then it has not yet been cached.
- 1 if the cursor has been cached, as opposed to properly closed, in an empty slot in the cache.
- 2 if the cursor was cached, but caused another cursor to be aged out as there were no free slots.
- 3 if the cursor remains in the cache.

A cursor ID that has been closed may be re-used by a subsequent opening of a new cursor, which can be for a different statement, or for this one again.

3.10 XCTEND

This line in a trace file indicates the end of a transaction. Sometimes you will see this:

```
PARSING IN CURSOR #398131288 len=6 dep=1 uid=90 oct=44 lid=90 tim
=> =1484913807072 hv=255718823 ad='0' sqlid='8ggw94h7mvxd7'
COMMIT
END OF STMT
PARSE #398131288:c=0,e=4,p=0,cr=0,cu=0,mis=0,r=0,dep=1,og=0,plh=0,tim
=> =1484913807071
XCTEND rlbk=0, rd_only=1, tim=1484913807100
EXEC #398131288:c=0,e=27,p=0,cr=0,cu=0,mis=0,r=0,dep=1,og=0,plh=0,tim
=> =1484913807121
CLOSE #398131288:c=0,e=0,dep=1,type=3,tim=1484913807132
```

Listing 3.13: Commit Statement with Xctend Line

You can see here the entire PARSE, EXEC and CLOSE for the statement. Sometimes, you don't see the COMMIT (or ROLLBACK) statement being parsed, all you see is the XCTEND line in the trace file. Why? I have no idea - it's an Oracle thing!

You should notice in the above, that the transaction was completed *before* the EXEC completed. remember that the trace file shows things after they have finished. So the EXEC of the COMMIT statement had to wait for the transaction to end before it could complete.

The fields you will see in an XCTEND line are as follows:

Code	Description
rlbk	0 indicates COMMIT, 1 is for ROLLBACK.
rd_only	Whether or not the transaction was read only (1) or read write (0) regardless of COMMIT or ROLLBACK being executed to end it.
tim	Time, in microseconds, at which the transaction ended.

Table 3.12: Xctend - Fields

3.11 BINDS

To see the bind details in a trace file, you need to have enabled at least trace level 4 (for a 10046 event), or set `binds => true` for `DBMS_SUPPORT` and `DBMS_MONITOR` calls to start tracing. You should also be *using* binds in your SQL statement too of course!

There is a *lot* of information in the binds section of a trace file. For 9i, the following data are listed:

Code	Description
dtv	Data type code. (See Appendices.)
mxl	Maximum length of the bind variable value. (private maximum length in parentheses.)
mal	Array length.
scl	Scale. Only for numeric binds.
pre	Precision. Only for numeric binds.
oacflg	Special flag indicating bind options.
oacflg2	Second part of oacflg.
size	Amount of memory to be allocated for this chunk of the bind.
offset	Offset into this chunk for this bind buffer.
bfp	Bind address.
bln	Bind buffer length.
avl	Actual value length. A value of zero = NULL, or a PL/SQL OUT bind - if the cursor's command is 47 for PL/SQL Execution.
flg	Bind status flag.
value	Value of the bind variable.

Table 3.13: Binds - Fields for Oracle 9i

While for 10g upwards, we would expect to see the following:

Code	Description
oacdty	Data type code. (See Appendices.)
mxl	Maximum length, in bytes, of the bind variable value. (Used length in parentheses.)
mxlc	Maximum length, in characters, of the bind variable value. (Used length in parentheses.)
mal	Array length.
scl	Scale. Only for numeric binds.
pre	Precision. Only for numeric binds.
oacflg	Special flag indicating bind options.
fl2	Second part of oacflg.
frm	Unknown.
csi	Identifier code for the database's default or national character set. (See Appendices.) Only used in character/string binds.
siz	Size of memory to be allocated for this chunk.
off	Offset into the chunk of the bind buffer.
kxsbbfp	Bind address.

Table 3.14: Binds - Fields for Oracle 10g Onwards. ...continues on next page

Code	Description
bln	Bind buffer length.
avl	Actual value length. A value of zero = NULL, or a PL/SQL OUT bind - if the cursor's command is 47 for PL/SQL Execution.
flg	Bind status flag.
value	Value of the bind variable, or a memory dump. This field will only be shown for any bind that has a non-NULL value.

Table 3.14: Binds - Fields for Oracle 10g Onwards

Binds always number from left to right in an SQL statement. This means that the first bind found in the statement, will be listed in the trace file as BIND#0 regardless of its actual name or number in the statement.

If a bind, for example :3, is used more than once in the *same* SQL statement, then it will appear *once* in the binds list - as BIND#2, however, the statement itself will refer to it correctly as :3 each time it is used.

The oacdt values are listed in the appendices for reference. There are quite a few of these, and you should note that experience has shown that the Oracle documentation doesn't always seem match up to the reality of a trace file.

Always be aware, however, that just because a bind is defined to be a VARCHAR2, oacdt=01, for example, it doesn't mean that the column in the table it relates to is also a VARCHAR2. Some people write code that passed VARCHAR2 values to a DATE column - this negating the ability to ever use an index (unless a function based index is created) on that DATE column!

The mx1 fields shows how big the buffer assigned to this bind variable is, and how much of it has been used. This is measured in bytes. The mx1c shows, where applicable, the buffer size and used size in characters³. This will depend on the character set in use. If the character size is not appropriate, then mx1c will be zero.

3.11.1 Examples

The following is an 11g example of the binds section for the following (recursive) SQL statement:

```

1 select o.owner#, o.name, o.namespace, o.obj#, d.d_timestamp,
2       nvl(d.property,0), o.type#, o.subname, d.d_attrs
3 from   dependency$ d, obj$ o
4 where  d.p_obj#=:1
5 and    (d.p_timestamp=nvl(:2,d.p_timestamp) or d.property=2)
6 and    o.owner#=nvl(:3,o.owner#)
7 and    d.d_obj#=o.obj#
8 order by o.obj#
```

Listing 3.14: Example of Recursive SQL Statement

The binds section, extracted from the trace file, looks as follows:

```

BINDS  #741210192:
Bind#0
```

³At least, that's what I think it shows!

```

oacdtty=02 mxl=22(22) mxlc=00 mal=00 scl=00 pre=00
oacflg=00 fl2=0001 frm=00 csi=00 siz=56 off=0
kxsbbbf=2c2d4c58 bln=22 avl=04 flg=05
value=104305
Bind#1
oacdtty=12 mxl=07(07) mxlc=00 mal=00 scl=00 pre=00
oacflg=11 fl2=0001 frm=00 csi=00 siz=0 off=24
kxsbbbf=2c2d4c70 bln=07 avl=07 flg=01
value="6/26/2017 9:58:26"
Bind#2
oacdtty=02 mxl=22(22) mxlc=00 mal=00 scl=00 pre=00
oacflg=01 fl2=0001 frm=00 csi=00 siz=0 off=32
kxsbbbf=2c2d4c78 bln=22 avl=00 flg=01

```

Listing 3.15: Binds Lines

Looking specifically at the above, we can see the following:

- We have two NUMBER binds, and one DATE;
- Neither of the NUMBERS have a scale or precision;
- The last bind, BIND#2, is a NUMBER and is NULL (avl=00) and so has no value clause;
- Because these binds are of specific types, where the storage is always exactly as indicated by the mxl field, the private storage used for the value is always the same length. In other words, NUMBER data types are always 22 bytes while DATES are 7;
- There are no character sets applicable to NUMBER or DATE data types (csi=00).

Character (VARCHAR2, CHAR etc) binds take the following form:

```

Bind#1
oacdtty=01 mxl=32(04) mxlc=00 mal=00 scl=00 pre=00
oacflg=10 fl2=0001 frm=01 csi=31 siz=0 off=24
kxsbbbf=610cd550 bln=32 avl=04 flg=01
value="DUAL"

```

Listing 3.16: Bind Example - VARCHAR2 with WE8ISO8859P1 Characterset

Here we can see that:

- csi=31 is listed so checking with the character set list, in the appendices of this document, we see that this means that the bind is using the WE8ISO8859P1 character set;
- The value can be easily read from the trace file. Had this been in a different character set, ALUTF16 for example (csi=2000), then the value would most likely have been dumped in hexadecimal, as follows:

```

...
value = 0 44 0 55 0 41 0 4C

```

Listing 3.17: Bind Example - VARCHAR2 with ALUTF16 Characterset

- We can also see that although the maximum size of the buffer for this bind is 32, (mxl=32), only 4 bytes are in use (mxl=32(04)).

A REF_CURSOR bind, will resemble the following. It has an oacdtty of 102, which appears to confuse the value field a little, as it implies that it cannot handle a data type of 102. Hmmm.

```

Bind#3
oacdtty=102 mxl=04(04) mxlc=00 mal=00 scl=00 pre=00
oacflg=01 fl2=1000000 frm=00 csi=00 siz=0 off=176
kxsbbbf=c2a91548 bln=04 avl=04 flg=01

```



```
value=Unhandled datatype (102) found in kxsbindinf  
Dump of memory from 0x00000000C2A91548 to 0x00000000C2A9154C  
0C2A91540 00000000 [...]
```

Listing 3.18: Bind Example - REF_CURSOR

3.12 UNMAP

Not often seen any more. It was used when a disc based sort, currently running, was interrupted by the user typing CTRL-C.

UNMAP trace lines, if you ever see one, are identical to those of PARSE, EXEC and FETCH as described above. They are, apparently, related to cleaning up the sort segments whose details can be seen in V\$SORT_USAGE. I have not seen an UNMAP line in any trace file for many years, although I do remember trying to figure them out back in my 8i (or possibly 9i) days!



Appendices

A	Oracle Data Types	39
B	Oracle Command Codes	41
C	Oracle Characterset Codes	45
D	How this Book Evolved	49
D.1	Why this Book?	
D.2	Creating the Book	
E	TraceAdjust Utility	51
F	TraceMiner2 Utility	53
	Index	55

A. Oracle Data Types

Bind Data Types

The `oacdt` parameter in a bind variables details determines the data type of that bind variable. This is not necessarily the data type of the column in a table that it may be being INSERTed or UPDATEd into, or compared against.

The following data are taken from the *Internal Data Types* section of the *Data Types* chapter in the 12cR2 *Oracle Call Interface manual*.

Listed data types are:

Code	Data Type
1	VARCHAR2 or NVARCHAR2
2	NUMBER
8	LONG
11	ROWID ¹
12	DATE
23	RAW
24	LONG RAW
25	Unhandled data type
29	Unhandled data type
69	ROWID
96	CHAR or NCHAR
100	BINARY_FLOAT
101	BINARY_DOUBLE
102	REF_CURSOR ²

Table A.1: Bind Variable data Types. ...*continues on next page*

¹Code 11 is not officially listed by Oracle, but I have seen it in a trace file of my own for a ROWID data type.

²Code 102 is not officially listed by Oracle, but I've seen REF CURSORS with this code in my own trace files.

Code	Data Type
108	User-defined type -object type, VARRAY, nested table)
111	REF
112	CLOB or NCLOB
113	BLOB
114	BFILE
123	VARRAY ³
180	TIMESTAMP
181	TIMESTAMP WITH TIME ZONE
182	INTERVAL YEAR TO MONTH
183	INTERVAL DAY TO SECOND
208	UROWID
231	TIMESTAMP WITH LOCAL TIME ZONE

Table A.1: Bind Variable data Types

However, various other sources on the internet, and in books, seem to disagree with some of what the above table shows. In addition, I have come across at least one Oracle Trace where a ROWID was code 11 and not code 69, also, I have seen VARRAY as code 123 and not as code 108. Consistency? Who mentioned consistency?

³Code 123 is not officially listed by Oracle, but I have seen it in a trace file of my own for a VARRAY data type.

B. Oracle Command Codes

Command Codes

The `oct` parameter in a `PARSING IN CURSOR` line in an Oracle trace file, determines the command that is being parsed in the SQL statement. Why we should need this, I have no idea, as the SQL text for the command will - obviously - show what command is being parsed. However. . .

The following (large) table outlines the various command codes and was extracted from an Oracle 12.1.0.2 database.

Code	Character Set	Code	Character Set
0	UNKNOWN	111	DROP PUBLIC SYNONYM
1	CREATE TABLE	112	CREATE PUBLIC DATABASE LINK
2	INSERT	113	DROP PUBLIC DATABASE LINK
3	SELECT	114	GRANT ROLE
4	CREATE CLUSTER	115	REVOKE ROLE
5	ALTER CLUSTER	116	EXECUTE PROCEDURE
6	UPDATE	117	USER COMMENT
7	DELETE	118	ENABLE TRIGGER
8	DROP CLUSTER	119	DISABLE TRIGGER
9	CREATE INDEX	120	ENABLE ALL TRIGGERS
10	DROP INDEX	121	DISABLE ALL TRIGGERS
11	ALTER INDEX	122	NETWORK ERROR
12	DROP TABLE	123	EXECUTE TYPE
13	CREATE SEQUENCE	128	FLASHBACK
14	ALTER SEQUENCE	129	CREATE SESSION
15	ALTER TABLE	130	ALTER MINING MODEL
16	DROP SEQUENCE	131	SELECT MINING MODEL
17	GRANT OBJECT	133	CREATE MINING MODEL

Table B.1: Oracle Command Codes. . . *continues on next page*

Code	Character Set	Code	Character Set
18	REVOKE OBJECT	134	ALTER PUBLIC SYNONYM
19	CREATE SYNONYM	135	DIRECTORY EXECUTE
20	DROP SYNONYM	136	SQL*LOADER DIRECT PATH LOAD
21	CREATE VIEW	137	DATAPUMP DIRECT PATH UNLOAD
22	DROP VIEW	138	DATABASE STARTUP
23	VALIDATE INDEX	139	DATABASE SHUTDOWN
24	CREATE PROCEDURE	140	CREATE SQL TXLN PROFILE
25	ALTER PROCEDURE	141	ALTER SQL TXLN PROFILE
26	LOCK	142	USE SQL TXLN PROFILE
27	NO-OP	143	DROP SQL TXLN PROFILE
28	RENAME	144	CREATE MEASURE FOLDER
29	COMMENT	145	ALTER MEASURE FOLDER
30	AUDIT OBJECT	146	DROP MEASURE FOLDER
31	NOAUDIT OBJECT	147	CREATE CUBE BUILD PROCESS
32	CREATE DATABASE LINK	148	ALTER CUBE BUILD PROCESS
33	DROP DATABASE LINK	149	DROP CUBE BUILD PROCESS
34	CREATE DATABASE	150	CREATE CUBE
35	ALTER DATABASE	151	ALTER CUBE
36	CREATE ROLLBACK SEG	152	DROP CUBE
37	ALTER ROLLBACK SEG	153	CREATE CUBE DIMENSION
38	DROP ROLLBACK SEG	154	ALTER CUBE DIMENSION
39	CREATE TABLESPACE	155	DROP CUBE DIMENSION
40	ALTER TABLESPACE	157	CREATE DIRECTORY
41	DROP TABLESPACE	158	DROP DIRECTORY
42	ALTER SESSION	159	CREATE LIBRARY
43	ALTER USER	160	CREATE JAVA
44	COMMIT	161	ALTER JAVA
45	ROLLBACK	162	DROP JAVA
46	SAVEPOINT	163	CREATE OPERATOR
47	PL/SQL EXECUTE	164	CREATE INDEXTYPE
48	SET TRANSACTION	165	DROP INDEXTYPE
49	ALTER SYSTEM	166	ALTER INDEXTYPE
50	EXPLAIN	167	DROP OPERATOR
51	CREATE USER	168	ASSOCIATE STATISTICS
52	CREATE ROLE	169	DISASSOCIATE STATISTICS
53	DROP USER	170	CALL METHOD
54	DROP ROLE	171	CREATE SUMMARY
55	SET ROLE	172	ALTER SUMMARY
56	CREATE SCHEMA	173	DROP SUMMARY
57	CREATE CONTROL FILE	174	CREATE DIMENSION
59	CREATE TRIGGER	175	ALTER DIMENSION
60	ALTER TRIGGER	176	DROP DIMENSION
61	DROP TRIGGER	177	CREATE CONTEXT
62	ANALYZE TABLE	178	DROP CONTEXT
63	ANALYZE INDEX	179	ALTER OUTLINE
64	ANALYZE CLUSTER	180	CREATE OUTLINE
65	CREATE PROFILE	181	DROP OUTLINE

Table B.1: Oracle Command Codes... *continues on next page*

Code	Character Set	Code	Character Set
66	DROP PROFILE	182	UPDATE INDEXES
67	ALTER PROFILE	183	ALTER OPERATOR
68	DROP PROCEDURE	190	PASSWORD CHANGE
70	ALTER RESOURCE COST	192	ALTER SYNONYM
71	CREATE MATERIALIZED VIEW LOG	197	PURGE USER_RECYCLEBIN
72	ALTER MATERIALIZED VIEW LOG	198	PURGE DBA_RECYCLEBIN
73	DROP MATERIALIZED VIEW LOG	199	PURGE TABLESPACE
74	CREATE MATERIALIZED VIEW	200	PURGE TABLE
75	ALTER MATERIALIZED VIEW	201	PURGE INDEX
76	DROP MATERIALIZED VIEW	202	UNDROP OBJECT
77	CREATE TYPE	204	FLASHBACK DATABASE
78	DROP TYPE	205	FLASHBACK TABLE
79	ALTER ROLE	206	CREATE RESTORE POINT
80	ALTER TYPE	207	DROP RESTORE POINT
81	CREATE TYPE BODY	208	PROXY AUTHENTICATION ONLY
82	ALTER TYPE BODY	209	DECLARE REWRITE EQUIVALENCE
83	DROP TYPE BODY	210	ALTER REWRITE EQUIVALENCE
84	DROP LIBRARY	211	DROP REWRITE EQUIVALENCE
85	TRUNCATE TABLE	212	CREATE EDITION
86	TRUNCATE CLUSTER	213	ALTER EDITION
88	ALTER VIEW	214	DROP EDITION
91	CREATE FUNCTION	215	DROP ASSEMBLY
92	ALTER FUNCTION	216	CREATE ASSEMBLY
93	DROP FUNCTION	217	ALTER ASSEMBLY
94	CREATE PACKAGE	218	CREATE FLASHBACK ARCHIVE
95	ALTER PACKAGE	219	ALTER FLASHBACK ARCHIVE
96	DROP PACKAGE	220	DROP FLASHBACK ARCHIVE
97	CREATE PACKAGE BODY	225	ALTER DATABASE LINK
98	ALTER PACKAGE BODY	226	CREATE PLUGGABLE DATABASE
99	DROP PACKAGE BODY	227	ALTER PLUGGABLE DATABASE
100	LOGON	228	DROP PLUGGABLE DATABASE
101	LOGOFF	229	CREATE AUDIT POLICY
102	LOGOFF BY CLEANUP	230	ALTER AUDIT POLICY
103	SESSION REC	231	DROP AUDIT POLICY
104	SYSTEM AUDIT	232	CODE-BASED GRANT
105	SYSTEM NOAUDIT	233	CODE-BASED REVOKE
106	AUDIT DEFAULT	238	ADMINISTER KEY MANAGEMENT
107	NOAUDIT DEFAULT	239	CREATE MATERIALIZED ZONEMAP
108	SYSTEM GRANT	240	ALTER MATERIALIZED ZONEMAP
109	SYSTEM REVOKE	241	DROP MATERIALIZED ZONEMAP
110	CREATE PUBLIC SYNONYM	305	ALTER PUBLIC DATABASE LINK

Table B.1: Oracle Command Codes

The exact list of commands for your particular database version can be extracted using the following SQL command:

```
1 | select action as code ,
```



```
2 name as command  
3 from audit_actions ;
```

Listing B.1: SQL Query to List Oracle Command Codes

There are 212 different commands in Oracle 12c (12.1.0.2) while Oracle 11g (11.2.0.4) has only (!) 181.

C. Oracle Characterset Codes

Bind Charactersets

Some data types use different character sets. These are coded in the `csi` field in the bind details lines of the trace file. You can extract the list of current character set codes and names with the following query:

```
1 select nls_charset_id(value), value
2 from v$nls_valid_values
3 where isdeprecated='FALSE'
4 and parameter = 'CHARACTERSET'
5 order by nls_charset_id(value);
```

Listing C.1: SQL Query to list Character Set Codes and Names

The values that you may see here are as follows, taken from an Oracle 12.1.0.1 database where there are 222 character sets listed:

Code	Command	Code	Command	Code	Command
1	US7ASCII	159	CL8MACCYRILLICS	301	EE8EBCDIC870C
2	WE8DEC	160	WE8PC860	312	TR8EBCDIC1026S
3	WE8HP	161	IS8PC861	314	BLT8EBCDIC1112S
4	US8PC437	162	EE8MACCES	315	IW8EBCDIC424S
5	WE8EBCDIC37	163	EE8MACCROATIANS	316	EE8EBCDIC870S
6	WE8EBCDIC500	164	TR8MACTURKISHS	317	CL8EBCDIC1025S
7	WE8EBCDIC1140	165	IS8MACICELANDICS	319	TH8TISEBCDICS
8	WE8EBCDIC285	166	EL8MACGREEKS	320	AR8EBCDIC420S
9	WE8EBCDIC1146	167	IW8MACHEBREWS	322	CL8EBCDIC1025C
10	WE8PC850	170	EE8MSWIN1250	323	CL8EBCDIC1025R
11	D7DEC	171	CL8MSWIN1251	324	EL8EBCDIC875R

Table C.1: Oracle Character Set Codes... *continues on next page*

Code	Command	Code	Command	Code	Command
12	F7DEC	172	ET8MSWIN923	325	CL8EBCDIC1158
13	S7DEC	173	BG8MSWIN	326	CL8EBCDIC1158R
14	E7DEC	174	EL8MSWIN1253	327	EL8EBCDIC423R
15	SF7ASCII	175	IW8MSWIN1255	351	WE8MACROMAN8
16	NDK7DEC	176	LT8MSWIN921	352	WE8MACROMAN8S
17	I7DEC	177	TR8MSWIN1254	353	TH8MACTHAI
18	NL7DEC	178	WE8MSWIN1252	354	TH8MACTHAIS
19	CH7DEC	179	BLT8MSWIN1257	368	HU8CW12
20	YUG7ASCII	180	D8EBCDIC273	380	EL8PC437S
21	SF7DEC	181	I8EBCDIC280	381	EL8EBCDIC875
22	TR7DEC	182	DK8EBCDIC277	382	EL8PC737
23	IW7IS960	183	S8EBCDIC278	383	LT8PC772
25	IN8ISCII	184	EE8EBCDIC870	384	LT8PC774
27	WE8EBCDIC1148	185	CL8EBCDIC1025	385	EL8PC869
28	WE8PC858	186	F8EBCDIC297	386	EL8PC851
31	WE8ISO8859P1	187	IW8EBCDIC1086	390	CDN8PC863
32	EE8ISO8859P2	188	CL8EBCDIC1025X	401	HU8ABMOD
33	SE8ISO8859P3	189	D8EBCDIC1141	500	AR8ASMO8X
34	NEE8ISO8859P4	190	N8PC865	554	AR8NAFITHA711
35	CL8ISO8859P5	191	BLT8CP921	555	AR8SAKHR707
36	AR8ISO8859P6	192	LV8PC1117	556	AR8MUSSAD768
37	EL8ISO8859P7	193	LV8PC8LR	557	AR8ADOS710
38	IW8ISO8859P8	194	BLT8EBCDIC1112	558	AR8ADOS720
39	WE8ISO8859P9	195	LV8RST104090	559	AR8APTEC715
40	NE8ISO8859P10	196	CL8KOI8R	560	AR8MSWIN1256
41	TH8TISASCII	197	BLT8PC775	561	AR8NAFITHA721
42	TH8TISEBCDIC	198	DK8EBCDIC1142	563	AR8SAKHR706
43	BN8BSCII	199	S8EBCDIC1143	565	AR8ARABICMAC
44	VN8VN3	200	I8EBCDIC1144	566	AR8ARABICMACS
45	VN8MSWIN1258	201	F7SIEMENS9780X	590	LA8ISO6937
46	WE8ISO8859P15	202	E7SIEMENS9780X	829	JA16VMS
47	BLT8ISO8859P13	203	S7SIEMENS9780X	830	JA16EUC
48	CEL8ISO8859P14	204	DK7SIEMENS9780X	831	JA16EUCYEN
49	CL8ISOIR111	205	N7SIEMENS9780X	832	JA16SJIS
50	WE8NEXTSTEP	206	I7SIEMENS9780X	833	JA16DBCS
51	CL8KOI8U	207	D7SIEMENS9780X	834	JA16SJISYEN
52	AZ8ISO8859P9E	208	F8EBCDIC1147	835	JA16EBCDIC930
70	AR8EBCDICX	210	WE8GCOS7	836	JA16MACSJIS
81	EL8DEC	211	EL8GCOS7	837	JA16EUCTILDE
82	TR8DEC	221	US8BS2000	838	JA16SJISTILDE
90	WE8EBCDIC37C	222	D8BS2000	840	KO16KSC5601
91	WE8EBCDIC500C	223	F8BS2000	842	KO16DBCS
92	IW8EBCDIC424	224	E8BS2000	845	KO16KSCCS
93	TR8EBCDIC1026	225	DK8BS2000	846	KO16MSWIN949
94	WE8EBCDIC871	226	S8BS2000	850	ZHS16CGB231280
95	WE8EBCDIC284	230	WE8BS2000E	851	ZHS16MACCGB23128
96	WE8EBCDIC1047	231	WE8BS2000	852	ZHS16GBK

Table C.1: Oracle Character Set Codes... continues on next page

Code	Command	Code	Command	Code	Command
97	WE8EBCDIC1140C	232	EE8BS2000	853	ZHS16DBCS
98	WE8EBCDIC1145	233	CE8BS2000	854	ZHS32GB18030
99	WE8EBCDIC1148C	235	CL8BS2000	860	ZHT32EUC
100	WE8EBCDIC1047E	239	WE8BS2000L5	861	ZHT32SOPS
101	WE8EBCDIC924	241	WE8DG	862	ZHT16DBT
110	EEC8EUROASCII	251	WE8NCR4970	863	ZHT32TRIS
113	EEC8EUROPA3	261	WE8ROMAN8	864	ZHT16DBCS
114	LA8PASSPORT	262	EE8MACCE	865	ZHT16BIG5
140	BG8PC437S	263	EE8MACCROATIAN	866	ZHT16CCDC
150	EE8PC852	264	TR8MACTURKISH	867	ZHT16MSWIN950
152	RU8PC866	265	IS8MACICELANDIC	868	ZHT16HKSCS
153	RU8BESTA	266	EL8MACGREEK	871	UTF8
154	IW8PC1507	267	IW8MACHEBREW	872	UTFE
155	RU8PC855	277	US8ICL	873	AL32UTF8
156	TR8PC857	278	WE8ICL	992	ZHT16HKSCS31
158	CL8MACCYRILLIC	279	WE8ISOICLUK	2000	AL16UTF16

Table C.1: Oracle Character Set Codes

If you see a character set code in the `csi` field, and you don't have the above list, you can determine the character set in use with the following query:

```
1 | SELECT NLS_CHARSET_NAME(1) FROM dual;
```

Listing C.2: SQL Query to Convert a `csi` Code to a Character Set Name

Correspondingly, you can go from a character set name to its `csi` code with the following query:

```
1 | SELECT NLS_CHARSET_ID('US7ASCII') FROM dual;
```

Listing C.3: SQL Query to Convert a Character Set Name to a `csi` Code



D. How this Book Evolved

D.1 Why this Book?

This eBook originally started as a collection of useful notes, scripts, etc which I had come across, written or deduced, over the years of playing with Oracle Trace Files and various Trace File Analysis tools.

Eventually, I collected them all together in one place so that I could have all the useful information, in one easy to find place¹.

There are many places on the internet, people I have met or worked with, books which I have bought (or had bought for me) and read, to whom I will always be grateful as they have taught me many things. Maybe I can help others as I have been helped.

As Isaac Newton is thought to have said, “*I have stood on the shoulders of giants*” - me too.

D.2 Creating the Book

The book was created in plain text files, originally in **ReStructuredText** mode, written (and edited) on both Windows², or on Linux - which I use for all my personal and business needs at home.

These RST files were simply a quick way to gather notes. They were then later enhanced by adding more detail and/or example code, and converted to \LaTeX by judicious use of the **Pandoc** text conversion utility, which I *highly* recommend.

The converted \LaTeX files were then further enhanced, indexed, tidied up, etc using **TexStudio** which runs on both Windows and Linux, so I had the same development environment in both locations. Handy.

¹I'm getting old, every day it seems. I am starting to forget things I knew - they are ageing out of the cache! I now appear to have the memory capacity of a small newt, so I need to have things written down!

²At work, in my lunch hour

The book itself, was created using a L^AT_EX template called [the] [Legrand Orange Book Template](#) created by Mathias Legrand. It is thanks to him that you get this book for free, because the licence terms of the book template specify no commercial use. I'm happy with that myself.

The front cover image on this book is taken from the book *Kunstformen der Natur* by German biologist Ernst Haeckel. The book was published between 1899 and 1904. The image used is of various *Discomedusae* which are a taxonomic group of jellyfish.

You can read about them on [Wikipedia](#) and there is a brief overview of the above book, also on [Wikipedia](#), which shows a number of other images taken from the book. (Some of which I considered before choosing the current one!)

*Discomedusae*³ have absolutely nothing to do with Oracle or Trace Files - but I liked the image, and decided that it would make a good cover for the book and a decent enough chapter heading image too.

³DiscoMedusae? Sounds like dancing jellyfish to me!



E. TraceAdjust Utility

TraceAdjust Introduction

TraceAdjust is a utility that I wrote to help me process the myriads of trace files that I come across in my DBA work. You can get the source code from github in my [TraceAdjust repository](#) and compile it on Windows or Linux/Unix with any decent C++ compiler.

It reads a normal trace file and writes out an adjusted one, as follows:

- The `tim` values are converted to seconds, by inserting a decimal point in the appropriate position;
- It adds a `delta` to each `tim` line. The `delta` is the number of microseconds between the `tim` on this line, and the `tim` on the previous (appropriate) trace line. This allows me to see how long passed between the previous `tim` and this one. Occasionally useful.
- It adds a `dslt` to each `tim` line. This is the “delta since last timestamp” and simply counts up the number of microseconds that have passed since the trace file last produced a timestamp line similar to the one in the header. Again, occasionally useful.
- It adds a `local` to each `tim` line. This is a conversion of the `tim` value on the line, to an actual date, in the current local timezone. The time part is resolved down to microsecond level. This is usually very useful!

Running a trace file through *TraceAdjust* will create a new trace file, which some trace analysing utilities cannot cope with due to the additional fields that I have introduced. The Trace File Browser, in Toad, on the other hand, copes with my trace files quite happily and simply ignores the additional data as appropriate.

The example below shows the before and after state of a `PARSE` line from a trace file:

```
PARSE #4474286416:c=0,e=418,p=0,cr=0,cu=0,mis=1,r=0,dep=1,og=4,plh=0,  
⇒ tim=1030574627220
```

Listing E.1: TraceAdjust Example - Before Processing

Which becomes:

```
PARSE #4474286416:c=0,e=418,p=0,cr=0,cu=0,mis=1,r=0,dep=1,og=4,plh=0,  
    => tim=1030574.627220,delta=-1,dslt=768371,local='2017 Mar 13  
    => 09:23:21.768371'
```

Listing E.2: TraceAdjust Example - After Processing



F. TraceMiner2 Utility

TraceMiner2 Introduction

So, you have a trace file, chock full of statements with lots of bind variables in use. You *need* to read through it to find out which execution of any of the statements used which actual bind values. How is this easily done?

*TraceMiner2*¹ is another utility that I wrote to help me process the myriads of trace files that I come across in my DBA work.

You can get the source code from github in my [TraceMiner2 repository](#) and compile it on Windows or Linux/Unix with any decent C++ compiler.

It reads a trace file and writes out an HTML report showing various details of the SQL in the file, showing:

- The line number of the file where the SQL statement was found at (PARSING IN CURSOR);
- The line number of the file where the PARSE statement was found at;
- The line number of the file where the BINDS details were found at;
- The line number of the file where the EXEC statement was found at;
- The depth (dep) of the statement when parsed etc.

You can choose to ignore statements over any given depth, so if you only want top-level and dep=1 statements, just request `-depth=1` on the command line.

The default HTML report appears as follows:

¹There will be no more unashamed plugs in this document, I promise.

TraceMiner2

Processing Trace File: test2.trc

EXEC Line	PARSE Line	BINDS# Line	SQL Line	DEP	SQL Text
44	27	28	25	1	select obj#,type#,ctime,mtime,stime, status, dataobj#, where owner#=90 and name='PK_RECONCILE_CAPSIL_UV' and linkname is null and subname is null
60	53	54	51	1	select audit\$,options from procedure\$ where obj#=90851
76	69	70	67	1	select owner#,name,namespace,remoteowner,linkname,p_tir (property,0),subname,type#,d_attrs from dependency\$d, p_obj#=obj#(+) order by order#
98	91	92	89	1	select order#,columns,types from access\$ where d_obj#=#
125	108	109	106	1	select /*+ index(idl_sb4\$ i_idl_sb41) */ piece#,length

However, you can, if you have a standard report format at your company, configure the generated css file to match that of your format. *TraceMiner2* will not overwrite the css file if one exists in the output folder.



Index

Symbols

\LaTeX 49, 50

B

BINDS 32

Block Details

Consistent blocks 19

Current blocks 19

Physical blocks 19

C

CLOSE 30

Cursor IDs 16

D

Discomedusae 50

E

ERROR 27

EXEC 22

F

FETCH 24

H

Haeckel, Ernst 50

Header, Trace File 13

K

Kunstformen der Natur 50

L

Legrand, Mathias 50

N

Newton, Isaac 49

O

Oracle Character Set Codes 45

Oracle Command Codes	41
Oracle Data Types	39

P

Pandoc	49
PARSE	19
PARSE ERROR	21
Parsing in Cursor	17
People	
Haeckel, Ernst	50
Newton, Isaac	49
Programs and applications	
L ATEX	49, 50
Pandoc	49
SQL*Plus	11
TexStudio	49
Toad	11, 51
TraceAdjust	51
TraceMiner2	53, 54
Trcsess	11

R

Recursive SQL	15
---------------------	----

S

SQL	
Recursive	15
Top Level	15
SQL*Plus	11
STAT	28

T

TexStudio	49
Timestamps	15
Toad	11, 51
Top Level SQL	15
Trace File Entries	
BINDS	32
CLOSE	30
ERROR	27
EXEC	22
FETCH	24
PARSE	19

PARSE ERROR	21
STAT	28
UNMAP	36
WAIT	25
XCTEND	31

Trace File Header	13
TraceAdjust	51
TraceMiner2	53, 54
Trcsess	11

U

UNMAP	36
-------------	----

W

WAIT	25
Waits	15

X

XCTEND	31
--------------	----