
CAMERADRONE

Camera Studio engineering guide

Ubuntu host application - Raspberry Pi camera - offline development - airborne video preparation

Release 0.2 / 3 November 2026

Current host functionality is validated without a connected Pi. Historical real-board results are identified separately. Radio integration and Pi 3 A+ performance remain unverified.

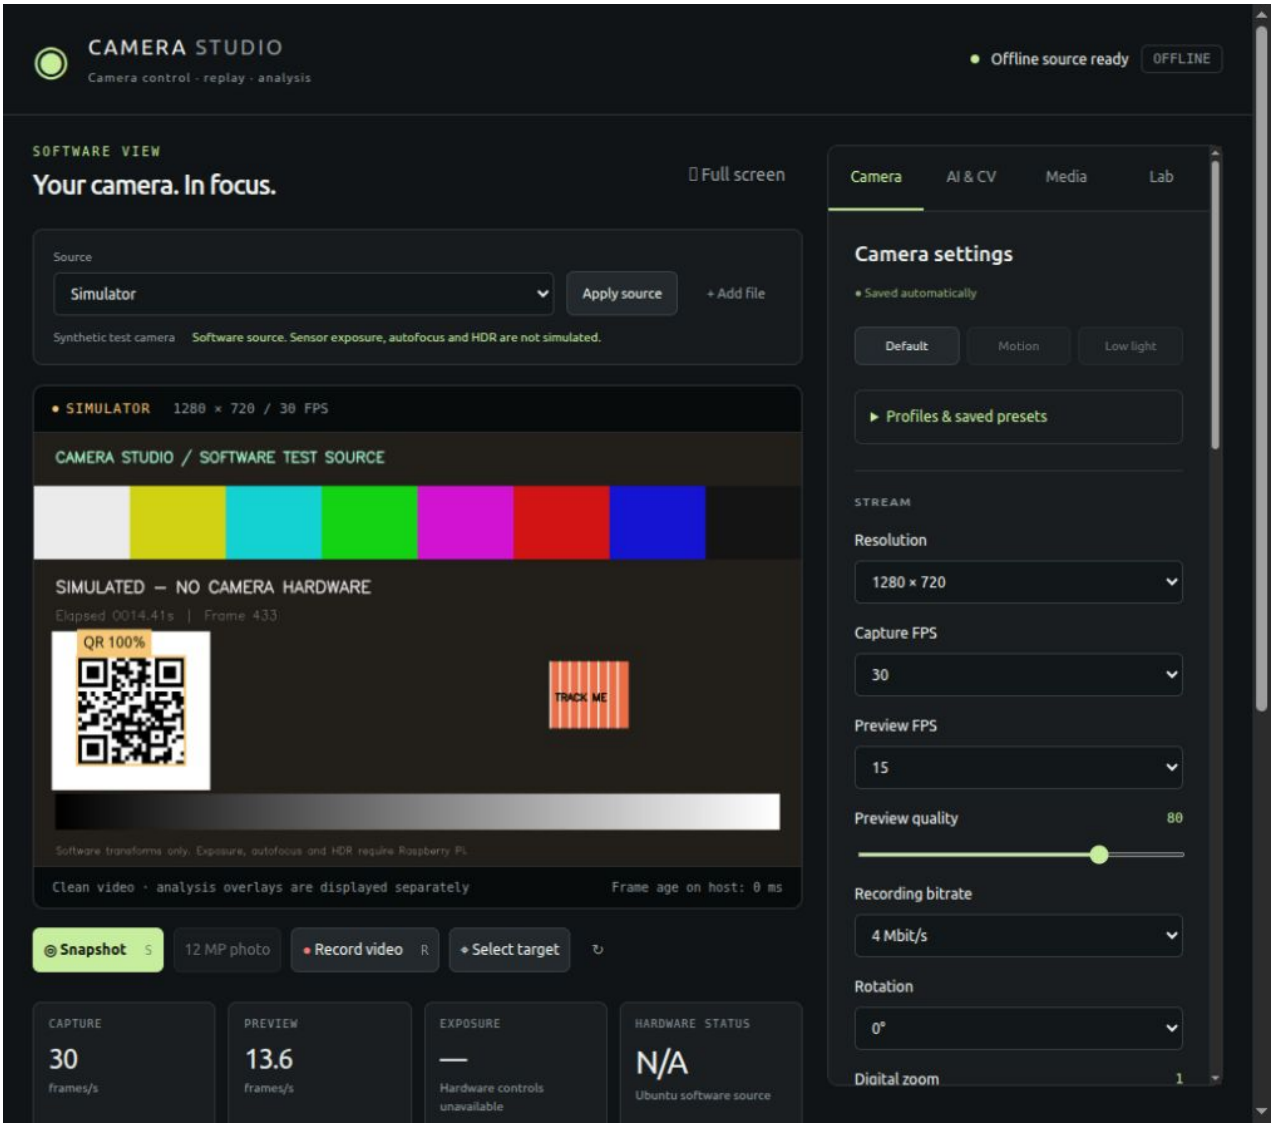

Synthetic preview only. No real camera imagery or credentials are included.

Guide contents

01 Quick start

02 Setup and deployment

03 Application workflow

04 Architecture and API

05 Airborne transport

06 Validation and limits

07 Hardware roadmap

08 Third-party components

09 Public release workflow

Source of truth

This guide is generated from the Markdown documents in the repository. Shell examples use the repository working directory. Use your virtualenv Python where appropriate. Local addresses shown in examples are placeholders; private runtime files and test recordings are intentionally absent.

Rebuild

Install ReportLab and system DejaVu fonts, then run python3 tools/build_pdf.py. The Markdown documents retain clickable relative links and Mermaid diagrams; the PDF includes simplified text schematics.

CameraDrone / Camera Studio

An English-language camera control application for an Ubuntu host and a Raspberry Pi CSI camera. Develop and test the application **without a Raspberry Pi** using a synthetic camera or recorded inputs. Capture, ISP and inference run on the Pi when a real camera is selected; offline processing runs on Ubuntu.

Start without hardware

On Ubuntu 22.04 with Python 3.10 or newer:

```
sudo apt-get update
sudo apt-get install -y python3-venv gstreamer1.0-tools gstreamer1.0-plugins-base
gstreamer1.0-plugins-good gstreamer1.0-plugins-bad gstreamer1.0-plugins-ugly
gstreamer1.0-libav
python3 -m venv .venv
.venv/bin/pip install -r requirements-host.txt
.venv/bin/python camera_app/fetch_models.py
.venv/bin/python camera_app/host.py
```

Open **http://127.0.0.1:8765/**. A fresh installation starts in **Simulator** mode. No microSD, SSH connection, camera driver or Pi is needed. To install a user service, run `.venv/bin/python tools/setup_host.py --install-service`. This generates paths for the current checkout and Python interpreter.

What works

Feature	Raspberry Pi	Simulator / Replay
Preview and browser overlays	CSI video via host proxy	Generated frames or local file
Resolution, FPS, preview quality	Camera pipeline	Software output transform
Exposure, gain, AWB, focus, denoise, processing HDR	Camera/ISP controls, subject to capabilities	Disabled; explicitly not simulated
Brightness, contrast, saturation, sharpness, zoom, rotation	ISP/camera controls	Approximate software transforms
Snapshots and video	Pi storage, H.264 MP4 + metadata	Ubuntu storage, JPEG / H.264 MP4 + metadata
Full-sensor photo	IMX708: 4608 x 2592; pauses preview	Unavailable
Objects / faces / QR / motion / ROI tracking	Pi CPU	Ubuntu CPU
Presets, profile selection and exports	Controlled from Ubuntu	Same host application
File import, playback pause/seek, analysis reports	Host lab remains available	Supported locally
Airborne radio video	Integration pending	Actual H.264/RTP localhost test provided

The tested sensor is **Sony IMX708**, identified by the camera stack; the board label supplied was Arducam UC-b47 rev B. Do not infer an AI accelerator from that board label. The application uses CPU vision. The separate GigE Vision camera is neither discovered nor configured.

Verification status

The earlier real Pi 5 baseline passed 18 hardware checks and a ten-minute live soak, plus five known-input vision checks. **The current offline extension and shared API refactor have not been redeployed or retested on the unplugged Pi.** The new suite passes 12 host tests, including complete MP4 decoding and H.264/RTP loopback. Raspberry Pi 3 A+, RF range and optical end-to-end latency remain unverified. See validation evidence and limits.

Documentation

- Setup, deployment and recovery
- Application usage and offline workflow
- Architecture, API and data
- Airborne video and driver plan
- Pi 3 A+ migration and next hardware checks
- Public release workflow
- Validation, third-party notices, PDF guide

Development checks

```
python3 -m unittest discover -s tests -p 'test_*.py' -v
python3 airlink/diagnose.py
```

Use the configured virtualenv interpreter instead of `python3` if needed. Tests use synthetic inputs, temporary directories and localhost sockets. They never connect to the Pi. GitHub Actions runs this suite on Ubuntu 22.04. Historical hardware checks are separate scripts and require an explicitly selected real camera.

Project layout

```
camera_app/       Host UI, source manager, camera API, Pi and offline engines, vision
camera_app/models/ Pinned CPU model and upstream license
airlink/          H.264/RTP sender, ground receiver, profiles, read-only inventory
tests/            Offline integration tests and separate historical hardware checks
tools/            Portable host setup, optional test fixtures, PDF/publication tooling
docs/             English Markdown documentation and synthetic UI screenshot
output/pdf/       Rendered technical guide
```

Runtime secrets, recordings, local inputs, known host keys, logs, caches and intermediate build files are excluded. The Pi API uses a private shared token over a trusted LAN; the host binds to localhost. This is a local development application, not an Internet-facing multiuser camera service.

Setup, deployment and recovery

Ubuntu host

Use the installation commands in the root README. The host needs Flask, Requests, NumPy, OpenCV and GStreamer. Picamera2 is **not** imported by the host. `opencv-python-headless` supplies its own face cascade; Debian `opencv-data` is also supported. GStreamer `x264enc`, `mp4mux`, `h264parse`, RTP plugins and `avdec_h264` are required for recording and the transport bench.

Start in foreground with `.venv/bin/python camera_app/host.py`. It binds to 127.0.0.1:8765. `CAMERA_HOST_PORT` can override the port, and `CAMERA_HOST_DATA` can select another private data directory. Use one host instance per data directory.

Optional user-session startup:

```
.venv/bin/python tools/setup_host.py --install-service
systemctl --user status camera-studio.service
journalctl --user -u camera-studio.service -n 80
bash start-studio.sh
bash stop-studio.sh
```

The setup script generates the user service and application-menu shortcut using the current paths. It does not contact the Pi. The service is tied to the host user's session by default. `start-studio.sh` starts an installed service or runs Python in the foreground; for a virtualenv foreground launch, use its Python explicitly.

A first run generates `camera_app/runtime.json`, mode 0600, with a random API token and default `http://camera.local:8081`. The UI lets you enter a private Pi address. Simulator and Replay never silently fall back to a Pi. The selected source is remembered, so an installation last used in Pi mode can show unavailable until Simulator is selected.

Raspberry Pi OS and camera

The reference system used Raspberry Pi OS with Picamera2 and an IMX708 camera on Pi 5. Ubuntu 22.04 is the **host** OS, not the recommended replacement for the Pi camera stack. Install Raspberry Pi OS to microSD using Raspberry Pi Imager, configure your own username, SSH and network, then boot the Pi. Keep storage connected for the entire operating session.

On the Pi, install camera-stack dependencies from the OS repositories:

```
sudo apt-get update
sudo apt-get install -y python3-picamera2 python3-flask python3-requests python3-opencv
opencv-data ffmpeg
rpicam-hello --list-cameras
```

Confirm the model and camera index before deployment. Older OS releases may expose `libcamera-*` names instead of `rpicam-*`; use a supported Raspberry Pi OS camera stack. Only one process can own the CSI camera. Stop an old `rpicam-vid`, OpenHD camera service or another capture application before starting this backend.

On Ubuntu, establish and verify the Pi SSH host key by a normal SSH login. Use your own username/private address; do not disable host-key checks. The helper uses normal SSH known_hosts, or `pi_known_hosts` in this checkout when that private file exists.

```
export PI_TARGET=youruser@192.168.1.20
bash deploy-studio.sh
```

The script verifies model checksums, transfers source/models/private shared token, generates a Pi user service, and starts it. It preserves `camera_app/data/` and never copies host input videos. Dependencies must already be installed. Review local source before redeployment: the current shared API refactor still needs a real-board regression run.

On the Pi, enable boot startup without an SSH login:

```
sudo loginctl enable-linger "$USER"
systemctl --user status camera-backend.service
journalctl --user -u camera-backend.service -n 80
```

On Ubuntu, choose **Raspberry Pi**, enter `http://192.168.1.20:8081`, then **Apply source**. The token is shared automatically by the deployment script. If you regenerate the host token, redeploy the matching runtime file to the Pi. Avoid publishing that file.

Storage and boot

This release uses a normal bootable microSD on the Pi. Network boot and a USB boot image are future packaging work, not prerequisites for the host simulator. A bare board with only Ethernet and camera cannot serve video unless its EEPROM boot configuration and a working network-boot server provide the OS. The passive `diagnose-netboot.sh` helper is historical troubleshooting, not a complete network-boot installer.

Do not remove storage while the Pi is running. Use a clean shutdown before physically switching it off. Neither a host service nor this repository magically supplies a Pi OS image.

Recovery

• **Source unavailable:** select Simulator to continue locally; for Pi mode check its power, address, token and service log.

• **No model:** run `camera_app/fetch_models.py`; the UI exposes unavailable detector capabilities. Hash mismatches abort downloads.

• **Recording fails:** inspect `.encoder.log` under private offline media, verify `gst-inspect-1.0 x264enc`, stop recording before changing format.

• **App not starting:** verify Python dependencies and port availability; run in foreground to see errors. Do not run a second instance on the same port/data.

• **Low storage:** new writes are refused below 256 MB; recording stops near that threshold. Inputs require at least 1 GB free before import. No automatic media deletion is implemented.

• **Pi temperature:** ensure active cooling and adequate power. Preview/AI workload caps help but do not replace cooling.

Host MP4 requires a clean stop to finalize. SIGTERM and Ctrl-C trigger host cleanup. The generated host service uses `KillMode=mixed` and `TimeoutStopSec=30` so Python can finalize its encoder before systemd terminates remaining children. Abrupt power loss can damage an unfinished recording. The Pi baseline uses a different fragmented-MP4 output path; its existing resilience does not prove SD-card or power-loss safety.

Using Camera Studio

Sources

Simulator renders a moving test pattern with color bars, a grayscale ramp, a textured tracking target and a generated QR payload. Its visible SIMULATOR badge remains on the preview. Exposure, autofocus, denoise and HDR are disabled because they require physical hardware. Software transforms approximate appearance; they do not reproduce the Pi ISP.

Replay file uses a host-local input library. Click **+ Add file**, select MP4/AVI/MOV/MKV/WebM/JPEG/PNG, then **Apply source**. Files are copied to private UUID names. Video loops automatically; use Pause/Resume and the seek slider. The output FPS can differ from native file FPS; frames are repeated or skipped to match. Images have no timeline. Imports are limited to 512 MB per request and 16 megapixels per decoded frame. Codec availability depends on OpenCV's decoder build.

Raspberry Pi forwards requests to a configured local camera API. It never probes the other cameras on the LAN. A disconnected Pi stays unavailable until you choose another source; a simulator is never substituted for live camera imagery. Switching source while recording is rejected.

Camera and analysis

The Camera tab controls capture format, preview quality/FPS, recording bitrate, zoom and image appearance. On hardware, it also exposes sensor/ISP exposure, white balance, focus and processing HDR. Actual sensor metadata is shown separately from requested settings. Format changes interrupt capture briefly. Some controls depend on sensor and Pi capabilities.

Open **Profiles & saved presets** for Pi 5 Balanced, Pi 3 A+ Candidate and Offline Development. The Pi 3 profile is a proposed low-load starting point, not a performance guarantee. Save a named preset on Ubuntu, export JSON for version control, or import version-1 Camera Studio preset JSON. Applying a full preset during recording is blocked. Physical settings are skipped when applying it to offline sources, and the UI reports that fact.

AI & CV modes:

• **Objects:** CPU FP32 MobileNet-SSD; 20 PASCAL VOC classes, confidence threshold adjustable. Not general open-vocabulary recognition.

• **Faces:** OpenCV Haar face locations, no identity recognition.

• **QR:** decoded text, never automatically navigated or executed. Includes a single-code fallback when the multi-code detector misses a small code.

• **Motion:** background subtraction with ten-cycle warmup; assumes a stationary camera.

• **Region tracking:** select a textured region by dragging. A local template matcher follows translations and declares loss below confidence 0.55; large rotation or scale changes are outside its design.

Analysis works on reduced 640 x 360 frames independently of capture. Increasing the interval reduces CPU use. Overlays are drawn in the browser; photos/video remain clean. Analysis age is shown and stale boxes are hidden. The histogram, clipped/dark percentages and detail score describe the reduced image. Detail score varies with noise and scene texture; it is not a calibrated focus measurement.

Photos, video and lab

Snapshot saves a JPEG and JSON sidecar at the current output resolution. **12 MP photo** is hardware-only, pauses preview briefly and is blocked during recording. **Record video** writes H.264 MP4 and JSONL metadata. Stop it before downloading or changing capture geometry/bitrate. Media lets you preview finished MP4s and download files. Files belong to the selected source: Pi storage in Pi mode, Ubuntu storage in offline modes.

Keyboard shortcuts: **S** snapshot, **R** toggle recording, **Escape** cancel ROI selection. Shortcuts are suppressed while editing form fields.

The **Lab** tab analyzes a saved host input regardless of the active preview source. Enable the desired AI/CV modes, select an input, frame stride (1..120), and maximum analyzed frames (1..1000), then start. Only one job runs at a time. Reports contain per-frame output, p50/p95 processing time, class counts, QR payloads and image quality metrics. Download JSON for detail or CSV for tabular analysis. Report timing measures this Ubuntu host; it does not estimate Pi speed or labeled-dataset accuracy.

Interpreting status

Capture FPS and preview FPS are independent. An idle source generates JPEGs at at most 2 FPS until a viewer connects. The Pi may cap preview/analysis at high temperature. Host frame age and HTTP round-trip time are not optical glass-to-glass latency. Offline sources show no fabricated sensor temperature, gain or focus metadata.

The browser UI, diagnostics and all project documentation are in English. No cloud service receives camera frames.

Architecture and API

Execution boundaries

```
Browser / localhost host UI  ->  explicit source manager
  ->  Local simulator or replay / Ubuntu vision
  ->  Pi API / Picamera2 / ISP / Pi vision

Air link target: one camera -> H.264 -> RTP -> WFB
  ->  ground RTP decoder -> native display
Radio + camera encoder fanout: hardware integration pending
```

`host.py` owns the browser application and proxies a selected endpoint. `host_services.py` manages source selection, presets, profiles and the offline API. `camera_api.py` is the common authenticated contract. `backend.py` lazily imports the Pi engine, so host imports do not need camera drivers.

`configuration.py` supplies shared validation. `engine.py` owns physical camera commands, capture, encoding, analysis and watchdog recovery. `offline.py` owns software capture/replay and uses the same API. Its capture and vision loops are independent; latest frames replace older analysis work. `vision.py` implements CPU algorithms and normalized boxes. `recording.py` uses a bounded four-frame host encoder queue, with drop/error counters. `benchmark.py` processes a bounded file job with separate Vision state.

The physical engine remains a single camera owner. Do not start a second Picamera2/rpicam/OpenHD capture process alongside it. The standalone air-link tools currently consume test video or already encoded H.264 bytes; they do not acquire the camera or modify the backend.

API contract

Host at localhost:8765; Pi camera API at private-address:8081. POSTs to the host need `X-Camera-Client: 1`. Calls directly to a camera API need `X-Camera-Token: <private token>`. Browser requests never receive the token. Camera JSON payload limit: 16 KB. Host uploads: 512 MB.

Endpoint	Method	Purpose
`/api/health`	GET	Host version and selected source, no hardware probe
`/api/host`	GET	Mode, input library and profiles
`/api/source`	POST	`{mode, input_id?, camera_url?}`; mode simulator/replay/pi
`/api/inputs`	GET / POST	List inputs / multipart field `file`
`/api/playback`	POST	`{paused?, seek_s?}` for replay
`/api/status`	GET	Settings, metadata, capabilities, analysis, recording, rates, events
`/stream.mjpg`	GET	Multipart JPEG preview
`/api/frame.jpg`	GET	Latest preview JPEG
`/api/settings`	POST	Validated partial camera settings
`/api/ai`	POST	objects/faces/qr/motion booleans, confidence, interval_ms

Endpoint	Method	Purpose
`/api/track`	POST	`{roi:{x,y,w,h}}` normalized coordinates; null clears
`/api/action/<name>`	POST	snapshot, snapshot_full, record_start, record_stop, restart, autofocus
`/api/media`	GET	Current source's media list
`/api/media/<name>`	GET	Download finished media/sidecars
`/api/media/view/<name>`	GET	Host inline media, Range support
`/api/presets`	GET / POST	List / save current `{name}` or import `{preset}`
`/api/presets/<id>`	GET	Export portable JSON
`/api/presets/<id>/apply`	POST	Apply validated preset
`/api/profiles/<id>/apply`	POST	Apply built-in profile
`/api/benchmarks`	GET / POST	Reports/progress / start input analysis
`/api/reports/<id>.json` or `.csv`	GET	Download a completed host report

Host-only endpoints are not implemented on the Pi. Examples:

```
curl http://127.0.0.1:8765/api/status
curl -H 'X-Camera-Client: 1' -H 'Content-Type: application/json' \
  -d '{"mode":"simulator"}' http://127.0.0.1:8765/api/source
curl -H 'X-Camera-Client: 1' -H 'Content-Type: application/json' \
  -d '{"qr":true,"interval_ms":350}' http://127.0.0.1:8765/api/ai
```

Validation rejects unknown keys, nonfinite values, wrong types and invalid ranges. Complete resolution pairs are checked against 640x360, 1280x720 and 1920x1080. Host presets use `format: camera-studio-preset`, `version: 1`, name, camera object and optional analysis object. Applying a preset filters unsupported physical settings in offline mode, then applies camera and AI values; camera settings are rolled back if AI application fails.

Private storage

- `camera_app/runtime.json`: shared token + Pi URL, mode 0600.
- `host-data/session.json`: selected source; no automatic network discovery.
- `host-data/inputs/`: UUID filenames + probed index; imported videos remain private.
- `host-data/presets.json`: named host presets.
- `host-data/offline/`: software settings and analysis; `media/` contains JPEG/MP4/JSON/JSONL and encoder logs.
- `host-data/reports/`: analysis JSON/CSV, potentially including input names and QR contents.
- Pi `~/camera_app/data/`: physical settings, media and metadata.

JSON state writes use unique temporary files, fsync and atomic replacement. There is no automatic retention/deletion policy. Keep reports private when inputs or QR content are private. A single host process owns each data directory; multiple independent writers are not supported.

Trust and deployment limits

The host listens only on loopback. Its write header limits ordinary cross-site form writes but is not a multiuser authentication system. Camera URLs are restricted to private/loopback IPs or `.local` names without credentials or paths. The Pi listens on its network interfaces and uses token authentication over plain HTTP. Use a trusted development LAN or an encrypted private tunnel; do not expose port 8081 publicly. TLS, Internet auth, discovery and role-based access are outside this version.

A source change closes the old stream generation and reconnects the preview. Failures remain attributed to the selected source. No GigE Vision discovery, address reassignment or NIC reconfiguration is performed.

Airborne video transport

Decision and current implementation

Use **H.264 over RTP/UDP** as the video contract. Keep browser MJPEG for local configuration. Prepare a dedicated **WFB-ng** air/ground radio link once compatible USB adapters are available. This is an architecture choice for later hardware evaluation, not an installed radio stack or a range guarantee.

The repository implements synthetic RTP transmission, raw H.264 stdin packetization, a native ground receiver, conservative profiles and a read-only adapter/driver inventory. The loopback test actually encodes, packetizes, sends UDP, depacketizes and decodes video. It does not exercise RF or a Pi encoder.

```
Browser / localhost host UI  ->  explicit source manager
  ->  Local simulator or replay / Ubuntu vision
  ->  Pi API / Picamera2 / ISP / Pi vision

Air link target: one camera -> H.264 -> RTP -> WFB
  ->  ground RTP decoder -> native display
Radio + camera encoder fanout: hardware integration pending
```

The encoded-stream fanout from `engine.py` is **not integrated yet**. The current recording path and the transport bench are separate. Integrate a single encoded output with bounded branches for RTP and recording when the board returns; avoid a second capture owner or a second expensive software encode. Preserve clean video and transmit low-rate detection metadata separately. For a first RF test, disable the browser MJPEG viewer over the radio.

Local bench

Install the host GStreamer packages listed in README. In separate terminals:

```
python3 airlink/video.py receive --profile bench
python3 airlink/video.py send-test --profile bench
```

Both default to 127.0.0.1:5600. Use `--headless` on receive without a display, or `--print-only` to inspect commands. For a LAN receiver, bind `--host` to its own private interface IP, and set sender `--host` to that address. No firewall settings are changed automatically. Stop with Ctrl-C.

An existing encoder can pipe an Annex-B H.264 byte stream into:

```
python3 airlink/video.py send-h264-stdin --host 127.0.0.1 --port 5600
```

The encoder must supply repeated IDRs and SPS/PPS, appropriate bitrate and dimensions. `send-h264-stdin` packetizes only; the profile does not reconfigure an upstream encoder. Do not launch `rpicam-vid` to supply it while Camera Studio owns the sensor.

Run the repeatable headless bench:

```
python3 -m unittest discover -s tests -p test_airlink.py -v
python3 airlink/diagnose.py
```

Observed loopback result: 29 decoded 640x360 frames from a 60-frame finite sender, with receive stopped after its configured buffer count. Receiver start/stop means this is a pipeline smoke test, not packet-loss estimation. Full sender/receiver E2E latency was not measured.

Packet and queue contract

Parameter	Initial value	Reason / limit
Codec	H.264	Native ground decode; camera encoding remains platform dependent
RTP payload / clock	96 / 90000 Hz	Explicit caps at receiver
UDP port	5600	Local contract; configure WFB endpoints to match
RTP MTU	1200 bytes	Candidate to avoid large IP packets; tune against actual radio MTU
IDR interval	One second in synthetic encoder	Candidate recovery tradeoff; measure after packet loss
SPS/PPS	`config-interval=-1`	Payloader sends with each IDR
Jitter buffer	30 ms bench/Pi5, 40 ms Pi3 candidate	Bounded waiting, late packets dropped
Synthetic encoder	x264 ultrafast / zerolatency / no B frames	Host bench, not a Pi encoder selection
Bench	640x360, 15 FPS, 1.5 Mbit/s	Low-load starting point
Pi 5 candidate	1280x720, 30 FPS, 4 Mbit/s	Must be remeasured with radio + inference

SPS/PPS behavior is documented by GStreamer rtph264pay. The jitterbuffer reorders packets, waits only up to its latency setting and adds that latency to the pipeline. A lower value is not automatically better on a variable radio channel.

Radio software and drivers

WFB-ng maps video packets onto raw WiFi frames with forward error correction and authenticated encryption. It requires compatible injection/reception adapters and suitable drivers; ordinary managed WiFi is not equivalent. Consult the upstream WFB-ng repository and setup guide for the exact current hardware and build instructions.

The upstream project lists patched RTL8812AU and RTL8812EU driver paths. Match the **exact USB chipset, driver branch, Linux kernel, architecture and adapter power/thermal design** before installing a driver. A brand name or `lsusb` entry alone does not prove compatibility. Upstream driver projects: rtl8812au and rtl8812eu. No third-party kernel modules, blacklist rules, monitor-mode changes or TX-power overrides are installed by this project.

The current Ubuntu inventory has only Ethernet and loopback interfaces, with no wireless network interface. Its required GStreamer elements are available. `iw` and `ethtool` were not present in the inspected host environment. Once adapters arrive, install those OS tools as needed, rerun inventory, and validate WFB injection/RX against the exact kernel before changing the operational network. Keep SSH management on Ethernet during initial radio work.

OpenHD is an alternative integrated video/telemetry stack. Evaluate it as a separate image or documented external-video integration. Its camera capture service must not contend with this application's camera owner. Do not mix arbitrary OpenHD kernels/drivers with WFB packages without a compatibility plan.

Control and AI metadata should use a separately budgeted private IP tunnel or dedicated telemetry link. Do not stream the high-bandwidth HTTP MJPEG preview through that control tunnel. Wire encryption comes from a configured radio/tunnel stack, not from plain RTP/UDP or the camera's API

token.

Hardware acceptance sequence

1. Inventory both USB adapters, board OS/kernel and drivers; keep management Ethernet working.

2. Repeat the synthetic RTP bench through WFB with a physical link before attaching a camera stream.

3. Use the real Pi encoded stream with AI off. Verify stable decode, packet/FEC counters, CPU, temperature and power.

4. Introduce controlled obstruction/interruption; measure freeze duration and recovery at successive IDRs.

5. Add low-rate AI metadata, then onboard recording, checking that neither causes queue growth.

6. Measure optical latency using a timer/LED visible to the camera and the ground display. Report p50/p95 and methodology.

7. Progress from a bench to restrained outdoor tests with measured link margins, safe power and correct local RF configuration.

No range, control-link availability, flight readiness or driver compatibility is asserted by a localhost test. Automatic bitrate adaptation, retransmission, WebRTC, MAVLink overlays and flight-controller integration are future work.

Validation report

Scope of evidence

This document separates the **historical Pi 5 baseline** from the **current offline extension**, validated on Ubuntu on 2026-11-03. The Pi was unplugged during the latter work. The shared API extraction, host source switching and portable deployment changes have not been retested on real hardware. Historical hardware results are evidence for the earlier baseline, not certification of every current source revision. Private raw artifacts and real camera images are intentionally excluded from the public repository.

Validation used the real Raspberry Pi 5 (8 GB) and its CSI IMX708 camera. The Ubuntu application at `http://127.0.0.1:8765/` was the control endpoint. No GigE Vision camera was accessed or configured.

Real camera checks

All **18 hardware checks passed** in the final functional run:

• Reject unknown settings, unsupported sizes and invalid confidence thresholds.

• Manual exposure of 5000 us produced 4991 us in sensor metadata; gain 2.0 was reported as 2.0.

• Manual white balance gains 1.6 / 1.2 appeared in ISP metadata.

• Brightness, contrast, saturation, sharpening, exposure compensation and denoise controls were accepted.

• Zoom 2 changed the capture crop from `[768,432,3072,1728]` to `[1536,864,1536,864]`.

• 640 x 360 at 15 FPS, 1920 x 1080 at 30 FPS and 1280 x 720 at 30 FPS captured correctly sized JPEGs.

• 180-degree rotation and Pi 5 single-exposure HDR reconfiguration resumed capture.

• Autofocus was exercised; a separate metadata check observed scanning followed by focused state, with lens position moving from 0 to 12 diopters.

• Standard snapshots and JSON metadata downloaded successfully.

• A full-resolution photo decoded as **4608 x 2592**; the 720p preview recovered afterward.

• A five-second MP4 decoded successfully into **155 frames** at 1280 x 720.

• Resolution/bitrate/full-photo changes and duplicate recording starts were rejected while recording.

• All four analysis modes ran together on the live image without stopping 30 FPS capture.

• Live-region tracking reported approximately 0.997 match confidence on a stationary region.

• The camera restart operation resumed capture.

Details: `artifacts/hardware-results.json`. JPEGs and a decoded test recording are also saved in `artifacts/`.

Known-input AI/CV checks

All **5 known-input tests passed on the Pi CPU**:

1. MobileNet-SSD detected a person in the model author's sample image.
2. OpenCV's face cascade found a face in the OpenCV Lena sample.
3. QR decoding recovered the generated payload `CameraStudio-QR-test`.
4. Background subtraction found a newly introduced moving region after warmup.
5. Template tracking followed a known translation and declared loss when the target disappeared.

These checks establish working model execution and algorithm behavior, not field accuracy across arbitrary lighting, object sizes or viewpoints.

Details: `artifacts/vision-results.json`. Sample sources: the MobileNet-SSD repository's `images/000001.jpg` and OpenCV's `samples/data/lena.jpg`. These are test fixtures, not camera media.

Ten-minute live soak

A continuous MJPEG client ran with CPU object detection every 350 ms. The first minute also recorded H.264 MP4 on the Pi.

Observation	Result
Duration	602.5 seconds
Preview JPEG frames received	7310
Stream errors	None
Capture FPS range	28.9-30.1
Highest sampled temperature	73.2 C
Highest sampled frame age on Pi	46 ms
Preview data received	534,434,043 bytes

Frame age measures freshness inside the Pi service. It does not include network, browser buffering or display latency. Preview target was 15 FPS; actual delivery was approximately 12 FPS under this workload. Preview and capture rates are reported independently in the application.

The initial implementation reached roughly 83 C and a firmware temperature limit under recording load. After reducing redundant frame copies/conversions, the continuous soak above remained below 74 C. Thermal workload caps and firmware flags are exposed in the application. Historical firmware limit flags can remain set even after the current condition clears.

The soak preceded the final additions for 12 MP photos, recording bitrate selection and stricter input validation. The unchanged capture/analysis pipeline was soaked; those additions were subsequently covered by the final hardware checks.

Details: `artifacts/soak-results.json`.

Recovery, persistence and access

• Forced termination of the Pi backend process: camera recovered in **4.77 seconds**.

• Camera and analysis settings survived that recovery.

• Software reboot: the camera API returned automatically after approximately 29 seconds,

before any SSH login. Capture returned to 30 FPS and AI settings were preserved.

• Host writes without the application header were rejected with HTTP 403.

• Pi API calls without the shared token were rejected with HTTP 401.

• Ten invalid-input cases were rejected with HTTP 400, including NaN, wrong types,

out-of-range settings and malformed tracking regions.

• The Pi user service is enabled with `Linger=yes`; the host service is enabled

for the Ubuntu user session.

• Browser checks exercised settings, snapshots, the Media gallery, downloading a

photo to Ubuntu, and selecting a tracking region by dragging on the live view.

• Application source strings were checked for remaining Cyrillic text.

Details: `artifacts/recovery-results.json`, `artifacts/invalid-input-results.json` and `artifacts/reboot-results.json`.

Verification limits

• Optical end-to-end latency has not been measured.

• Physical power removal, power quality and SD-card failure have not been tested.

• Low-disk protection is implemented but the real card was not filled to test it.

• No long-duration 1080p recording or field-accuracy benchmark was performed.

• Pi 3 A+ portability and performance remain future work.

• HDR and focus commands were functionally exercised; controlled optical comparisons and sensor HDR tuning remain future work.

Current Ubuntu offline extension (2026-11-03)

The complete standard-library unittest suite passes **12 tests**:

Check	Observed result
Synthetic capture / JPEG / multipart preview	Running; valid JPEG frames
API authentication / host write header	Missing token 401, missing application header 403
Hardware-only controls offline	Exposure and full-sensor photo rejected, 400
Resolution validation and QR fallback	Invalid size pair rejected; generated testcard payload decoded at 640x360
Preset save/export/apply and Pi3 candidate profile	Passed with explicit unsupported-setting filtering
Local recording	H.264 MP4 stopped cleanly; every submitted/encoded frame decoded
Recording guards and HTTP Range media view	Source change/download blocked during recording; 206 partial response afterward
Input upload, replay, pause/seek and bounded batch report	Synthetic PNG and generated MP4; JSON/CSV downloads passed
Offline source isolation	Requests stayed on localhost despite an unreachable configured Pi address
Numeric / type / URL boundary validation	Invalid values rejected, including nonfinite values and nonlocal endpoints
Motion and tracking known synthetic transforms	Motion detected; translation followed and target loss declared
Real H.264/RTP localhost transport	29 decoded 640x360 frames; encode, UDP and decode pipeline all executed

Five additional known-input checks passed on the Ubuntu CPU: object detection, face detection, QR decoding, background motion and tracking/loss. These use the historical optional upstream sample photographs and generated patterns; the photographs are not redistributed. This does not establish general detection accuracy.

The recording test exposed malformed fragmented-MP4 output from this Ubuntu GStreamer stack: a weak first-frame-only check could pass even though subsequent NAL reads failed. The host recorder now uses finalized fast-start MP4 with I420 input, and the regression check decodes **all** encoded frames. This change is host-only; the Pi's FFmpeg output path remains separate. Host recordings require a clean stop and do not claim power-loss resilience.

Browser review verified Simulator labeling, generated QR overlay/text, unavailable hardware controls and the English source/AI interface. The public screenshot is synthetic. Python compilation, JavaScript syntax and shell syntax checks passed. GitHub Actions is configured but remote execution is not claimed until its actual result is observed.

Read-only radio inventory: Ubuntu x86_64, Ethernet `e1000e` and loopback only; no wireless network interface. Required GStreamer encoder/RTP/decode elements are present. No WiFi driver/module, monitor mode, channel, power or other camera configuration was changed.

Offline soak and service shutdown

A separate **60.69-second** synthetic-source soak ran all four AI/CV modes, preview JPEG generation and an initial recording on Ubuntu. Minimum sampled capture rate after warmup was **30.0 FPS**, maximum sampled frame age **26 ms**, and **867 preview frames** were generated. The recording contained **451 decoded frames**, with **zero encoder queue drops**. These figures describe this host, not Raspberry Pi or RF behavior.

A real `systemctl --user restart camera-studio.service` during a synthetic recording initially exposed process-group termination interrupting MP4 finalization. The installed/generated host unit now uses `KillMode=mixed` and a 30-second stop timeout, while Python handles SIGTERM cleanup. The repeated restart test produced a finalized MP4 with **53 decoded frames**, and the source returned running at 30 FPS with no active recording. Abrupt power loss remains untested.

Reproduce

```
python3 -m unittest discover -s tests -p 'test_*.py' -v
python3 tools/fetch_test_fixtures.py  # optional external samples
python3 tests/vision_check.py       # optional known-image suite
python3 airlink/diagnose.py
python3 tools/offline_soak.py --seconds 60 --output artifacts/offline-soak.json
```

Hardware scripts `tests/hardware_check.py` and `tests/soak_check.py` change settings and create media. Select the real Pi deliberately before running them. They are not part of offline unittest discovery.

Remaining unverified behavior

Current source on real Pi, physical cold boot and power loss, Pi3 encoder/driver/RAM suitability, actual RF adapter support, RF packet loss/FEC/recovery, optical latency, range, field accuracy, storage-exhaustion behavior and long-term 1080p operation still need physical tests. A localhost transport test does not establish any of those results.

Hardware return and Pi 3 A+ migration

Next session with the existing Pi 5

1. Preserve its existing bootable card and deployed baseline. Back up private settings/media separately; they are not in the public repository.

2. Verify the detected sensor (`rpicam-hello --list-cameras`) and confirm no second capture process.

3. Deploy the shared API refactor, select the explicit Pi endpoint and repeat `tests/hardware_check.py`.

4. Verify resolution, exposure/gain/AWB, AF states, zoom, Pi5 processing HDR, full photo, recording and overlays. Compare MP4 decode counts and sidecar data.

5. Repeat the ten-minute soak, watchdog/process recovery and source reconnect tests. Check the new host presets and switching back from Simulator to hardware.

6. Test a clean shutdown and physical cold boot. Previous software reboot success does not cover power removal.

7. Integrate a single H.264 encoder output with RTP fanout; run camera-to-native-view on Ethernet before RF.

Pi 3 Model A+ constraints

The Pi 3 A+ has **512 MB RAM**, one USB 2.0 port and no onboard Ethernet connector. A USB radio, optional Ethernet adapter and power must fit that topology; a powered hub may be needed for development. The CSI ribbon/connector differs from Pi 5's connector, so select the correct cable. Hardware details: official Pi 3 A+ product page and product brief.

The supplied `pi3a-light` profile requests 640x360 at 15 FPS, 5 FPS JPEG preview, 1.5 Mbit/s recording, HDR off and motion-only analysis every 1200 ms. These are candidate settings, **not a validated port**. Background motion itself is unsuitable for a moving drone until camera-motion compensation is designed.

Use Raspberry Pi OS Lite and verify camera support on that OS. Keep the host UI and batch analysis on Ubuntu. Avoid loading the neural network on the Pi if the selected profile does not need it; the current Vision constructor still loads it eagerly, so profile reduction alone does not fully reduce memory. A lazy model loader is a later board-measured optimization. Set explicit memory budgets before enabling object detection.

Pi 5 H.264 encoding is software-based; Pi 3 has a different hardware encoder path. The present engine needs platform-specific encoder selection and testing on Pi 3, not just profile changes. The official camera software guide describes platform-dependent encoding, and Pi 5 encoding performance explains its software encoder.

Definition of a validated port

• Sensor detected and correct controls/capabilities shown; Pi5-only HDR hidden/rejected as appropriate.

• Sustained capture/encoding at the candidate resolution without OOM or excessive swap.

• Actual memory, CPU, temperature, dropped frames and bitrate reported for capture + radio + chosen AI.

• Correct hardware encoder selected; one camera owner; bounded stream/record queues.

• At least 30-minute soak, interruption/recovery, clean shutdown and cold boot.

• Exact OS/kernel/driver/cable/power/adapters documented with measured results.

Later product work

A repeatable boot image, network boot packaging, labeled field datasets, camera calibration, exposure/AF/HDR optical comparisons, adaptive stream settings and flight integration remain separate milestones. A USB boot image should be created from a validated system; this offline work does not claim an installable Pi OS image.

Third-party components

CameraDrone's own source and documentation are MIT licensed. Third-party software and model assets retain their own licenses.

Component	Role	Upstream / license
MobileNet-SSD model and Caffe graph	CPU object detection	chuanqi305/MobileNet-SSD, MIT; full notice in `camera_app/models/LICENSE.MobileNet-SSD`
OpenCV	DNN, Haar faces, QR, motion, tracking, file decoding	OpenCV; installed separately, version dependent
Haar face cascade	Face locations without identification	Distributed with installed OpenCV/opencv-data; retain upstream cascade notice
Picamera2 / libcamera	Pi camera and ISP	Picamera2, BSD-2-Clause; libcamera, component-specific licenses
Flask / Werkzeug	Local HTTP services	Pallets, BSD-3-Clause
Requests	Host-to-camera HTTP client	Requests, Apache-2.0
NumPy	Image arrays and numeric summaries	NumPy, BSD-3-Clause
GStreamer / x264 / FFmpeg	Video encoding, transport, decoding	GStreamer licensing; plugins/codecs have separate licenses, including GPL components
WFB-ng / OpenHD	Future optional radio transport	External projects, not bundled or installed by CameraDrone; consult their licenses
ReportLab / DejaVu fonts	PDF build tools	Installed separately; PDF build script uses system DejaVu fonts

Model inputs and SHA-256 checksums are recorded in `camera_app/models/README.md` and `camera_app/fetch_models.py`. The included weights are about 23 MB. No cloud model or API key is needed.

`tools/fetch_test_fixtures.py` optionally fetches upstream sample images for the historical known-image tests. CameraDrone does not redistribute these photographs or claim their rights. Generated unit-test images and the documentation screenshot contain no real camera imagery.

Public repository publication

The intended destination is a **new public** `CameraDrone` **repository** in the owner's GitHub account. No runtime credentials, recordings or workstation-specific state should be published.

`tools/prepare_public_release.py` creates an allowlisted checkout outside the active workspace, checks it for the actual private runtime token and common GitHub/private-key patterns, and writes a SHA-256 manifest. It includes application source, pinned model weights and license, generated documentation screenshot, tests, CI and the final PDF. It excludes runtime state, inputs, real imagery, upstream sample photographs, logs, caches and build intermediates. Review the resulting manifest before publication.

```
python3 tools/prepare_public_release.py /tmp/cameradrone-public
cd /tmp/cameradrone-public
git init -b main
git add .
git commit -m 'Build Camera Studio with offline development, AI and RTP bench'
```

The final prepared checkout may already have a commit; do not recreate it unnecessarily. A local `releases/CameraDrone-public.bundle` can preserve the complete clean commit history without including private working data:

```
git clone /path/to/CameraDrone-public.bundle CameraDrone-public
```

Authenticate using your normal GitHub browser/CLI flow. Do not paste credentials into chat or commit them. With an authenticated GitHub CLI, publish the reviewed checkout using:

```
gh repo create CameraDrone --public --source . --remote origin --push
```

If the empty public repository was created in the browser instead, add its HTTPS/SSH remote and push `main` normally. Do not force-push over existing content. Check the resulting repository's public visibility, commit, model asset, PDF and Actions result after publication. An attached GitHub connector may support commits to an existing repository while lacking repository-creation capability; a local commit is not proof of a remote push.