

FULL GUIDE - OFFLINE DANTE XML EDITING

Dante Config Editor 2026.1 Beta

Full user guide

This tool began as an attempt to provide what I personally was missing in Dante Controller: review an entire configuration quickly, correct discrepancies, and prepare a preset offline.

One overview Latency, sample rate, network, IP, clock, and channels on one screen.	Consistent renaming Recognized references follow renamed devices and channels.	Offline preparation Review, merge, and edit before official validation.
---	---	--

Unofficial third-party tool. It does not connect to the Dante network. Always keep the original and validate the final XML in Dante Controller.

Public project: github.com/Mamat79/DanteConfigEditorV3

1. Installation and startup

Important: this is a third-party tool, not an official Audinate product. Version 2026.1 is a beta and may still contain bugs. It edits XML files offline without connecting to a Dante network or using an Audinate API. Keep the original and validate the generated file in Dante Controller before production use.

The Windows x64 installer includes the application and the required .NET 8 runtime. A separate .NET installation is normally not required.

- The default location is Program Files, with Start menu and desktop shortcuts.
- A 2026.1 Beta installation uses its own AppId, Program Files folder, shortcuts, and local profile so it can coexist with V3.6.
- 2026.1 may copy V3.6 settings into its own profile but never modifies the V3.6 profile in place.
- The wizard offers separate active-bank and included-bank folders. DCE Generic Roles 3.6 and DCE Community Devices 3.6 are optional, can be selected independently, and no existing folder is replaced.
- Two self-contained 2026.1 Beta DMGs are planned for Apple Silicon and Intel. They include both archives in the Machine Banks folder, and their separate bundle can coexist with V3.6.
- All four French and English PDFs are installed and remain available from the application.

2. Safety principles

- Work on a copy of the exported XML and use Save as.
- The guard tracks devices by stable technical identity, blocks unknown paths, and protects Dante IDs, mediaType, and instance_id.
- The destination is replaced atomically. The source and any existing destination receive a copy in DanteConfigEditor_Backups.
- A successful import into Dante Controller is the final validation before operation.

3. Open a project

Click Open XML, choose the file, then review device, TX/RX channel, and active subscription counts. XML files with a default namespace are supported. Language and theme can be changed at any time.

4. 2026.1 workspace

The Windows build organizes work by intent: Home, Overview, Devices, Patch, Synoptic, Device bank, Import / Export, Validation, Safety, and Atomic Bomb.

- The top bar keeps the active file, Save as, Undo, and Redo available.
- The right inspector shows selection context without changing pages.
- Patch, Easy Patch, and the synoptic share stable identities and one session.
- The Validation Center separates internal DCE checks from manual Dante Controller validation.
- Dante XML remains the official exchange file; a .dceproj additionally stores DCE layout, notes, assets, and history.

Screenshots in this guide are real V3.5 captures using a synthetic preset. They illustrate retained workflows; 2026.1 navigation and styling differ.

Screen map

The top bar opens, merges, saves, undoes, and restores the project. The Project column stays visible for counters, alerts, and search.

Screen	Main purpose
Configuration	Overview, selected device, channels, quick lists, global actions, and device table.
Patch	Tabular review and editing of Rx-to-Tx subscriptions, with filters and direct renaming.
Easy patch	Visual matrix, selection/range tools, immediate apply, and optional replacement warning.
Import / Export > Labels	JSON/CSV, DMT XLSX/ODS, A&H,, and Yamaha exchange with an import report.
Import / Export > Reports	TXT/PDF reports, TXT/CSV patchbooks, and a simple text topology.
Import / Export > Synoptic	Locations, order, visibility, zoom, reset, and SVG/PDF exports.
File health	Errors, warnings, subscription information, and review filters.
Safety and log	Validation, final report, compatibility, history, XML comparison, user guides, and optional support.
Atomic Bomb	Configurable, undoable, offline troubleshooting exercise generation.

The essentials on one screen

The Configuration page addresses the software's original need: review an entire preset quickly without opening each Dante Controller page in turn.

Spot issues
Colored rows and the side banner highlight important discrepancies.

Target safely
Filters, multiple selection, and locks define exactly which devices are affected.

Review
Before / after lets you inspect every change before saving.

Quick lists

RedundantDaisychainLatenciesSample rates

BitsStatic IPsPreferred Masters

Global actions

Network / audioIPProfilesClock

Redundant

Daisychain

Global sample rate

Apply mode to all48 kHz

Global latency

0,25 ms

Global bits per sample

24 bit

Apply sample rate to all

Apply latency to all

Apply bits to all

Reset all channels

Selected device

Device

DEVICE-A

New name

DEVICE-A

Network mode

RedundantDaisychain

Unicast latency

1 ms

Apply settings

Device details

Clear Rx/Tx

Clear Rx

Clear Tx

Remove

Device channels

Channel to rename

TX

1 - PROGRAM L

New channel name

PROGRAM L

Rename channel

Reset device channels

Batch rename

Start channel

1 - PROGRAM L

End channel

2 - PROGRAM R

Prefix

Number

1

Rename range

Device filter

All

Action target

All unlocked

Select visible

Clear selection

Lock selection

Unlock selection

Before / after

Hide settings

Lock	Device	Friendly name	Network	Latency	Sample rate	Bits	IP	Preferred	TX	RX
☐	DEVICE-A	DEVICE-A	Daisychain	1 ms	48 kHz	24 bit	Auto	☐	2	1
☐	DEVICE-B	DEVICE-B	Redondant	2 ms	96 kHz	32 bit	Fixe (192.168.50.20)	☒	0	2
☐	DEVICE-C	DEVICE-C	Daisychain	1 ms	48 kHz	24 bit	Auto	☐	1	1

Configuration view: quick lists and global actions on the left, device and channels in the center, complete device table at the bottom.

4. Configuration page

The Configuration page combines the selected device, its channels, global actions, and the device table.

Selected device

- Apply the name, network mode, latency, and Preferred Master state together with Apply settings.
- Double-click a row or use Device details to edit IP settings, sample rate, bits per sample, TX/RX names, and subscriptions for its Rx inputs.
- A complete Device details change is grouped into one model rebuild.
- Clear actions can disconnect Rx inputs, remove subscriptions using Tx channels, or do both.
- Deleting a device also removes subscription points that reference it.

Device table

- Multiple selection defines the Selected unlocked target. The Lock column protects devices from global actions.
- Preferred Master can be toggled directly. Hide settings enlarges the table.

Search, filters, and global actions

- Search finds devices, channels, and subscription references after at least two characters.
- Quick lists filter network modes, latencies, sample rates, bits, static IPs, and Preferred Masters.
- Modified only shows changed devices; Before / after lists every difference.
- Choose all unlocked, selected unlocked, or visible unlocked devices. A preview is shown before application.

Edit a device without leaving the workflow

Device details combines the essential settings and lets you move directly to another device from the top menu.

Identity Device name, network mode, and Preferred Master.	Audio Latency, sample rate, and bits per sample.	Network Automatic or static primary IP without changing secondary interfaces.
--	---	--

Selected device

Device

DEVICE-A

1

New name

DEVICE-A

Network mode

Redundant

Daisychain

Unicast latency

1 ms

Clock

Preferred master

Apply settings

Device details

Clear Rx/Tx

Clear Rx

Clear Tx

Remove

Device channels

Channel to rename

TX

1 - PROGRAM L

2

New channel name

PROGRAM L

Rename channel

Reset device channels

Batch rename

Start channel

1 - PROGRAM L

End channel

2 - PROGRAM R

Prefix

Number

1

3


Rename range

1 device settings; 2 selected Tx/Rx channel; 3 range rename.

- The RX then TX tabs rename individual channels.
- Rx patch reviews or disconnects subscriptions received by the device.
- Apply validates the complete edit as one grouped operation; Cancel leaves the XML unchanged.

Quick profiles and global actions

A global action affects only the displayed target: all unlocked devices, the unlocked selection, or the current filter. Always review the target before confirming.

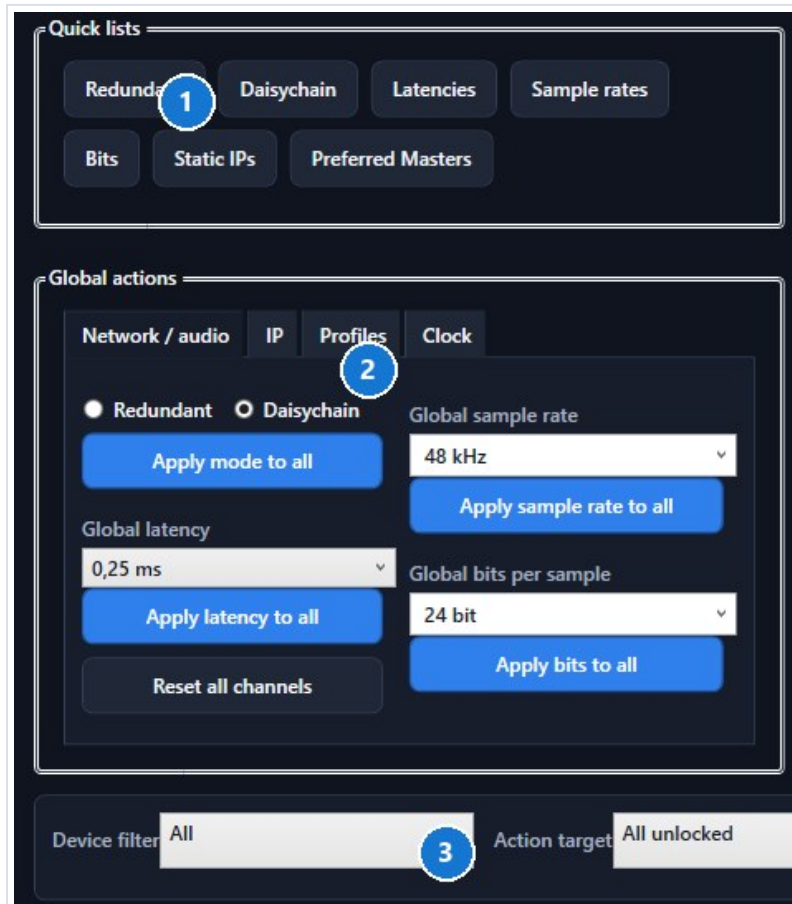

1 quick lists; 2 Network/audio, IP, Profiles, and Clock tabs; 3 target and locking controls.

Apply a profile

- Open Global actions > Profiles, choose a profile, then select Apply profile.
- The preview compares the current and target states for every device that will actually be affected.
- Profiles set sample rate, bit depth, latency, and automatic IP; the last two also set Redundant or Daisy-chain.
- A locked device is always excluded. Undo restores the previous state as one operation.

A profile cannot verify physical hardware capabilities. Check the supported rates, latencies, and network modes.

5. Navigable alerts

The Items to check banner reports mixed redundant/daisychain modes, static IPs, multiple sample rates, and multiple bit depths.

- Click Show devices, choose an alert, then review the filtered devices.
- After correcting an item, verify that the alert disappears and review File health.

6. Quick profiles

Profile	Applied settings
48 kHz / 24 bit / 1 ms	Automatic IP
48 kHz / 24 bit / 2 ms	Automatic IP
96 kHz / 24 bit / 1 ms	Automatic IP
96 kHz / 24 bit / 2 ms	Automatic IP
48 kHz / 24 bit / 1 ms / Redundant	Redundant mode and automatic IP
48 kHz / 24 bit / 1 ms / Daisychain	Daisychain mode and automatic IP

Verify that every device supports the requested sample rate, bit depth, latency, and network mode.

7. Automatic recovery

After a change, the application waits briefly and writes recovery data in the background without blocking the interface or replacing the source XML.

- When reopening the same XML, choose whether to restore or discard the previous session.
- After Save as, the new file becomes the reference for later edits and recovery data.
- The copy is deleted after saving or reverting; copies older than 30 days are cleaned automatically.

Rename Rx and Tx channels quickly

Direct rename works in Configuration, Device details, Patch, and Easy patch. For a Tx channel, DCE also updates every recognized subscription that uses the old name.

Channel to rename

TX

1

1 - PROGRAM L

New channel name

PROGRAM L

Rename

2

Reset device channels

Batch rename

Start channel

End channel

1 - PROGRAM L

2 - PROGRAM R

Prefix

3

Number

1

Rename range

4

1 choose Rx or Tx and a channel; 2 enter the name; 3 choose the range; 4 set prefix and starting number.

Editing shortcuts

Key	Action
Enter	Validate the name without leaving the current cell.
Tab	Validate and open the next channel.
Shift + Tab	Validate and open the previous channel.
Escape	Cancel the current edit or fill operation.
Ctrl / Shift	Extend a channel selection in Easy patch.
Mouse wheel	Scroll; use the dedicated zoom controls in the matrix and synoptic.

Extend a numbered series like a spreadsheet

The fill handle appears only when the final characters form a number at the end of the label. Drag it to the last required channel; a preview displays the resulting series before release.

Starting name	Handle	Result
Mic 4	Visible	Mic 5, Mic 6, Mic 7...
Mic 04	Visible	Mic 05, Mic 06, Mic 07...
Wireless 12	Visible	Wireless 13, Wireless 14...
Mic	Hidden	No trailing number found
Mic 4 main	Hidden	The name does not end with a number

- All text before the final number is preserved exactly.
- The number may contain several digits and leading zeroes are retained.
- Fill works in Rx/Tx lists and in the Easy patch matrix.
- Escape cancels the preview. No label changes until the handle is dropped on a valid target.
- One Undo operation restores the complete series.

Important: the trailing number belongs to the label. DCE never rennumbers technical Dante IDs.

Patch: inspect and correct a subscription precisely

Every row represents one Rx channel and its Tx source. Patch is the most precise view for filtering, reviewing local or external sources, replacing a subscription, or removing it.

Search device or channel

State filter

Tx source to apply

Tx channel to apply

View

Apply

Remove

Rx device	Rx Dante ID	Rx channel	TX device	TX Dante Id	Tx channel	Status
DEVICE-A	1	LOCAL MON	LOCAL / DEVICE-A	1	PROGRAM L	Patch local
DEVICE-B	1	INPUT L	DEVICE-A	1	PROGRAM L	Patch actif
DEVICE-B	2	INPUT R	DEVICE-A	2	PROGRAM R	Patch actif
DEVICE-C	1	RETURN		-		Libre


1 search and state; 2 Tx source to apply; 3 Simple/Expert mode; 4 Rx-to-Tx result.

Simple Shows Rx device/ID/channel, Tx device/ID/channel, and state.	Expert Adds raw source, resolved source, type, active, modified, and complete source.	Local The "." source means the Rx device itself and is preserved.
--	--	--

- Rx receiver and Tx transmitter filters reduce the table without changing XML.
- Select an Rx row, choose its Tx device and channel, then select Apply.
- Remove disconnects only the selected Rx row.
- A source device missing from a partial preset may be intentional: understand the warning before replacing it.
- Direct Rx and Tx column rename supports Enter, Tab, Shift+Tab, and series fill.

Easy patch: visual and immediate patching

Easy patch always shows Rx channels for the receiving device on the left and Tx channels for the transmitting device on the right. Menus and arrows move quickly between devices.

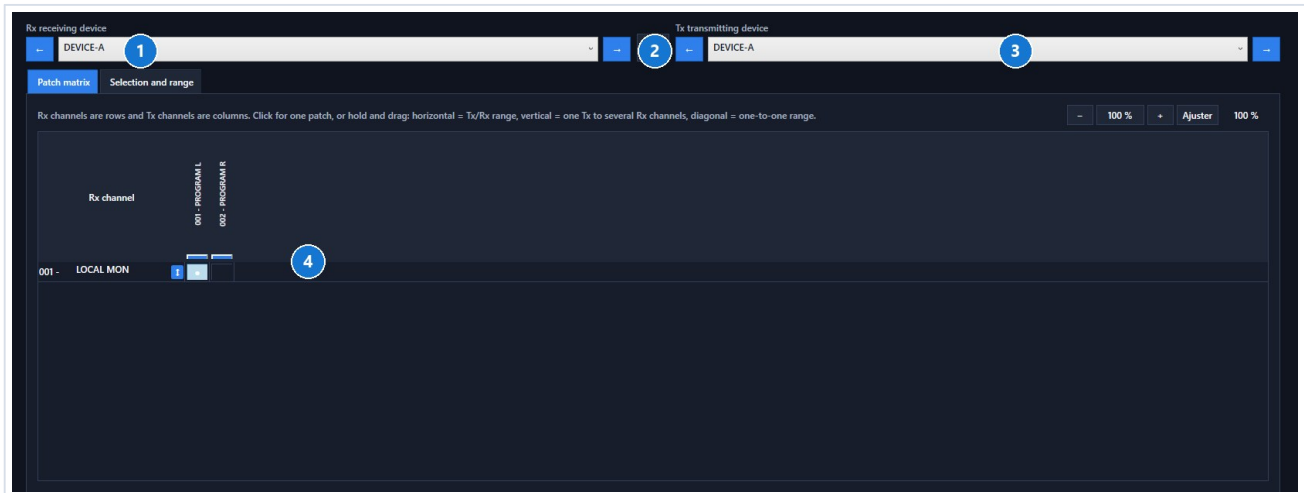

1 Rx device; 2 FLIP exchanges only the displayed Rx/Tx roles; 3 Tx device; 4 patch matrix.

FLIP does not reverse subscriptions. It only exchanges the two selected devices so you can inspect or create subscriptions in the opposite direction.

Easy patch: click, drag, range, and PATCH 1:1

Gesture	Result
Click one cell	Immediately applies that Tx source to that Rx channel.
Drag horizontally	Advances from the starting Tx across columns on one Rx row.
Drag vertically	Feeds several consecutive Rx channels from one Tx source.
Drag diagonally	Creates Tx1>Rx1, Tx2>Rx2, and so on.
Rx/Tx selection	Equal counts: one-to-one. One Tx: distribution to several Rx channels.
PATCH 1:1	Click the first intersection, select the count, then apply the series.

- Every click or drag changes the project immediately; there is no preview batch waiting to be applied.
- Warn me when the Rx channel is already patched is enabled by default. Clear it only when you accept replacement without confirmation.
- A selection containing several Tx and Rx channels must contain equal counts.
- Several Tx channels into one Rx or unequal multiple selections are rejected.
- Rx and Tx labels are directly editable. Tab, Shift+Tab, Escape, and the series handle remain available.
- The wheel and -, 100%, +, and Fit controls adjust matrix zoom.
- Undo restores the last immediate operation.

8. Channels and subscriptions

- TX/RX channels can be renamed individually or by range with {00}, {000}, {n}, and {device}.
- Renaming a Tx channel updates every recognized subscription alias in the project.
- In Rx/Tx lists, click the name, then press Enter to validate, Tab to validate and move forward, Shift+Tab to move backward, or Escape to cancel the edit.
- In the Easy patch matrix, click a vertical Tx label to rename it. Enter, Tab, Shift+Tab, and Escape behave exactly as they do in the lists.
- The fill handle appears only when the name ends with a number. Mic 4 and Mic 04 can be extended; Mic, Mic left, and Mic 4 main cannot.
- Fill keeps the text before the number and any leading zeroes: Mic 04 becomes Mic 05, Mic 06, and so on. Cancelling the drag changes no channel.
- Dante IDs are not renumbered. The local subscribed_device="." marker is preserved.
- The Easy patch tab shows Rx channels on the left and Tx channels on the right. Menus and arrows switch devices quickly.
- Select equal Tx and Rx counts for one-to-one mapping, or one Tx to feed several Rx channels.
- Several Tx channels to one Rx and unequal multiple selections are blocked.
- Range patching requires a first Tx, first Rx, and exact count; an incomplete range is blocked as a whole.
- A click or drag immediately applies the affected crosspoints, with no preview step.
- Clicks and drags update only the affected cells: the entire matrix is no longer rebuilt after every action.
- Selections, ranges, and PATCH 1:1 are also applied immediately.
- Warn me when the Rx channel is already patched is selected by default. Clear it only to replace a subscription without that warning.
- In the compact matrix, Rx channels are rows and Tx channels are columns. Click for one assignment, or hold and drag horizontally, vertically, or diagonally for a safe range.
- Each immediate operation remains reversible with Undo.
- In Device details, the top menu switches devices and protects unapplied changes.

Starting name	Handle	Result
Mic 4 [drag]	Visible	Mic 5, Mic 6, Mic 7...
Mic 04 [drag]	Visible	Mic 05, Mic 06, Mic 07...
Mic left	Hidden	No fill action offered

9. Add XML to project

- Devices with unique names are always imported.
- Only conflicting names are offered for automatic or manual rename.
- Imported subscriptions follow renamed imported devices.

10. IP and audio formats

- Automatic or static IP is editable per device or through a global action.
- Only the primary IPv4 interface, network=0 when available, is targeted. A secondary interface is not changed.
- DNS is not rewritten implicitly. Gateway changes only when the action provides a value.
- Sample rate and bits per sample are editable per device, globally, or through a profile.

Incorrect settings can make a device unreachable or incompatible. Verify actual hardware capabilities.

11. File health, comparison, and Import / Export

- File health combines statistics, errors, warnings, free/local subscriptions, and compatibility checks.
- XML comparison displays differences in a table.
- TXT/PDF exports include the application version and the By Mamat et ses agents signature.
- Import / Export groups Labels, Reports and patchbook, and Synoptic. The synoptic remembers locations, shows or hides devices, provides a separate preview whose zoom preserves proportions, and exports SVG or PDF; its local layout sidecar never changes Dante XML.

Add another XML file to the open project

This command merges devices already described by a second preset. It differs from adding from the bank: the second XML retains its compatible device structure and internal subscriptions.


Step	What DCE does
1. Open the main project	This XML remains the session and save baseline.
2. Add XML to project	DCE loads and validates the second file without modifying its original.
3. Verify format	Preset version and namespace must match.
4. Resolve duplicates	Only used names are offered: skip, custom automatic suffix, or manual names.
5. Adapt references	Imported subscriptions follow renamed devices from the second XML.
6. Review	The result reports added, renamed, and skipped duplicate devices.

Devices whose names do not conflict are always added. The automatic suffix is normalized without parentheses.

- Invalid XML, a different preset version, or a different namespace blocks the complete merge.
- A final name that is already used blocks the operation instead of producing an ambiguous duplicate.
- The merge can be undone. Review File health and Before / after before Save as.

Label Import / Export

The Labels tab centralizes generic, DMT, Allen & Heath, and Yamaha exchange. Native files are created from bundled templates; DCE does not ask for an external template file.

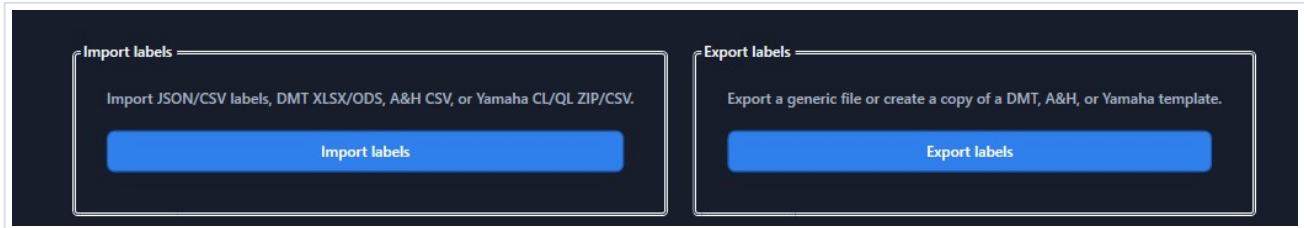

Import is on the left and export on the right. The DMT button opens the associated dLive MIDI Tools project.

- Import: choose the file, review the detection report, associate source lists with devices, and apply only valid changes.
- Export: choose Rx/Tx, devices, range, format, and any required name adaptation, then provide the new output name.
- DMT uses XLSX/ODS or JSON/CSV; dLive and Avantis use their native CSV; CL/QL use the complete native ZIP.
- A second identical import does not enable Apply because labels already match.

Exchange labels without an external template

dLive, Avantis, Yamaha CL/QL, and DMT templates are bundled with Dante Config Editor. Native export only asks for the new file name and folder.

Choose the correct format

Format	Destination	Content
Generic JSON / CSV	DCE or third-party tool	Full Unicode. Do not import into dLive Director.
DMT XLSX/ODS dLive / Avantis	dLive MIDI Tools	Direct DMT workbook; rows outside the selection are disabled.
Native A&H; CSV dLive	dLive Director	dLive [Version]/[Channels] structure and Input names.
Native A&H; CSV Avantis	Avantis Director	Avantis [Version]/[Channels] structure and Input names.
Native Yamaha ZIP CL / QL	CL/QL Editor	Complete nine-CSV package; only InName.csv receives labels.

Workflow

- Under Import / Export > Labels, choose Export labels.
- Choose TX or RX, devices, first channel, and count. A device with RX but no TX automatically switches to RX.
- Choose the native format matching the real model. Devices without channels in the selected direction cannot be checked.
- Review the preview. Enable ASCII/eight-character adaptation only when required, then choose Export.
- DCE opens Save as directly. Output is written atomically, so a failed export does not destroy an existing file.

During import, DCE reports the detected format, source version, lists, devices, channels, ignored rows, empty labels, duplicates, and warnings. Apply requires at least one error-free change. After loading the same labels again, the button intentionally remains disabled and DCE states that the labels already match.

DMT 2.14.0-RC1 JSON/CSV exports are checked with fixtures generated by the DMT exporters at commit 3c34052. XLSX/ODS support continues to target the Channels sheet from observed DMT workbooks.

Before use, always open the generated file in DMT, dLive Director, Avantis Director, or Yamaha CL/QL Editor and verify labels and the selected model.

Bundled DMT workbooks come from Tobias Grupe's MIT-licensed dLive MIDI Tools project. DMT_LICENSE.txt is included with the application.

Understand the device bank

A bank contains reusable offline role templates. It is not a live network inventory and does not contain deployable Dante hardware identities.

Action	Source	Result
Duplicate	Device in the open project	Independent new device in the same project.
Save to device bank	Device in the open project	Sanitized, versioned, reusable template.
Add from device bank	Bank template	Independent new instance in the open project.
Add XML to project	Second XML preset	Compatible devices and references added to the open project.
New project	Minimal structure and bank	Experimental 3.0.0 XML that requires validation.

Removed from a template

- instance_id, device_id, and other hardware identities from the source instance;
- network addresses and interfaces from the source project;
- subscriptions, patches, and flows tied to other devices;
- Preferred Master and project-specific values not explicitly selected.

Retained when appropriate

- manufacturer, model, category, description, tags, and image;
- compatible role structure and Tx/Rx channel counts;
- generic Tx/Rx labels that remain editable before insertion.

Create, share, and reuse a device bank

Need	Procedure
Create a template	Select the device > Save to device bank > replace project-specific labels with generic labels > enter metadata > Save.
Add an image	Choose PNG, JPEG, or WebP. The image is copied into the template folder, so the source file can later be moved.
Change bank	Device bank > Change bank. You may use a local, shared, or synchronized folder.
Share the bank	Export bank creates a verified *.dce-bank.zip archive.
Install a bank	Import bank and choose a new or empty folder. DCE never silently replaces an existing bank.
Add to project	Select the template > Add to project > choose a unique name and labels > confirm.

- Editing an inserted device never changes its bank template.
- Editing the template never changes devices already inserted into projects.
- Version, checksum, namespace, channel counts, and preset version are checked before insertion.
- Bundled GitHub banks are sanitized and installed separately; a personal bank is never replaced.

After insertion or project creation, reopen the XML, review File health, and import a copy into Dante Controller. Generic roles without hardware identity remain experimental.

Machine bank and generic roles

These functions edit offline preset roles, not real devices. DCE removes hardware identifiers from the source instance and does not claim to create a Dante device identity.

Duplicate a device

- Select a device, choose Duplicate, and provide a unique role name.
- TX/RX labels may be retained. Network data, settings, flows, Preferred Master, and subscriptions are disabled by default.
- The source is unchanged. The copy is added as one undoable operation and receives a DCE session identity that is never serialized.

Save and share a template

- Choose Save to machine bank and enter manufacturer, model, category, description, tags, and generic labels.
- An optional PNG, JPEG, or WebP image is copied into the model folder; no fragile external path is kept.
- The default bank is Documents/Dante Config Editor/Machine Bank. You may choose, open, copy, or place it in a synchronized folder.
- Export bank creates a verified *.dce-bank.zip archive. Import bank requires a new or empty folder and never replaces existing data.
- GitHub banks opens the public catalog in main. Banks retain their historical 3.6 names: DCE Generic Roles 3.6 provides generic 8x8 and 32x32 test roles. DCE Community Devices 3.6 provides nine sanitized illustrated templates: Yamaha QL1 and Rio1608-D2, Fohhn DI4.1000, Lake LM 44, RME Digiface Dante, Glensound Divine, Beatrice D8 and AOIP22, and Allen & Heath SDante 64x64. These banks contain no hardware identity, network data, or subscription.
- Administration supports search, filters, edit, duplicate, confirmed delete, and model ZIP import/export.

Add a template to the project


- Choose Add from bank, then configure the new name, labels, and only the options you explicitly need.
- The inserted instance is independent from the template. Editing either one never changes the other.
- DCE checks model version, checksum, channel counts, namespace, and preset version before a transactional insertion.

Experimental new project

- New project writes a minimal 3.0.0 structure, either empty or with one initial role from the bank.
- An existing file is never overwritten silently. Writing uses a temporary file followed by validation and atomic replacement.
- Reopen the XML in DCE, review File health, then perform a mandatory manual import into Dante Controller.

Technical logs are available from Safety and log. They explain import, validation, bank, and export failures without changing the project.

Build and export a synoptic

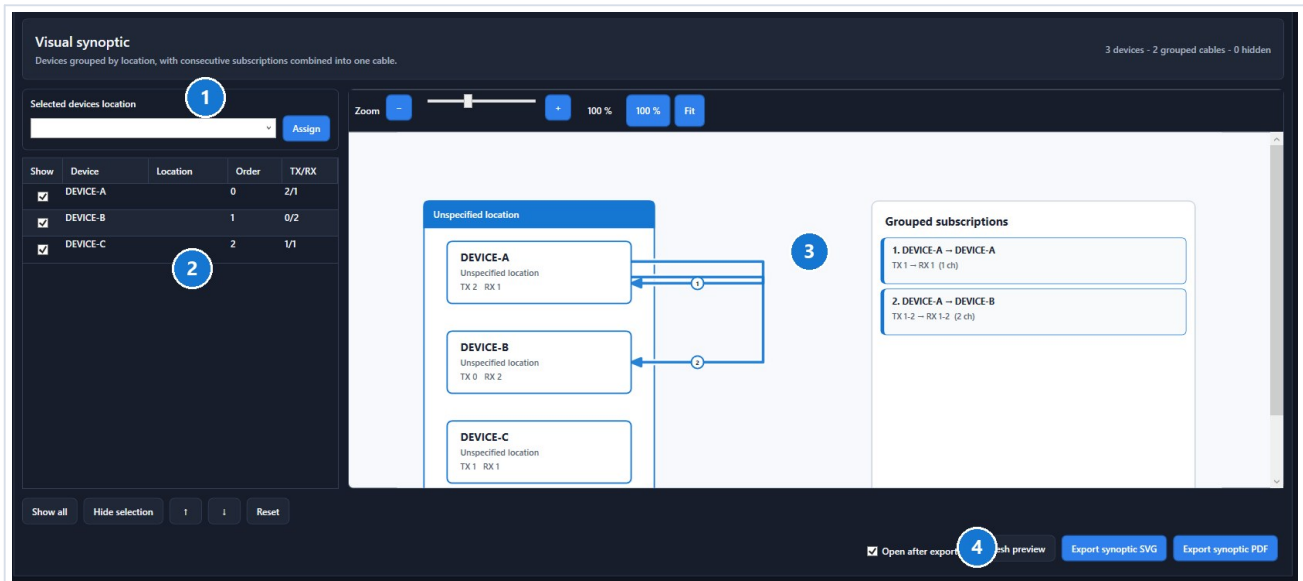

1 location; 2 order and visibility; 3 zoomable preview; 4 reset and SVG/PDF exports.

- Select one or more devices, enter or choose a location, then select Assign.
- Within one location, the smallest order number places the device higher.
- Clear Show to hide a device without removing it from the project.
- In the visual editor, drag a device; cables follow. Reset rebuilds a clean automatic layout.
- Consecutive subscriptions are grouped on one range-labelled cable. A link in both directions uses one line with an arrow at each end.
- Zoom, Fit, and the separate preview window help with large projects.
- SVG and PDF are presentation exports. Locations and positions are stored next to the project and never modify Dante XML.

Review before saving

File health separates blocking errors, warnings, and information. Read the complete row: it identifies the category, device, channel, and cause.


Severity	Category	Device	Dante Id	Channel	Message
Avertissement	Device	DEVICE-B			DEVICE-B ne contient aucun canal TX.
Avertissement	Format audio				Plusieurs samplerates sont présents dans le preset : 48000, 96000.
Avertissement	Format audio				Plusieurs encodages sont présents dans le preset : 24, 32.
Avertissement	Réseau				ATTENTION : le fichier mélange 1 machine(s) en redondant et 2 machine(s) en daisychain. Vérifiez que c'est
Avertissement	Réseau				IP fixe détectée sur 1 machine(s) : DEVICE-B (192.168.50.20).
Avertissement	Réseau				ATTENTION : plusieurs fréquences d'échantillonnage sont présentes dans le preset : 48 kHz (48000), 96 kHz
Avertissement	Réseau				ATTENTION : plusieurs bits par échantillon sont présentes dans le preset : 24 bit, 32 bit.
Avertissement	Réseau				Plusieurs latences sont présentes dans le preset : 1000, 2000.
Info	Patch	DEVICE-A	1	LOCAL MON	DEVICE-A / LOCAL MON utilise une source locale ''.
Info	Patch	DEVICE-C	1	RETURN	DEVICE-C / RETURN est libre.
Info	Sauvegarde				Compatibilité XML : aucune modification interdite détectée.

Anonymized example: mixed audio formats, mixed network mode, static IP, local subscription, and free Rx.

File health Errors, warnings, mixed audio formats, static IPs, and local subscriptions.	Safety and log Pre-save summary, XML compatibility, reports, history, and user guides.	Atomic Bomb Separate tab, configurable categories, and three required confirmations.
--	---	---

- An error blocks saving; a warning requires review but may describe an intentional condition.
- Items to check > Show devices applies a filter to find affected devices quickly.
- Modified only followed by Before / after reviews the exact scope of the changes.
- Safety and log combines validation, compatibility, history, XML comparison, reports, and user guides.

Atomic Bomb: prepare an exercise, never a live network

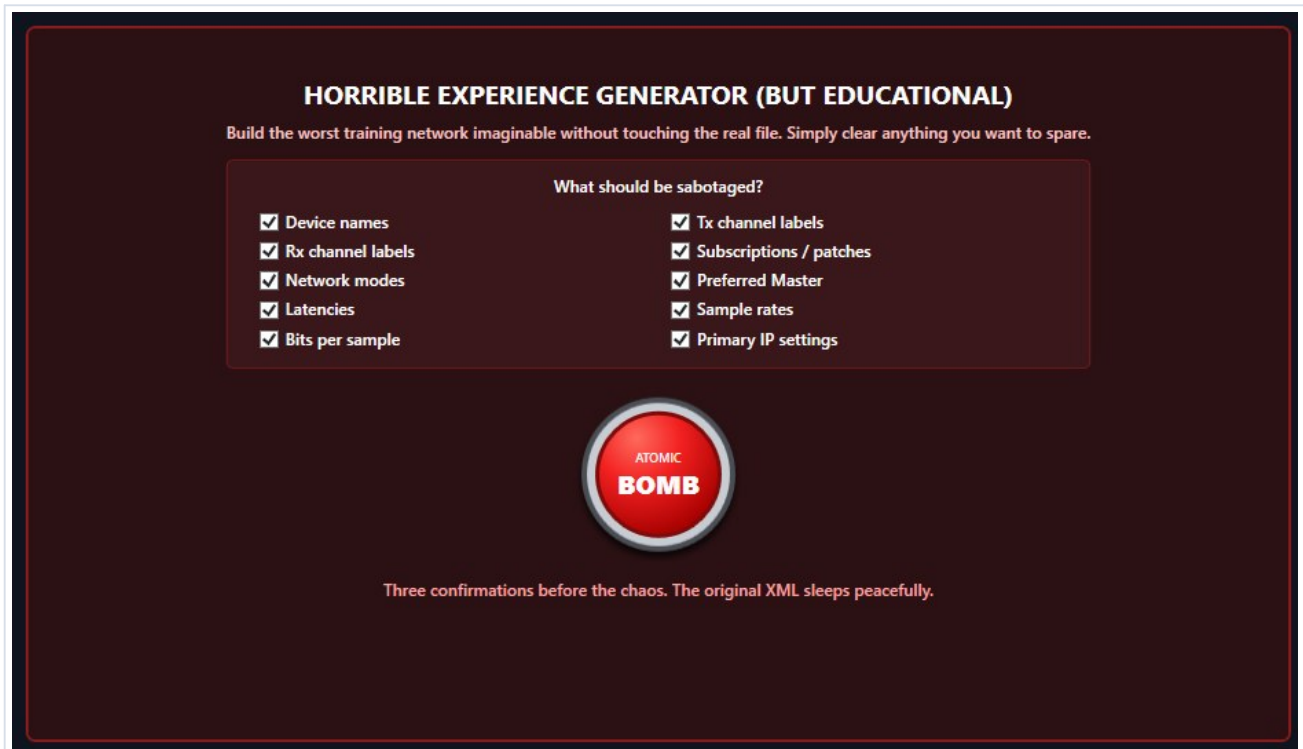

Clear categories that must be preserved. Three confirmations are required before changing the in-memory copy.

- Categories cover names, labels, subscriptions, network modes, Preferred Master, latencies, sample rates, bit depth, and primary IP.
- Technical identifiers, namespaces, DNS, gateways, and secondary interfaces remain protected.
- The complete operation is one Undo step.
- The source XML is never overwritten. Use Save as to create the exercise file.

Atomic Bomb does not communicate with any device. The exercise file must still be reviewed in Dante Controller before distribution to trainees.

12. Atomic Bomb: create an exercise

- Open the Atomic Bomb tab after Safety and log. Clear the categories you want to spare; all are selected by default. Three confirmations then describe the consequences before any change.
- The in-memory copy receives unique mythological, audio-themed, or playful names plus a mixture of subscriptions, network modes, Preferred Master states, latencies, sample rates, encodings, and primary IP settings.
- Technical identifiers, namespaces, DNS, gateways, and secondary interfaces remain protected.
- The summary displays the scenario seed. The entire operation is one undo step and the source file is never overwritten.
- Use Save as to provide the trainee preset, then verify its import in the appropriate official Dante tool.

This mode is only for offline training. It does not alter any device or communicate with the Dante network.

13. Save and final validation

Use Save as. The temporary XML is reloaded, protected changes are checked, and the destination is replaced atomically. A failure before replacement leaves the previous destination intact.

Check	Recommended action
Items to check	Open affected devices and explain or correct every unexpected difference.
Modified only	Verify that only the intended devices appear.
Before / after	Review every changed setting, channel, and subscription.
Dante Controller	Import the file into a working copy before any field operation.

14. Regression tests

The 2026.1 suite runs 364 Core/Windows tests and 20 headless Mac tests. Coverage includes XML guards, save and recovery, IPv4 interfaces, subscriptions, large presets, duplication, the device bank, experimental project creation, .dceproj packages, XML profiles, commands, DMT formats, import reports, synoptic export, Atomic Bomb, Easy patch, optional support, and translation consistency.

15. Known limitations

- No real-time Dante control and no communication with devices.
- No Audinate SDK/API and no proprietary protocol bypass.
- Compatibility depends on the XML structure; only an official import confirms the final file.
- Undo keeps at most 10 states to limit memory use.
- The matrix displays only the two selected devices to preserve performance on large presets.
- Mac DMGs are ad hoc signed but not notarized; first launch may require right-clicking the application and choosing Open.
- The Windows Easy patch tab is not reproduced identically on Mac, which keeps the Avalonia visual patch workshop.
- Duplicate Tx names are ambiguous in Dante subscriptions and must be renamed before using Easy patch.
- Native workbooks match observed DMT 2.13.0 templates and the supplied dLive, Avantis, CL5, and QL5 examples; DMT 2.14.0-RC1 JSON/CSV is tested separately.
- Generic roles duplicated or added from the bank carry no hardware instance_id/device_id. Only an actual Dante Controller import can confirm their use with a given version.
- New project writes an experimental minimal 3.0.0 structure. It must be imported and reviewed in Dante Controller before use.

16. Help and information

Quick start and Full guide automatically open the French or English PDF for the active language. Public project: github.com/Mamat79/DanteConfigEditorV3 - Credit: By Mamat et ses agents.

17. Support DCE

Dante Config Editor remains completely free, and every feature is available without contributing.

- The Support DCE button is available in Safety and log.
- The Support DCE button displays the PayPal QR code for the phone app and a PayPal.Me button for computers; DCE contains no payment system and performs no network request at startup.
- The local reminder does not appear on first launch. It can be postponed for 20 launches or disabled permanently.
- Starring the GitHub project or sharing feedback also helps for free. And if you are truly crazy, you can even do both!