PROFESSIONAL USER MANUAL

Dante Config Editor

Complete guide - 2027.3

Prepare a Dante project offline, patch on the local network, or work with project devices and discovered hardware in the same matrix.

Review	Edit without losing patching	Build offline
Scan latency, sample rate, audio format, network, IP, clock, and alerts at a glance.	Rename devices and channels while recognized subscriptions are updated.	Merge XML presets, add templates, and prepare the network before devices are available.

Permanent license for EUR 49 including French VAT, one-time payment.
If you have no valid license, the first launch of 2027.3 starts a 30-day trial that works offline. A valid license is required after the trial. Existing permanent licenses remain valid. Payment through Stripe Managed Payments.

Unofficial third-party tool, independent from Audinate. Keep the original and review the final XML in Dante Controller.

Windows 11 x64
www.silemio.com

SiLeMI/O
By Mamat
-------[]--

Contents

Select an entry to open it. PDF viewer bookmarks use the same hierarchy, and every page provides a direct link back to these contents.

How to use this guide . . . 4

1. Start safely . . . 5
- Safety principles . . . 5
- Open or create a project . . . 5
- Moving from 2026.10 to 2027 . . . 6
- Local StageFlow project and LIVE session . . . 7
- Join StageFlow LIVE . . . 8
- LIVE connection: troubleshooting . . . 9
- LIVE change notifications . . . 10

2. Project and general settings . . . 11
- A home page that fits your screen . . . 12
- Create or open, add if needed, edit, export . . . 13
- Common header and preparation . . . 14
  - Prepare → Devices → Patch → Validate → Export . . . 14
- Screen map . . . 15
- Choose the right workflow . . . 16
  - Role, template, and physical device . . . 16
- Adapt the workspace . . . 17
- The essentials on one screen . . . 18
- General settings, alerts, and profiles . . . 19
  - Quick profiles . . . 19
- Quick profiles and global actions . . . 20
  - Apply a profile . . . 20

3. Per-device settings and channels . . . 21
- Selected device . . . 21
- Device table . . . 21
- Search, filters, and global actions . . . 21
- Edit a device without leaving the workflow . . . 22
- IP and audio formats . . . 23
- Rename Rx and Tx channels quickly . . . 24
  - Editing shortcuts . . . 24
- Extend a numbered or stereo series like a spreadsheet . . . 25
- Channels and patching principles . . . 26
- Project-wide matrix . . . 27
- Easy patch: visual and immediate patching . . . 28
- Easy patch: click, drag, range, and PATCH 1:1 . . . 29
- Project multicast flows . . . 30
- Add configurations to the project . . . 31

5. Build a project: add another XML file . . . 32
- Understand the device bank . . . 33
  - Removed from a template . . . 33
  - Retained when appropriate . . . 33
- Manage device banks . . . 34
- Create, share, and reuse a device bank . . . 35
- Machine bank and generic roles . . . 36
  - Duplicate a device . . . 36
  - Save and share a template . . . 36
  - Add a template to the project . . . 36
  - New offline project . . . 36
- Create a new offline project . . . 37

6. Label Import / Export . . . 38
- Exchange labels without an external template . . . 39

Choose the correct format . . . 39
Workflow . . . 39
Build and export a synoptic . . . 40
Validation, comparison, and Import / Export . . . 41

7. Review, save, and recover . . . 42
Save and final validation . . . 43
Automatic recovery . . . 44

8. Atomic Bomb: prepare an exercise . . . 45
Atomic Bomb: create an exercise . . . 46
Checks before use . . . 47
Known limitations . . . 47
Help and information . . . 47
License and trial . . . 47
DCE license . . . 48
Local Dante network . . . 49

How to use this guide

This guide starts with XML projects and then covers Dante networking. Each chapter identifies the screen to open, the action to perform, and the checks to complete before moving on.

Step	Topic	Expected result
1	Startup	Install, open, or create a project without altering the original.
2	General settings	Review the project, target devices, and apply profiles.
3	Per-device settings	Edit identity, network, audio, and Rx/Tx labels.
4	Patch	Inspect, create, trace, or remove subscriptions.
5	Project composition	Merge XML, duplicate devices, and use banks.
6	Import / Export	Exchange labels, reports, patchbooks, and synoptics.
7	Validation	Compare, save, recover, and review the XML.
8	Atomic Bomb	Create an offline exercise and access help.

1. Start safely

Important: DCE is a third-party tool independent of Audinate. On Windows, it prepares XML offline and can edit discovered devices after you open a Dante session. Keep the original and check exported XML in Dante Controller.

The Windows x64 installer includes the application and .NET 10 LTS. The embedded matrix uses Microsoft Edge WebView2.

- The default location is Program Files, with Start menu and desktop shortcuts.
- Installation uses a stable AppId, Program Files location, shortcuts, and local DCE profile so upgrades preserve settings and previously activated licenses.
- The included banks comprise DCE Community (77 devices), DCE Generic (2 roles), and six sanitized XML 2.1.0 roles. My bank remains reserved for the user's own templates.
- This guide describes Windows 11 x64. The Apple Silicon and Intel macOS editions have separate guides matching their tabs and commands.
- All four French and English PDFs are installed and remain available from the application.
- At startup, DCE quietly checks GitHub Releases. Only a version newer than the running application is offered, never the already installed version. DCE verifies the matching installer's SHA-256 and launches it only after confirmation. The same check is available under Help > Check for updates.
- If GitHub temporarily limits requests, DCE respects the retry deadline across restarts. Manual checks explain when to retry; startup remains silent and offline work continues.

Safety principles

- Work on a copy of the XML and use Export to Dante Controller to produce the final preset.
- The guard tracks devices by stable technical identity, blocks unknown paths, and protects Dante IDs, mediaType, and instance_id.
- Safe saving: DCE validates a temporary file first. The source and any existing destination receive a copy in DanteConfigEditor_Backups before replacement.
- A successful import into Dante Controller is the final validation before operation.

Open or create a project

On first launch, a guided welcome offers four starting points: open XML, create a project, browse device banks, or read the full guide. Close it to enter DCE; it will not open automatically again and remains available from Help > Discover DCE. The first launch uses the light theme; the last selected theme and language are then restored automatically.

Click Open XML, choose the file, then review device, TX/RX channel, and active subscription counts. XML files with a default namespace are supported.

You can also drop an XML into the window without creating a project first. If a project is already open, choose Open separately or Add. Several XML files of the same version can be dropped together; different versions are not merged. Drop a .stageflow directory on its own to open it. DCE offers to save unsaved changes before switching projects.

Moving from 2026.10 to 2027

Windows and Mac each have their own verified packages. A newer Windows number does not mean a new Mac package exists. Direct site and README links identify the appropriate version for each platform.

- 1. Save projects and close DCE. Do not remove device banks or the user profile.
- 2. From Downloads on the SiLeMI/O website, choose the stable DCE version offered for your platform.
- 3. Compare its SHA-256 with the checksum from that same release. Run the installer and keep the existing installation location.
- 4. Open DCE and check Help > About. The Program Files folder may keep an old year: the version reported by DCE and by the executable is authoritative.
- 5. Subsequent update checks select a stable release containing a Windows installer, verifying size and SHA-256. This migration requires no purchase or license reactivation.

Projects, personal banks, preferences, and licenses are preserved. Check the version and architecture of the package offered for your platform.

Download Dante Config Editor

Local StageFlow project and LIVE session

DCE distinguishes three workflows: standalone DCE XML project, local StageFlow project, and StageFlow LIVE session joined with its six-digit code. StageFlow is free and optional. Dante XML remains the file exported to Dante Controller.

Download and documentation: StageFlow - SiLeMI/O

.stageflow project One shared directory, isolated domains		
StageFlow	StageDesk	StageMark
StageMon	Dante Config Editor	AutoCAD

Item	DCE behavior
dante/dante.json	The only domain owned and replaced by DCE.
patch.json / protected/patch.json	Groups, inheritance, and UUIDs are read; DCE can preview their names against an RX range.
cad/, smt/, stagemark/	Never rewritten or removed by DCE.
Concurrency	Domain lock, base hash, debounced watcher, and atomic replacement.
StageFlow LIVE	Validated V1 lease; only Rx channels linked by UUID and a saved rule can follow the patch.
Windows console	Single instance, current-user pipe, nonce and UUID checks; local choice before switching.

Local StageFlow project: open an empty .stageflow project. Start from scratch immediately opens an empty in-memory configuration; then add the required devices from the bank. Open Dante XML uses an existing configuration. Save then updates only the Dante domain. Export to Dante Controller creates a copy for Dante Controller. Other domains remain byte-for-byte unchanged. DCE reads local V1 and V2 and keeps the open format. Save As from V2 prepares a complete copy without overwriting. Only StageFlow creates a migrated V2 copy; DCE creation stays V1. V2 network sessions are refused. V1 with an SF02 table or a distinct common hash is read-only; create an explicit V2 copy in StageFlow.

Patch to RX: from Project or Import / Export > Labels, map a StageFlow group to an RX device and range. Choose Source, Microphone, Source + microphone, or StageFlow label. Preview shows Before / After; nothing changes before Apply.

LIVE and console: after a voluntary join, change notifications are enabled by default. The orange banner shows the affected item, previous → current label, origin, time, and count. Acknowledge and Acknowledge all apply to this computer only; changes arriving after the click remain pending. Host pause is distinct from local reception off: LIVE continues, with no reconnect or backlog replay on resumption. LIVE changes affect only UUID-linked Rx channels. On Windows, the local console can open Patch, validation, or save Dante through a current-user pipe. Unsaved work prompts Save / Discard / Cancel. A StageFlow LIVE session edits the project and starts no Dante network session.

Join StageFlow LIVE

The StageFlow connection button keeps its name; a second line shows Standalone, Session available, Connected to the session, or Disconnected. The center combines StageFlow LIVE and Dante Config Editor remote in a side rail. The current project and Back to project remain accessible. Open a local project uses a .stageflow folder without launching StageFlow; joining LIVE requires an explicit action and code.

- 1. In StageFlow, open the project to share and start its LIVE session.
- 2. In DCE, open StageFlow connection then StageFlow LIVE. Select the session on this PC or the local network. Check the project and host; its IPv4 is under Technical details.
- 3. Enter the six digits displayed by the host, then Join. Leading zeros are preserved; you can paste 001234, 001-234, or 00 12 34.
- 4. Connected · synchronized confirms the link. Back to project keeps this connection while you work. Disconnect ends it.

Remote target: StageFlow suite. DCE has no standalone mobile server. Manage the QR, activation, permissions and revocation in StageFlow on the session host. DCE does not receive that link or its active/stopped state. With a loaded project and the required permissions, the suite can open Patch / RX or validation, not control Dante hardware. Unsaved local changes remain protected before switching projects.

LIVE connection: troubleshooting

Situation	What to do
No session	Check that StageFlow is sharing the project. Both computers must be on the same trusted LAN. Refresh the list.
Discovery blocked	Enter the private IPv4 address and port displayed by StageFlow, then Find. Example: 192.168.20.10:45827. Do not enter a path, account, or Internet address.
Incorrect code	The window stays open. Check the host's six-digit code, correct it, then choose Join.
Session changed	Refresh and select the session again. DCE refuses to send the code to a different project from the selected one.
Incompatible version	Update the applications. A protocol mismatch blocks the connection without changing your project.
Too many attempts / capacity reached	Wait one minute or release a connection on the host. DCE never retries automatically.
Connection lost / session stopped	The last local state is kept. Restore the host and explicitly reconnect.
Departure not confirmed	DCE is disconnected locally even if the host did not respond. A late response cannot reactivate the session.

Three distinct modes: XML or a DCE package is standalone; a local .stageflow folder uses files accessible on this computer; a LIVE session is temporary and depends on the network host. Leaving LIVE does not delete your files or banks. The session code and token are not stored in the project.

LIVE change notifications

The orange banner stays above your workspace, including Patch and Machines. It identifies the affected label, previous and current text, origin, time, and pending count. Hover over long text to read it in full.

Action / state	Effect
Acknowledge	Acknowledges only the displayed change, on this computer. The next one is then shown.
Acknowledge all	Freezes the alerts present at the click and acknowledges only those. A later change remains pending.
Details	Opens the notification list with changes and timestamps.
Reception disabled on this computer	Your local choice is preserved. Other computers are unchanged; only new alerts arrive after re-enabling.
Notifications paused by StageFlow	The host is preparing a series of changes. Synchronization continues; there is no need to leave or rejoin.

Pause affects change notifications only. Connection, conflict, and safety warnings remain visible. No acknowledgement is sent on behalf of another computer.


2. Project and general settings

The sidebar organizes work by intent: Project, Overview, Devices, Patch, Import / Export, Validation center, and History. Open the bank from Devices. Atomic Bomb is under Tools > Training. Collapsible panels and scrolling keep controls reachable on smaller displays.

- The header keeps menus, Undo/Redo, StageFlow connection, Alerts, Light/Dark theme, FR/EN language, Guide, and Help available. Common controls move to a second line at smaller widths.
- The right inspector follows the last device selected in Devices, Patch, or Easy patch and keeps that context when changing pages.
- Navigation, settings, and inspector start expanded; one persistent arrow hides or reopens each area.
- The Patch grid, device details and Synoptic use the same stable identities.
- The Validation Center separates internal DCE checks from manual Dante Controller validation.
- Dante XML remains the official exchange file; a .dceproj additionally stores DCE layout, notes, assets, and history.

A home page that fits your screen


Project groups the counters, starting points, and recent files. DCE automatically adapts the header, margins, and panels to the window. In a small window, fallback scrolling keeps every command accessible without shrinking text.

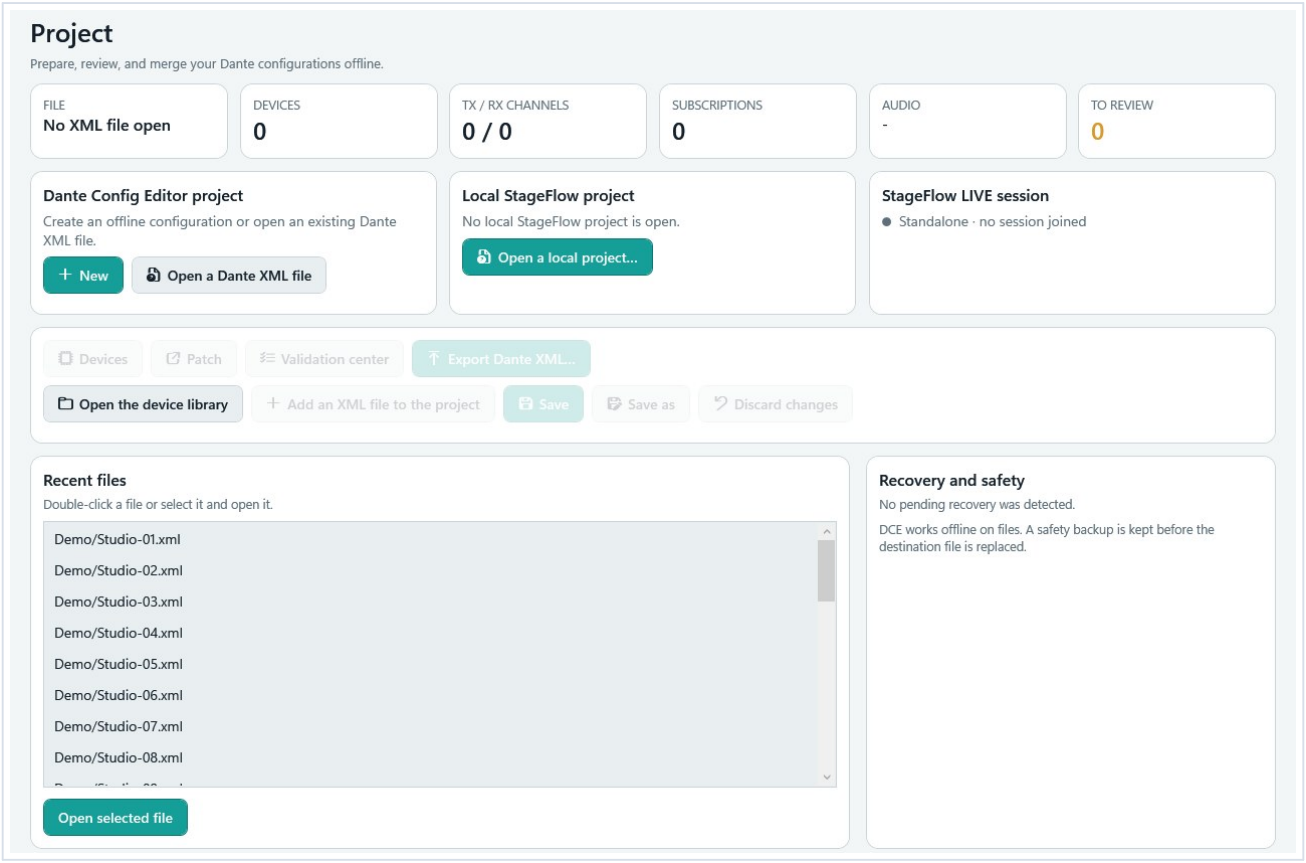

Project page overview with no configuration open: starting points above and recent files below.

- New and Open a Dante XML file prepare a standalone configuration.
- Open a local project selects a .stageflow folder. StageFlow connection in the header manages LIVE separately.
- A disabled command becomes available when its context permits it. Recent files are not opened until you explicitly choose one.

Create or open, add if needed, edit, export

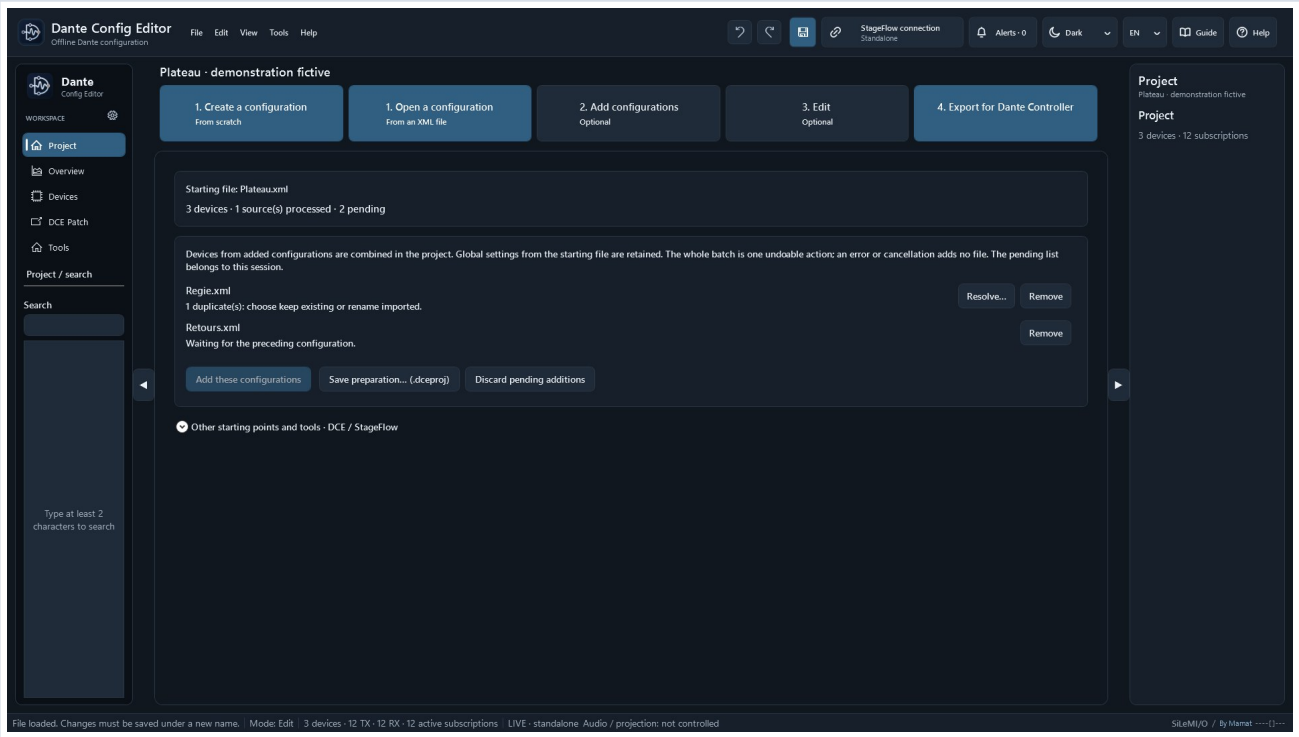

WPF interface, fictitious configurations: the batch stays pending until the duplicate is resolved.

- Create a configuration and Open a configuration are two choices for the first step, at the same level in the bar. Create immediately opens an empty in-memory draft; then add devices from the bank. Open chooses a starting XML file whose name remains visible.
- Add configurations selects several XML files. They remain pending: no device is added yet. Resolve keeps the existing device or renames imported roles, including a conflict between two queued files.
- Add these configurations commits the whole batch once. A different version or namespace, invalid XML, or a file changed since selection blocks the entire batch. Discard pending additions clears only the list. After applying, one undo restores the preceding project.
- Edit opens Devices and Patch: dense matrix, Flip, searches, renaming, series and multicast. The compact bar keeps both starting choices and the following steps accessible. Tools, banks, formats, validation and StageFlow remain available.
- Export for Dante Controller creates a .xml copy under another name with existing validation. The starting and selected XML files stay protected. If additions are pending, explicitly confirm their exclusion or return to process them.
- Save preparation (.dceproj) is optional: applied XML and provenance are retained without reading external sources on reopening. Pending additions are not saved. Global settings from the starting file remain authoritative when combining files.

Common header and preparation



Header overview: connection, alerts, theme, language, and help controls remain accessible on every page.

Common controls are available on every page. Color alone never identifies a state: read the label and hover for details. Tab and Shift+Tab move keyboard focus.

The Project page sizes the recent-file list to the available space. In a large window, the list scrolls without moving the entire page. If the window is too small, page scrolling remains available: no command is hidden.

Control	Use
StageFlow connection	Opens the center with current project, host, state, and available actions. A local project is not a LIVE connection.
Alerts	Counts XML validation items and unacknowledged StageFlow changes. Click to choose a category; opening the menu acknowledges nothing.
Light / Dark	Shows the current theme and offers both choices. The dark header keeps its contrast. Your preference is saved.
FR / EN	Changes the language. Tooltips, local help, and the next launch follow this choice.
Guide	Opens this Dante Config Editor manual in the selected language, French or English. No Internet connection is required.
Help	Opens Discover DCE to choose a starting point. Help > SiLeMI/O suite guide in the menu opens the guide shared by the applications.
Undo / Redo	The arrows near the menus keep Ctrl+Z and Ctrl+Y. A disabled button means no corresponding action is available.

Prepare → Devices → Patch → Validate → Export

From Project, open or create a configuration. Devices and Patch lead to preparation; Validation center lets you correct reported items. Export to Dante Controller is available in Project, Import / Export, and File. It offers only a .xml file and reuses the validation assistant.

> Keep the outputs distinct: Save updates the open StageFlow project's Dante domain. Save as can create another StageFlow project. Export to Dante Controller produces the file for Dante Controller. Blocking errors prevent writing; cancelling or opening an issue creates no file.

Screen map

The top bar opens, merges, saves, undoes, and restores the project. The Project column stays visible for counters, alerts, and search.

Screen	Main purpose
Overview	Counters, audio formats, network, clock, alerts, and latest changes.
Devices	Selected device, channels, quick lists, global actions, and device table.
Patch > Matrix	Rx/Tx grid, link navigation, detached window, drag, 1:1, zoom, and rename.
Device details > RX patch	Review the device connections and open Easy patch for a selection or range.
Patch > Locate	Find the source of an RX or the destinations of a TX in the grid.
Import / Export > Labels	JSON/CSV, DMT XLSX/ODS, A&H, and Yamaha exchange with an import report.
Import / Export > Reports	TXT/PDF reports, TXT/CSV patchbooks, and a simple text topology.
Import / Export > Synoptic	Locations, order, visibility, zoom, reset, and SVG/PDF exports.
Validation center	Errors, warnings, information, XML paths, navigation, and report export.
History	Changes, XML comparison, user guides, logs, and diagnostics.
Tools > Training > Atomic Bomb	Configurable, undoable, offline troubleshooting exercises.

Choose the right workflow

DCE keeps the open XML as the working baseline. Choose the command that matches your goal; the workflows below separate Dante roles, bank templates, and physical devices.

Goal	Start	Recommended workflow
Review or correct a preset	Project > Open Dante XML	Overview > Devices or Patch > Validation center > Export to Dante Controller.
Merge two installations	Open the main XML	Add XML to project > resolve conflicts > review references > Export to Dante Controller.
Reuse a device type	Device in the project	Save to device bank > make labels generic > Add from bank in another project.
Create a copy in this project	Device in the project	Duplicate > choose a unique name > retain only the required properties.
Prepare an offline project	Create a configuration	Empty draft > add devices from the bank > patch > validate > export for Dante Controller.


Role, template, and physical device

- A Dante role is a position in a preset. Dante Controller can assign it to the original device or to another compatible device.
- A bank template is a sanitized reusable role: it contains no hardware device_id, IP address, or reference to the source project.
- Duplicating a role or renaming an identity conflict creates a generic offline role; DCE never invents a fake hardware identifier.
- DCE validation protects XML structure. Final role assignment and hardware checks take place in Dante Controller.

Recommendation: keep the original XML unchanged. Save as creates another StageFlow project; Export to Dante Controller produces an XML copy for each significant scenario.

Adapt the workspace

DCE automatically selects a wide, compact, or narrow layout from the available space. The header compacts, Devices and Easy Patch editors reflow, and words are never split. Pane arrows remain visible when collapsed so every pane can be reopened immediately.

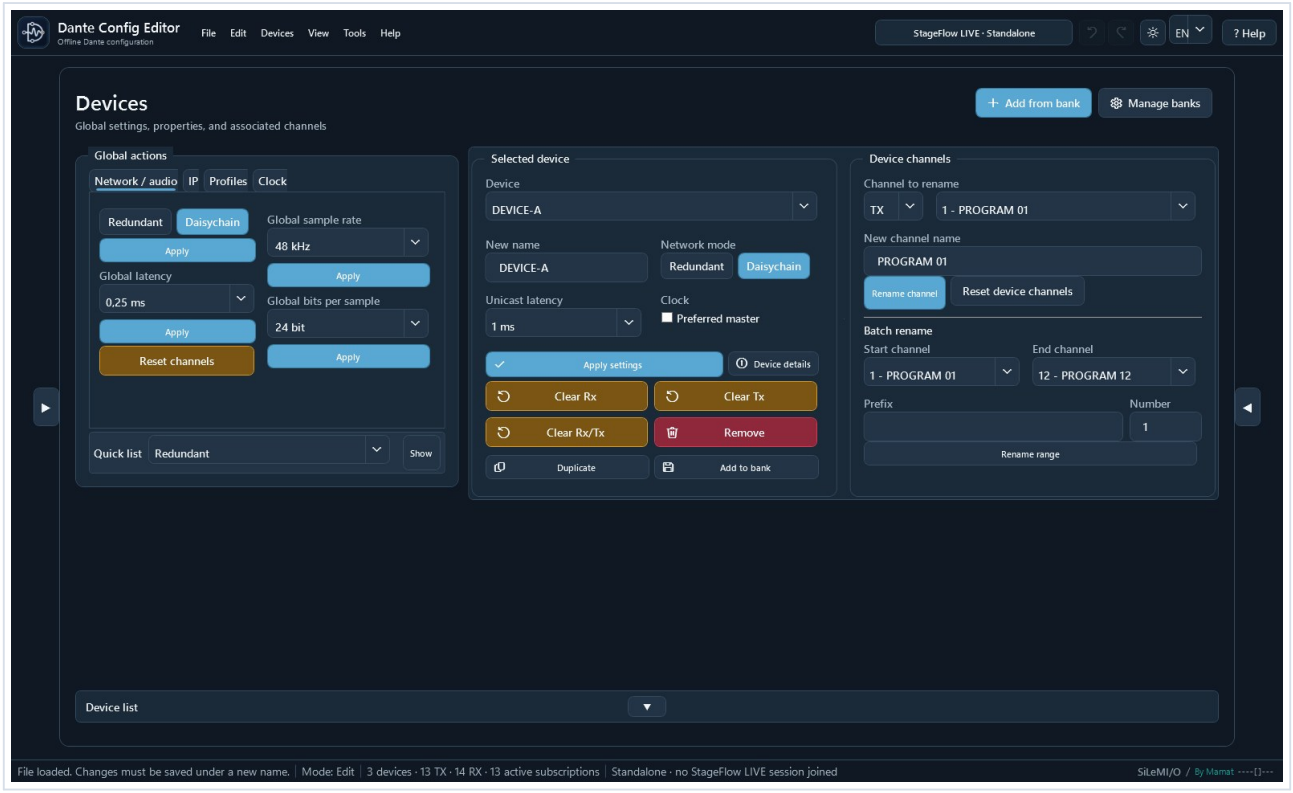


Example with both side panes collapsed: the central workspace grows while the reopen controls remain available.

The essentials on one screen

The Overview page addresses the software's original need: review an entire preset quickly without opening each Dante Controller page in turn.

Spot issues Colored rows and the side banner highlight important discrepancies.	Target safely Filters, multiple selection, and locks define exactly which devices are affected.	Review Before / after lets you inspect every change before saving.

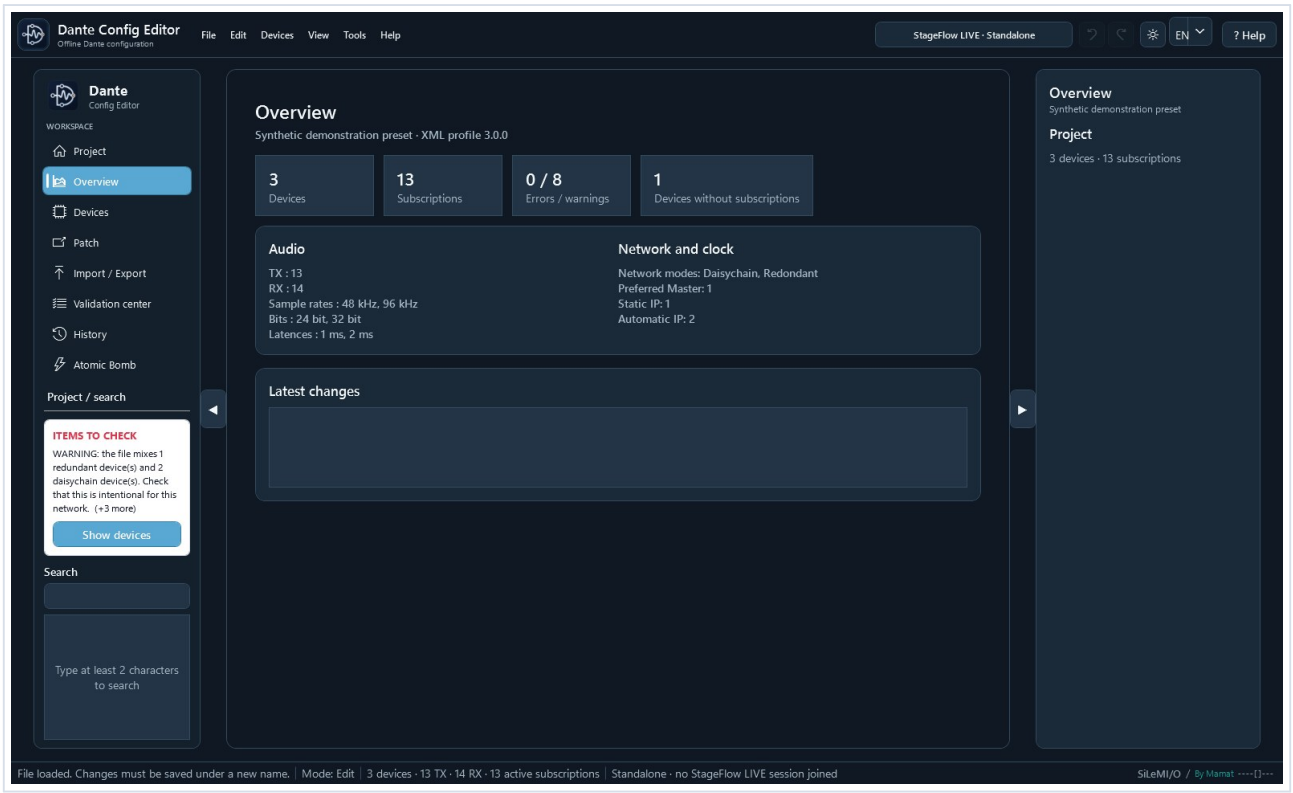

Overview: counters, audio formats, network, clock, and latest changes on one screen.

General settings, alerts, and profiles

The Items to check banner reports mixed redundant/daisychain modes, static IPs, multiple sample rates, and multiple bit depths.

- Click Show devices, choose an alert, then review the filtered devices.
- After correcting an item, verify that the alert disappears and review the Validation center.


Quick profiles

Profile	Applied settings
48 kHz / 24 bit / 1 ms	Automatic IP
48 kHz / 24 bit / 2 ms	Automatic IP
96 kHz / 24 bit / 1 ms	Automatic IP
96 kHz / 24 bit / 2 ms	Automatic IP
48 kHz / 24 bit / 1 ms / Redundant	Redundant mode and automatic IP
48 kHz / 24 bit / 1 ms / Daisychain	Daisychain mode and automatic IP

Verify that every device supports the requested sample rate, bit depth, latency, and network mode.

Quick profiles and global actions

A global action affects only the displayed target: all unlocked devices, the unlocked selection, or the current filter. Always review the target before confirming.

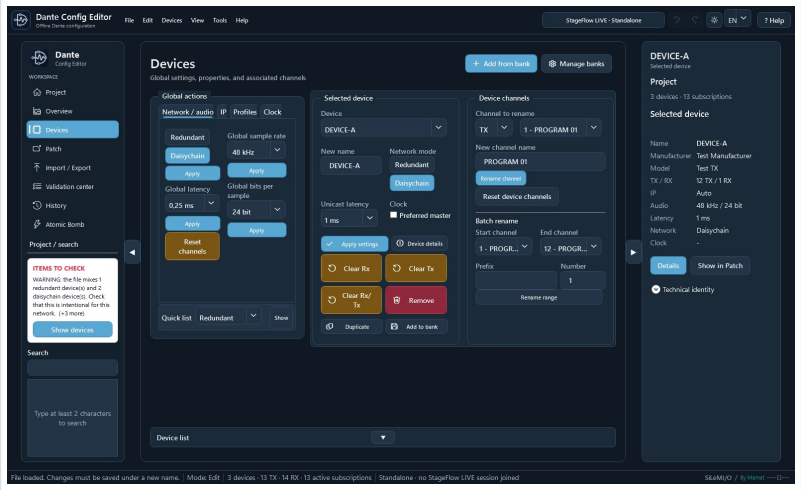

1 Network/audio, IP, Profiles, and Clock tabs; 2 compact Quick list bar; 3 target and locking controls.

Apply a profile

- Open Global actions > Profiles, choose a profile, then select Apply profile.
- Before / after reviews the initial and resulting states for every device that was actually affected.
- Profiles set sample rate, bit depth, latency, and automatic IP; the last two also set Redundant or Daisy-chain.
- A locked device is always excluded. Undo restores the previous state as one operation.

A profile cannot verify physical hardware capabilities. Check the supported rates, latencies, and network modes.

3. Per-device settings and channels

The Devices page combines the template bank, quick lists, global actions, the selected device, its channels, and the complete device table.

Selected device

- Apply the name, network mode, latency, and Preferred Master state together with Apply settings.
- Double-click a row or use Device details to edit IP settings, sample rate, bits per sample, TX/RX names, and subscriptions for its Rx inputs.
- A technical setting is available only when its element already exists in that Dante role. Redundant/Daisychain remains available when redundancy exists; the IP tab stays disabled and explains why if the role has no ipv4_address section. DCE does not invent a missing capability.
- A complete Device details change is grouped into one model rebuild.
- Clear actions can disconnect Rx inputs, remove subscriptions using Tx channels, or do both.
- Deleting a device also removes subscription points that reference it.

Device table

- Multiple selection defines the Selected unlocked target. The Lock column protects devices from global actions.
- The complete list starts collapsed behind the Device list bar. Its persistent arrow expands it; fallback scrolling remains available on small displays.
- Preferred Master can be toggled directly in the expanded list.
- Add from bank and Manage banks show templates with their source. The filter selects My bank and the included banks, including six XML 2.1.0 roles.


Search, filters, and global actions

- Search finds devices, channels, and subscription references after at least two characters.
- The compact Quick list bar below Global actions displays network modes, latencies, sample rates, bits, static IPs, or Preferred Masters without occupying several rows of buttons.
- Tooltips wrap onto multiple lines: keep the pointer still over a command to read the full explanation, including when the command is disabled.
- Modified only shows changed devices; Before / after lists every difference.
- Choose all unlocked, selected unlocked, or visible unlocked devices. The target remains visible before application.

Edit a device without leaving the workflow

Device details combines the essential settings and lets you move directly to another device from the top menu.

Identity Device name, network mode, and Preferred Master.	Audio Latency, sample rate, and bits per sample.	Network Automatic or static primary IP without changing secondary interfaces.

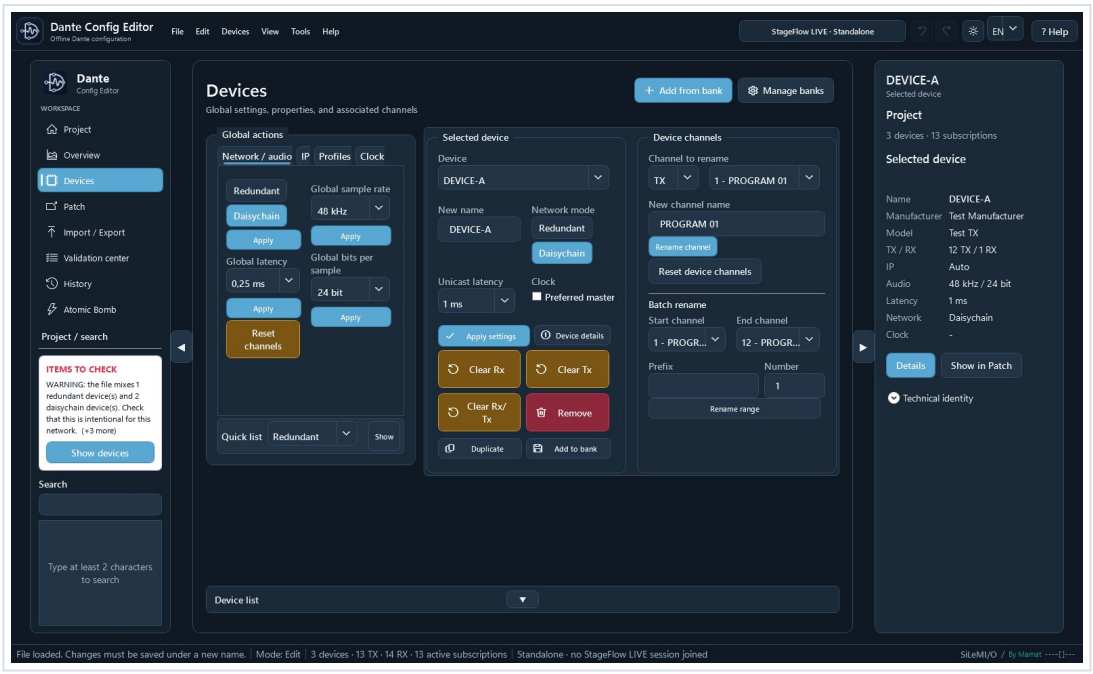

1 device settings; 2 selected Tx/Rx channel; 3 range rename.

- The RX then TX tabs rename individual channels.
- Rx patch reviews or disconnects subscriptions received by the device.
- Apply validates the complete edit as one grouped operation; Cancel leaves the XML unchanged.


IP and audio formats

- Automatic or static IP is editable per device or through a global action.
- Only the primary IPv4 interface, network=0 when available, is targeted. A secondary interface is not changed.
- DNS is not rewritten implicitly. Gateway changes only when the action provides a value.
- Sample rate and bits per sample are editable per device, globally, or through a profile.
- Global actions skip devices without the compatible element and report how many devices were excluded.

Incorrect settings can make a device unreachable or incompatible. Verify actual hardware capabilities.

Rename Rx and Tx channels quickly

Direct rename works in Configuration, Device details, Patch, and Easy patch. For a Tx channel, DCE also updates every recognized subscription that uses the old name.

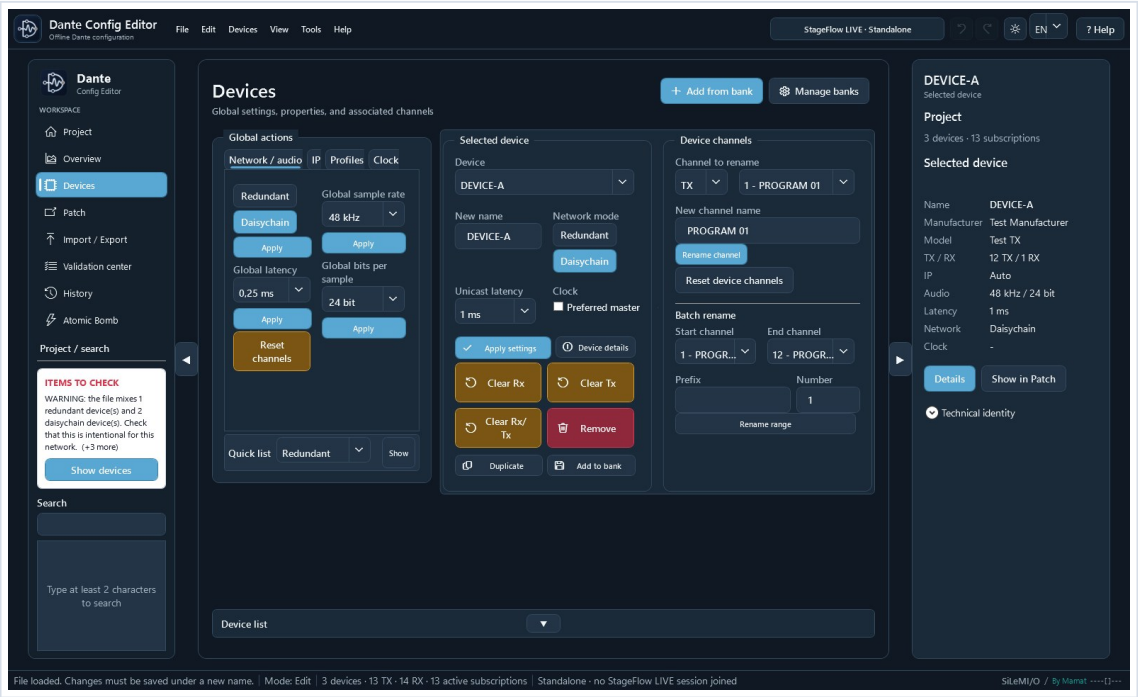

1 choose Rx or Tx and a channel; 2 enter the name; 3 choose the range; 4 set prefix and starting number.

Editing shortcuts

Key	Action
Enter	Validate the name without leaving the current cell.
Tab	Validate and open the next channel.
Shift + Tab	Validate and open the previous channel.
Escape	Cancel the current edit or fill operation.
Ctrl / Shift	Extend a channel selection in Easy patch.
Mouse wheel	Scroll; use the dedicated zoom controls in the matrix and synoptic.

Extend a numbered or stereo series like a spreadsheet

The fill handle appears only when the label ends with a number, or a number followed by L/R. Drag it to the last required channel; a preview displays the resulting series before release.

Starting name	Handle	Result
Mic 4	Visible	Mic 5, Mic 6, Mic 7...
Mic 04	Visible	Mic 05, Mic 06, Mic 07...
FX-01L	Visible	FX-01R, FX-02L, FX-02R...
Wireless 12	Visible	Wireless 13, Wireless 14...
Mic	Hidden	No trailing number found
Mic 4 main	Hidden	The name does not end with a number

- All text before the final number is preserved exactly.
- The number may contain several digits and leading zeroes are retained.
- With an L/R suffix, DCE alternates sides before moving to the next number: 1L, 1R, 2L, 2R.
- Fill works in Rx/Tx lists and in the Easy patch matrix.
- Escape cancels the preview. No label changes until the handle is dropped on a valid target.
- One Undo operation restores the complete series.

Important: the trailing number belongs to the label. DCE never renumbers technical Dante IDs.

Channels and patching principles

- TX/RX channels can be renamed individually or by range with {00}, {000}, {n}, and {device}.
- Renaming a Tx channel updates every recognized subscription alias in the project.
- In Rx/Tx lists, click the name, then press Enter to validate, Tab to validate and move forward, Shift+Tab to move backward, or Escape to cancel the edit.
- In the Easy patch matrix, double-click a horizontal Tx label to rename it. Enter, Tab, Shift+Tab, and Escape behave exactly as they do in the lists.
- The fill handle appears only when the name ends with a number, or a number followed by L/R. Mic 4, Mic 04, and FX-01L can be extended; Mic, Mic left, and Mic 4 main cannot.
- Fill preserves text and leading zeroes: Mic 04 becomes Mic 05, Mic 06; FX-01L becomes FX-01R, FX-02L, FX-02R. Cancelling the drag changes no channel.
- Dante IDs are not renumbered. The local subscribed_device="." marker is preserved.
- The Easy patch tab shows Rx channels on the left and Tx channels on the right. Menus and arrows switch devices quickly.
- Select equal Tx and Rx counts for one-to-one mapping, or one Tx to feed several Rx channels.
- Several Tx channels to one Rx and unequal multiple selections are blocked.
- Range patching requires a first Tx, first Rx, and exact count; an incomplete range is blocked as a whole.
- A click or drag immediately applies the affected crosspoints.
- Clicks and drags update only the affected cells: the entire matrix is no longer rebuilt after every action.
- Selections, ranges, and PATCH 1:1 are also applied immediately.
- Warn me when the Rx channel is already patched is selected by default. Clear it only to replace a subscription without that warning.
- In the compact matrix, Rx channels are rows and Tx channels are columns. Click for one assignment, drag vertically to feed one Tx into several Rx channels, or diagonally for a 1:1 sequence.
- Each immediate operation remains reversible with Undo.
- In Device details, the top menu switches devices and protects unapplied changes.


Starting name	Handle	Result
Mic 4 [drag]	Visible	Mic 5, Mic 6, Mic 7...
Mic 04 [drag]	Visible	Mic 05, Mic 06, Mic 07...
FX-01L [drag]	Visible	FX-01R, FX-02L, FX-02R...
Mic left	Hidden	No fill action offered

Project-wide matrix

- DCE Patch opens the same matrix for an offline project and a Dante session. In mixed mode, XML roles and discovered devices appear together. The matrix follows DCE's Light or Dark theme.
- TX and RX search filter each axis. Online, the left sidebar also offers criteria such as manufacturer, model, and sample rate. Clear the criteria to show hidden items again.
- Click a device to expand its channels, or use Collapse all and Expand all. Double-click a device name to open its details. Select two devices and use FLIP TX RX to swap their roles in the selection.
- Click to assign or remove a patch. Drag diagonally for one-to-one routing or along a column to feed multiple RX channels from the same TX. The preview shows the target cells before release. Escape cancels the gesture.
- Double-click a label to edit it. Enter confirms and Escape cancels. Drag the handle of a numbered name to extend the series. Online, check the confirmation and subscriptions on the affected RX channels.
- Right-click a channel and choose Locate source or Locate destinations. Click a connection in the list to jump to its exact cell. Clear location removes the highlight.
- Offline, a green cell represents a project connection. Online, green means confirmed unicast, blue confirmed multicast, grey a missing device and amber a prepared connection ready to compare. The Local Dante network chapter covers synchronization and transport changes.

Easy patch: visual and immediate patching

Easy patch always shows Rx channels for the receiving device on the left and Tx channels for the transmitting device on the right. Menus and arrows move quickly between devices.

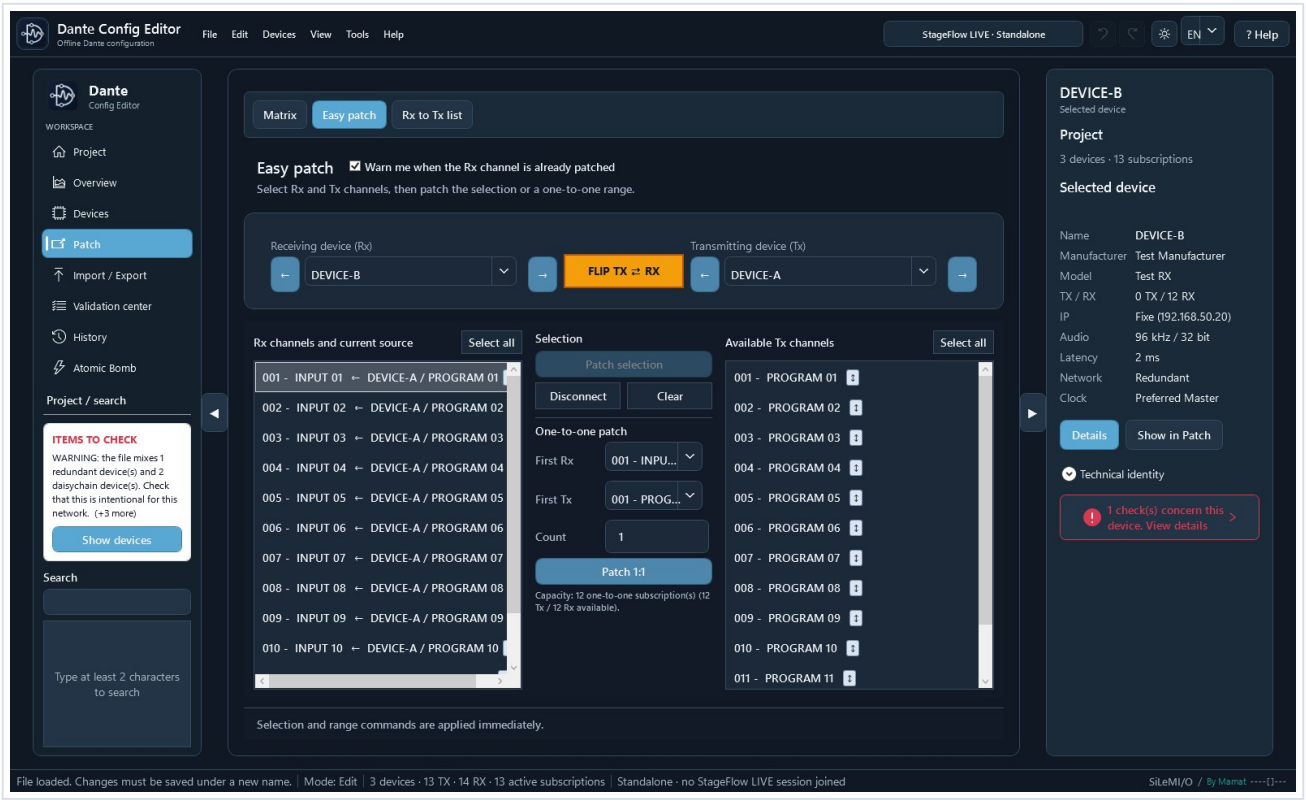


1 Rx device; 2 FLIP exchanges only the displayed roles; 3 Tx device; 4 selection, range, and Patch 1:1.

FLIP does not reverse subscriptions. It only exchanges the two selected devices so you can inspect or create subscriptions in the opposite direction.

Easy patch: click, drag, range, and PATCH 1:1


Gesture	Result
Click one cell	Immediately applies that Tx source to that Rx channel.
Drag vertically	Feeds several consecutive Rx channels from one Tx source.
Drag diagonally	Creates Tx1>Rx1, Tx2>Rx2, and so on.
Rx/Tx selection	Tx channels dropped on the first Rx, or Rx channels dropped on the first Tx: immediate sequential assignment.
PATCH 1:1	Click the first intersection, select the count, then apply the series.

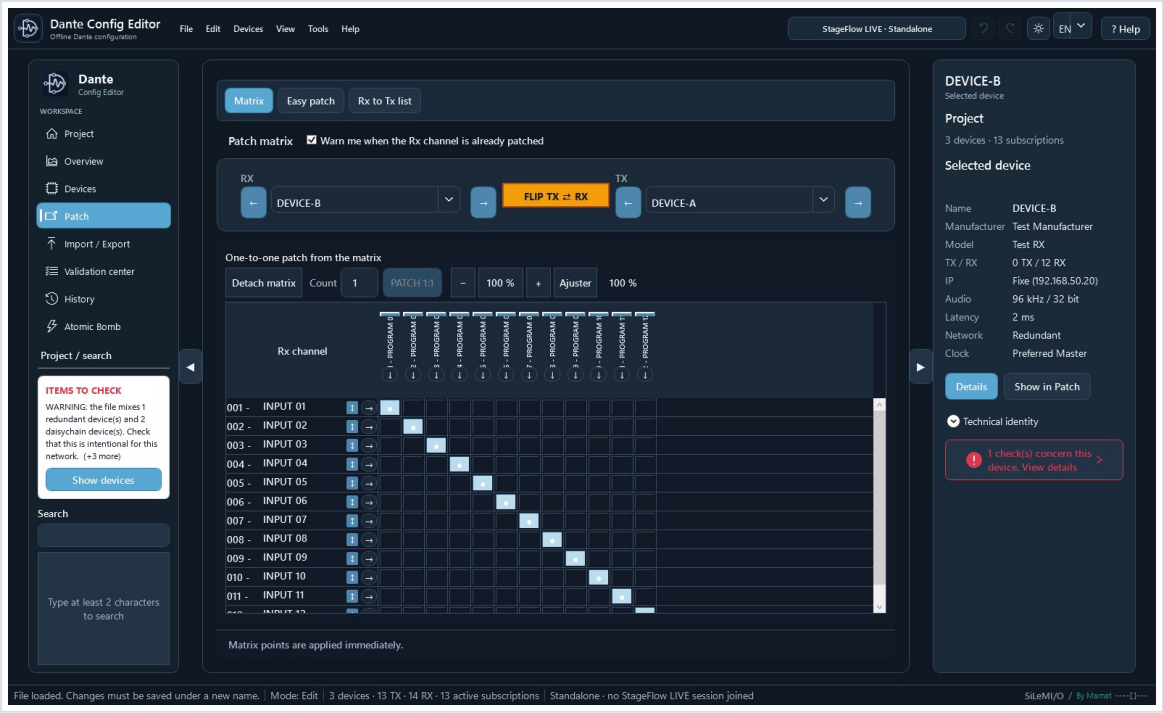

Compact matrix: Rx channels are rows, Tx channels are columns, and every click or drag is applied immediately.

- Warn me when the Rx channel is already patched is enabled by default. Clear it only when you accept replacement without confirmation.
- In Selection and range, select Tx channels with Ctrl or Shift, then drop them on the first Rx: assignment to successive Rx channels is immediate.
- In the other direction, select Rx channels with Ctrl or Shift, then drop them on the first Tx: each Rx receives that Tx and the following Tx channels in sequence. Each Rx keeps one source; DCE reports channels left unassigned at the end of the sequence.
- Rx and Tx labels are directly editable. Tab, Shift+Tab, Escape, and the series handle remain available.
- The button on an Rx row locates its Tx source, selects the transmitting device, and highlights the intersection.
- The button below a Tx header lists every Rx destination. Select one to display and highlight its intersection.
- Detach matrix keeps the Rx/Tx selectors, FLIP, and PATCH 1:1. The wheel and -, 100%, +, and Fit controls adjust matrix zoom.
- Undo restores the last immediate operation.

Project multicast flows

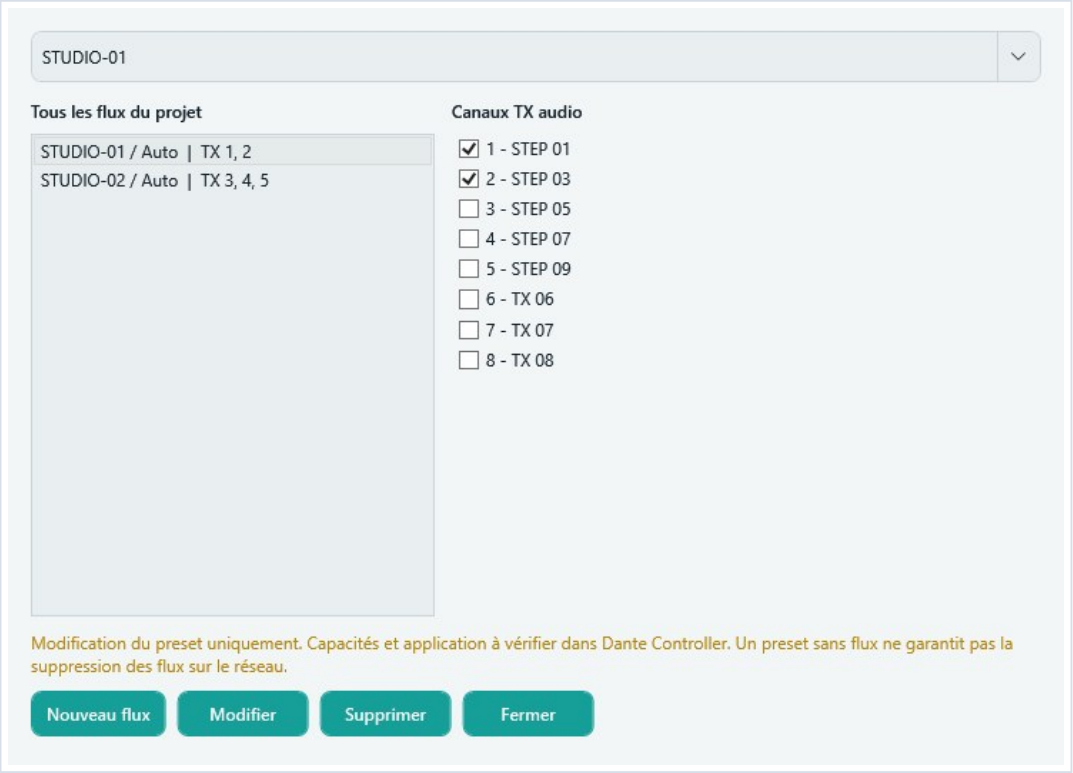

All flows, device selection, and TX channels.

- Open Multicast from the matrix. The list includes all project flows, not only the selected device.
- New flow: select a device, check its audio TX channels, then Create. Select an existing flow to Update or Delete.
- Simple Dante audio flows in 3.0.0 presets are supported. Unknown flow formats remain intact and read-only.
- Deleting a flow preserves RX patches. Changes can be undone in the project. Check the exported preset in Dante Controller.

A preset with no flows does not guarantee removal of active network flows. Check capacity and the result in Dante Controller.

Add configurations to the project

- Choose Add configurations, select several XML files, then resolve duplicates in the list before Add these configurations. The entire batch is prepared on an in-memory copy.
- Import unique only retains the existing role when it represents the same identity and redirects imported subscriptions to it.
- Automatic or manual rename retains a second role but makes it generic: its hardware instance_id/device_id is not copied.
- Imported subscriptions follow the final selected name or the reused existing role.

5. Build a project: add another XML file

This command merges roles described by a second preset. It differs from adding from the bank: the second XML retains its compatible role structure and internal subscriptions, while DCE protects hardware identities that cannot be duplicated.

Step	What DCE does
1. Open the main project	This XML remains the session and save baseline.
2. Add configurations	Select several XML files; they remain pending and their originals stay unchanged.
3. Verify format	Preset version and namespace must match.
4. Detect conflicts	DCE reports a used name or the same device_id/process_id pair, even when names differ.
5. Choose the result	Reuse the existing role, or rename to create a second independent generic role.
6. Adapt references	Imported subscriptions follow the reused role or the selected new name.
7. Add the batch and review	The whole batch is one undoable action; the result separates added, reused, renamed, and skipped roles.

Import unique only: when the same technical identity already exists, DCE keeps the current role and redirects second-XML subscriptions to its name. Rename: DCE imports a generic role without copying instance_id/device_id, network interfaces, multicast flows, or Preferred Master.

- DCE does not generate fake EUI-64 values. A new hardware identity belongs to the physical device to which Dante Controller assigns the role.
- The generic role retains compatible structure, labels, role settings, and subscriptions that can be resolved in the merged project.
- The automatic suffix is customizable and normalized without parentheses.
- Invalid XML, a different version or namespace, or a changed source blocks the whole batch. Cancellation before applying leaves the current project untouched; Undo after applying removes the whole batch.
- A final name that is already used blocks the operation instead of producing an ambiguous duplicate.
- The merge can be undone. Review the Validation center and Before / after before Export to Dante Controller.

This follows the Dante preset model: a saved role can be assigned in Dante Controller to its original device or another compatible device. Audinate documentation: dev.audinate.com/GA/dante-controller/userguide/webhelp/content/applying_presets.htm

Understand the device bank

A bank contains reusable offline role templates. It is not a live network inventory and does not contain deployable Dante hardware identities.

Action	Source	Result
Duplicate	Device in the open project	Independent new device in the same project.
Save to device bank	Device in the open project	Sanitized, versioned, reusable template.
Add from device bank	Bank template	Independent new instance in the open project.
Add XML to project	Second XML preset	Compatible devices and references added to the open project.
New project	Minimal structure and bank	3.0.0 XML to review before operation.


Removed from a template

- instance_id, device_id, and other hardware identities from the source instance;
- network addresses and interfaces from the source project;
- subscriptions, patches, and flows tied to other devices;
- Preferred Master and project-specific values not explicitly selected.

Retained when appropriate

- manufacturer, model, category, description, tags, and image;
- compatible role structure and Tx/Rx channel counts;
- generic Tx/Rx labels that remain editable before insertion.

Manage device banks

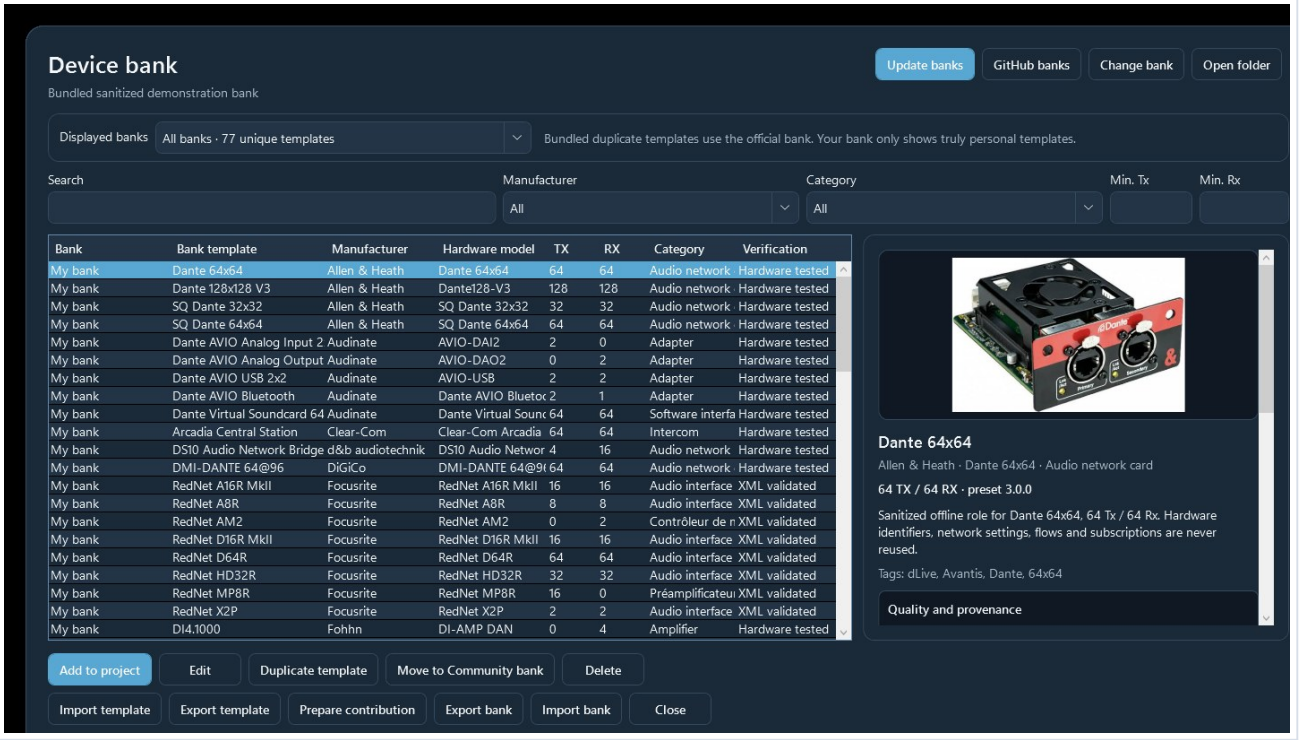

Search and filters on the left, template and label preview on the right, add and exchange actions at the bottom.

Create, share, and reuse a device bank

Need	Procedure
Create a template	Select the device > Save to device bank > replace project-specific labels with generic labels > enter metadata > Save.
Add an image	Choose PNG, JPEG, or WebP. The image is copied into the template folder, so the source file can later be moved.
Browse banks	Devices > Manage banks opens included and personal templates. The Displayed banks filter isolates each bank, while the Bank column shows its source.
Share the bank	Export bank creates a verified *.dce-bank.zip archive.
Contribute a template	Prepare contribution creates a sanitized *.dce-contribution.zip with a manifest, verification level, and SHA-256, without hardware identity, IP address, subscriptions, or project XML.
Install a bank	Import bank and choose a new or empty folder. DCE never silently replaces an existing bank.
Add to project	Select the template > Add to project > choose the first name, quantity (1 by default), and labels > check the preview > confirm. For a batch, DCE creates Name, Name-2, Name-3, and so on, validates everything before insertion, and keeps the bank open.

- Editing an inserted device never changes its bank template.
- Editing the template never changes devices already inserted into projects.
- Version, checksum, namespace, channel counts, and preset version are checked before insertion.
- The Verification column and Quality and provenance panel distinguish generic roles, community review, structural validation, and hardware testing. In DCE Community, 57 templates were tested on real hardware by the maintainer and 20 additional profiles were structurally validated from official specifications; the 2 DCE Generic roles remain explicitly generic.
- The 79 bundled GitHub templates are sanitized and installed with the application; a personal bank is never replaced.

After insertion or project creation, reopen the XML, review the Validation center, and import a copy into Dante Controller. A generic role without hardware identity must be reviewed before operation.

Machine bank and generic roles

These functions edit offline preset roles, not real devices. DCE removes hardware identifiers from the source instance and does not claim to create a Dante device identity.

Duplicate a device

- Select a device, choose Duplicate, and provide a unique role name.
- TX/RX labels may be retained. Network data, settings, flows, Preferred Master, and subscriptions are disabled by default.
- The source is unchanged. The copy is added as one undoable operation and receives a DCE session identity that is never serialized.

Save and share a template

- Choose Save to machine bank and enter manufacturer, model, category, description, tags, and generic labels.
- An optional PNG, JPEG, or WebP image is copied into the model folder; no fragile external path is kept.
- The default bank is Documents/Dante Config Editor/Machine Bank. You may choose, open, copy, or place it in a synchronized folder.
- Updated banks stay separate under Documents/Dante Config Editor/Included Machine Banks. The newest generation wins; for the same generation, DCE uses the bank bundled with the application.
- The window presents DCE Community (77 templates), DCE Generic (2 roles), and six XML 2.1.0 roles. The selector isolates each bank and the Bank column identifies its source.
- Export bank creates a verified *.dce-bank.zip archive. Import bank requires a new or empty folder and never replaces existing data.
- Update banks checks the GitHub catalog, verifies SHA-256, prepares the bank in a temporary folder, and backs up the previous official copy before replacement. GitHub banks opens the public page. The 79 bundled templates contain no hardware identity, network data, flow, or subscription.
- Administration supports search, filters, edit, duplicate, confirmed delete, and model ZIP import/export.

Add a template to the project

- Choose Add from bank, then configure the new name, labels, and only the options you explicitly need.
- The inserted instance is independent from the template. Editing either one never changes the other.
- DCE checks model version, checksum, channel counts, namespace, and preset version before a transactional insertion.
- CL3 and QL5 (64 TX / 64 RX), HY144-D (144 TX / 144 RX), and RU-LB4 (4 TX / 4 RX) are explicit generic audio roles rebuilt using catalog channel counts. DCE does not restore a missing mediaType from source XML. Validation is structural; hardware assignment and import must be checked in Dante Controller.

New offline project

- Create a configuration, beside Open a configuration, opens an empty standalone draft without requiring a name, path, or first device. Then add devices from the bank. Inside an empty StageFlow project, use its Dante-domain creation action to keep that context.
- DCE writes only its Dante domain and never silently overwrites an existing project.
- Review the Validation center, export XML, then test the import in Dante Controller.

Create a new offline project


Choose Create a configuration in the large bar, beside Open a configuration. New DCE project and Ctrl+N also open an empty draft immediately, without a mandatory wizard.

- Step 1: create the empty in-memory draft. No name, path, source XML, or first device is required.
- Step 2: in Devices, add the required bank roles; review their TX/RX counts and labels, then prepare the patch.
- Step 3: review the configuration, then export for Dante Controller. Save preparation optionally retains a DCE project, even while empty; choose its destination at that point.
- If the current project was modified, Save / Don't save / Cancel prevents unintended data loss.
- For a Yamaha console or I/O-rack template, Y001-, Y002-, and subsequent names are editable suggestions that avoid collisions; existing or imported devices are never renamed.

Project creation remains an offline workflow. Reopen the XML, review the Validation center, then verify its import in Dante Controller.

6. Label Import / Export

The Labels tab centralizes generic, DMT, Allen & Heath, and Yamaha exchange. Native files are created from bundled templates; DCE does not ask for an external template file.

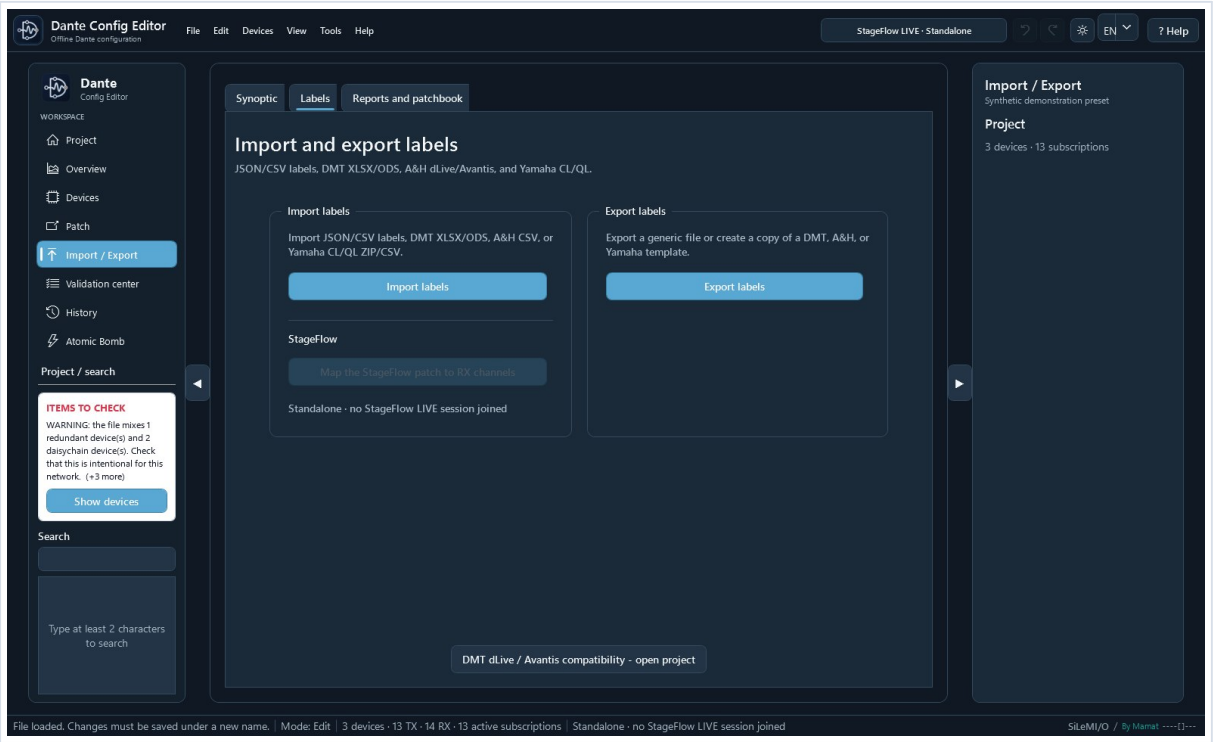

Import is on the left and export on the right. The DMT button opens the associated dLive MIDI Tools project.

- Import: choose the file, review the detection report, associate source lists with devices, and apply only valid changes.
- Export: choose Rx/Tx, devices, range, format, and any required name adaptation, then provide the new output name.
- DMT uses XLSX/ODS or JSON/CSV; dLive and Avantis use their native CSV; CL/QL use the complete native ZIP.
- A second identical import does not enable Apply because labels already match.

Exchange labels without an external template

dLive, Avantis, Yamaha CL/QL, and DMT templates are bundled with Dante Config Editor. Native export only asks for the new file name and folder.

Choose the correct format

Format	Destination	Content
StageFlow patch	Dante RX channels	Group and naming mode; Before / After preview before applying.
Generic JSON / CSV	DCE or third-party tool	Full Unicode. Do not import into dLive Director.
DMT XLSX/ODS dLive / Avantis	dLive MIDI Tools	Direct DMT workbook; rows outside the selection are disabled.
Native A&H CSV dLive	dLive Director	dLive [Version]/[Channels] structure and Input names.
Native A&H CSV Avantis	Avantis Director	Avantis [Version]/[Channels] structure and Input names.
Native Yamaha ZIP CL / QL	CL/QL Editor	Complete nine-CSV package; only InName.csv receives labels.

Workflow

- With a .stageflow project open, choose Map the StageFlow patch to RX channels. Select the group, Source, Microphone, Source + microphone, or StageFlow label mode, then the device, first patch channel, first Dante RX, and channel count.
- DCE uses shared pairs and group-specific values, excluding hidden pairs. For example, if a group customizes a shared pair's name, DCE uses that name for this group. Empty rows remain visible in Preview but are ignored; Apply changes only populated RX channels.
- Under Import / Export > Labels, choose Export labels.
- Choose TX or RX, devices, first channel, and count. A device with RX but no TX automatically switches to RX.
- Choose the native format matching the real model. Devices without channels in the selected direction cannot be checked.
- Review the preview. Enable ASCII/eight-character adaptation only when required, then choose Export.
- DCE opens Save as directly. Output is validated in a temporary file before the destination is replaced, so a failed export does not destroy an existing file.


During import, DCE reports the detected format, source version, lists, devices, channels, ignored rows, empty labels, duplicates, and warnings. Apply requires at least one error-free change. After loading the same labels again, the button intentionally remains disabled and DCE states that the labels already match.

DMT formats: 2.14.0-RC1 JSON/CSV and the Channels sheet in XLSX/ODS workbooks.

Before use, always open the generated file in DMT, dLive Director, Avantis Director, or Yamaha CL/QL Editor and verify labels and the selected model.

Bundled DMT workbooks come from Tobias Grupe's MIT-licensed dLive MIDI Tools project. DMT_LICENSE.txt is included with the application.

Build and export a synoptic

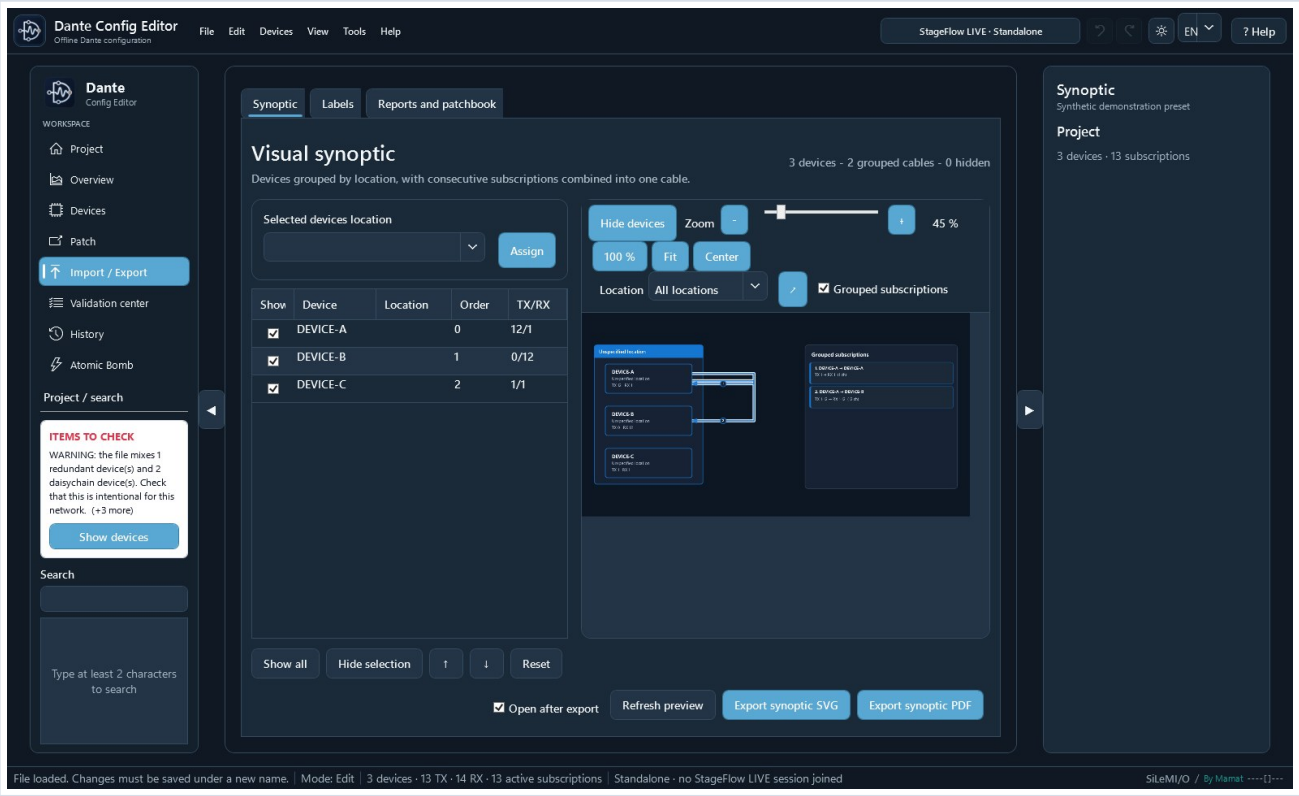

1 location; 2 order and visibility; 3 zoomable preview; 4 reset and SVG/PDF exports.


- Select one or more devices, enter or choose a location, then select Assign.
- Within one location, the smallest order number places the device higher.
- Clear Show to hide a device without removing it from the project.
- In the visual editor, drag a device or drag a location's coloured header; all of its devices and cables follow. The same interaction is available in the separate preview window.
- The Devices and locations button frees diagram space and reopens the location, order, and visibility list when needed. Reset rebuilds a clean automatic layout and distributes large locations across several columns.
- Consecutive subscriptions are grouped on one range-labelled cable. A link in both directions uses one line with an arrow at each end.
- Detach synoptic opens a separate window. Move devices or zones, then Reattach returns to the main window while keeping the layout. Zoom and Fit help with large projects.
- SVG and PDF are presentation exports. In a StageFlow project, Save keeps locations, ordering, visibility, and positions in the Dante domain. In standalone mode, DCE stores them locally. They never modify Dante XML.

Validation, comparison, and Import / Export

- The Validation center combines statistics, errors, warnings, local subscriptions, and compatibility checks.
- XML comparison displays differences in a table.
- TXT/PDF exports include the application version and the By Mamat et ses agents signature.
- Import / Export opens Synoptic first, followed by Labels and Reports and patchbook. The synoptic remembers locations, shows or hides devices, moves one device or a complete location together with its cables, provides a separate proportion-preserving preview, and exports SVG or PDF; its local layout sidecar never changes Dante XML.

7. Review, save, and recover

The Validation center separates blocking errors, warnings, and information. Read the complete row: it identifies the category, affected item, cause, and XML path. Export to Dante Controller reruns these checks in a dedicated assistant: errors block writing, while warnings must be reviewed and acknowledged before continuing. Unused Rx channels and devices intentionally lacking Tx or Rx are not anomalies and are no longer reported. A reference to a device or Tx channel missing from a partial preset remains visible as information and does not prevent export.

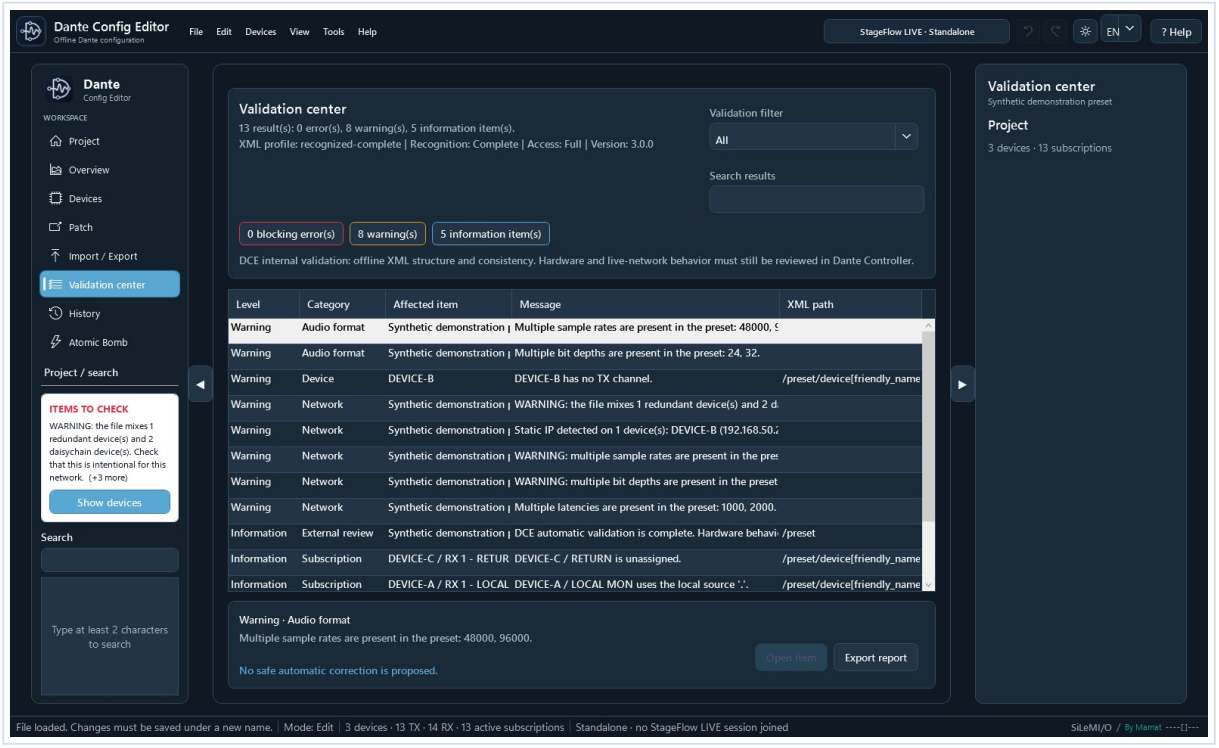

Anonymized example: mixed audio formats, mixed network mode, static IP, and a local subscription.

Validation center Errors, warnings, audio formats, static IPs, local subscriptions, and XML paths.	History Changes, XML comparison, logs, diagnostics, and user guides.	Atomic Bomb Configurable categories and a key, cover, ARM, LOCK, FIRE panel.

- An error blocks saving; a warning requires review but may describe an intentional condition.
- Items to check > Show devices applies a filter to find affected devices quickly.
- Modified only followed by Before / after reviews the exact scope of the changes.
- History combines changes, XML comparison, logs, diagnostics, and user guides.
- Tools > Create support package produces a ZIP with version, platform, validation counts, and sanitized logs. It excludes project XML and license codes and displays its SHA-256.

Save and final validation

Use Export to Dante Controller. The temporary XML is reloaded and validated before replacing the destination; a failure leaves the existing file intact. Export preserves the open project and its history. Save separately updates the StageFlow project.


Check	Recommended action
Items to check	Open affected devices and explain or correct every unexpected difference.
Modified only	Verify that only the intended devices appear.
Before / after	Review every changed setting, channel, and subscription.
Dante Controller	Import the file into a working copy before any field operation.

Automatic recovery

After a change, the application waits briefly and writes recovery data in the background without blocking the interface or replacing the source XML.

- When reopening the same XML, choose whether to restore or discard the previous session.
- Save as creates another working project. Export to Dante Controller produces a copy without changing the open project or its history.
- The copy is deleted after saving or reverting; copies older than 30 days are cleaned automatically.

8. Atomic Bomb: prepare an exercise

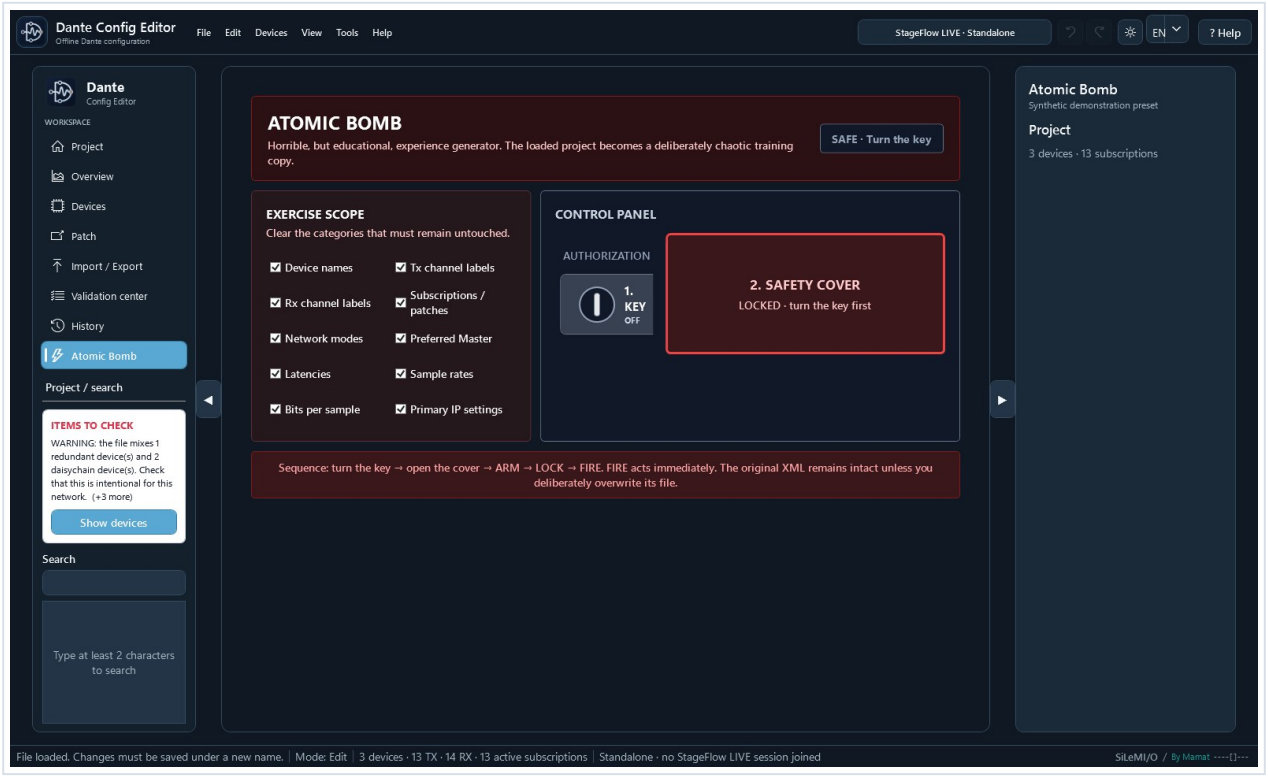

Clear categories that must be preserved. Turn the key to unlock the cover, click the cover to open it, then press ARM, LOCK, and FIRE. FIRE immediately changes the in-memory copy.

- Categories cover names, labels, subscriptions, network modes, Preferred Master, latencies, sample rates, bit depth, and primary IP.
- Technical identifiers, namespaces, DNS, gateways, and secondary interfaces remain protected.
- The complete operation is one Undo step.
- The source XML is never overwritten. Use Export to Dante Controller to create the exercise file.

Atomic Bomb does not communicate with any device. The exercise file must still be reviewed in Dante Controller before distribution to trainees.

Atomic Bomb: create an exercise

- Open Tools > Training > Atomic Bomb. Clear the categories you want to spare; all are selected by default. Turn the key to unlock the cover, click the cover to open it, then press ARM, LOCK, and FIRE in order. FIRE applies the exercise immediately.
- The in-memory copy receives unique mythological, audio-themed, or playful names plus a mixture of subscriptions, network modes, Preferred Master states, latencies, sample rates, encodings, and primary IP settings.
- Technical identifiers, namespaces, DNS, gateways, and secondary interfaces remain protected.
- The summary displays the scenario seed. The entire operation is one undo step and the source file is never overwritten.
- Use Export to Dante Controller to provide the trainee preset, then verify its import in Dante Controller.

This mode is only for offline training. It does not alter any device or communicate with the Dante network.

Checks before use

Before working on an installation, review the Validation center, Before / after changes, and subscriptions on edited devices. Export an XML copy and open it in Dante Controller. Keep the original preset: DCE's checks do not replace verification of the physical installation.

Known limitations

- In offline mode, changes apply to the XML project. Online, available operations depend on what the detected devices support.
- Compatibility depends on the XML structure; only an official import confirms the final file.
- Undo keeps at most 30 states to limit memory use.
- The project matrix uses horizontal Tx labels, separate Dante numbers, independent Tx/Rx filters and a collapsible point detail panel; it draws only visible cells. Easy Patch retains its device selectors. In a narrow window, fallback scrollbars provide access to controls outside the viewport.
- For macOS, check the package signature and notarization status in its release notes. Verify origin and SHA-256 before granting an application-specific exception.
- Both editions prepare and export XML offline. The live and mixed Dante modes described here are available on Windows.
- Duplicate Tx names are ambiguous in Dante subscriptions and must be renamed before using Easy patch.
- Native workbooks match observed DMT 2.13.0 templates and the supplied dLive, Avantis, CL5, and QL5 examples; DMT 2.14.0-RC1 JSON/CSV is tested separately.
- Generic roles duplicated or added from the bank carry no hardware instance_id/device_id. Only an actual Dante Controller import can confirm their use with a given version.
- New project writes a minimal 3.0.0 structure. Always review the final file in Dante Controller before operation.

Help and information

Guide opens this DCE manual in the selected language. Help opens Discover DCE to choose a starting point. The Help menu contains Quick start, Full guide, and SiLeMI/O suite guide; these PDFs are available offline. Current manuals: SiLeMI/O website - By Mamat.

License and trial

If you have no valid license, the first launch of 2027.3 starts a full 30-day trial. The trial works offline. A valid license is required to continue after the trial expires.

- Help > DCE license shows the trial status and accepts a license code.
- A permanent license costs EUR 49 including French VAT, paid once. First activation of a permanent V2 code on this computer requires Internet. Verification is local and offline afterwards. Legacy V1 codes remain accepted under their existing rules.
- Buy opens Stripe Managed Payments in the browser; DCE receives no banking data, and a sales-service outage cannot deactivate a code already received.
- Activate a valid code to access DCE after expiry. The license screen remains available for entering a code or opening the purchase page.
- An activated license remains valid when DCE is updated on the same computer.

DCE license

If you have no valid license, the first launch of 2027.3 starts a 30-day trial that works offline. Activate a valid license when the trial expires to continue using DCE.

A permanent license costs EUR 49 including French VAT. Existing valid permanent licenses continue to work. For a V2 permanent code, connect this PC to the internet for the first activation. DCE then checks the receipt locally.

Local Dante network

- In DCE Patch, offline mode displays the XML project. Go online opens the session chooser. Start simulation uses simulated devices. For a live session, select the Dante adapter and check the status banner and inventory. Go offline closes the session.
- Between two discovered devices, click to apply the connection directly to the network. Drag diagonally for one-to-one routing, or keep the same TX to feed several RX channels. Escape cancels the preview. When a device is missing, DCE prepares the connection in the project. If needed, DCE adds a local role for the discovered device when its channels and the project format support it.
- A grey cell is a prepared connection waiting for a device. When the device returns, an amber cell is ready to compare or apply. Click the point to apply it when both devices are discovered. A confirmed network connection is green for unicast or blue for multicast.
- Open Replace / Synchronize devices to compare the project and network. Review the proposed matches and select the differences to apply on one or more devices. TX/RX names, patches, and supported settings can be selected separately. Choose Project → Network or Network → Project and the order if both directions are used. DCE warns you before sending changes that may interrupt audio.
- Right-click a TX channel to find destinations or an RX channel to find its source. Click a result to expand the relevant devices and locate the exact cell. FLIP TX □ RX swaps the selected pair with TX at the top and RX on the left. The left sidebar filters the online matrix.
- Right-click a confirmed connection and choose Route as multicast or Route as unicast. Review the confirmation and check the new colour. Use flow management to return a shared multicast flow to unicast, since deleting a flow can affect multiple receivers.
- Double-click a channel label to edit it. Drag a numbered channel's fill handle to extend a series. Online, DCE attempts to restore subscriptions after renaming a TX and verifies their status. Check the route and signal of any unconfirmed RX before continuing.
- Device, Clock, Network, and Events show observed data. Available flow counts appear when the device provides them. H.264 processing requires a WSL distribution with the compatible video component. Simulation lets you try the commands with simulated devices. In production, check the signal and subscription status.