



VISUALIZATION BEST PRACTICES IN R


Bars and dots: point data

Nick Strayer
Instructor



What is point data?


- One categorical axis, one numeric
- Counts, averages, rates, etc.

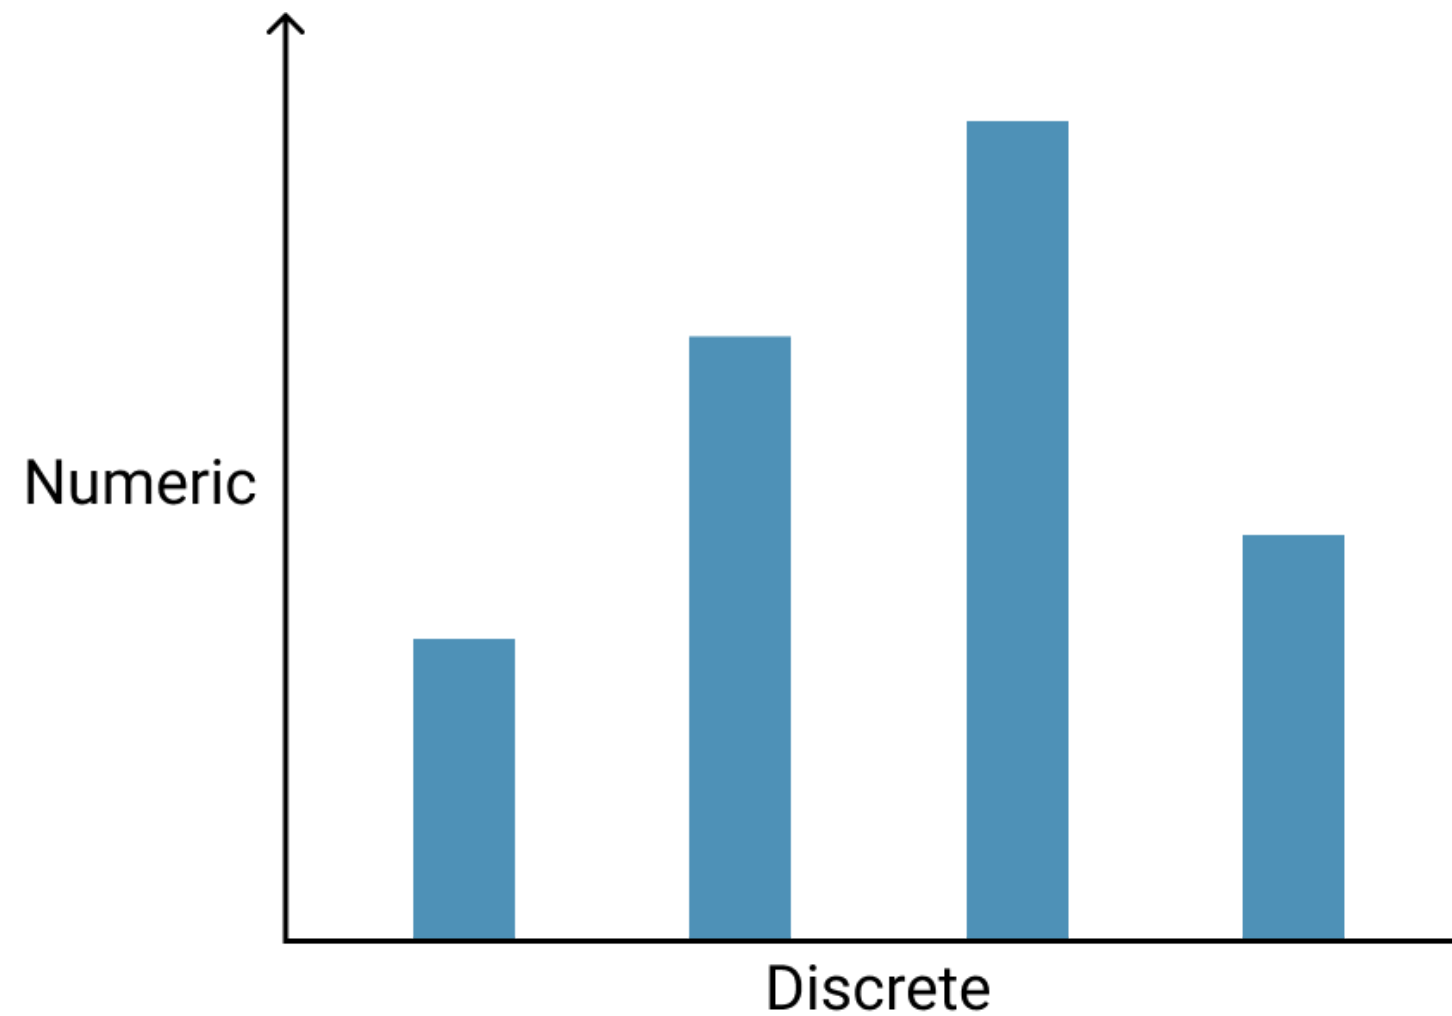



A single observation

- Represents a singular observation of something
- E.g. population of a state, rate of cell growth

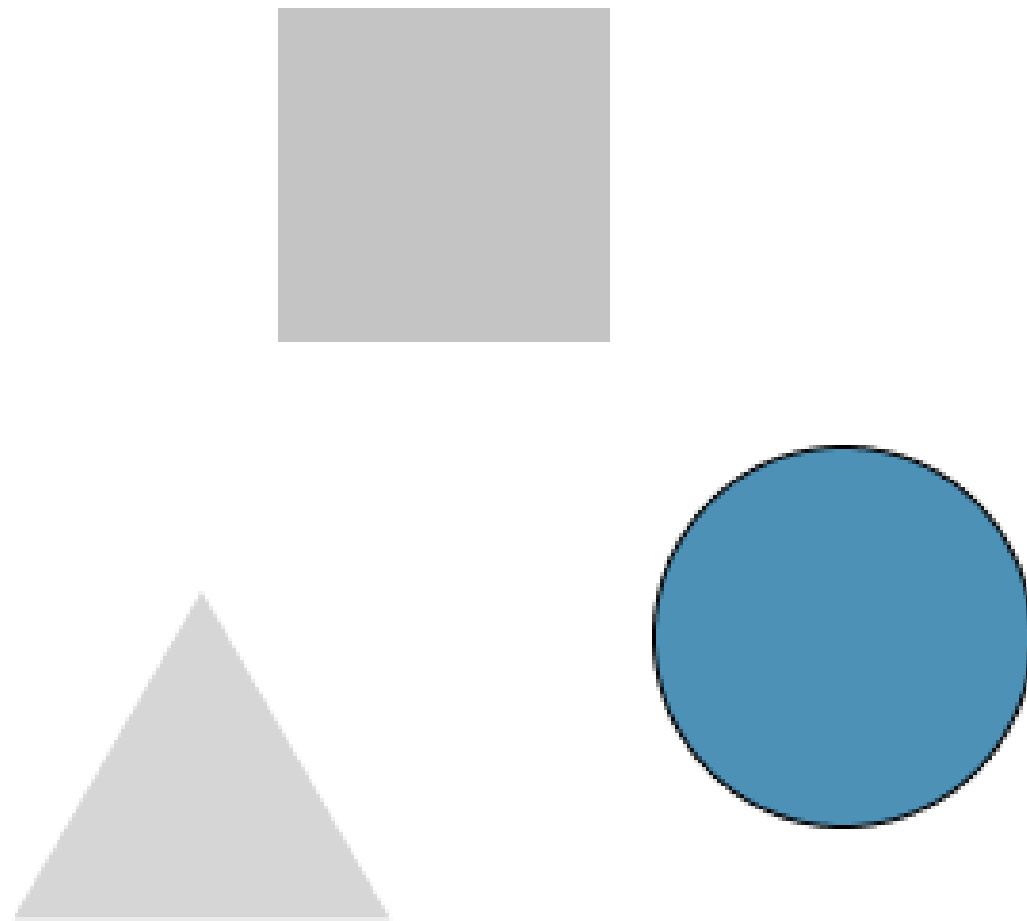




The Bar Chart

- Popular
- Simple
- Accurate

```
ggplot(who_disease) +  
  geom_col(aes(x = disease, y = cases))
```

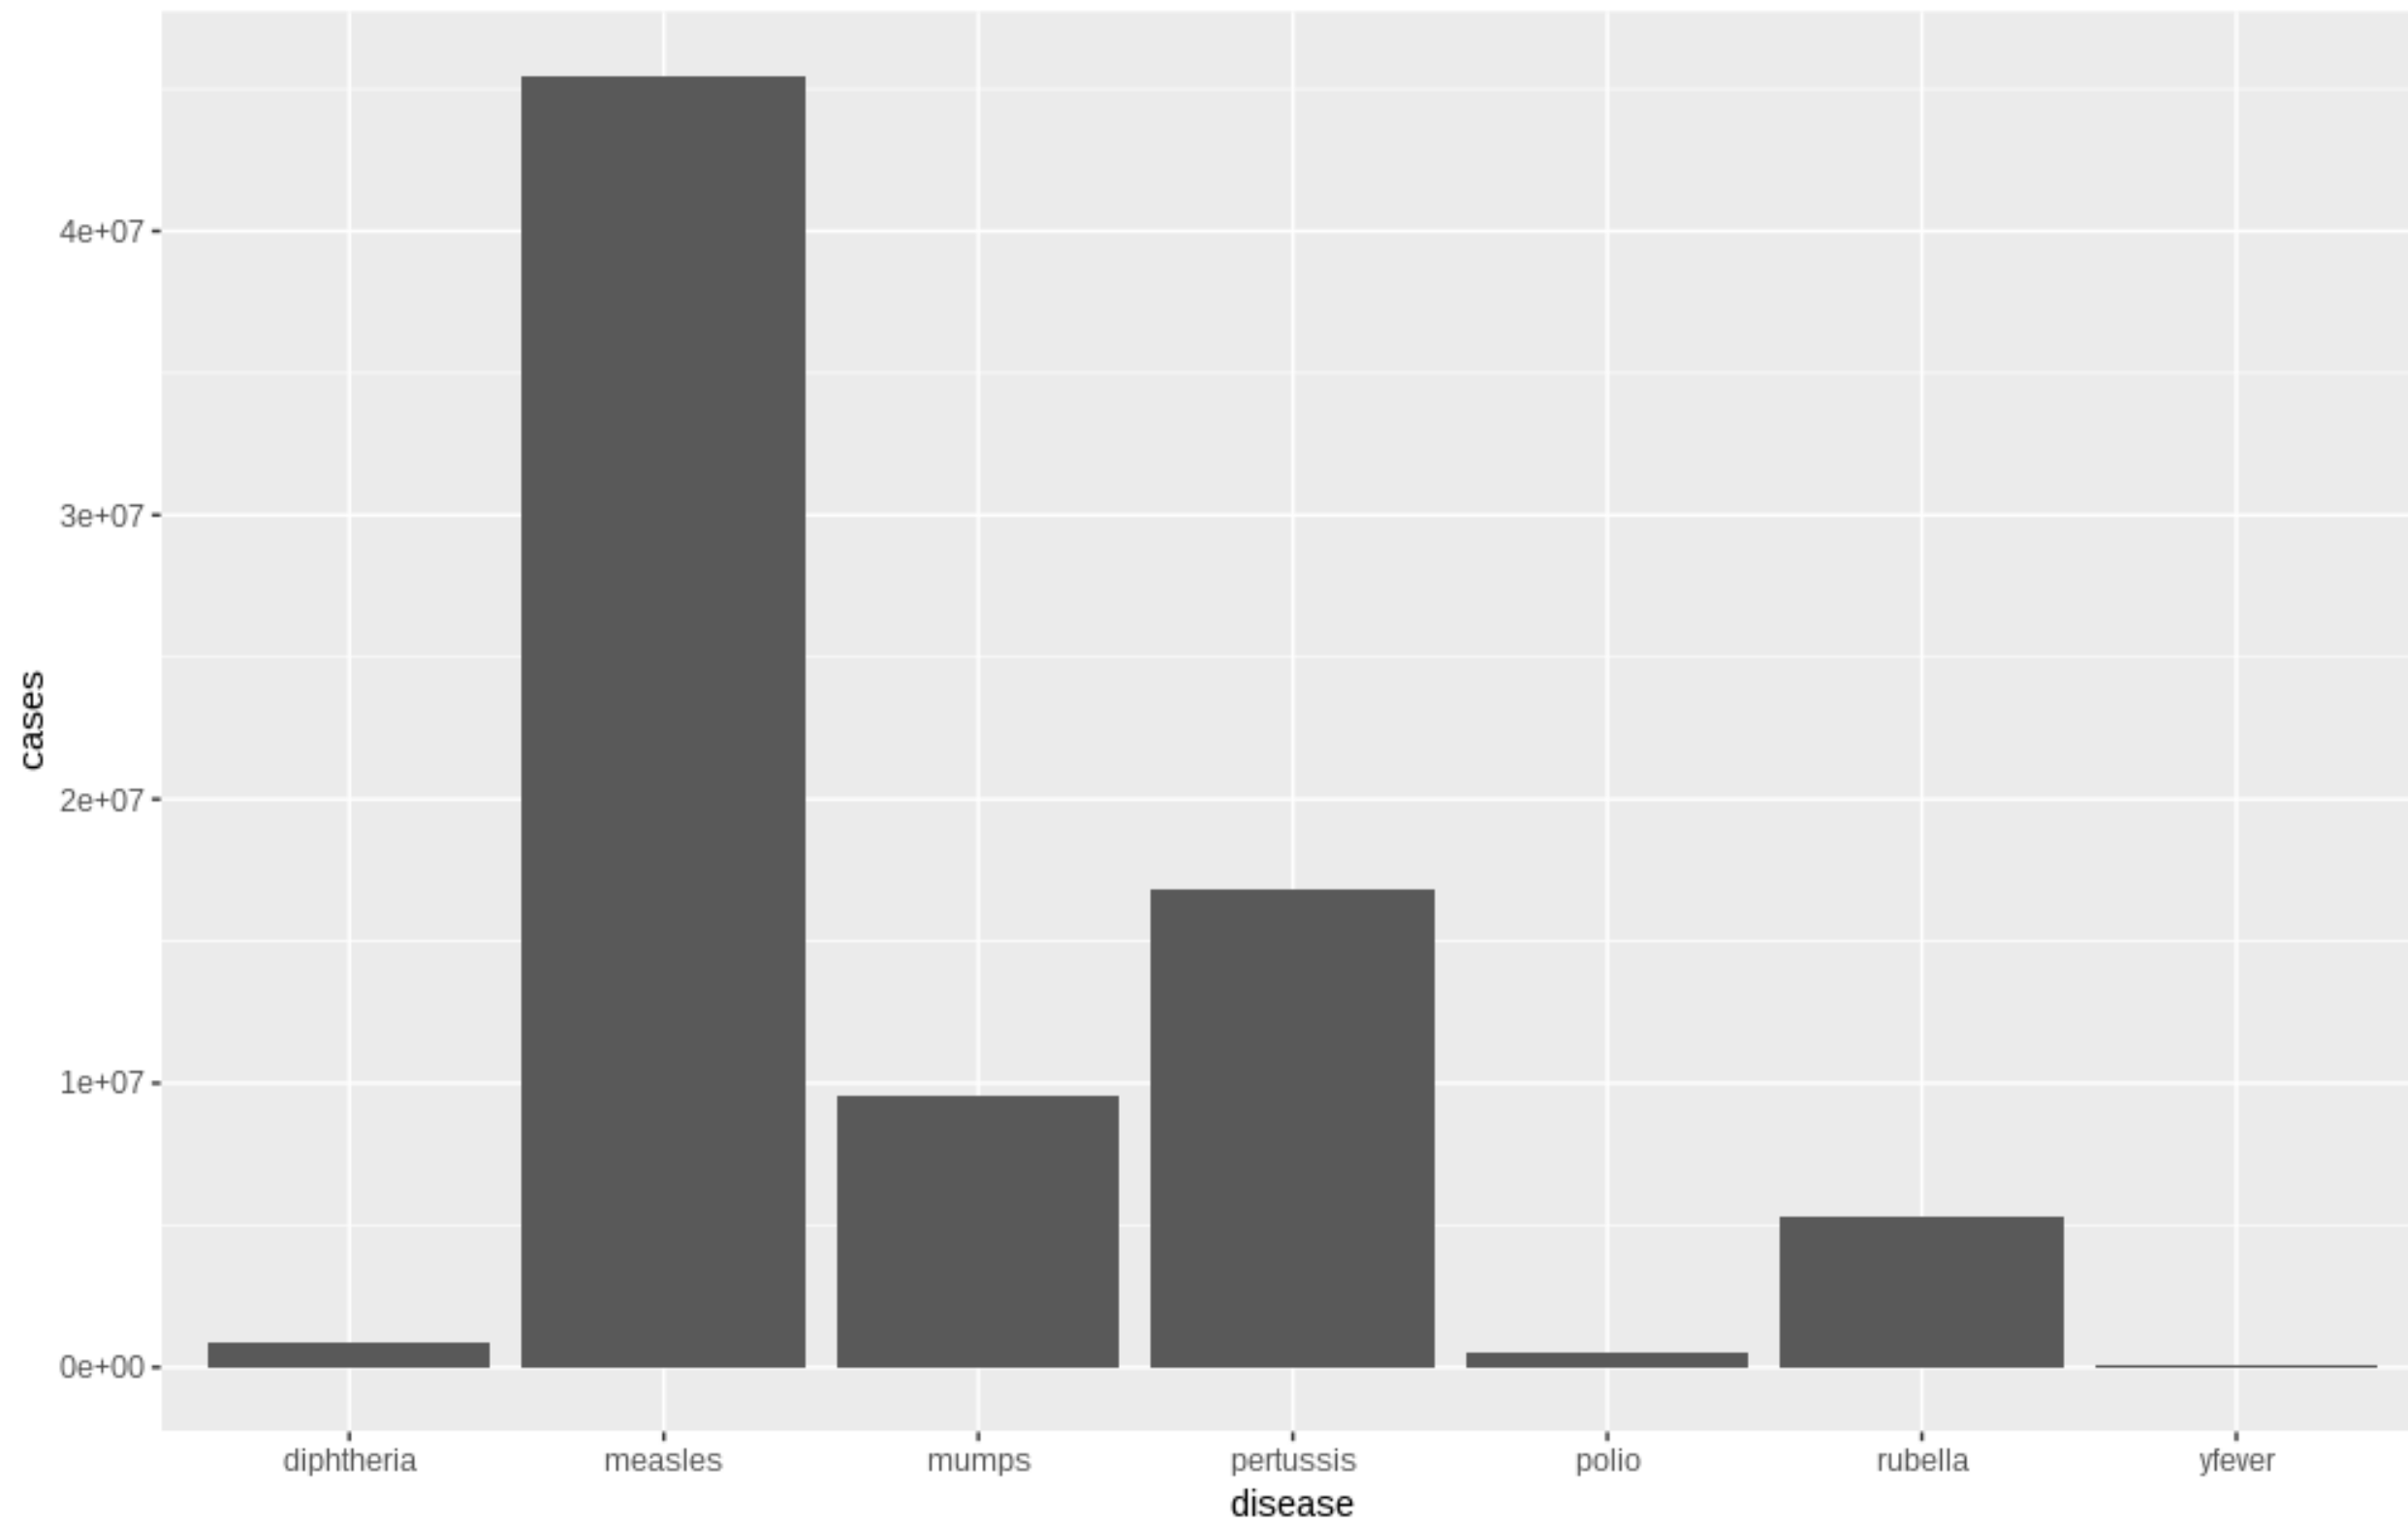



Not always the best

- Bar charts are frequently used when other charts are more appropriate
- A few principles can be followed to help avoid this





The stacking principle


- Should be used for data that represents a meaningful quantity
- Ask: 'Could I stack what I'm measuring to make the bars?'



Why quantities?

"...viewers judge points that fall within the bar as being more likely than points equidistant from the mean, but outside the bar..." - Scholl & Newman, 2012

- People view the bar as 'containing' the values below top
- Quantities fulfill this assumption

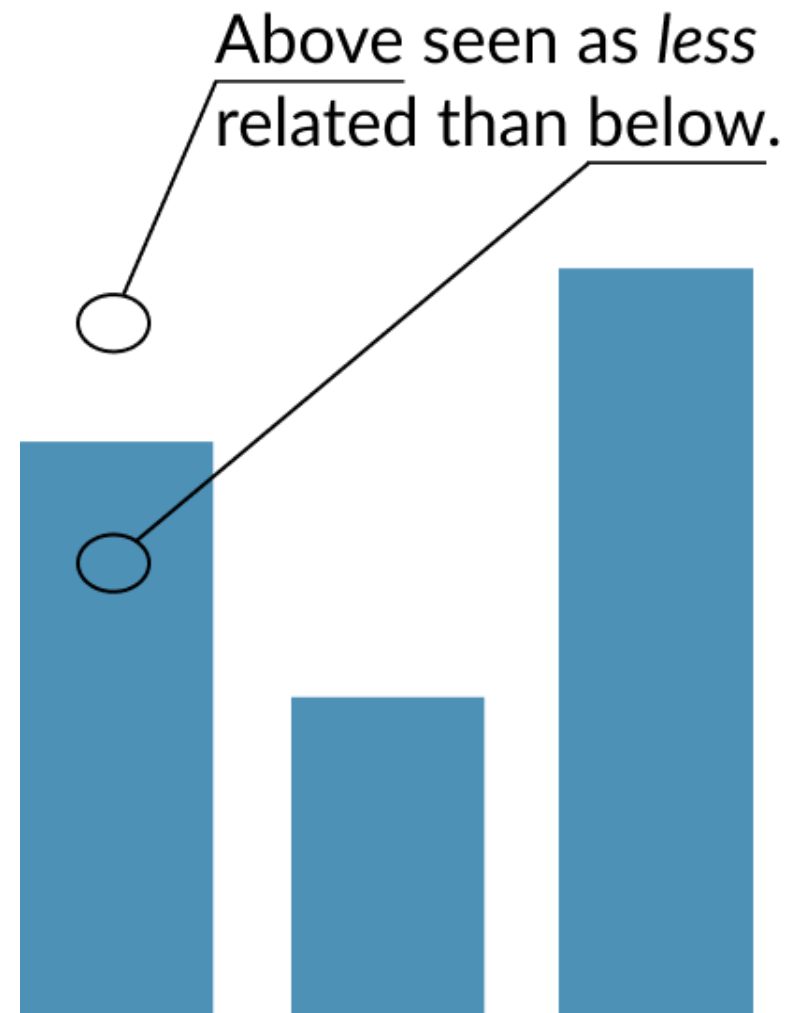



A big deal?

- Not really...
- ... but alternatives are not *worse*, so they may as well be used





VISUALIZATION BEST PRACTICES IN R

Let's practice!



VISUALIZATION BEST PRACTICES IN R

Point Charts

Nick Strayer
Instructor



When a bar chart isn't ideal


- Not a quantity
- Non-Linear transformations





Point charts


- Simply replace bar with a point
- Sometimes called point charts or dot plots

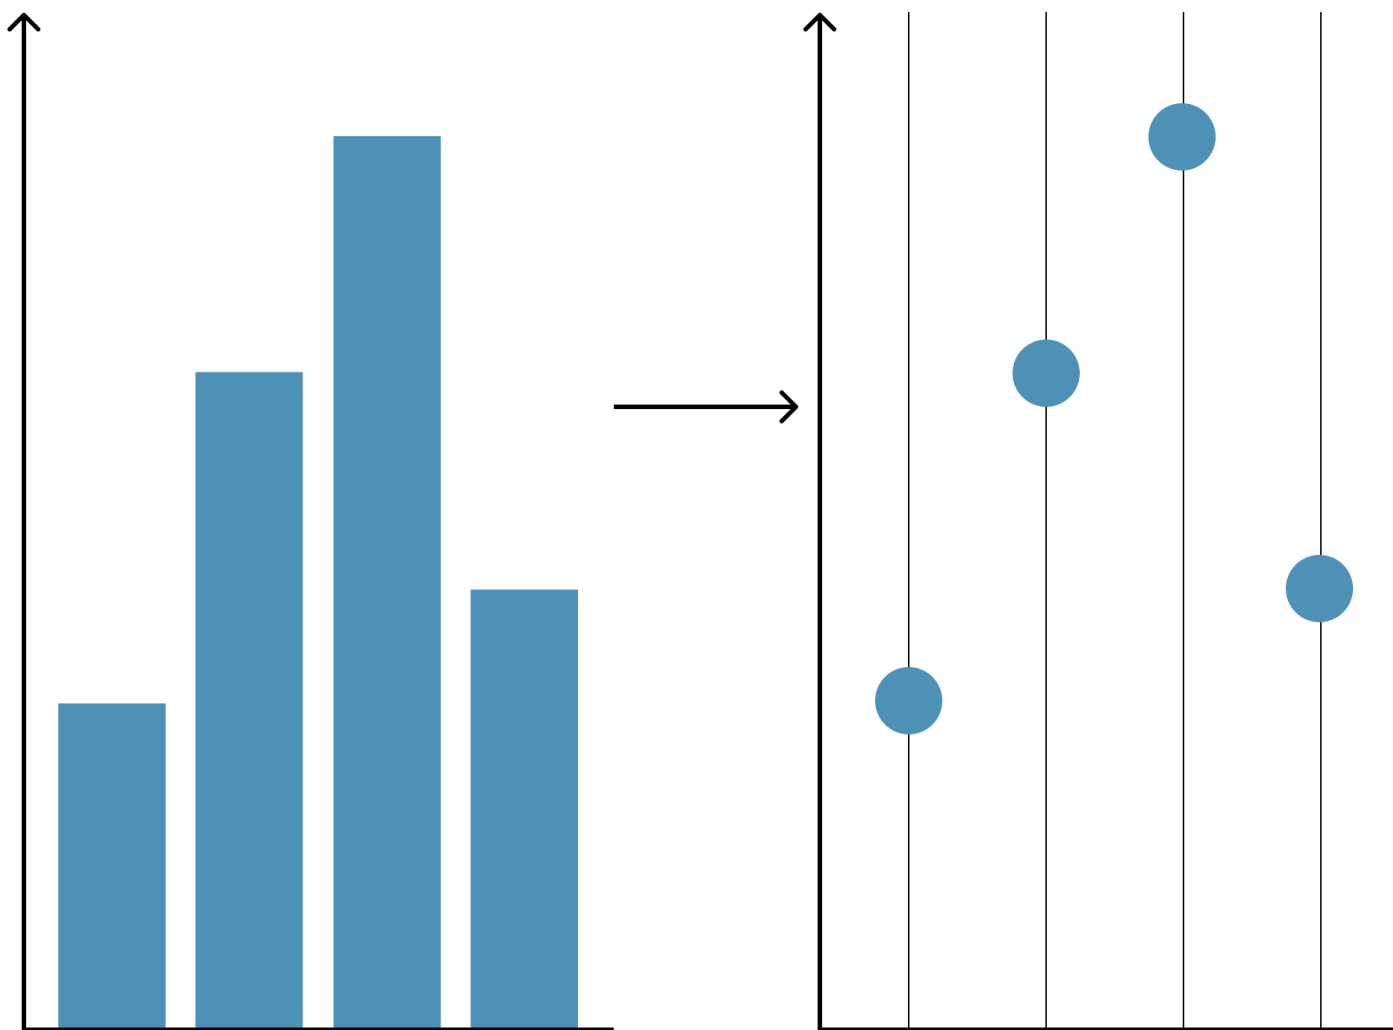



Benefits of point charts

- High precision
- Efficient representation
- Simple

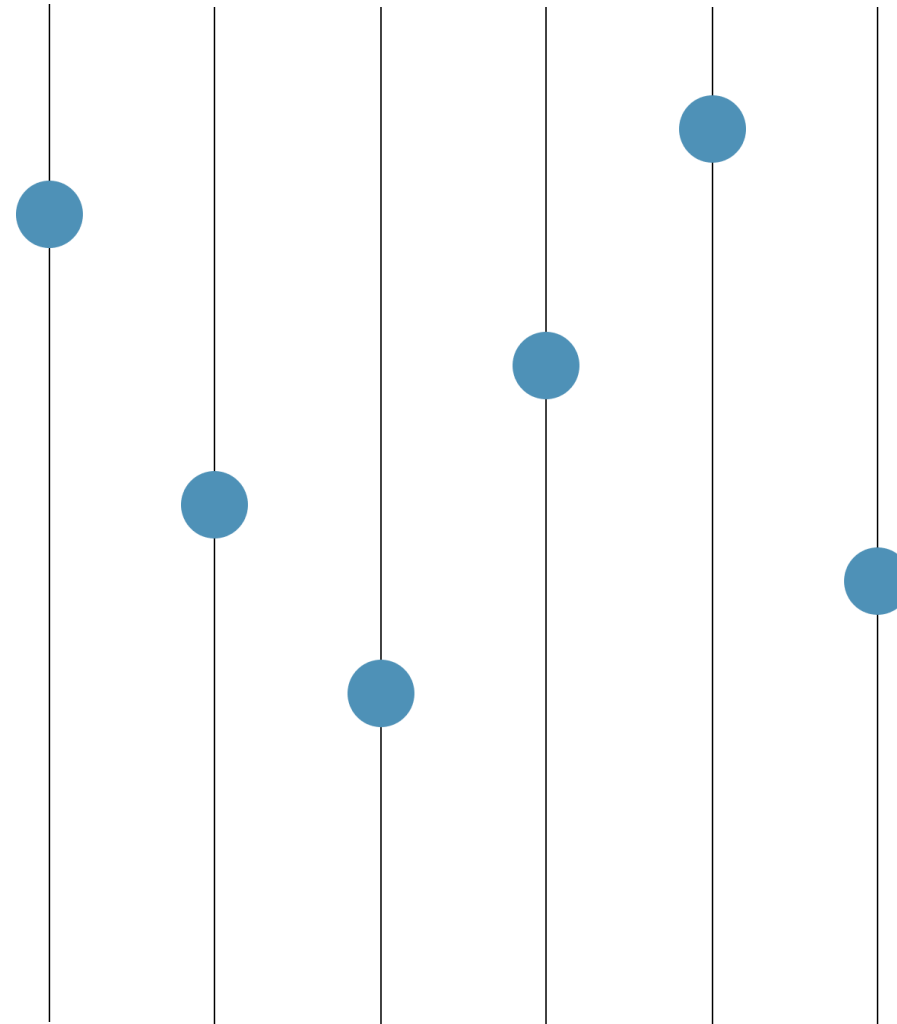



Data for lesson

- Working with a subset of WHO data
- Countries are an 'interesting' subset -- let's see if we can find out why

```
interestingCountries <- c(
  "NGA", "SDN", "FRA", "NPL", "MYS",
  "TZA", "YEM", "UKR", "BGD", "VNM"
)
who_subset <- who_disease %>%
  filter(
    countryCode %in% interestingCountries,
    disease == 'measles',
    year %in% c(2006, 2016)
  ) %>%
  mutate(year = paste0('cases_', year)) %>%
  spread(year, cases)
```

who_subset


```
> who_subset
# A tibble: 10 x 6
  region countryCode country    disease cases_2006 cases_2016
  <chr>    <chr>      <chr>      <chr>      <dbl>      <dbl>
1 AFR      NGA        Nigeria    measles      704      17136
2 AFR      TZA        Tanzania    measles     2362         33
3 EMR      SDN        Sudan (the) measles      228      1767
4 EMR      YEM        Yemen      measles     8079        143
5 EUR      FRA        France     measles       40         79
6 EUR      UKR        Ukraine    measles    42724        102
7 SEAR     BGD        Bangladesh measles     6192        972
8 SEAR     NPL        Nepal      measles     2838      1269
9 WPR      MYS        Malaysia   measles      564      1569
10 WPR     VNM        Viet Nam   measles     1978         46
```




Code for point charts

- `geom_point` with one categorical and one numerical axis

```
who_subset %>%  
  # we log transform our values here so bars are not appropriate  
  ggplot(aes(y = country, x = log10(cases_2016))) +  
  # simple geom_point.  
  geom_point()
```

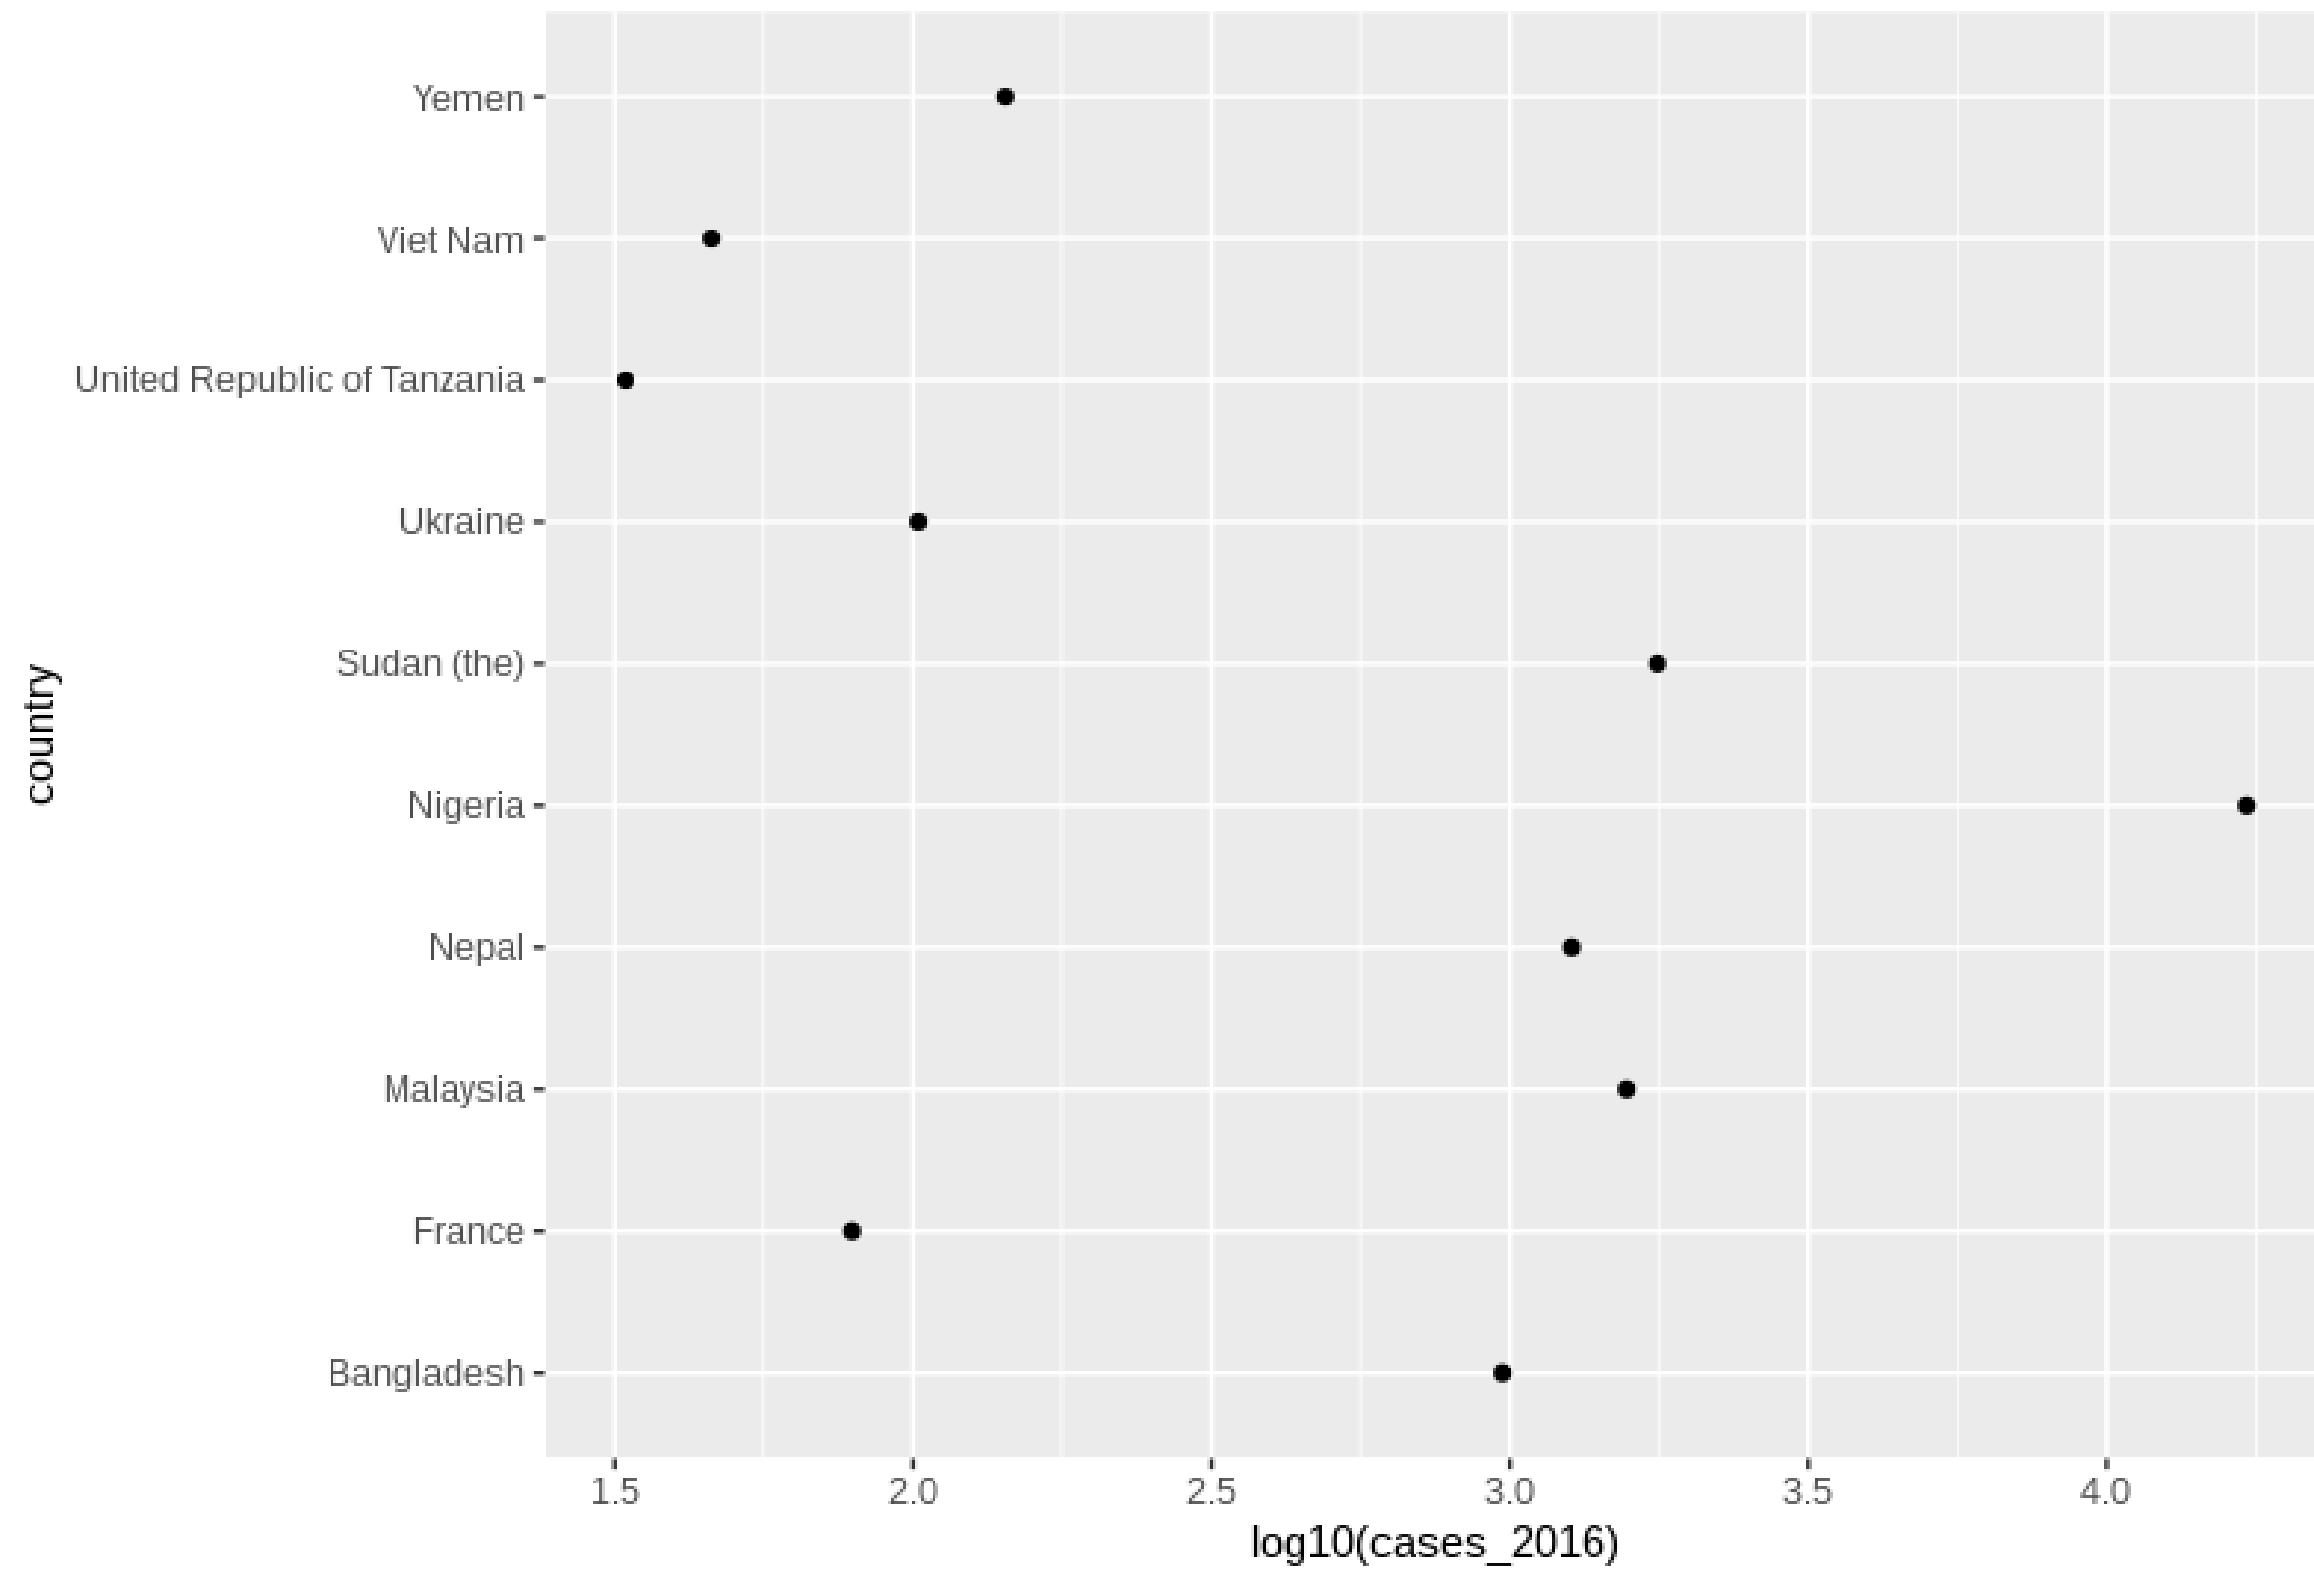





Ordering your point charts

- Ordering can vastly help legibility
- Use the `reorder` function in the aesthetic assignment

```
who_subset %>%  
  # calculate the log fold change between 2016 and 2006  
  mutate(logFoldChange = log2(cases_2016/cases_2006)) %>%  
  ggplot(aes(x = logFoldChange, y = reorder(country, logFoldChange))) +  
  geom_point()
```



reorder →

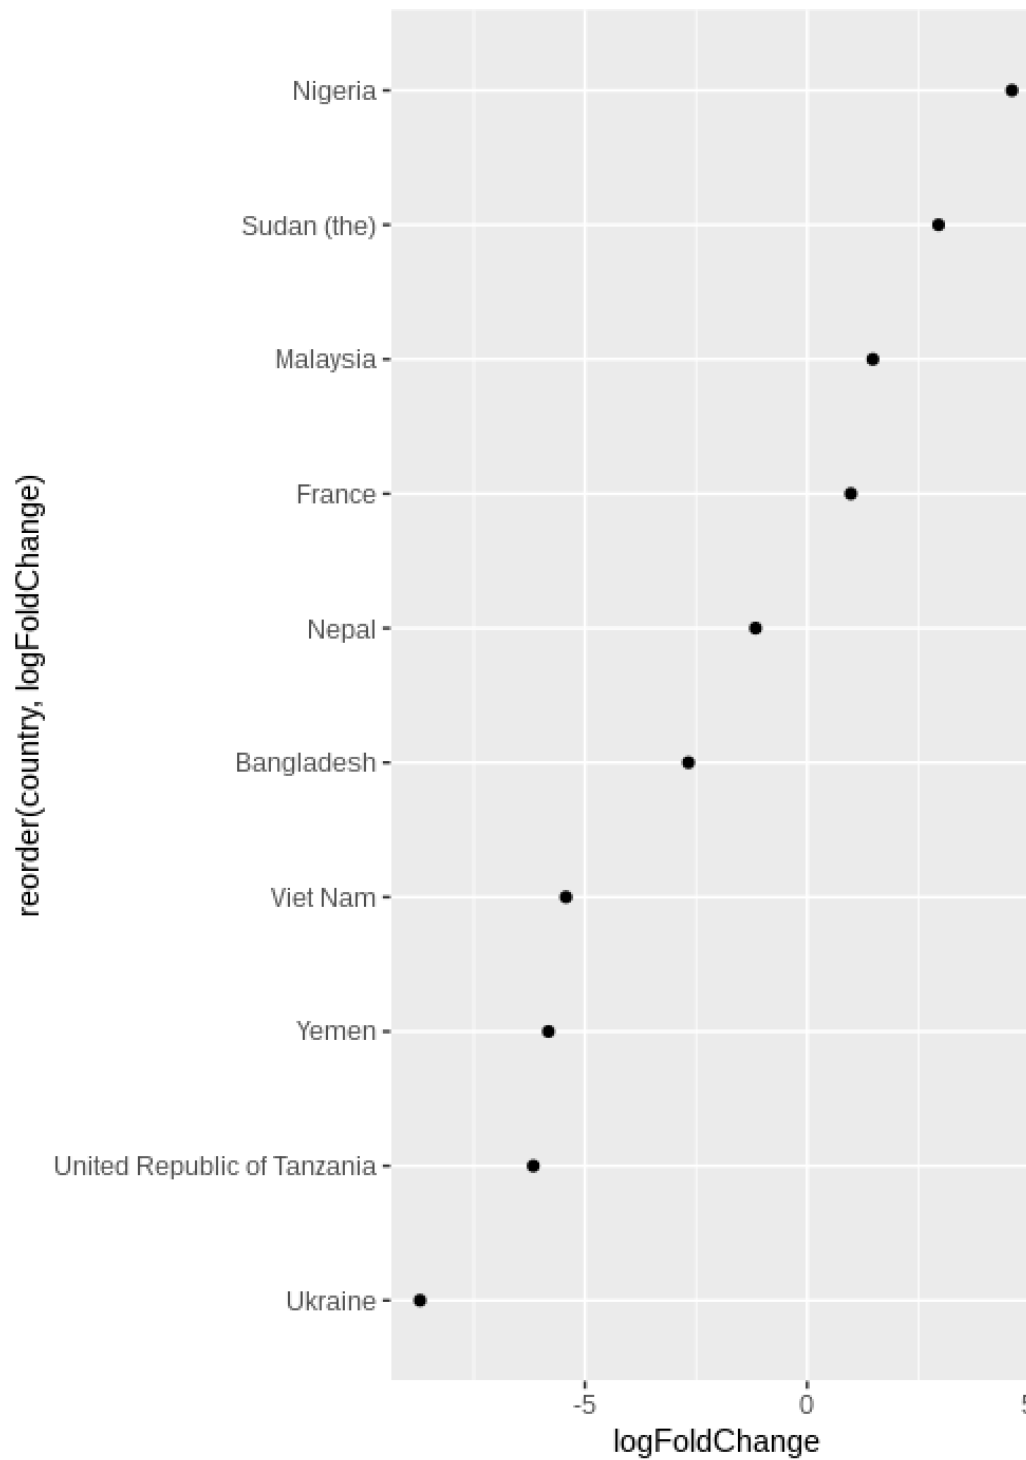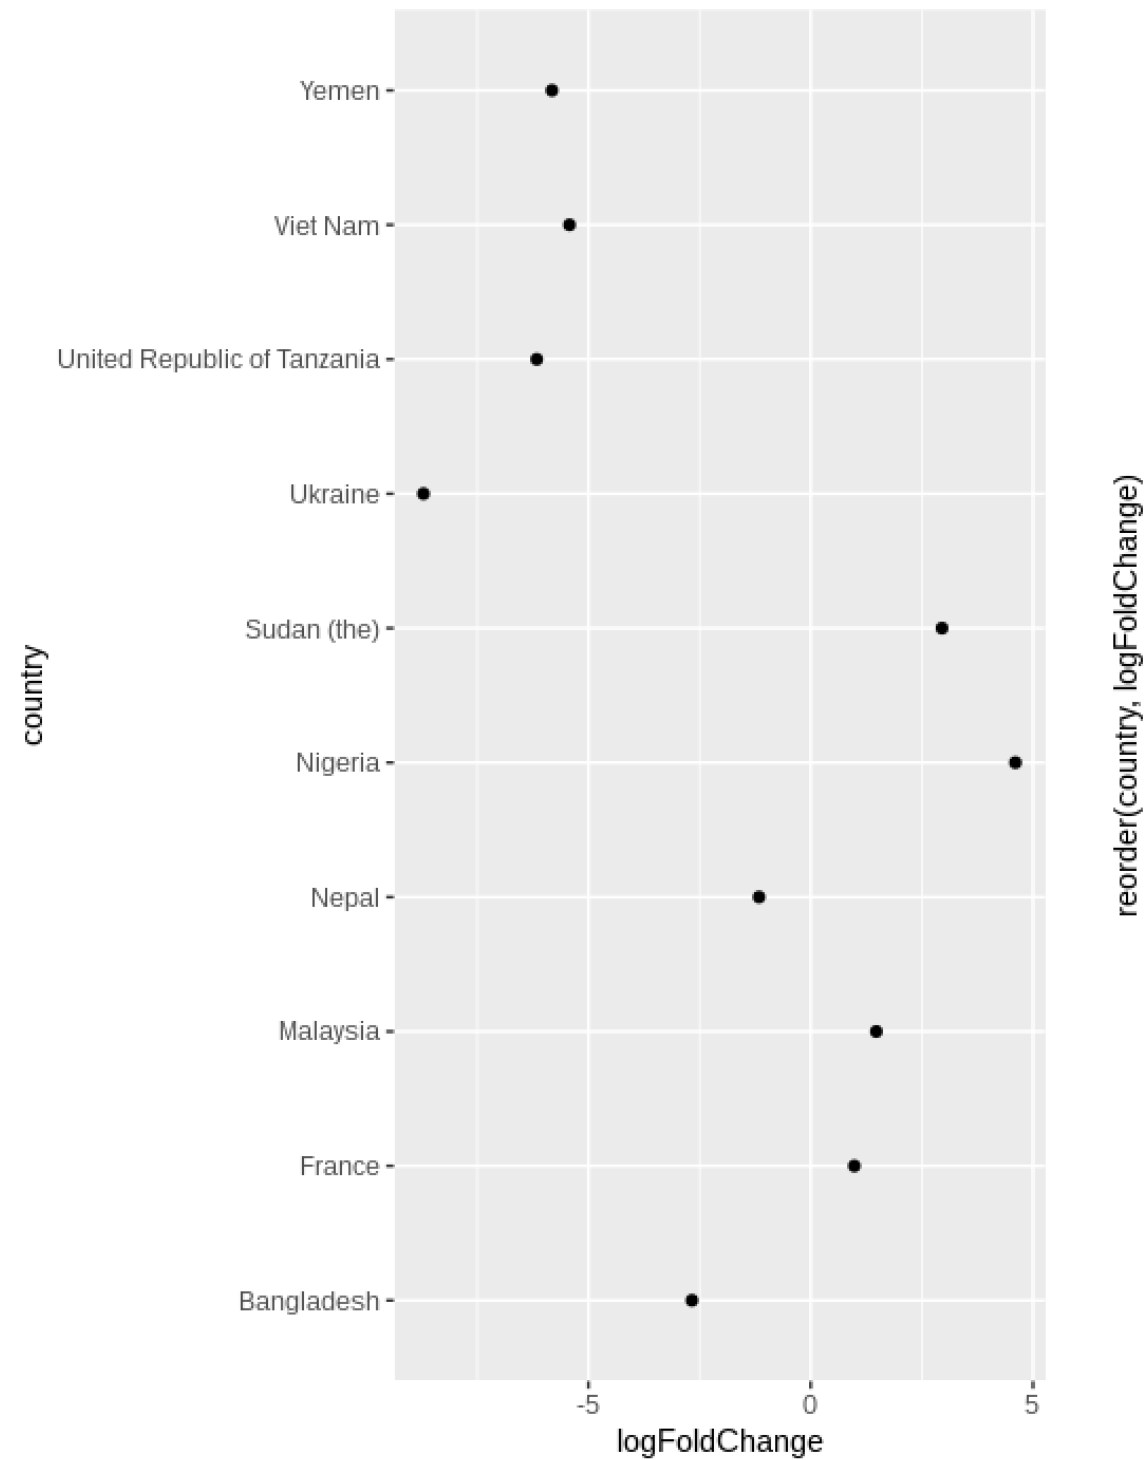



VISUALIZATION BEST PRACTICES IN R

Let's practice!



VISUALIZATION BEST PRACTICES IN R


Tuning your bar and point charts

Nick Strayer
Instructor



A busy bar chart

```
who_disease %>%  
  filter(region == 'EMR', disease == 'measles', year == 2015) %>%  
  ggplot(aes(x = country, y = cases)) +  
  geom_col()
```

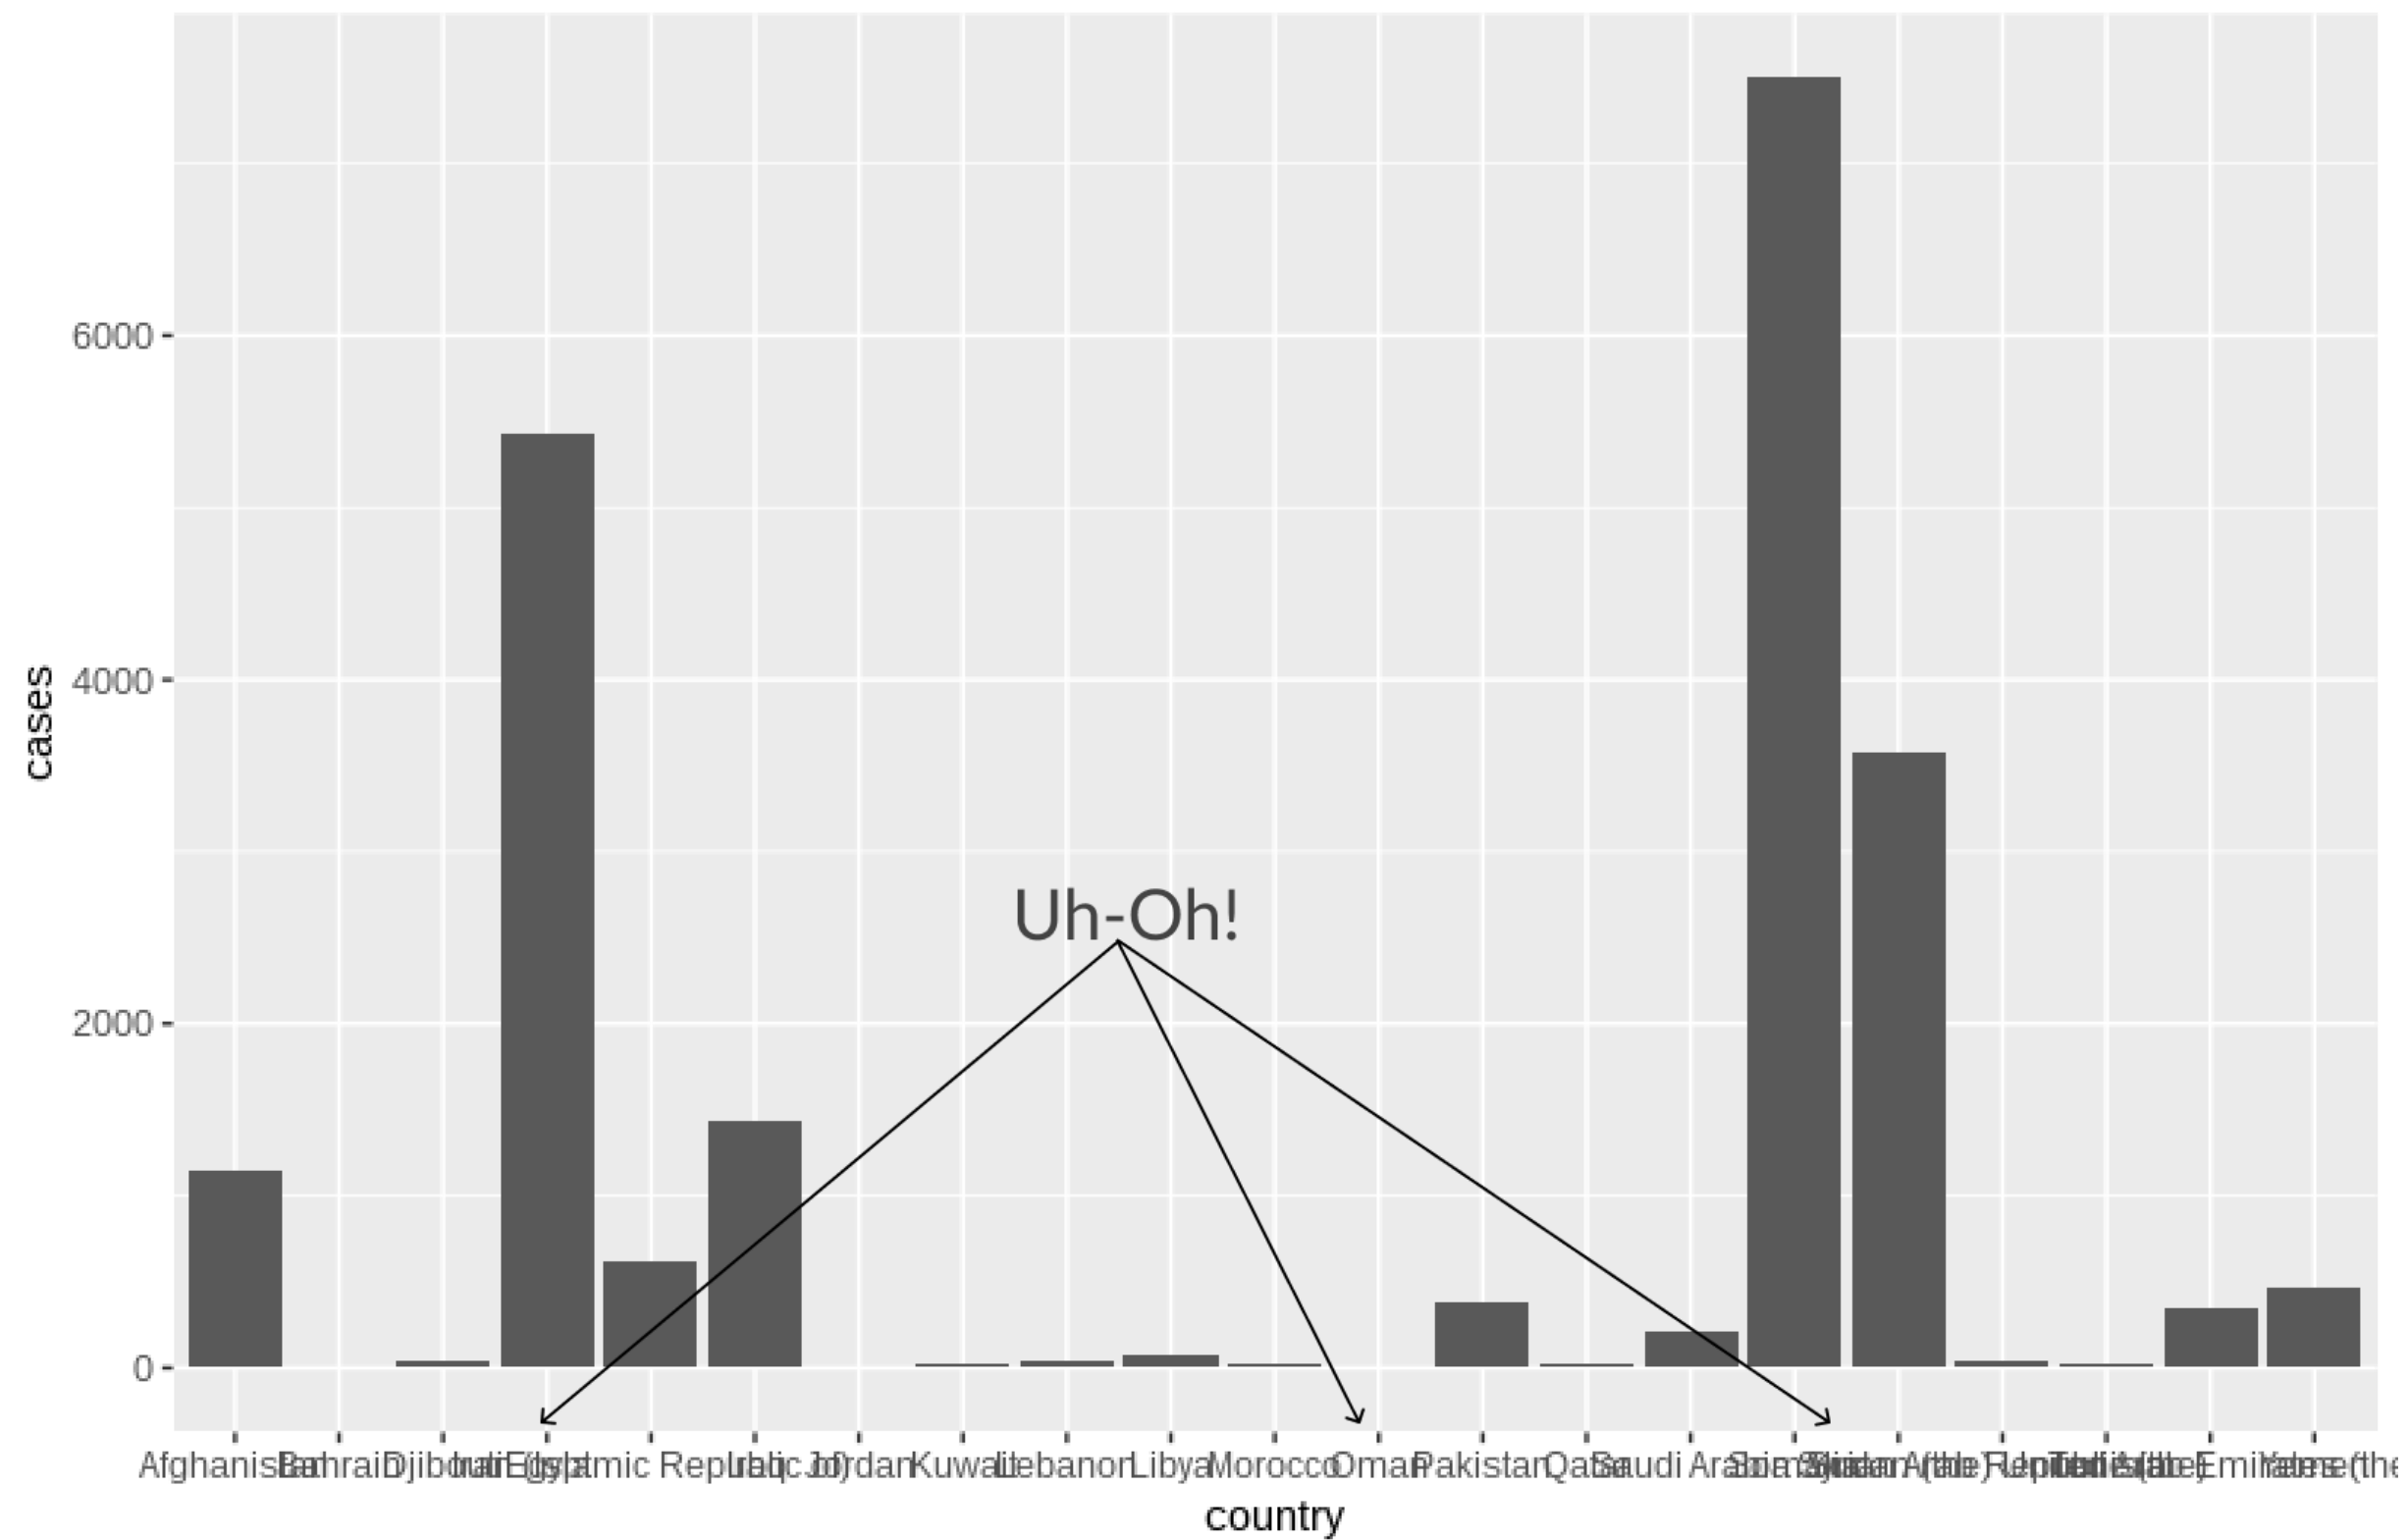




Flipping the bar

- `geom_bar` and `geom_col` don't allow categories on y-axis

```
busyBars <- who_disease %>%  
  filter(region == 'EMR', disease == 'measles', year == 2015) %>%  
  ggplot(aes(x = country, y = cases)) +  
  geom_col()
```

- So we have to flip!


```
busyBars + coord_flip() # swap x and y axes!
```

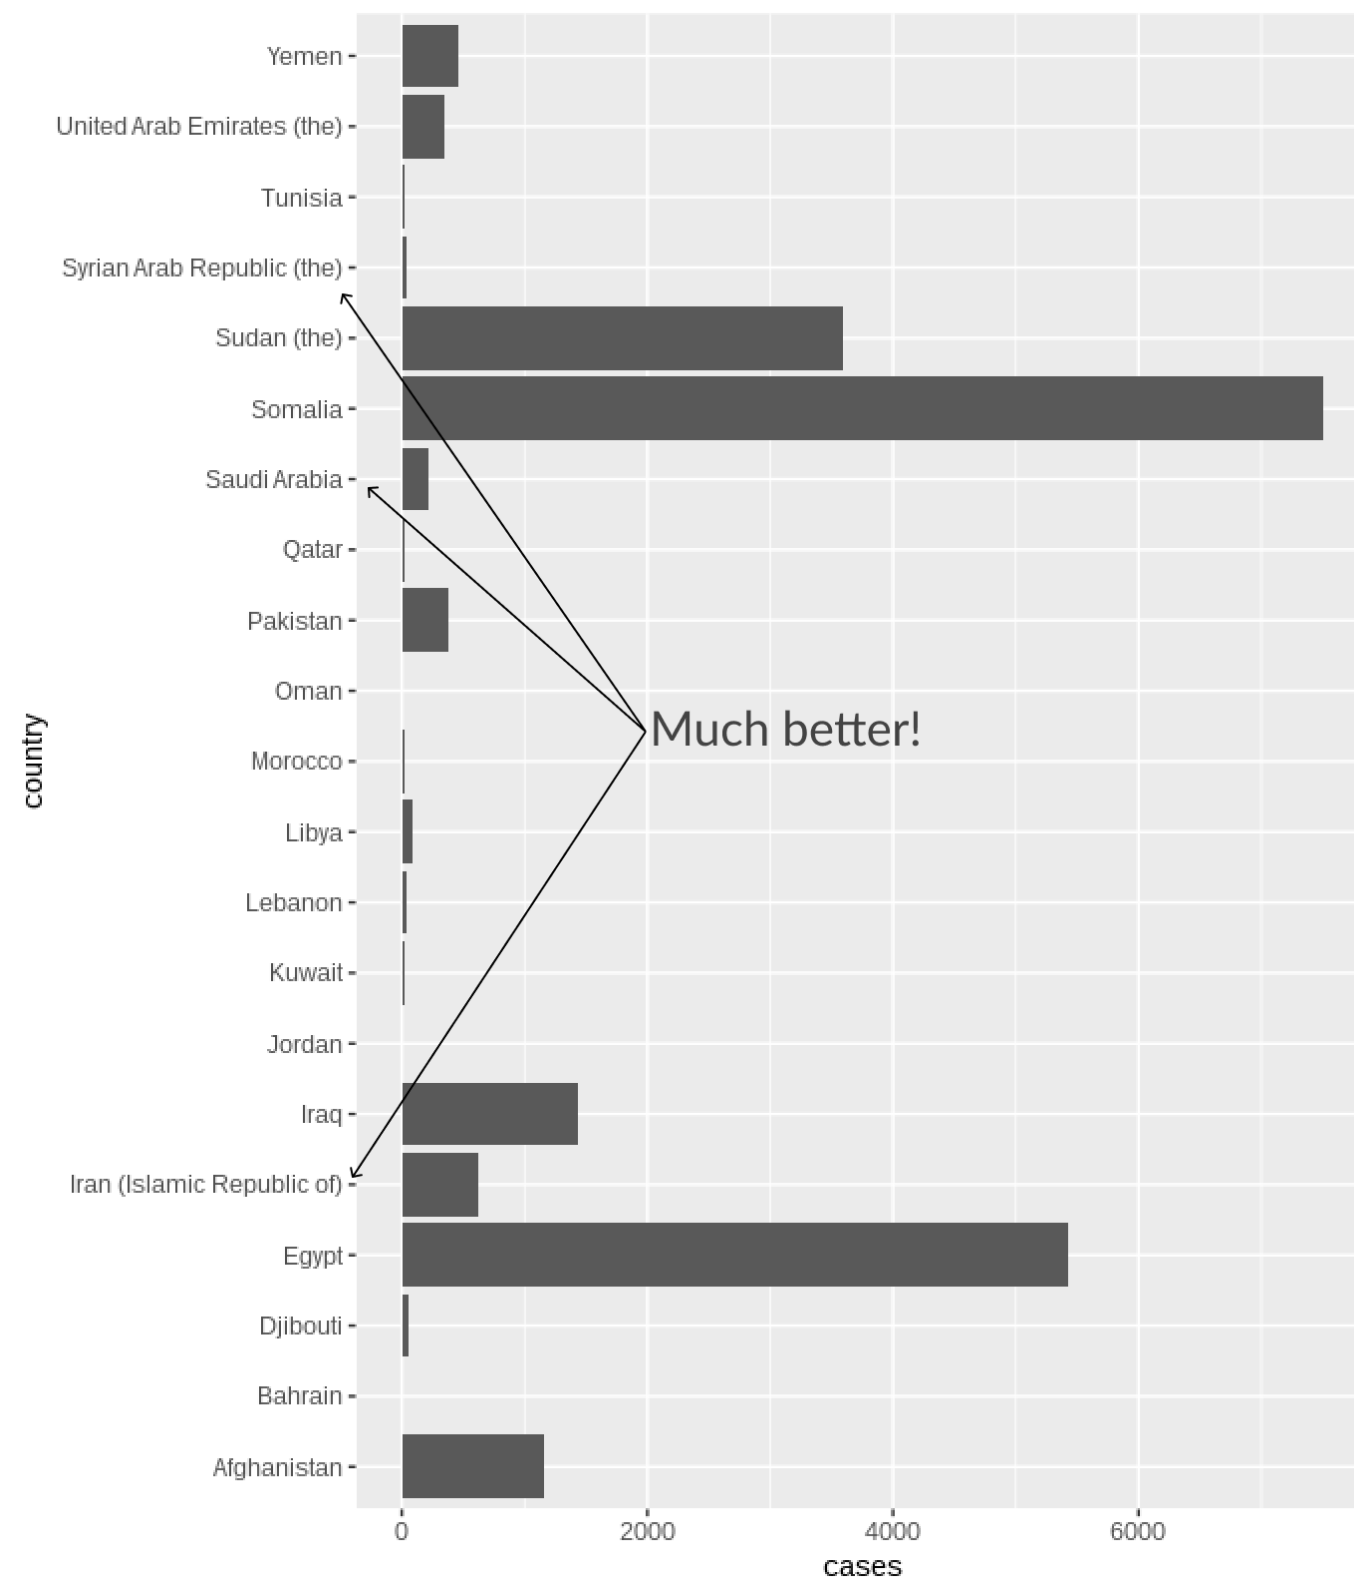




Excess grid

- No need for parallel grid lines in bars
- In point charts, only grids in line with point locations are needed

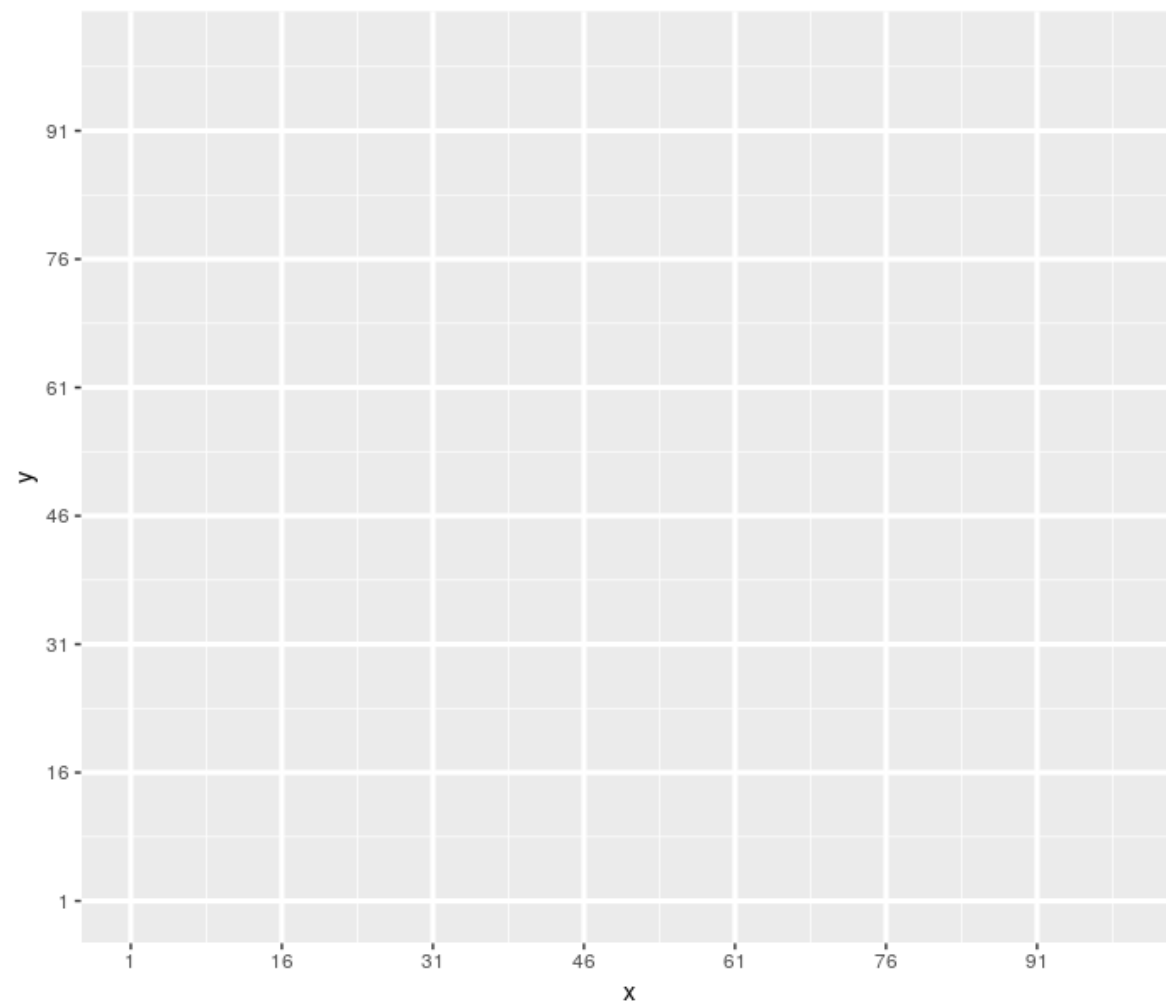

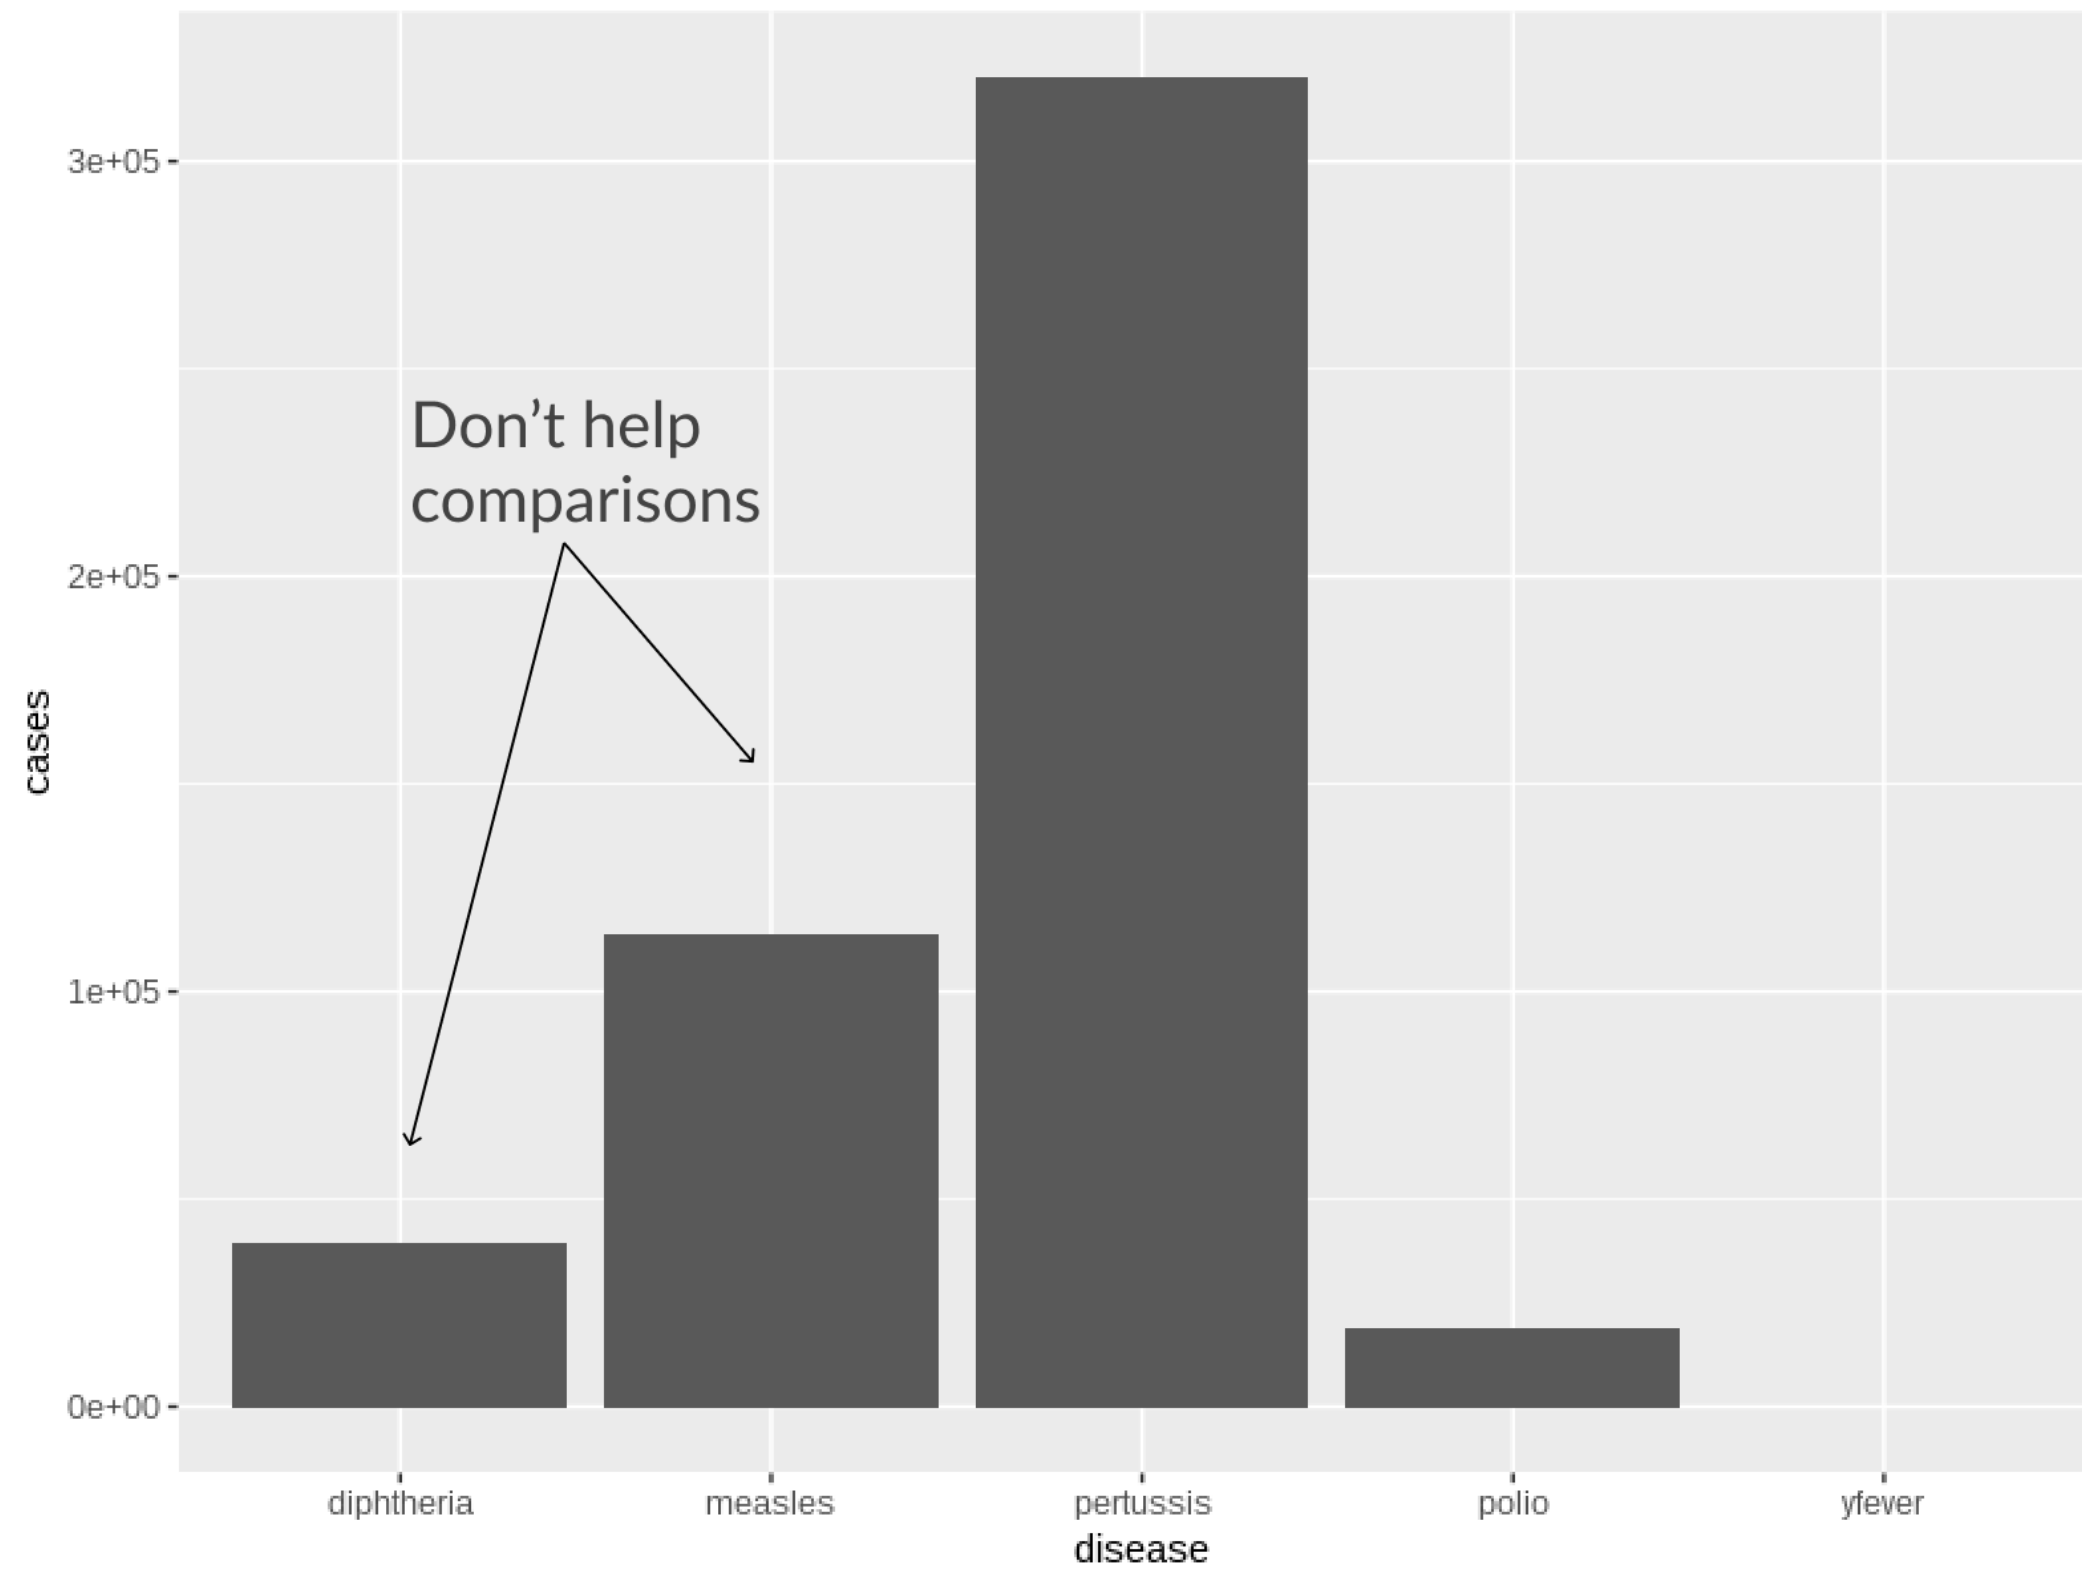




Removing vertical grid

```
plot <- who_disease %>%  
  filter(country == "India", year == 1980) %>%  
  ggplot(aes(x = disease, y = cases)) +  
  geom_col()
```

```
# get rid of vertical grid lines  
plot + theme(  
  panel.grid.major.x = element_blank()  
)
```

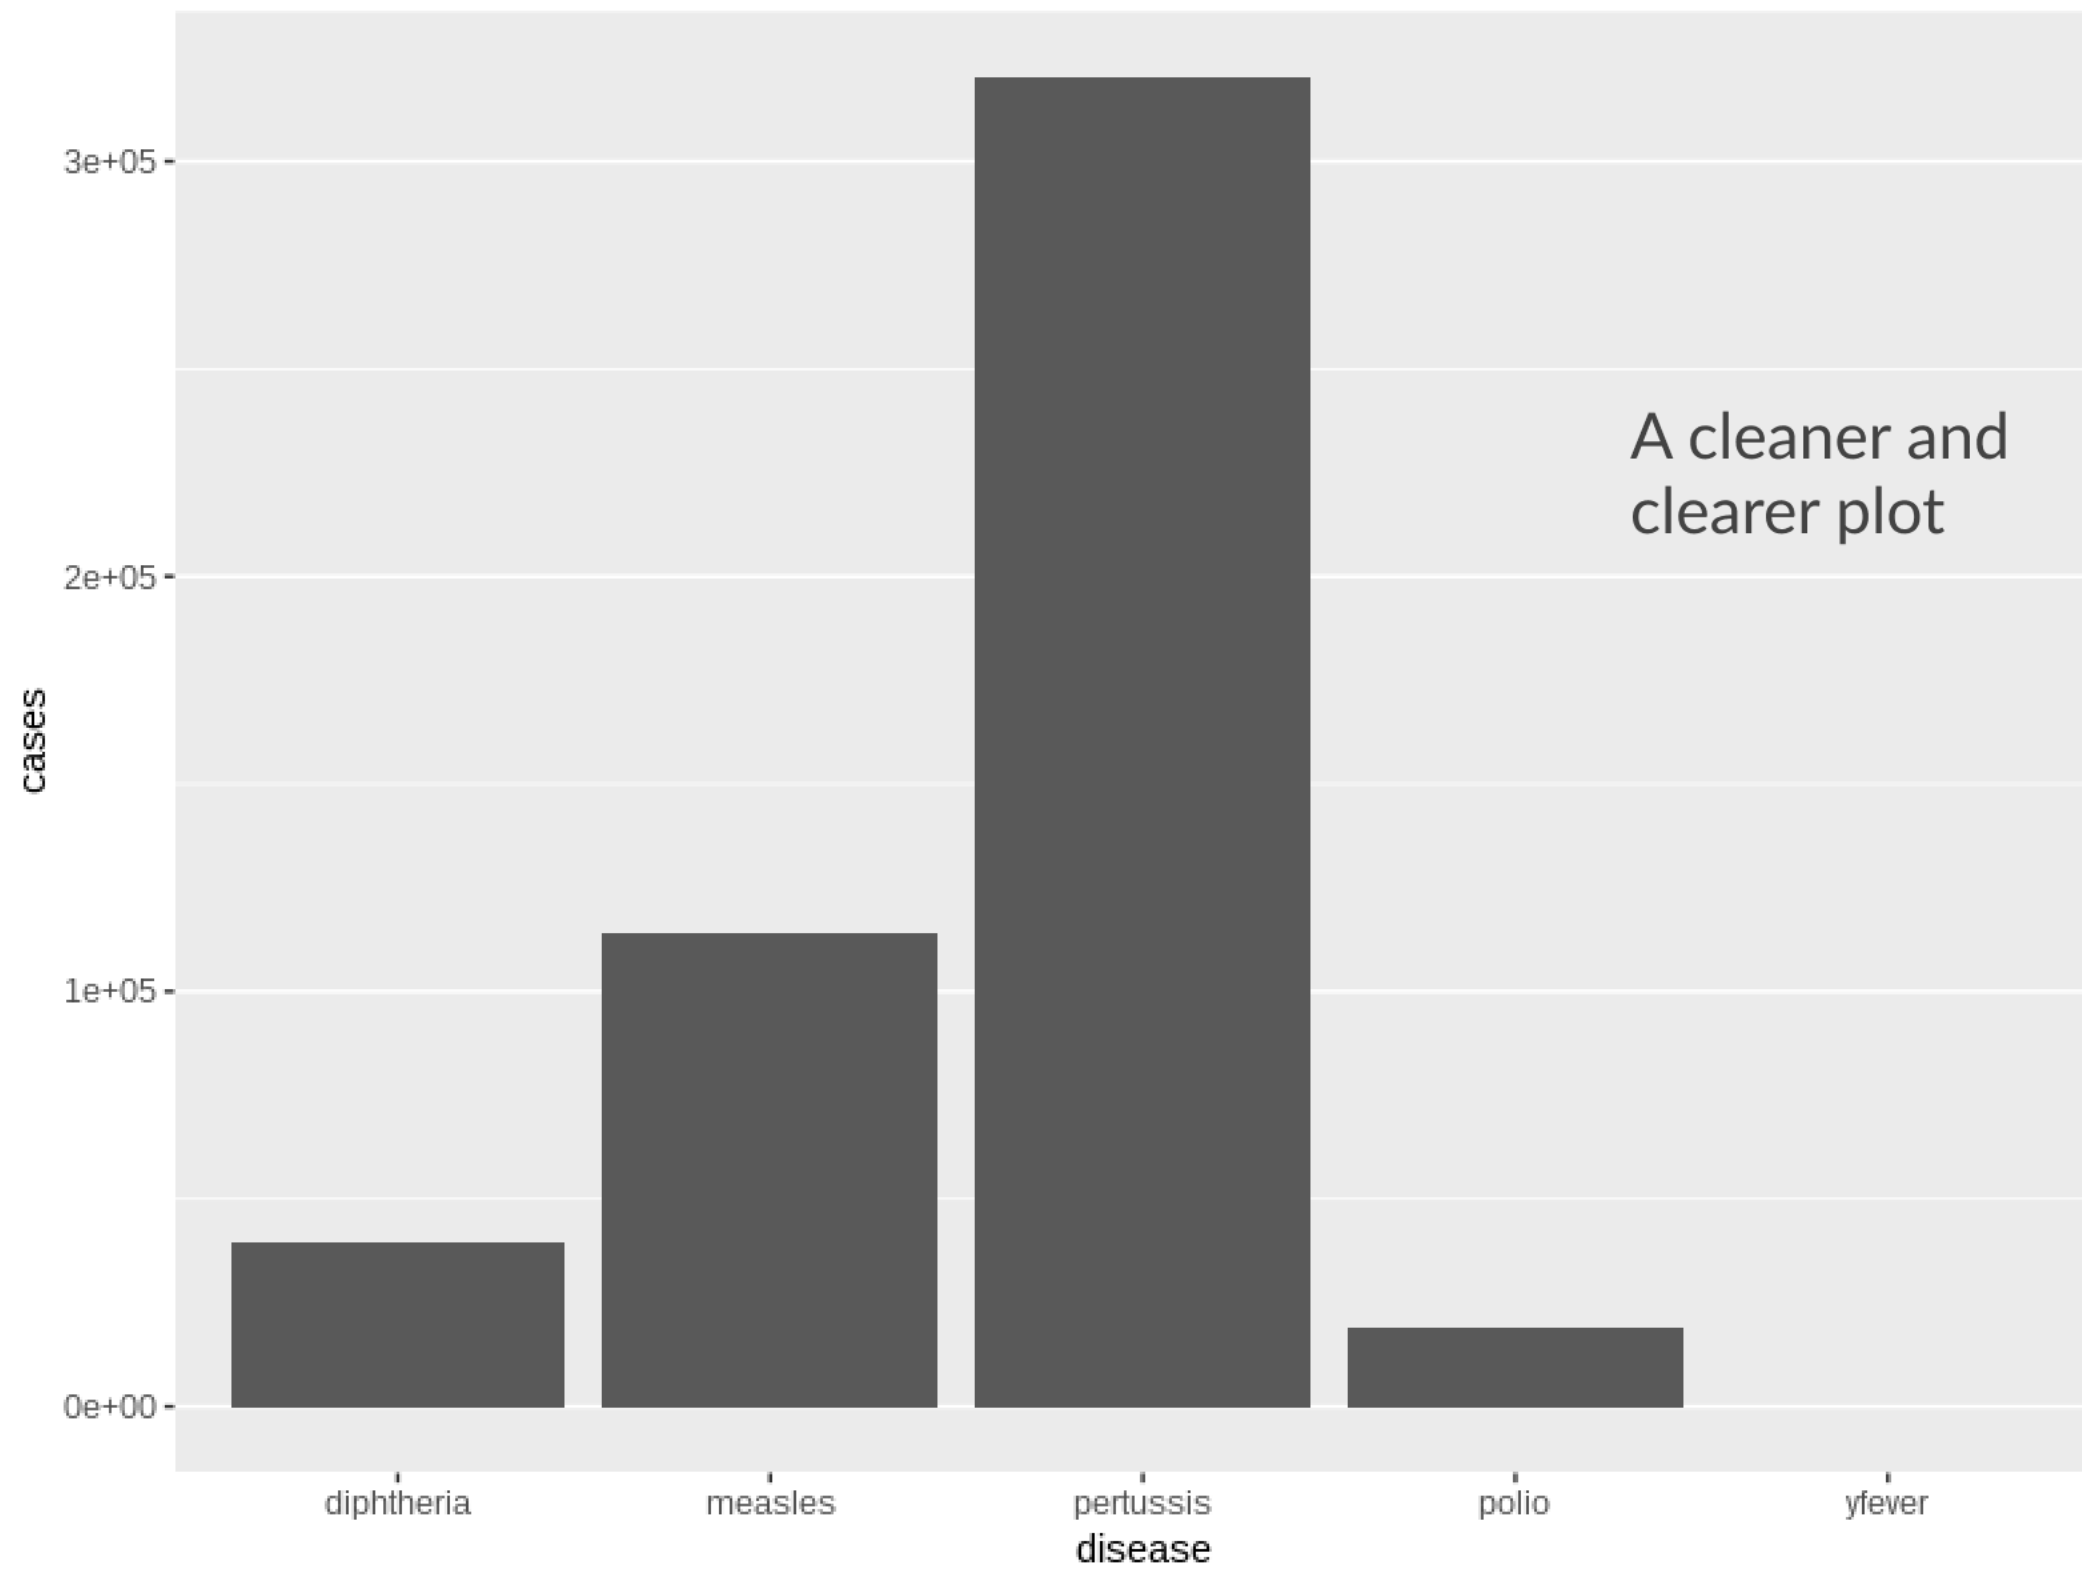





Lighter background for point charts

- Default grey background can be too low-contrast for points
- `theme_minimal()` is a quick fix
- Making points bigger helps too

```
who_subset %>%  
  ggplot(aes(y = reorder(country, cases_2016), x = log10(cases_2016))) +  
  
  # point size increased  
  geom_point(size = 2) +  
  
  # theme minimal for light background  
  theme_minimal()
```



size=2 +
theme_minimal()

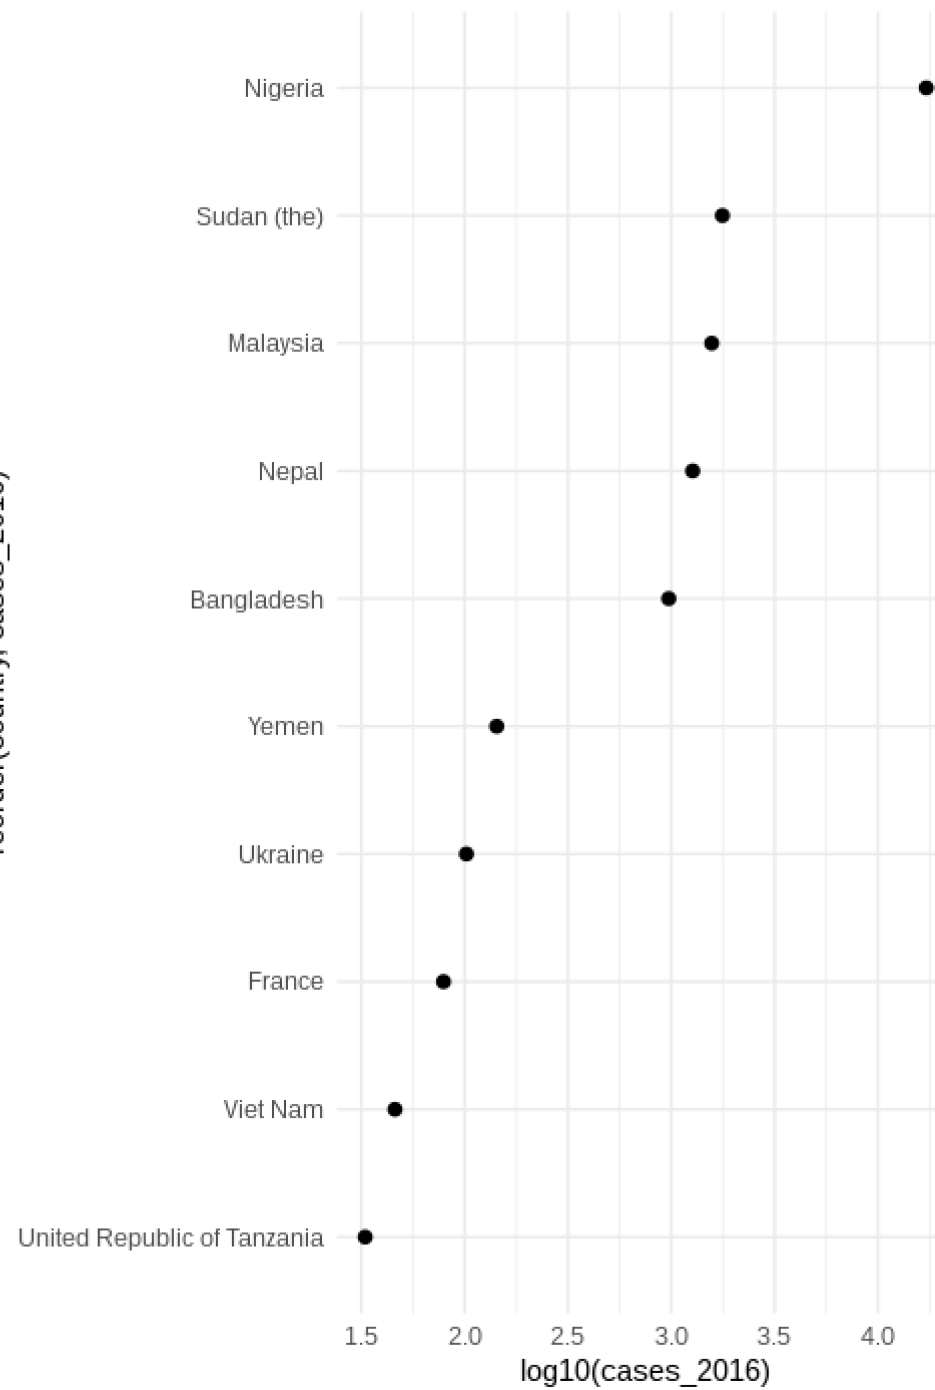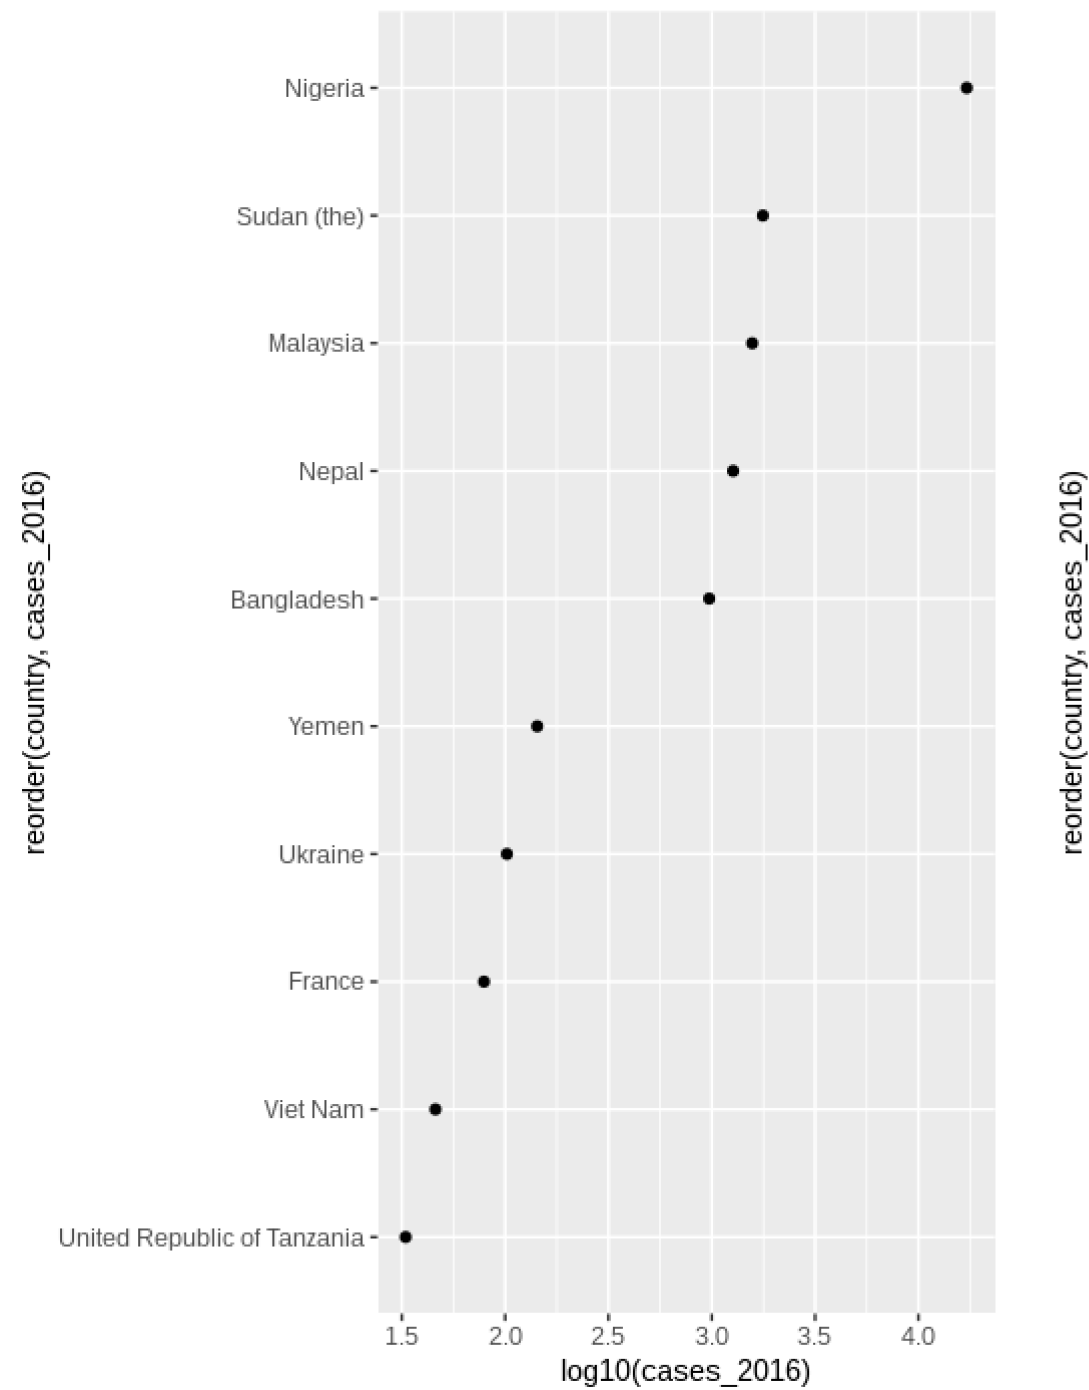



VISUALIZATION BEST PRACTICES IN R

Let's try it out