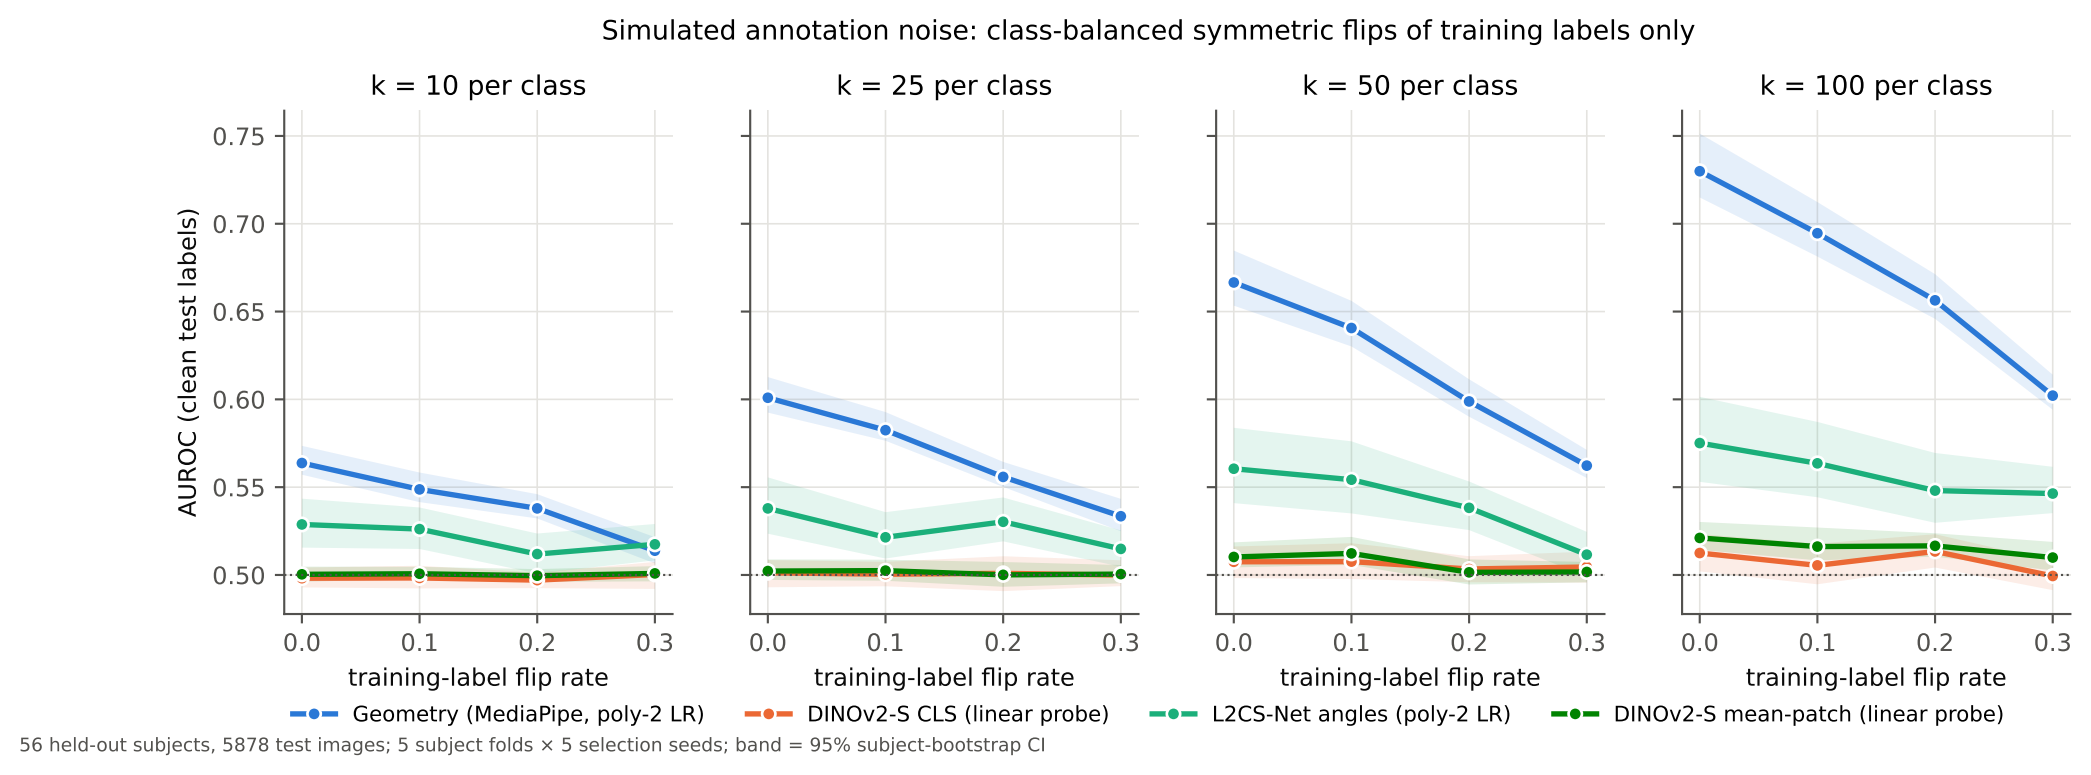
Simulated annotation noise: class-balanced symmetric flips of training labels only
k = 10 per class
k = 25 per class
k = 50 per class
k = 100 per class
AUROC (clean test labels)
0.75
0.70
0.65
0.60
0.55
0.50
0.0
0.1
0.2
0.3
training-label flip rate
Geometry (MediaPipe, poly-2 LR)
DINOv2-S CLS (linear probe)
L2CS-Net angles (poly-2 LR)
DINOv2-S mean-patch (linear probe)
56 held-out subjects, 5878 test images; 5 subject folds × 5 selection seeds; band = 95% subject-bootstrap CI