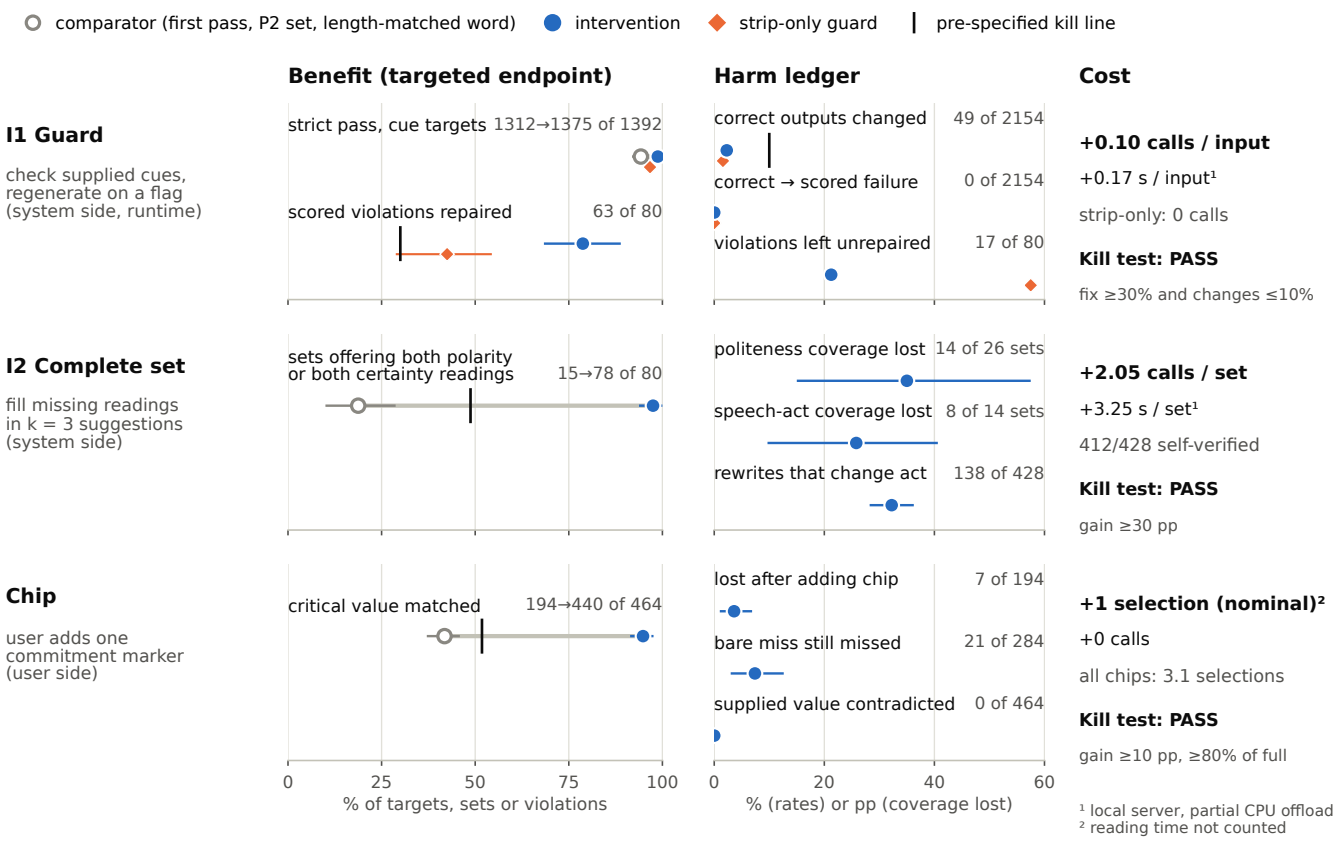
comparator (first pass, P2 set, length-matched word)
intervention
strip-only guard
pre-specified kill line
Benefit (targeted endpoint)
Harm ledger
Cost
I1 Guard
check supplied cues, regenerate on a flag (system side, runtime)
strict pass, cue targets
1312→1375 of 1392
scored violations repaired
63 of 80
correct outputs changed
49 of 2154
correct → scored failure
0 of 2154
violations left unrepaired
17 of 80
+0.10 calls / input
+0.17 s / input¹
strip-only: 0 calls
Kill test: PASS
fix ≥30% and changes ≤10%
I2 Complete set
fill missing readings in k = 3 suggestions (system side)
sets offering both polarity or both certainty readings
15→78 of 80
politeness coverage lost
14 of 26 sets
speech-act coverage lost
8 of 14 sets
rewrites that change act
138 of 428
+2.05 calls / set
+3.25 s / set¹
412/428 self-verified
Kill test: PASS
gain ≥30 pp
Chip
user adds one commitment marker (user side)
critical value matched
194→440 of 464
lost after adding chip
7 of 194
bare miss still missed
21 of 284
supplied value contradicted
0 of 464
+1 selection (nominal)²
+0 calls
all chips: 3.1 selections
Kill test: PASS
gain ≥10 pp, ≥80% of full
0
25
50
75
100
% of targets, sets or violations
0
20
40
60
% (rates) or pp (coverage lost)
¹ local server, partial CPU offload
² reading time not counted