

Interference effect in scattering loss of high-index-contrast planar waveguides caused by boundary reflections

J. H. Schmid,* A. Del  ge, B. Lamontagne, J. Lapointe, S. Janz, P. Cheben, A. Densmore, P. Waldron, D.-X. Xu, and K. P. Yap

Institute for Microstructural Sciences, National Research Council Canada, Ottawa, Ontario K1A 0R6, Canada

*Corresponding author: jens.schmid@nrc-cnrc.gc.ca

Received April 29, 2008; revised May 26, 2008; accepted May 27, 2008;
posted May 29, 2008 (Doc. ID 95582); published June 25, 2008

We present theoretical and experimental results on an interference effect caused by boundary reflections on the optical scattering loss in high-index-contrast planar waveguides. Analytical expressions for the polarization-dependent scattering loss are derived using a surface Green's function. For high-index-contrast waveguides of submicrometer dimensions a significant deviation from accepted theory arises, including scattering loss suppression owing to a thin-film interference effect. Our theoretical predictions are confirmed by loss measurements on silicon-on-insulator channel waveguides.   2008 Optical Society of America
OCIS codes: 130.2790, 130.3060, 130.5990, 230.7400, 290.5825, 290.5880.

The optical scattering loss of planar dielectric waveguides is a topic of enormous practical interest in the field of integrated optics and has been studied extensively over the past four decades, starting with pioneering work by Marcuse [1]. In recent years, miniaturization of planar waveguide circuits using high-index-contrast (HIC) platforms such as silicon-on-insulator (SOI) has been a major research thrust. In small HIC waveguides, scattering loss is one of the main practical problems for many devices. In the recent literature, dielectric waveguide loss analysis has most commonly been based on the Payne–Lacey (PL) model [2]. The PL model is particularly convenient in design and data analysis because it provides a relatively simple analytical expression for the loss of the TE mode of a slab waveguide in terms of the fundamental waveguide parameters and the statistics of the surface roughness. Here, we present a new model, based on the same physical assumptions as the PL model, but using a surface Green's function approach first described by Sipe [3]. This approach has previously been applied to analyze mode coupling effects of surface gratings on planar waveguides [4,5]. The two main analytical achievements of our work are an extension of the PL model to include multilayer interference and the derivation of an analytical expression for the loss of the TM mode. The interference effect is caused by the multiple reflections of the light scattered from the rough waveguide boundary inside the slab waveguide core. For small HIC waveguides this effect causes a significant deviation from the PL result; namely, a periodic modulation of the loss as a function of the waveguide thickness.

The starting point for the derivation of a loss formula is the wave equation for the Fourier transform of the electric field with a source polarization $\mathbf{P}$:

$$\nabla^2 \mathbf{E} + n^2(y) k_0^2 \mathbf{E} = 4\pi k_0^2 \mathbf{P}, \quad (1)$$

where n is the refractive index of the ideal slab waveguide, i.e., $n = n_1$ for $(y < 0, y > d)$, $n = n_2$ for $0 < y < d$,

as shown in Fig. 1; and k_0 is the free-space wave vector. The homogeneous solutions to Eq. (1) are the well-known TE and TM modes of the slab waveguide, which can be written as $\mathbf{E}^{\text{TE}} = \Phi_x(y) \hat{x} e^{i\beta z}$ and $\mathbf{E}^{\text{TM}} = (\Phi_y(y) \hat{y} + \Phi_z(y) \hat{z}) e^{i\beta z}$, respectively, with the unit coordinate vectors $\hat{x}$, $\hat{y}$, and $\hat{z}$ and propagation constant β . We are interested in the particular solution to Eq. (1) for a source polarization $\mathbf{P}$ that corresponds to the perturbation caused by a random surface roughness of the slab, given by $\mathbf{P} = \chi \mathbf{E} = -n_r^2(y, z)/(4\pi) \mathbf{E}$. Here, χ is the susceptibility and n_r is the deviation of the index profile from that of the ideal slab, which can be expressed in terms of the Heaviside step function Θ and the surface profile $s(z)$ as $n_r^2 = (n_2^2 - n_1^2) \Theta(y - d) \Theta(s(z) + d - y)$. Assuming that the roughness layer is much thinner than the wavelength of light, i.e., $s_{\text{max}} \ll \lambda$, the susceptibility can be approximated within the thin uniform layer $d < y < d + s_{\text{max}}$ by its averaged value $\bar{\chi} = (1/s_{\text{max}}) \int_d^{d+s_{\text{max}}} \chi dy = [s(z)/4\pi s_{\text{max}}] (n_2^2 - n_1^2)$. We also assume that the change in the field caused by the perturbation n_r is small compared with the fields of the ideal waveguide. These assumptions are identical to the ones used in the PL model. It has been shown [4] that the polarization in such a thin perturbation layer can be

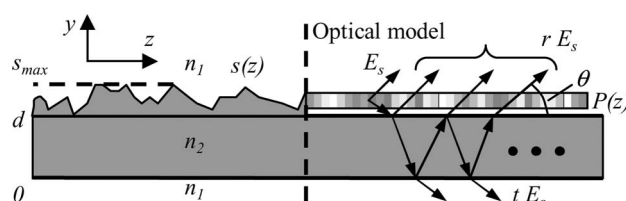


Fig. 1. Left, slab waveguide with a randomly rough surface profile $s(z)$ with $s_{\text{max}} \ll \lambda$. Right, the roughness layer is modeled as a thin radiating sheet with a polarization $P(z)$ proportional to the average susceptibility $\bar{\chi}$ as defined in the text and the unperturbed mode field at the surface. Owing to the presence of the waveguide below, the scattered field E_s above and below the slab is modified by thin-film interference.

expressed as $\mathbf{P} = \bar{\chi}[\hat{x}\hat{x} + (n_1^2/n_2^2)\hat{y}\hat{y} + \hat{z}\hat{z}]\mathbf{E}_0 e^{i\beta z}$, where $\mathbf{E}_0 = \Phi(y=d^+)$ is the amplitude of the unperturbed TE or TM mode field at the position of the roughness layer, just above the surface of the unperturbed slab waveguide. The prefactor n_1^2/n_2^2 in the y component of $\mathbf{P}$ is a result of the electric field discontinuity at the interface dictated by the boundary conditions. Essentially, our optical model treats the roughness layer as a thin radiating sheet of polarization above the waveguide, as indicated in Fig. 1. The expression for the polarization can be Fourier transformed using the shift theorem:

$$\mathbf{P}(k_z) = \frac{(n_2^2 - n_1^2)}{4\pi s_{\max}} \tilde{s}(k_z - \beta) \left(\hat{x}\hat{x} + \frac{n_1^2}{n_2^2} \hat{y}\hat{y} + \hat{z}\hat{z} \right) \mathbf{E}_0, \quad (2)$$

where $\tilde{s}(k)$ is the Fourier transform of the surface profile $s(z)$.

The field scattered from the rough surface can now be found as a particular solution to Eq. (1) with the source term given by Eq. (2). This solution can be expressed in terms of a surface Green's function [3]:

$$\begin{aligned} \mathbf{E}(y, k_z) = & s_{\max} [\tilde{\mathbf{g}}_+(k_z) e^{i w(k_z) y} \\ & + \tilde{\mathbf{r}}(k_z) \tilde{\mathbf{g}}_-(k_z) e^{i w(k_z) y}] \mathbf{P}(k_z) \quad \text{for } y > d + s_{\max}, \end{aligned} \quad (3a)$$

$$\mathbf{E}(y, k_z) = s_{\max} \tilde{\mathbf{t}}(k_z) \tilde{\mathbf{g}}_-(k_z) e^{-i w(k_z)(y+d)} \mathbf{P}(k_z) \quad \text{for } y < 0. \quad (3b)$$

In these equations, $\tilde{\mathbf{r}} = r_s \hat{s}\hat{s} + r_p \hat{p}_+ \hat{p}_+$ and $\tilde{\mathbf{t}} = t_s \hat{s}\hat{s} + t_p \hat{p}_- \hat{p}_-$ are reflection and transmission tensors, where $r_{s,p}$ and $t_{s,p}$ are the Fresnel reflection and transmission coefficients for s - and p -polarized light for the trilayer waveguide structure (n_1, n_2, n_1) . These multilayer coefficients are obtained from the conventional Fresnel interface coefficients by summing up the contributions of multiple reflections, as discussed in detail, e.g., in [3]. The unit polarization vectors $\hat{s}$ and $\hat{p}_\pm$ are related to the $(\hat{x}, \hat{y}, \hat{z})$ -coordinate system by $\hat{s} = \hat{x}$, $\hat{p}_+ = \hat{y} \cos \theta - \hat{z} \sin \theta$ and $\hat{p}_- = \hat{y} \cos \theta + \hat{z} \sin \theta$, where $\theta = \arccos(k_z/n_1 k_0)$ is the angle between the wave vector of the radiated field and the z axis, as shown in Fig. 1. The Green's function tensors $\tilde{\mathbf{g}}_+$ and $\tilde{\mathbf{g}}_-$ represent waves propagating upward and downward from the polarization sheet, respectively,

$$\tilde{\mathbf{g}}_\pm(k_z) = \frac{2\pi i k_0^2}{w(k_z)} [\hat{s}\hat{s} + \hat{p}_\pm(k_z) \hat{p}_\pm(k_z)], \quad (4)$$

where $w(k_z) = \sqrt{n_1^2 k_0^2 - k_z^2}$ is the y component of the wave vector. The first term in Eq. (3a) thus corresponds to the field propagating up directly from the polarization source, while the second term corresponds to the field that is radiated downward and subsequently reflected by the waveguide into the upper half-space. Similarly, Eq. (3b) describes the field that is transmitted through the waveguide core into the lower half-space. The complete expressions for the scattered field are now given by Eq. (3) using Eqs. (2) and (4). The power loss coefficients can be found

by evaluating the dyadic vector products occurring in these expressions, Fourier transforming the fields back into real space using the method of steepest descents and integrating the total scattered fields to obtain an expression for the scattering loss. The latter mathematical steps are analogous to those used by Payne and Lacey [2]. For the TE mode we find the following expression for the exponential power loss coefficient α :

$$\begin{aligned} \alpha_{\text{TE}} = & \frac{k_0^3}{4\pi n_{\text{eff}}} (n_2^2 - n_1^2)^2 (\Phi_0^x)^2 \int_0^\pi ((1 + r_s(\theta))^2 \\ & + t_s^2(\theta)) \tilde{R}(\beta + n_1 k_0 \cos \theta) d\theta, \end{aligned} \quad (5)$$

where $\tilde{R}(k)$ is the Fourier transform of the autocorrelation function of the surface $s(z)$ and $(\Phi_0^x)^2 = (E_0^x)^2 / \int_{-\infty}^\infty \Phi_x^2(y) dy$ is the normalized field intensity at the surface. In Eq. (5) the contributions of the scattered fields in the upper and lower half-space are accounted for, including multiplication by a factor of 2 to account for uncorrelated scattering by two rough surfaces—the situation typically encountered in experiments. The factor n_{eff} in the denominator stems from the power of the incident mode. In the PL model n_2 is used instead. Except for this replacement and the interference term $(1+r)^2 + t^2$ in the integral, Eq. (5) is identical to the one derived by Payne and Lacey [2]. The interference term originates from the Green's functions in Eq. (3) and results from the fact that the scattered field is proportional to $(1+r)\mathbf{P}$ and $t\mathbf{P}$ above and below the waveguide, respectively. For waveguides with small index contrast $r_s^2 \approx 0$ and $t_s^2 \approx 1$. This suggests that a factor of 2 appears to be missing in Payne and Lacey's [2] result, a fact that has also been remarked upon by Barwicz and Haus [6]. The expression corresponding to Eq. (5) for the TM loss coefficient is given by

$$\begin{aligned} \alpha_{\text{TM}} = & \left(\frac{n_{\text{eff}} k_0^3 (n_2^2 - n_1^2)^2}{4\pi b} \right) \int_0^\pi \left(\left| \frac{n_1^2}{n_2^2} E_0^y (1 + r_p) \cos \theta \right. \right. \\ & \left. \left. - E_0^z (1 - r_p) \sin \theta \right|^2 \right. \\ & \left. + \left| \frac{n_1^2}{n_2^2} E_0^y t_p \cos \theta + E_0^z t_p \sin \theta \right|^2 \right) \\ & \times \tilde{R}(\beta + n_1 k_0 \cos \theta) d\theta, \end{aligned} \quad (6)$$

with the normalization constant $b = \int_{-\infty}^\infty n^2(y) |\Phi_y(y)|^2 dy$. It is observed that the y and z components of the TM field are multiplied by cosine and sine functions of θ , respectively. This is expected since the radiation efficiency of a dipole is zero along its axis and therefore, e.g., the y component of the polarization $\mathbf{P}$ does not scatter light in the y direction.

To calculate waveguide loss using Eqs. (5) and (6) one only needs to know the mode effective index, the unperturbed mode profiles of the three field components, and the function $\tilde{R}$. The former are known

analytically for a three-layer slab. For the latter an exponential autocorrelation function is typically used, which is characterized by two parameters: namely, the root-mean-square roughness, σ , and the correlation length, L_c : $\tilde{R}(k) = 2\sigma^2 L_c / (1 + L_c^2 k^2)$. In Fig. 2 the slab waveguide loss (in decibels per centimeter) at $\lambda = 1.55 \mu\text{m}$, calculated by numerical integration of Eqs. (5) and (6), is shown for a silicon waveguide ($n_2 = 3.5$) with SU-8 polymer claddings ($n_1 = 1.58$) as a function of the core thickness. The calculated loss is compared with the PL result for TE polarization, which we have multiplied by 2 for the reason given above. Since loss scales with σ^2 , we use $\sigma = 1 \text{ nm}$ as a normalization condition. A correlation length of $L_c = 180 \text{ nm}$ is assumed. The PL model predicts a monotonic rise of the loss with decreasing waveguide width until the mode becomes delocalized for widths less than $\sim 60 \text{ nm}$. In contrast, according to our model the waveguide loss is modulated by interference fringes arising from the interference terms discussed above. Another important prediction of our model is that the TE and TM losses are of comparable magnitude except for waveguide widths less than $\sim 120 \text{ nm}$, where the TM mode becomes delocalized, while the TE mode is still confined.

Finally, we compare our theoretical model with experimental loss data. Samples were fabricated on SOI substrates with a silicon thickness of $1.5 \mu\text{m}$. A series of channel waveguides with a length of 1.5 mm and widths ranging between 75 and 525 nm in steps of 25 nm , as well as $4 \mu\text{m}$ wide reference waveguides, were defined by electron beam lithography and reactive ion etching down to the buried oxide layer. Owing to their high aspect ratio these structures can be regarded as vertical silicon slab waveguides in a good approximation. The surface roughness in our 2D model thus corresponds to the sidewall roughness of the channel waveguides. To increase the coupling efficiency all waveguides are adiabatically tapered to a width of $4 \mu\text{m}$ at the input and output facets. After etching, the sample was coated with $2\text{-}\mu\text{m}$ -thick SU-8 resist using a standard spin and bake procedure. Waveguide transmittance was measured at a wavelength $\lambda = 1.55 \mu\text{m}$ using an erbium-doped fiber amplified spontaneous emission source. The data points in Fig. 3 indicate the excess loss of the waveguide at the specified width, normalized to the aver-

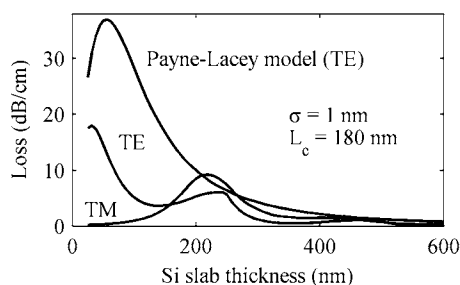


Fig. 2. Scattering loss of a silicon slab waveguide with SU-8 cladding according to a numerical integration of Eqs. (5) and (6) compared with the PL result (valid for TE) for the roughness parameters indicated.

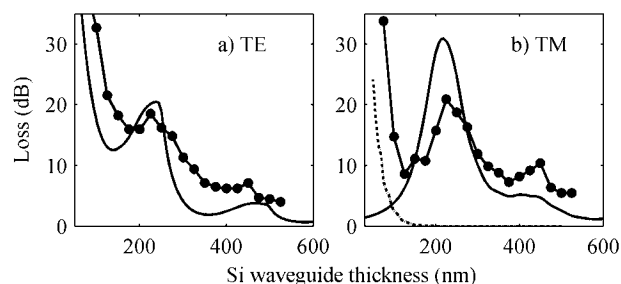


Fig. 3. Experimental loss of 1.5-mm -long Si waveguides as a function of the waveguide width compared with the theoretical result [Eqs. (5) and (6), solid curves]. The dashed curves indicate simulated taper loss as explained in the text.

age loss of the $4 \mu\text{m}$ wide reference waveguides. This normalization mitigates the influence of common sources of loss, including the fiber-to-chip coupling loss. Each data point is an average of nine waveguides from three different chips. The solid curves represent the results of Eqs. (5) and (6) using $\sigma = 4.7 \text{ nm}$ and $L_c = 180 \text{ nm}$, multiplied by the length of the waveguides. The values for σ and L_c were determined by atomic force microscopy (AFM) using samples that were cleaved in close proximity to a waveguide sidewall, inserted into the AFM with the sidewall facing up and scanned with a standard tip from above. In terms of the magnitude of the observed scattering loss, it should be noted that the loss of 3D photonic wires can be more than an order of magnitude lower than that of a slab waveguide with the same width [6]. The experimental data clearly confirm the predicted interference effect, with fringes at the expected width values. There is also good agreement between experiment and model for the polarization dependent loss. Multimode effects are not included in our analysis and may be partially responsible for deviations of experiment from theory. There is a sharp increase of TM loss for widths less than $\sim 100 \text{ nm}$, which is not predicted theoretically. Calculations based on the beam propagation method and a fully vectorial finite element mode solver show that this extra loss originates in the input tapers and is caused by cut-off of the fundamental TM mode in our 3D channel waveguides. Simulated taper loss, which is additional to the theoretical scattering loss, is shown in Fig. 3 as a dashed curve. In conclusion, we have presented and experimentally verified an extension of the PL model, which is valid for both TE and TM polarizations and predicts modulation of the loss with the waveguide width owing to thin-film interference.

References

1. D. Marcuse, *Bell Syst. Tech. J.* **48**, 3187 (1969).
2. J. P. R. Lacey and F. P. Payne, *IEE Proc.-J: Optoelectron.* **137**, 282 (1990).
3. J. E. Sipe, *J. Opt. Soc. Am. B* **4**, 481 (1987).
4. C. Martijn de Sterke and J. E. Sipe, *J. Opt. Soc. Am. A* **7**, 636 (1990).
5. P. Paddon and J. F. Young, *Opt. Lett.* **23**, 1529 (1998).
6. T. Barwicz and H. Haus, *J. Lightwave Technol.* **23**, 2719 (2005).