Nikon Corporation



Digital Camera ZR
USB Still Image Capture Device
Media Transfer Protocol (MTP)
Specifications

Rev. 1.00

Nikon Corporation
Development Management Department

Do Not Copy

Table of Contents

Table of Contents 2
1 Introduction 6
1.1 Application 6
2 Outline 7
2.1 PC Connection Mode 7
2.2 PC Connection Mode and Camera Operations 7
2.3 PC Camera Mode and Remote Mode 7
2.4 Application Mode 7
2.5 Photo Mode and Video Mode 8
2.6 Recording Destination 8
2.6.1 Access to the Card 10
2.6.2 Access to the SDRAM 10
2.7 Sending the Event 11
2.8 Sequence of Shooting Operation and Image Data Acquisition in PC Connection Mode 12
2.8.1 Recording in the Card 12
2.8.2 Recording in the SDRAM 12
2.8.3 Recording by the Shutter-Release Button of the Camera 13
2.8.4 Bulb Shooting 15
2.8.5 Interval Timer Shooting 16
2.8.6 Focus Shift Shooting 17
2.8.7 Pixel Shift Shooting 18
2.9 Sequence of Live View Image and Data Acquisition in the PC Connection Mode 19
2.9.1 Live View 19
2.9.2 Video Recording 20
2.9.3 Spot WB 22
2.9.4 Tracking Operation 24
2.10 Reacquisition of the Image Data 25
2.11 Operation with the Empty Battery 25
2.12 Storing and Recalling the Power Zoom Position 25
2.12.1 Storing the Power Zoom Position 25
2.12.2 Recalling the Power Zoom Position 25
3 Device Requests 27
3.1 Standard Device Requests 27
3.2 Class-Specific Requests 28
3.2.1 Cancel Request 28
3.2.2 DeviceReset Request 28
3.2.3 GetDeviceStatus Request 28
4 Descriptors 29
4.1 Standard Descriptors 29
4.1.1 Device Descriptor 29
4.1.2 Device_Qualifier Descriptor 32
4.1.3 Configuration Descriptor 33
4.1.4 Other_Speed_Configuration Descriptor 33
4.1.5 Interface Descriptor 34
4.1.6 Endpoint Descriptor 35

Do Not Copy

4.1.7 Super Speed Endpoint Companion Descriptor 38
4.1.8 String Descriptor 39
4.1.9 BOS Descriptor 41
4.1.10 USB 2.0 Extension Descriptor 41
4.1.11 Super Speed Device Capabilities Descriptor 41
4.2 Class-Specific Descriptor 41
5 Protocol 42
5.1 Generic Container Structure 43
5.2 Asynchronous Event Interrupt Data Format 43
5.3 Phases 44
5.3.1 Command Phase 44
5.3.2 Data Phase 45
5.3.3 Response Phase 46
5.4 Error Handling 47
5.4.1 Command Block Reception Failure 47
5.4.2 Command Block Invalidity 47
5.4.3 Command Execution Error 47
6 Code 48
6.1 ObjectFormat Code 48
6.1.1 Association Type 49
6.2 Operation Code 50
6.2.1 Standard 53
6.2.2 Vendor 77
6.2.3 Vendor (Object) 105
6.2.4 Vendor (Shooting) 121
6.2.5 Vendor (Lens) 138
6.2.6 Vendor (LiveView) 147
6.2.7 Vendor (Video) 157
6.2.8 Vendor (White Balance) 161
6.2.9 Vendor (Picture Control) 169
6.2.10 Vendor (IPTC) 183
6.2.11 Vendor (MTP) 187
6.3 Response Code 196
6.3.1 Standard 198
6.3.2 Vendor 203
6.4 Event Code 207
6.4.1 Standard 208
6.4.2 Vendor 211
6.5 DeviceProp Code 216
6.5.1 Standard 225
6.5.2 Vendor (Photo Shooting Menu) 244
6.5.3 Vendor (Video Recording Menu) 321
6.5.4 Vendor (Custom Settings Menu) 409
6.5.5 Vendor (Setup Menu) 454
6.5.6 Vendor (Camera Information) 469
6.5.7 Vendor (Recording Destination) 496
6.5.8 Vendor (Bracketing) 500
6.5.9 Vendor (Speedlight) 510
6.5.10 Vendor (Lens) 517

Do Not Copy

6.5.11 Vendor (LiveView) 525
6.5.12 Vendor (Video) 532
6.5.13 Vendor (Sound) 544
6.5.14 Vendor (Picture Control) 553
6.5.15 Vendor (Power Supply) 558
6.5.16 Vendor (USB) 559
6.5.17 Vendor (MTP) 561
6.6 ObjectProp Code 562
6.6.1 Object Information 563
6.6.2 Thumbnail 574
6.6.3 Image Information 579
6.6.4 Video Information 583
7 Data Type 592
7.1 DataTypeCode 592
7.2 Character String Format 593
7.3 Date Format 593
7.4 Array Format 594
8 ObjectHandle 595
8.1 ObjectHandle of the Object Recorded in the Card 595
8.2 ObjectHandle of the Object Recorded in the SDRAM 595
8.3 Addition of the ObjectHandle 595
9 DataSet 596
9.1 DeviceInfo DataSet 596
9.2 StorageInfo DataSet 604
9.3 ObjectInfo DataSet 605
9.3.1 Directory/Virtual Association DataSet 606
9.3.2 Image File DataSet 607
9.3.3 Script File Data Set 609
9.3.4 Video File DataSet 610
9.3.5 WAV File Data Set 611
9.4 DevicePropDesc DataSet 612
9.5 ObjectPropDesc DataSet 614
9.6 Property Description DataSet 615
9.6.1 Range Form 615
9.6.2 Enumeration Form 615
9.6.3 Time Form 615
9.6.4 Fixed-Length Array Form 616
9.6.5 Regular Expression Form 616
9.6.6 Byte String Form 616
9.6.7 LongString Form 616
9.7 LiveViewObject DataSet 617
9.7.1 DataSet with Version 617
9.7.2 DataSet without Version 620
9.8 IPTCPreset Data Set 623
9.8.1 NMS-IPTC 623
9.8.2 XMP-IPTC 624
9.9 PictureControl DataSet 625
9.9.1 BasePictureControl 626
9.9.2 RegistrationName 626

Do Not Copy

9.9.3 ApplyLevel 626
9.9.4 QuickSharpFlag 628
9.9.5 QuickSharp 628
9.9.6 Sharpening 629
9.9.7 MiddleRangeSharpening 629
9.9.8 Clarity 630
9.9.9 Contrast 630
9.9.10 Brightness 631
9.9.11 Saturation 631
9.9.12 Hue 632
9.9.13 FilterEffects 632
9.9.14 Toning 633
9.9.15 ToningDensity 633
9.9.16 CustomCurveFlag 634
9.9.17 CustomCurveData 634
9.10 PictureControlCapability DataSet 636
9.10.1 DefaultLevel 636
9.11 PictureControlHlg DataSet 638
9.11.1 QuickSharp 638
9.11.2 Contrast 639
9.11.3 Highlight 639
9.11.4 Shadow 639
9.11.5 Saturation 639
9.12 PictureControlHlgCapability DataSet 640
9.13 HLGQuality DataSet 641
9.14 PortraitImpressionBalance DataSet 642
10 Data Format 643
10.1 ASCII Codes 643
11 Appendices 644
11.1 Properties Affected by Mounting the CPU Lens 644
11.2 Properties Affected by Mounting the Speedlight 644
11.3 Properties Affected by the Shooting Mode 645
11.4 Properties Affected by Time Zone 646
11.5 White Balance Fine Tuning Coordinates 647
11.6 Speedlight Types 648
11.7 Command Release Operation 649
11.7.1 Continuous Shooting 649
11.7.2 AF Operation 649
11.7.3 Preset WB Acquisition 649
11.7.4 Event on the Release Operation 650
11.7.5 Recovery from the Sequence Error 650

Do Not Copy

1 Introduction

1.1 Application

These specifications describe the operations of the ZR (hereinafter referred to as the camera) as the USB Still Image Capture Device.

The specifications of the USB Still Image Capture Device are defined by “MTP Specification v1.0 - Media Transfer Protocol (MTP)” and the camera is based on it.

The camera conforms to the USB-related specifications below. For details on each specification, please refer to the related specifications.

Item	Description
USB specifications	Revision3.0
Class	Image Interface
Subclass	Still Image Capture Device
Protocol	Bulk-Only Transport Protocol

Do Not Copy

2 Outline

2.1 PC Connection Mode

When the camera is connected to the PC, the camera is switched to the PC connection mode.

2.2 PC Connection Mode and Camera Operations

The operations of the camera in the PC connection mode differ from those of the camera alone in the following points.

No.	Description
1	When the remote mode is set (the camera is controlled by the PC), the operations by the dials and buttons of the camera body are locked with some exceptions. (Refer to section 2.4)
2	The captured images are recorded either in the card or in the SDRAM. (Refer to section 2.6)
3	The image playback cannot be performed. The image deletion by operating the camera body also cannot be performed. (Except in the application mode)
4	The Auto meter-off delay is set to “No limit”.

2.3 PC Camera Mode and Remote Mode

The PC connection mode has the PC camera mode and the remote mode, and the camera is set to the PC camera mode when it is connected to the PC. Switching between the PC camera mode and the remote mode is performed by the command processing routine in the camera automatically for each command sent from the host or by the ChangeCameraMode command defined as a vendor command.

If a command for which changing the PC camera mode to the remote mode is necessary is issued while the remote mode is specified by the ChangeCameraMode command, the remote mode is retained even when the command processing is terminated.

During switching to the remote mode by the ChangeCameraMode command, the operation of each dial or button is ignored and the value set by the host is valid. When switching to the PC camera mode, the values set by the host in the remote mode are canceled and those set by each dial or button are used. For the setting value of each dial or button when switching to the remote mode, the value set by each dial or button becomes the initial value.

2.4 Application Mode

The camera is switched to the application mode by the ChangeApplicationMode property. At this time, the StoreRemoved event is passed.

In the application mode by the PC camera mode, the image playback, deletion and the video recording can be performed on the camera.

The host, which acquires the events by using the GetEventEx command, can acquire all the events generated in the application mode.

Do Not Copy

The host, which acquires the events by using the Interrupt IN transfer, can acquire only the DevicePropChanged event of the standard property.

2.5 Photo Mode and Video Mode

In the case of PC camera mode, you can switch between photo mode and video mode with the photo/video selector (switching lever) of the camera. Also, the status can be checked from the host using the LiveViewSelector property (section 6.5.6.1).
When in remote mode, you can switch using the LiveViewSelector property.

2.6 Recording Destination

The camera supports the following three methods for the recording destinations of the image data when the images are acquired by using the shutter-release button of the camera or the release request command from the host during the USB connection.

No.	Description
1	Records in the card (default).
2	Transfers to the host (records in the SDRAM temporarily).
3	Records in the card and transfers to the PC simultaneously.

The camera has the RecordingMedia property to save the recording destination setting. The RecordingMedia property can be changed only by issuing the command from the host.

RecordingMedia property	Operation
Card	The captured data are recorded in the card.
SDRAM	The captured data are recorded in the SDRAM temporarily and transferred to the host.
Card and SDRAM	Operation with the recording destination set to the card and that with the recording destination set to the SDRAM are both performed.

The operation that changes the recording destination depending on the RecordingMedia property is as follows.

- Shutter release button of the camera
- Interval Timer Shooting
- Focus Shift Shooting

Shooting with the following commands is not affected by the RecordingMedia property, and the recording destination differs depending on the requested command.

Command	Operation
InitiateCapture	The captured data are recorded in the card.
InitiateCaptureRecInSdram	The captured data are recorded in the SDRAM temporarily and transferred to the host.
AfAndCaptureRecInSdram	
InitiateCaptureRecInMedia	The recording destination is selected with specifying the parameter.

Do Not Copy

If the host is incapable of performing an image acquisition operation via SDRAM recording as described in section 2.8, the value of the RecordingMedia property must not be changed.

Do Not Copy

2.6.1 Access to the Card

During the USB connection, the insertion/ejection, existence/nonexistence, capacity, and the type of the card are detected by the camera. For the access to the card, the file system of the camera is always used and that of the host is not used. Therefore the host can access the card only after the USB connection is performed and the initialization of the information in the card is completed. During the USB connection, even if the card does not exist and then it is inserted, the host cannot access the data in the card until the initialization of the card information is completed.

The file system conforms to the DCF. The DPOF specification is also supported. Therefore the host cannot access the card with the directory structure or the file structure that does not conform to the DCF or the DPOF specification.

The host can read the data in the card, but cannot write the data to the card.

The camera can make the deletion of data in the card and perform card formatting by the command from the host.
When the captured images are being recorded on the card, the data deletion and the card formatting cannot be performed until all the images are recorded on the card. The release operation by the shutter-release button of the camera and the shooting request command cannot be executed during the data deletion and the card formatting.

2.6.2 Access to the SDRAM

When accessing the image data recorded in the SDRAM, accessing can be performed only to the one image data that is ready to be taken in and to the oldest image data in order of storage in the SDRAM. The image data in the SDRAM cannot be accessed randomly. (Refer to section 8.2). The image data sent to the host is deleted from the SDRAM.

Do Not Copy

2.7 Sending the Event

When the status in the camera is changed, the camera sends an event by the Interrupt transfer to notify the host of the contents of the change. However, the host may not be able to get the event sent by the camera depending on the OS type of the PC (host). Therefore the camera provides two methods of getting the event.

All the generated events can be acquired in order of generation by either of the two methods. The methods are shown below.

No.	Description
1	Sending the event by the Interrupt transfer (based on the PTP specifications)
2	Sending the event by the GetEventEx command (vendor-defined)

The camera stores the event generated in the camera in order in the queue buffer and retains the queue buffer status until the event is acquired by the host. The camera is provided with two queue buffers for the two methods of getting the event.
It is necessary for the host to use only one of the two methods of acquiring the event to perform the event processing. The camera does not manage the coordination of the two queue buffers.
Up to 2048 events can be stored in the queue buffer. When the queue buffer becomes full, the camera deletes the old event from the queue buffer and stores the new event in the queue buffer.

The event of the GetEventEx command is stored in the queue buffer only when the session is open, and the information in the queue buffer is cleared when the session is closed.

For sending the event in application mode, refer to “Application Mode” (section 2.4).

Do Not Copy

2.8 Sequence of Shooting Operation and Image Data Acquisition in PC Connection Mode

While the session is open in PC connection mode, the camera performs shooting operations in response to commands from both the host and the shutter-release button of the camera. The captured images are stored in the card or the SDRAM according to both the command from the host and the setting value of the recording destination property. (Refer to section 2.6)

The host can acquire the saved image data by the GetObject or the GetPartialObject command.

The command sequence of each operation is described below.

2.8.1 Recording in the Card

The command sequence leading from the recording of the captured image data in the card to the data acquisition by the host is shown below.

No.	Description
1	When acquiring the event by the command, the host issues the GetEventEx command regularly to acquire the event.
2	The host issues the InitiateCapture command or the InitiateCaptureRecInMedia command to capture the image data. The camera performs the single shot operation or the continuous shot operation according to the shooting mode setting.
3	When the camera saves captured image data to the card, it issues the ObjectAdded event. The object handle indicating the saved image data is added to the ObjectAdded event.
4	If the continuous shot operation is set, the camera repeats the procedure in (3) as many times as the number of shooting.
5	The camera issues the CaptureComplete event when all the image data captured by the InitiateCapture command or the InitiateCaptureRecInMedia command are saved completely.
6	The host acquires the image data information by issuing the GetObjectInfo command.
7	The host acquires the thumbnail data by issuing the GetThumb and the GetLargeThumb commands, if necessary.
8	The host issues the GetObject or GetPartialObject command to obtain image data.
9	When two or more image data are saved by the continuous shot operation, the host repeats the procedures in (6) to (8) to acquire all the image data.

2.8.2 Recording in the SDRAM

The command sequence leading from the recording of the captured image data in the SDRAM to the data acquisition by the host is shown below.

No.	Description
1	When acquiring the event by the command, the host issues the GetEventEx command regularly to acquire the event.
2	The host issues the InitiateCaptureRecInSdram, the AfAndCaptureRecInSdram, or the InitiateCaptureRecInMedia command to capture the image data. The camera performs the single shot operation or the continuous shot operation according to the shooting mode setting.
3	The host issues the DeviceReady command repeatedly while executing the operations in (4) and

Do Not Copy

	after.
4	The host waits for the camera to issue the ObjectAddedInSdram event.
5	The camera saves the captured image data in the SDRAM in order, and issues the ObjectAddedInSdram event in sequence when the sending of image data to the host becomes enabled.
6	The host acquires the image data information by issuing the GetObjectInfo command.
7	The host acquires the thumbnail data by issuing the GetThumb and the GetLargeThumb commands, if necessary.
8	The host issues the GetObject or GetPartialObject command to obtain image data.
9	The host repeats the procedures in (6) to (8) as many times as the number of received ObjectAddedInSdram events.
10	When all the image data captured by one InitiateCaptureRecInSdram, the AfAndCaptureRecInSdram, or the InitiateCaptureRecInMedia command are sent completely, the camera sends the CaptureCompleteRecInSdram event.

2.8.3 Recording by the Shutter-Release Button of the Camera

The command sequence leading from the capture of the image data by the shutter-release button of the camera to the acquisition of the recorded image data is shown below.

No.	Description
1	When acquiring the event by the command, the host issues the GetEventEx command regularly to acquire the event.
2	The shooting operation is performed by the shutter-release button of the camera. The camera performs the shooting operation (single shot operation, the continuous shot operation, or the interval timer shooting) according to the shooting mode setting.
3	The camera saves the images in the card, the SDRAM, or the card and the SDRAM according to the setting of the recording destination property.
4	To save the image to the card, perform steps (5) to (10); to save the image to the SDRAM, perform steps (11) to (16).
5	When the camera saves captured image data to the card, it issues the ObjectAdded event. The object handle indicating the saved image data is added to the ObjectAdded event.
6	If the continuous shot operation is set, the camera repeats the procedure in (5) as many times as the number of shooting.
7	The host acquires the image data information by issuing the GetObjectInfo command.
8	The host acquires the thumbnail data by issuing the GetThumb and the GetLargeThumb commands, if necessary.
9	The host issues the GetObject or GetPartialObject command to obtain image data.
10	When two or more image data are saved by the continuous shot operation, the host repeats the procedures in (11) to (14) to acquire all the image data.
11	The camera sequentially stores captured image data in SDRAM, and when the data is ready to be sent to the host, it sequentially issues the ObjectAddedInSDRAM event.
12	The host acquires the image data information by issuing the GetObjectInfo command.
13	The host acquires the thumbnail data by issuing the GetThumb and the GetLargeThumb commands, if necessary.

Do Not Copy

14	The host issues the GetObject or GetPartialObject command to obtain image data.
15	The host repeats the procedures in (12) to (15) as many times as the number of received ObjectAddedInSdram events.
16	The camera issues CaptureCompleteRecInSdram event when the transmission of image data is complete.

Do Not Copy

2.8.4 Bulb Shooting

The command sequence to acquire the image data recorded by Bulb shooting is shown below.

No.	Description
1	The host changes the camera to the remote mode by using the ChangeCameraMode command.
2	The host sets “M” by using the ExposureProgramMode property.
3	The host sets Bulb shooting (0xFFFFFFFF) by using the ExposureTime property and the ShutterSpeed property.
4	The host issues the InitiateCaptureRecInMedia command to start shooting.
5	The host issues the DeviceReady command and confirms that the response code is Bulb_Release_Busy.
6	The host issues the TerminateCapture command to terminate Bulb shooting.
7	The camera records the created images in the card, the SDRAM, or the card and the SDRAM after completion of the shooting and issues the ObjectAdded event or the ObjectAddedInSdram event to the host.
8	The host acquires the ObjectAdded event or the ObjectAddedInSdram event by the GetEventEx command to acquire the ObjectHandle of the created images.
9	The host acquires the image information by the GetObjectInfo command.
10	The host acquires the thumbnail image by the GetThumb and the GetLargeThumb commands, if necessary.
11	The host issues the GetObject or GetPartialObject command to obtain image data.
12	The camera issues the CaptureComplete event or the CaptureCompleteRecInSdram event.
13	The host acquires the CaptureComplete event or the CaptureCompleteRecInSdram event by the GetEventEx command.
14	The host changes the camera to the PC camera mode by using the ChangeCameraMode command.

Do Not Copy

2.8.5 Interval Timer Shooting

The command sequence to acquire the image data recorded by interval timer shooting is shown below.

No.	Description
1	The host acquires information about interval timer shooting by issuing the GetOpenCaptureInfo commands, if necessary.
2	The host requests the start of the interval timer shooting by issuing InitiateOpenCaptureV command.
3	The specialShootingMode property of the camera is turned on, and the shooting operation is performed according to the interval timer shooting setting.
4	The camera saves the images in the card, the SDRAM, or the card and the SDRAM according to the setting of the recording destination property.
5	To save the image to the card, perform steps (6) to (8); to save the image to the SDRAM, perform steps (9) to (12).
6	When the camera saves captured image data to the card, it issues the ObjectAdded event.
7	The host acquires the image data. The acquisition method is the same as the sequence in section 2.8.1.
8	Multiple image data is saved depending on the interval timer shooting setting. The host repeats (7) to acquire all the image data.
9	The camera sequentially stores captured image data in SDRAM, and when the data is ready to be sent to the host, it sequentially issues the ObjectAddedInSDRAM event.
10	The host acquires the SDRAM image data. The acquisition method is the same as the sequence in section 2.8.2.
11	The host repeats (10) the number of times the ObjectAddedInSdram event is received.
12	The camera issues a CaptureCompleteRecInSdram event when the transmission of SDRAM image data is completed. The camera issues a CaptureCompleteRecInSdram event when all the SDRAM images taken up to that point are transmitted even during the interval timer shooting.
13	When the interval timer shooting can be skipped, the camera issues a CaptureSkip event if shooting is skipped.
14	If the host needs to stop the interval timer shooting in the middle, it requests the stop with the TerminateOpenCaptureV command.
15	If the time-lapse video option for interval timer shooting is enabled, the camera writes the time-lapse video file to the card and issues an ObjectAdded event.
16	The host gets the video file. The acquisition method is the same as the video recording sequence (Section 2.9.2, Section 2.9.2.2).
17	The camera issues an OpenCaptureComplete event when the interval timer shooting started by the InitiateOpenCaptureV command is completed(*). Note: This includes when shooting stops midway.
18	The camera turns off the SpecialShootingMode property when interval timer shooting is complete.

Do Not Copy

2.8.6 Focus Shift Shooting

The command sequence to acquire the image data recorded by focus shift shooting is shown below.

No.	Description
1	The host acquires information about focus shift shooting by issuing the GetOpenCaptureInfo commands, if necessary.
2	The host requests the start of the focus shift shooting by issuing InitiateOpenCaptureV command.
3	The specialShootingMode property of the camera is turned on, and the shooting operation is performed according to the focus shift shooting setting.
4	The camera saves the images in the card, the SDRAM, or the card and the SDRAM according to the setting of the recording destination property.
5	To save the image to the card, perform steps (6) to (8); to save the image to the SDRAM, perform steps (9) to (12).
6	When the camera saves captured image data to the card, it issues the ObjectAdded event.
7	The host acquires the image data. The acquisition method is the same as the sequence in section 2.8.1.
8	Multiple image data is saved depending on the focus shift shooting setting. The host repeats (7) to acquire all the image data.
9	The camera sequentially stores captured image data in SDRAM, and when the data is ready to be sent to the host, it sequentially issues the ObjectAddedInSDRAM event.
10	The host acquires the SDRAM image data. The acquisition method is the same as the sequence in section 2.8.2.
11	The host repeats (10) the number of times the ObjectAddedInSdram event is received.
12	The camera issues a CaptureCompleteRecInSdram event when the transmission of SDRAM image data is completed. The camera issues a CaptureCompleteRecInSdram event when all the SDRAM images taken up to that point are transmitted even during the focus shift shooting.
14	If the host needs to stop the focus shift shooting in the middle, it requests the stop with the TerminateOpenCaptureV command.
15	The camera issues an OpenCaptureComplete event when the focus shift shooting started by the InitiateOpenCaptureV command is completed(*). Note: This includes when shooting stops midway.
16	The camera turns off the SpecialShootingMode property when focus shift shooting is complete.

Do Not Copy

2.8.7 Pixel Shift Shooting

The command sequence for performing pixel shift shooting and acquiring the recorded image data is as follows.

No.	Description
1	With the PixelShiftShootingMode property set to "On", the host issues a shooting command (InitiateCapture, InitiateCaptureRecInMedia) to request the start of pixel shift shooting.
2	The PixelShiftShootingStatus property is turned ON, and the camera performs shooting according to the pixel shift shooting settings.
3	To stop pixel shift capture midway, the host requests stopping by using the TerminateCapture command.
4	The camera stores the image in a specified storage location. When saving an image on a card, perform operation (5), and when saving an image on an SDRAM, perform operation (6).
5-1	When the camera saves captured image data to the card, it issues the ObjectAdded event.
5-2	The host issues the GetObject or the GetPartialObject command to obtain image data.
5-3	Because multiple image data are saved due to the pixel shift shooting settings, the host repeats (5-2) to obtain all of the image data.
5-4	The camera will issue the CaptureComplete event when pixel shift shooting started by the shooting command is completed. Note: This includes when shooting stops midway.
6-1	The camera saves the captured image data in the SDRAM in order, and issues the ObjectAddedInSdram event in sequence when the sending of image data to the host becomes enabled.
6-2	The host issues the GetObject or GetPartialObject command to obtain image data.
6-3	The host repeats the procedures in (6-2) as many times as the number of received ObjectAddedInSdram events.
6-4	The camera issues a CaptureCompleteRecInSdram event when the transmission of SDRAM image data is completed. Note: This is issued when all SDRAM images captured up to that point have been sent, even during pixel shift shooting.
7	When pixel shift shooting is complete, the PixelShiftShootingStatus property turns OFF. If the PixelShiftShootingMode property is set to "ON (one time)", the PixelShiftShootingMode property will be set to "OFF".

Do Not Copy

2.9 Sequence of Live View Image and Data Acquisition in the PC Connection Mode

When the session is open in the PC connection mode, the camera starts the live view by the request from the host.
During the remote live view after the host executed the StartLiveView command, the live view images can be acquired by the GetLiveViewImageEx command.

The command sequence of each operation is described below.

2.9.1 Live View

The command sequence leading from the start of live view by the request from the host to the acquisition of the live view image is shown below.

No.	Description
1	The host issues the StartLiveView command to request the camera to start the remote live view.
2	After confirming the normal termination of the StartLiveView command, the host issues the DeviceReady command repeatedly until the DeviceReady command response other than Device_Busy appears.
3	The camera returns the normal termination response to the DeviceReady command when the live view image acquisition becomes enabled. If the live view image acquisition is disabled for some reason, the camera returns an error response to the DeviceReady command to terminate the live view.
4	After confirming the normal termination of the DeviceReady command response, the host issues the GetLiveViewImageEx command to acquire the live view image.
5	The host issues the GetLiveViewImageEx command repeatedly while the live view continues. At this time, the AF driving (AfDrive command), the MF driving (MfDrive command), the AF area change (ChangeAfArea command), etc. can be performed optionally.
6	When the remote live view is finished, the host issues the EndLiveView command.

Do Not Copy

2.9.2 Video Recording

The sequence leading from the recording of the video in the card by the MovieRec command to the acquisition of the video file is shown below.

2.9.2.1 Video Recording Transfer

No.	Description
1	The host issues MovieRecProhibitionCondition in video mode to confirm that video recording can be performed.
2	The host issues the StartMovieRecord command to start the video recording.
3	The camera stops the video recording or the host issues the EndMovieRecord command to stop the video recording.
4	The camera writes the captured video file in the card and issues the ObjectAdded event.
5	The camera issues the MovieRecordComplete event after stopping video recording.
6	The host acquires the MovieRecordComplete event by the GetEventEx command.
7	The host acquires the ObjectAdded event by the GetEventEx command to acquire the ObjectHandle of the video file.
8	The host acquires the file size of the video file by the GetObjectInfo command.
9	The host divides and acquires the video file by the GetPartialObject command. When the video file is acquired by the GetObject command, the control from the host cannot be performed until the file transfer is finished because the file size of the video file is large. Therefore, use the GetPartialObject command.

2.9.2.2 Over 4GB Video Transfer

The command sequence to transfer the video data over 4GB is shown below.

No.	Description
1 – 7	Same as normal video recording transfer.
8	The host acquires the file size of the video file by the GetObjectInfo command. When the file size of the GetObjectInfo command is 0xFFFFFFFF, use the following method to get the file size. PTP: Use GetObjectSize command to get the file size. MTP: Use ObjectSize of the GetObjectPropValue command to get the file size.
9	The host divides and acquires the video file by the GetPartialObjectHighSpeed or GetPartialObjectEx command. When the video file is acquired by the GetObject command, the control from the host cannot be performed until the file transfer is finished because the file size of the video file is large. Therefore, use the GetPartialObjectHighSpeed or GetPartialObjectEx command.

Do Not Copy

2.9.2.3 RAW Video Transfer

When video recording is performed with N-RAW12-bit(NEV)/ProResRAW HQ12bit(MOV), a video of the parent NEV (MOV) and the child MP4 is created.
The sequence to get this parent-child video is as follows.

No.	Description
1 – 3	Same as normal video recording transfer.
4	The camera writes the captured video file of NEV(MOV) in the card and issues the ObjectAdded event.
5	The camera writes the captured video file of MP4 in the card and issues the ObjectAdded event.
6	The camera issues the MovieRecordComplete event after stopping video recording.
7	The host acquires the MovieRecordComplete event by the GetEventEx command.
8	The host acquires the ObjectAdded event of NEV(MOV) by the GetEventEx command to acquire the ObjectHandle of the video file.
9	The host acquires the file size of the video file of NEV(MOV) by the GetObjectInfo command. When the file size of the GetObjectInfo command is 0xFFFFFFFF, use the following method to get the file size. PTP: Use GetObjectSize command to get the file size. MTP: Use ObjectSize of the GetObjectPropValue command to get the file size.
10	The host divides and acquires the video file of NEV(MOV) by the GetPartialObjectHighSpeed or GetPartialObjectEx command.
11	Perform No.8 to No.10 for MP4 files.

Do Not Copy


2.9.3 Spot WB

The command sequence to acquire the spot WB by the MeasureSpotWB command and set it to preset manual is shown below.

No.	Description
1	The host issues the StartLiveView command to request the camera to start the remote live view.
2	The host issues the ChangeApplicationMode command to switch the camera into application mode.
3	The host sets WhiteBalance to Preset manual.
4	The host sets WbPresetDataNo in which the spot WB is saved. At this time, a WbPresetDataNo in which Preset manual is protected must not be set.
5	The host issues the StartSpotWb command to request the camera to start the spot WB acquisition standby state. Confirm the spot WB condition of LiveViewObject that can be acquired by the GetLiveViewImageEx command to check whether the spot WB acquisition standby state is started.
6	The host sets the area to be acquired by ChangeSpotWbArea.
7	The host issues the MeasureSpotWb command to acquire the spot WB. Confirm the spot WB condition of LiveViewObject to check the acquisition result.
8	If the acquisition succeeds, the camera cancels the spot WB acquisition standby state and sets the spot WB condition of LiveViewObject to “On standby” (acquisition success) for three seconds.
9	If the acquisition fails, the camera remains in the spot WB acquisition standby state and sets the spot WB condition of LiveViewObject to “On standby” (acquisition failure) for five seconds.
10	The host issues the EndSpotWbResultDisp command to cancel the spot WB acquisition result display quickly.
11	The host issues the EndSpotWb command to terminate the spot WB acquisition standby state.

Do Not Copy

The transition of the spot WB condition that can be acquired by GetLiveViewImageEx command is shown below.

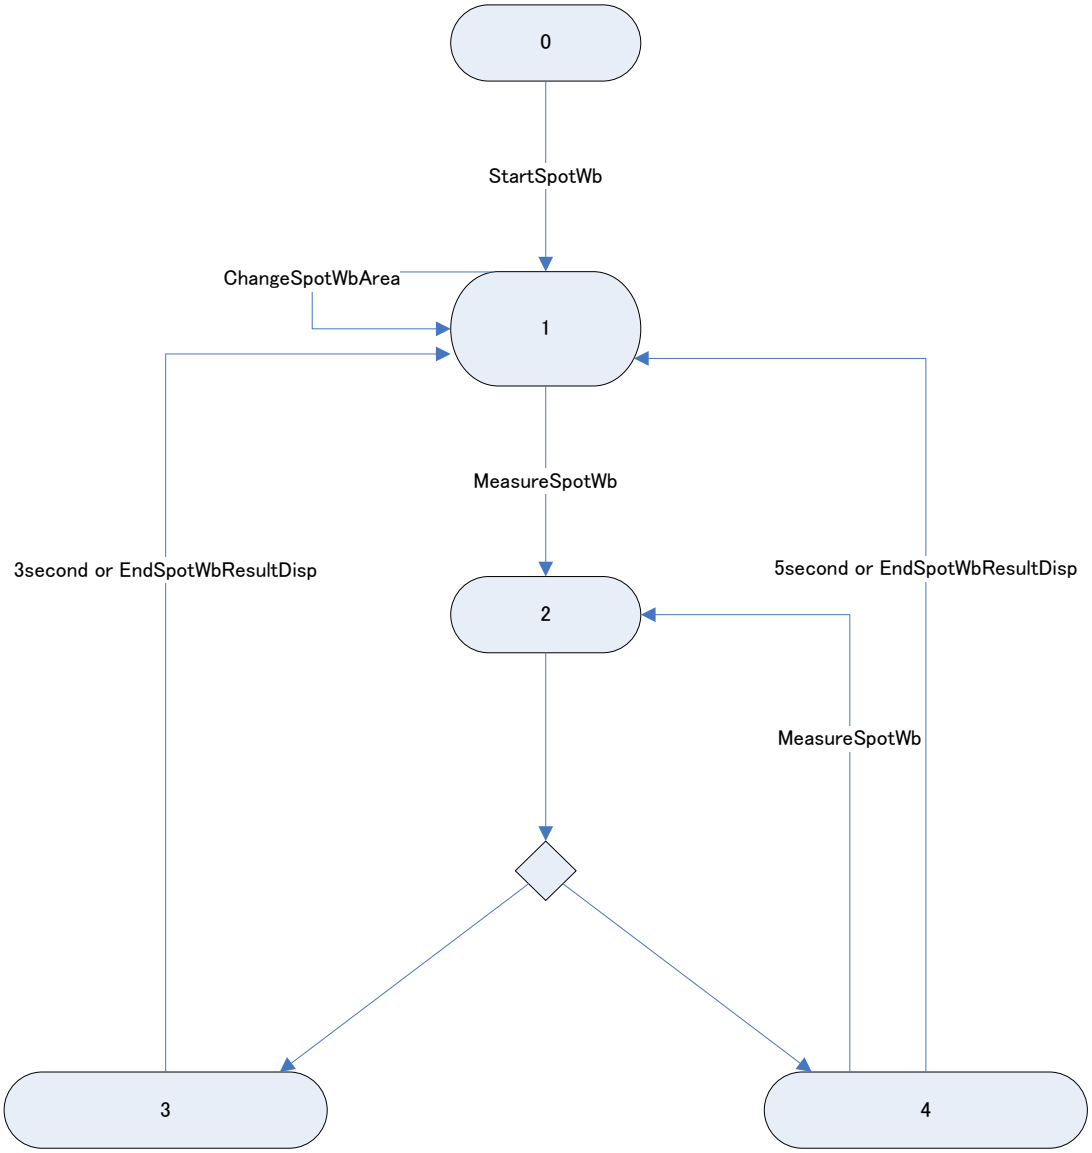

The figures in the diagram above show “Spot WB condition” of LiveViewObject acquired by the GetLiveViewImageEx command.

Do Not Copy

2.9.4 Tracking Operation

The command sequence from tracking start to tracking end is shown below.

No.	Description
1	The host issues the StartLiveView command to request the camera to start the remote live view.
2	The host sets the AF area mode to Auto-area AF.
3	The host can execute the following commands to change the tracking state. - StartTracking command The host issues the StartTracking command with the area where you want to start tracking as the parameters. When the subject recognition target is not detected at the specified coordinates, the camera sets the tracking state of LiveViewObject to "On tracking" and starts tracking operation at the specified coordinates. When the subject recognition target is detected at the specified coordinates, the camera updates the selected face index. At this time, the tracking state changes to the standby state. When the StartTracking command is executed with "On tracking" in the tracking state, the camera starts tracking operation at the specified coordinates with or without detected subject recognition target.
4	The host issues the EndTracking command to end tracking action.

* Whether the tracking state has changed or not is confirmed by checking the tracking state of LiveViewObject acquired by the GetLiveViewImageEx command.

Do Not Copy

2.10 Reacquisition of the Image Data

When one of the following occurs during the reading sequence of the image data recorded in the SDRAM in sections 2.8.2 and 2.8.3, the host can redo the image data acquisition by issuing the GetObjectInfo command.

No.	Description
1	The USB connection is cut. (Such as the case that the USB cable is extracted.)
2	The camera returns an error to the GetObject or the GetPartialObject command.
3	It is desirable for the host to redo the acquisition of the SDRAM image.

When the image data that is not sent yet exists in the SDRAM, the camera must retain it even if the USB connection is cut.
If the shooting has been performed with “RAW+JPEG” and either of the image data has been sent normally, only the other image data should be sent again.

2.11 Operation with the Empty Battery

When the battery is exhausted, the camera cannot detect the card and notify the host of no card status even if it is inserted.

2.12 Storing and Recalling the Power Zoom Position

2.12.1 Storing the Power Zoom Position

The command sequence for storing the power zoom position from the host is shown below.

No.	Description
1	The camera performs power zoom according to the zoom position to be stored by the host.
2	To store the power zoom drive position, the host acquires the PowerZoomPosition (section 6.5.10.9) and LensID properties (section 6.5.10.4). As the power zoom drive position information varies from lens to lens, it must be stored in combination with the lens ID. When doing so, the lens's focal length (section 6.5.1.6) and any other required data is stored along with it.
3	To store several zoom positions, the host repeats steps (1) and (2).

2.12.2 Recalling the Power Zoom Position

The command sequence for recalling the power zoom position from the host is shown below.

No.	Description
1	Once the Lens ID is acquired, the host verifies whether the corresponding power zoom position data is available.
2	If available, the host proceeds to step (3). Otherwise, the process of storing the power zoom position (section 2.12.1) is repeated.
3	The host specifies the power zoom drive position data with the PowerZoomDrive command (section 6.2.5.4).

Do Not Copy

	The camera performs power zoom according to the specified zoom position.

Do Not Copy

3 Device Requests

3.1 Standard Device Requests

Request		wIndex	
		Data stage	Status stage
Get Status	Device	Status of the current device power and REMOTE_WAKEUP function	Receive NULL data
	Endpoint: Endpoint number that is supported	The current ENDPOINT_STALL status	Receive NULL data
	Endpoint: Endpoint number that is not supported	STALL response	-
Clear Feature	Device: DEVICE_REMOTE_WAKEUP	-	Return NULL data
	Endpoint: END_POINT_HALT Endpoint number that is supported	-	Return NULL data
	Endpoint: END_POINT_HALT Endpoint number that is not supported	-	STALL response
Set Feature	Device: DEVICE_REMOTE_WAKEUP	-	Return NULL data
	Endpoint: END_POINT_HALT Endpoint number that is supported	-	Return NULL data
	Endpoint: END_POINT_HALT Endpoint number that is not supported	-	STALL response
Set Address		-	Return NULL data
Get Descriptor		The specified descriptor	Receive NULL data
Set Descriptor		STALL response	-
Get Configuration		The current configuration value	Return NULL data
Set Configuration	Configuration number that is supported	-	Return NULL data
	Configuration number that is not supported	-	STALL response
Set Interface	Interface number and alternate number that are supported	-	Return NULL data
	Interface number and alternate number that are not supported	-	STALL response
Get Interface	Interface number that is supported	The current alternate value	Return NULL data
	Interface number that is not supported	STALL response	-
Synch Frame		STALL response	-

Do Not Copy

3.2 Class-Specific Requests

The camera supports the class-specific requests below.

3.2.1 Cancel Request

This request is used for the host to cancel the data transfer.

bmRequestType	bRequest	wValue	wIndex	wLength
00100001b	01100100b	0000h	0000h	06h

The camera receives the Cancel request data according to the following format.

Offset	Field	Size	Value	Description
0	Cancellation Code	2	Code	0x4001
2	TransactionID	4	Number	TransactionID

The camera cancels the command processing that corresponds to the TransactionID.

3.2.2 DeviceReset Request

This request is sent from the host to the camera in order to make the device become in the idle status when the Bulk Pipe is stalled.

bmRequestType	bRequest	wValue	wIndex	wLength
00100001b	01100110	0000h	0000h	0

3.2.3 GetDeviceStatus Request

This request is used for the host to acquire the device information for the recovery of the endpoint that is in the halt status.

bmRequestType	bRequest	wValue	wIndex	wLength
10100001b	01100110	0000h	0000h	0

The camera sends the GetDeviceStatus request data according to the following format.

Offset	Field	Size	Value	Description
0	WLength	2	Number	4
2	Code	2	Code	0x2001: Status OK 0x2019: DeviceBusy

Do Not Copy

4 Descriptors

4.1 Standard Descriptors

The camera has the following standard descriptors.

4.1.1 Device Descriptor

4.1.1.1 HIGH-SPEED

USB 2.x				
Offset	Field	Size	Value	Description
0	bLength	1	12h	Size of the descriptor
1	bDescriptorType	1	01h	Type of the descriptor (Device descriptor)
2	bcdUSB	2	0210h	USB specification number (0210h=Revision 2.10)
4	bDeviceClass	1	00h	Class (specified by the interface descriptor)
5	bDeviceSubClass	1	00h	Subclass (specified by the interface descriptor)
6	bDeviceProtocol	1	00h	Protocol (specified by the interface descriptor)
7	bMaxPacketSize0	1	40h	Maximum packet size of endpoint 0
8	idVendor	2	04B0h	Vendor ID (“NIKON”)
10	idProduct	2	0458h	Product ID
12	bcdDevice	2	0100h	Device release number (0100h=1.00)
14	iManufacture	1	01h	Index of the string descriptor describing the manufacturer name
15	iProduct	1	02h	Index of the string descriptor describing the product name
16	iSerialNumber	1	03h	Index of the string descriptor describing the serial number
17	bNumConfigurations	1	01h	The number of configurations

USB 3.x				
Offset	Field	Size	Value	Description
0	bLength	1	12h	Size of the descriptor
1	bDescriptorType	1	01h	Type of the descriptor (Device descriptor)
2	bcdUSB	2	0320h	USB specification number (0320h=Revision 3.20)
4	bDeviceClass	1	00h	Class (specified by the interface descriptor)
5	bDeviceSubClass	1	00h	Subclass (specified by the interface descriptor)
6	bDeviceProtocol	1	00h	Protocol (specified by the interface descriptor)
7	bMaxPacketSize0	1	09h	Maximum packet size of endpoint 0
8	idVendor	2	04B0h	Vendor ID (“NIKON”)
10	idProduct	2	0458h	Product ID
12	bcdDevice	2	0100h	Device release number (0100h=1.00)
14	iManufacture	1	01h	Index of the string descriptor describing the manufacturer name

Do Not Copy

15	iProduct	1	02h	Index of the string descriptor describing the product name
16	iSerialNumber	1	03h	Index of the string descriptor describing the serial number
17	bNumConfigurations	1	01h	The number of configurations

Do Not Copy

4.1.1.2 FULL-SPEED

USB 2.x				
Offset	Field	Size	Value	Description
0	bLength	1	12h	Size of the descriptor
1	bDescriptorType	1	01h	Type of the descriptor (Device descriptor)
2	bcdUSB	2	0210h	USB specification number (0210h=Revision 2.10)
4	bDeviceClass	1	00h	Class (specified by the interface descriptor)
5	bDeviceSubClass	1	00h	Subclass (specified by the interface descriptor)
6	bDeviceProtocol	1	00h	Protocol (specified by the interface descriptor)
7	bMaxPacketSize0	1	40h	Maximum packet size of endpoint 0
8	idVendor	2	04B0h	Vendor ID (“NIKON”)
10	idProduct	2	0458h	Product ID
12	bcdDevice	2	0100h	Device release number (0100h=1.00)
14	iManufacture	1	01h	Index of the string descriptor describing the manufacturer name
15	iProduct	1	02h	Index of the string descriptor describing the product name
16	iSerialNumber	1	03h	Index of the string descriptor describing the serial number
17	bNumConfigurations	1	01h	The number of configurations

USB 3.x				
Offset	Field	Size	Value	Description
0	bLength	1	12h	Size of the descriptor
1	bDescriptorType	1	01h	Type of the descriptor (Device descriptor)
2	bcdUSB	2	0320h	USB specification number (0320h=Revision 3.20)
4	bDeviceClass	1	00h	Class (specified by the interface descriptor)
5	bDeviceSubClass	1	00h	Subclass (specified by the interface descriptor)
6	bDeviceProtocol	1	00h	Protocol (specified by the interface descriptor)
7	bMaxPacketSize0	1	09h	Maximum packet size of endpoint 0
8	idVendor	2	04B0h	Vendor ID (“NIKON”)
10	idProduct	2	0458h	Product ID
12	bcdDevice	2	0100h	Device release number (0100h=1.00)
14	iManufacture	1	01h	Index of the string descriptor describing the manufacturer name
15	iProduct	1	02h	Index of the string descriptor describing the product name
16	iSerialNumber	1	03h	Index of the string descriptor describing the serial number
17	bNumConfigurations	1	01h	The number of configurations

Do Not Copy

4.1.2 Device_Qualifier Descriptor

USB 2.x				
Offset	Field	Size	Value	Description
0	bLength	1	0Ah	Size of the descriptor
1	bDescriptorType	1	06h	Type of the descriptor (Device_Qualifier descriptor)
2	bcdUSB	2	0210h	USB specification number (0210h=Revision 2.10)
4	bDeviceClass	1	00h	Class (specified by the interface descriptor)
5	bDeviceSubClass	1	00h	Subclass (specified by the interface descriptor)
6	bDeviceProtocol	1	00h	Protocol (specified by the interface descriptor)
7	bMaxPacketSize0	1	40h	Maximum packet size of endpoint 0
8	bNumComfigurations	1	01h	The number of configurations other than USB2.0
9	bReserved	1	00h	Reserved

USB 3.x				
Offset	Field	Size	Value	Description
0	bLength	1	0Ah	Size of the descriptor
1	bDescriptorType	1	06h	Type of the descriptor (Device_Qualifier descriptor)
2	bcdUSB	2	0210h	USB specification number (0210h=Revision 2.10)
4	bDeviceClass	1	00h	Class (specified by the interface descriptor)
5	bDeviceSubClass	1	00h	Subclass (specified by the interface descriptor)
6	bDeviceProtocol	1	00h	Protocol (specified by the interface descriptor)
7	bMaxPacketSize0	1	40h	Maximum packet size of endpoint 0
8	bNumComfigurations	1	01h	The number of configurations other than USB2.0
9	bReserved	1	00h	Reserved

Do Not Copy

4.1.3 Configuration Descriptor

Offset	Field	Size	Value	Description	
0	bLength	1	09h	Size of the descriptor	
1	bDescriptorType	1	02h	Type of the descriptor (Configuration descriptor)	
2	wTotalLength	2	0027h	The total length of the data returned for this configuration All the descriptors are included (configuration, interface, endpoint, and class-specific). Total length is 0039h when the SuperSpeed is used.	
4	bNumInterfaces	1	01h	The number of interfaces	
5	bConfiguration Value	1	01h	The value used as an argument to Set Configuration Request for selecting this configuration	
6	iConfiguration	1	00h	Index of the string descriptor	
7	bmAttributes	1	C0h	Configuration characteristics	
				Bit7	Reserved (1)
				Bit6	Self-powered
				Bit5	Remote Wakeup
				Bit4…0	Reserved (0)
8	MaxPower	1	FAh	Maximum power consumption supplied from the bus to the USB device (2 mA) 003fh (8 mA) for SuperSpeed.	

4.1.4 Other_Speed_Configuration Descriptor

Offset	Field	Size	Value	Description	
0	bLength	1	09h	Size of the descriptor	
1	bDescriptorType	1	07h	Type of the descriptor (OtherSpeedConfiguration descriptor)	
2	wTotalLength	2	0027h	The total length of the data returned for this configuration All the descriptors are included (configuration, interface, endpoint, and class-specific).	
4	bNumInterfaces	1	01h	The number of interfaces	
5	bConfiguration Value	1	01h	The value used as an argument to Set Configuration Request for selecting this configuration	
6	iConfiguration	1	00h	Index of the string descriptor	
7	bmAttributes	1	C0h	Configuration characteristics	
				Bit7	Reserved (1)
				Bit6	Self-powered
				Bit5	Remote Wakeup
				Bit4…0	Reserved (0)
8	MaxPower	1	FAh	Maximum power consumption supplied from the bus to the USB device (2 mA)	

Do Not Copy

4.1.5 Interface Descriptor

Offset	Field	Size	Value	Description
0	bLength	1	09h	Size of the descriptor
1	bDescriptorType	1	04h	Type of the descriptor (Interface descriptor)
2	bInterfaceNumber	1	00h	Interface number (0 is the standard.)
3	bAlternatingSetting	1	00h	The value used for selecting the interface
4	bNumEndpoints	1	03h	The number of endpoints
5	bInterfaceClass	1	06h	Class code (06=ImageInterface)
6	bInterfaceSubClass	1	01h	Subclass code (01=Still Image Capture Device)
7	bInterfaceProtocol	1	01h	Protocol (01h=Bulk-Only Transport)
8	iInterface	1	00h	Index of the string descriptor describing this interface

Do Not Copy

4.1.6 Endpoint Descriptor

4.1.6.1 Bulk-Out Endpoint

For SUPER-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	02h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	02h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0400h	Maximum packet size of this endpoint (0400h → 1024 bytes)	
6	bInterval	1	00h	Polling interval (invalid for the Bulk and the Control endpoints)	

For HIGH-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	02h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	02h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0200h	Maximum packet size of this endpoint (0200h=512Byte)	
6	bInterval	1	00h	Polling interval (invalid for the Bulk and the Control endpoints)	

For FULL-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	02h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	02h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0040h	Maximum packet size of this endpoint (0040h=64Byte)	
6	bInterval	1	00h	Polling interval (invalid for the Bulk and the Control endpoints)	

Do Not Copy

4.1.6.2 Bulk-In Endpoint

For SUPER-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	81h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	02h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0400h	Maximum packet size of this endpoint (0400h → 1024 bytes)	
6	bInterval	1	00h	Polling interval (invalid for the Bulk and the Control endpoints)	

For HIGH-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	81h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	02h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0200h	Maximum packet size of this endpoint (0200h=512Byte)	
6	bInterval	1	00h	Polling interval (invalid for the Bulk and the Control endpoints)	

For FULL-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	81h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	02h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0040h	Maximum packet size of this endpoint (0040h=64Byte)	
6	bInterval	1	00h	Polling interval (invalid for the Bulk and the Control endpoints)	

Do Not Copy

4.1.6.3 Interrupt Endpoint

For SUPER-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	83h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	03h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0018h	Maximum packet size of this endpoint (0018h=24Byte)	
6	bInterval	1	0Ah	Polling interval (0Ah = 10ms)	

For HIGH-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	83h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	03h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0008h	Maximum packet size of this endpoint (0008h=8Byte)	
6	bInterval	1	09h	Polling interval	

For FULL-SPEED

Offset	Field	Size	Value	Description	
0	bLength	1	07h	Size of the descriptor	
1	bDescriptorType	1	05h	Type of the descriptor (Endpoint descriptor)	
2	bEndpointAddress	1	83h	Address of the endpoint	
				Bit7	Transfer direction (0=OUT, 1=IN)
				Bit6…4	Reserved (0)
				Bit3…0	Endpoint number
3	bmAttributes	1	03h	Attributes of the endpoint	
				Bit1…0	Transfer type
				(00 = Control、01 = Isochronous、10 = Bulk、11 = Interrupt)	
4	wMaxPacketSize	2	0008h	Maximum packet size of this endpoint (0008h=8Byte)	
6	bInterval	1	09h	Polling interval	

Do Not Copy

4.1.7 Super Speed Endpoint Companion Descriptor

4.1.7.1 Bulk-Out Endpoint

For SUPER-SPEED

Offset	Field	Size	Value	Description
0	bLength	1	06h	Size of the descriptor
1	bDescriptorType	1	30h	Type of the descriptor (SuperSpeed Endpoint Companion Descriptor)
2	bMaxBurst	1	0Fh	Maximum number of packets that can be transmitted and received by burst transfer. (Number of burst transfers -1) should be set. The maximum value is 15
3	bmAttributes	1	00h	Maximum number of streams for Bulk-Endpoint. 0 for no stream definition. In the case of an isochronous end point, the maximum number of packets in the service interval.
4	wBytesPerInterval	2	0000h	Maximum number of bytes at which a fixed interval interrupt or isochronous endpoint will transfer per service interval.

4.1.7.2 Bulk-In Endpoint

For SUPER-SPEED

Offset	Field	Size	Value	Description
0	bLength	1	06h	Size of the descriptor
1	bDescriptorType	1	30h	Type of the descriptor (SuperSpeed Endpoint Companion Descriptor)
2	bMaxBurst	1	0Fh	Maximum number of packets that can be transmitted and received by burst transfer. (Number of burst transfers -1) should be set. The maximum value is 15
3	bmAttributes	1	00h	Maximum number of streams for Bulk-Endpoint. 0 for no stream definition. In the case of an isochronous end point, the maximum number of packets in the service interval.
4	wBytesPerInterval	2	0000h	Maximum number of bytes at which a fixed interval interrupt or isochronous endpoint will transfer per service interval.

4.1.7.3 Interrupt Endpoint

For SUPER-SPEED

Offset	Field	Size	Value	Description
0	bLength	1	06h	Size of the descriptor
1	bDescriptorType	1	30h	Type of the descriptor (SuperSpeed Endpoint Companion Descriptor)

Do Not Copy

2	bMaxBurst	1	00h	Maximum number of packets that can be transmitted and received by burst transfer. (Number of burst transfers -1) should be set. The maximum value is 15
3	bmAttributes	1	00h	Maximum number of streams for Bulk-Endpoint. 0 for no stream definition. In the case of an isochronous end point, the maximum number of packets in the service interval.
4	wBytesPerInterval	2	0018h	Maximum number of bytes at which a fixed interval interrupt or isochronous endpoint will transfer per service interval.

4.1.8 String Descriptor

4.1.8.1 Index1 (iManufacture)

Offset	Field	Size	Value	Description
0	bLength	1	0Ch	Size of the descriptor
1	bDescriptorType	1	03h	Type of the descriptor (String descriptor)
2	bString	10	4E00h 4900h 4B00h 4F00h 4E00h	UNICODE character string “NIKON”

4.1.8.2 Index2 (iProduct)

Offset	Field	Size	Value	Description
0	bLength	1	1Ch	Size of the descriptor
1	bDescriptorType	1	03h	Type of the descriptor (String descriptor)
2	bString	24	4E00h 4900h 4B00h 4F00h 4E00h 2000h 4400h 5300h 4300h 2000h 5A00h 5200h	UNICODE character string “NIKON DSC ZR”

Do Not Copy

4.1.8.3 Index3 (iSerialNumber)

Offset	Field	Size	Value	Description
0	bLength	1	42h	Size of the descriptor
1	bDescriptorType	1	03h	Type of the descriptor (String descriptor)
2	bString	64	XX00h XX00h XX00h XX00h XX00h XX00h XX00h XX00h XX00h XX00h XX00h XX00h	UNICODE character string “XXXXXXXXXXXX” Currently 0000h is set after the twelfth character.

4.1.9 BOS Descriptor

Offset	Field	Size	Value	Description
0	bLength	1	05h	Size of the descriptor
1	bDescriptorType	1	0Fh	Type of the descriptor (BOS descriptor)
2	wTotalLength	2	0016h	Length of this descriptor and all of its sub descriptors
4	bString	1	02h	The number of separate device capability descriptors in the BOS

4.1.10 USB 2.0 Extension Descriptor

Offset	Field	Size	Value	Description
0	bLength	1	07h	Size of the descriptor
1	bDescriptorType	1	10h	Type of the descriptor (DEVICE CAPABILITY descriptor)
2	bDevCapabilityType	1	02h	Capability type (USB 2.0 Extension)
3	bmAttributes	4	00000006h	Bit0 : Reserved Bit1 : LPM (Link Power Management protocol) Bit2 : BESL & Altermate HIRD definitions supported Bit3 to Bit31 : Reserved

4.1.11 Super Speed Device Capabilities Descriptor

Offset	Field	Size	Value	Description
0	bLength	1	0Ah	Size of the descriptor
1	bDescriptorType	1	10h	Type of the descriptor (DEVICE CAPABILITY descriptor)
2	bDevCapabilityType	1	03h	Capability type (SUPERSPEED_USB)
3	bmAttributes	1	00h	Bit0 : Reserved Bit1 : LTM Capable Bit2 to Bit31 : Reserved
4	wSpeedsSupported	2	000Eh	Bit0 : Reserved Bit1 : full-speed supported Bit2 : high-speed supported Bit3 : 5Gbs supported Bit4 to Bit15 : Reserved
6	bFunctionalitySupport	1	01h	
7	bU1DevExitLat	1	01h	U1 Device Exit Latency. 01h : Less than 1μs
8	wU1DevExitLat	2	0065h	U2 Device Exit Latency. 0065h : Less than 101μs

4.2 Class-Specific Descriptor

The camera has no class-specific descriptor.

Do Not Copy

5 Protocol

The camera supports the Bulk-Only Transport protocol. In the Bulk-Only protocol, all transmission/reception of the command, data, and response are performed by the bulk transfer. When an asynchronous event is generated in the camera, the information is sent by the Interrupt transfer.

The protocol processing is composed of three phases (command phase, data phase, and response phase). All the commands, data, and responses are stored in the Generic Container Structure and transferred between the host and the camera. The processing starts by sending the command (Bulk-Out transfer) from the host to the camera first (command phase). Then the data is transmitted or received by the bulk transfer if the command needs the data transfer (data phase). The processing is completed when the device transmits the command response to the host (Bulk-In transfer) last (response phase). The command and the response phases are always present.
When sending the event to the host, the contents of the event to be sent are stored according to the asynchronous event interrupt data format and sent as the asynchronous event (Interrupt transfer).

Do Not Copy

5.1 Generic Container Structure

Each field data of the Generic Container Structure is transferred in order of the LSB first (little endian). The Container Type and the contents of the Payload differ according to the phase difference.

Offset	Size	Field	Description
0	4	Container Length	The number of bytes in the unsigned integer of this container is coded. The still image capture device decides the container size by using this field.
4	2	Container Type	This field shows the container type. 0: Not defined 1: Command block 2: Data block 3: Response block 4: Event block
6	2	Code	This field conforms to MTP Specification v1.0. (OperationCode, ResponseCode, or EventCode) For the data block, the OperationCode of the command block is used.
8	4	TransactionID	This is the number of the 32-bit unsigned integer created by the host related to all the phases. It starts with 0x00000001 and is incremented along with the command block issue. When the OperationCode is OpenSession, 0x00000000 is set and 0x00000001 is given by the next command block. When the number reaches the maximum value (0xFFFFFFFE), the next TransactionID becomes 0x00000001.
12	??	Payload	Differs depending on the phase.

5.2 Asynchronous Event Interrupt Data Format

When an event is generated in the camera, the information is transferred to the host according to the following format. Each field data is transferred in order of the LSB first (little endian).

Offset	Size	Field	Description
0	4	Container Length	The number of bytes in the unsigned integer of the length of this container is coded. The value is 0x00000010.
4	2	Container Type	Container Type = 0x0004 (Event)
6	2	Code	EventCode
8	4	TransactionID	TransactionID = 0xFFFFFFFF
12	??	Payload	Differs depending on the event.

Do Not Copy

5.3 Phases

The communication between the camera and the host is composed of the three phases; command phase, data phase, and response phase. The details of each phase are shown below.

5.3.1 Command Phase

In the command phase, the host sends the Generic Container Structure of the command block to the camera. The processing is started by sending the command block from the host in the command phase. The camera performs the processing according to the OperationCode sent in the command block. For the OperationCode and its processing, refer to section 6.2. The Generic Container Structure field data set in the command phase is shown below.

Offset	Size	Field	Description
0	4	Container Length	Indicates the length of this container. Each code has its own container length.
4	2	Container Type	1: Command block
6	2	Code	Operation Code
8	4	TransactionID	This is the number given by the 32-bit unsigned integer created by the host related to all the phases. It starts with 0x00000001 and is incremented by 1 along with the command block issue. When the OperationCode is OpenSession, 0x00000000 is set and 0x00000001 is given by the next command block. When the number reaches the maximum value of the field (0xFFFFFFFE), the next TransactionID becomes 0x00000001.
12	4	Parameter 1	This field includes the operation parameter. The format and the meaning of the parameter differ depending on the OperationCode.
16	4	Parameter 2	
20	4	Parameter 3	

Do Not Copy

5.3.2 Data Phase

The data phase is an optional phase used to transfer the data that is larger than what can fit in the data sets of the command or the response block. According to the OperationCode specified by the command block, the data is transferred from the host to the camera, from the camera to the host, or not transferred at all. For the OperationCode and the corresponding data contents, refer to section 6.2. The Generic Container Structure field data set in the data phase is shown below.

Offset	Size	Field	Description
0	4	Container Length	Indicates the length of this container. The container length differs depending on the size of the Payload.
4	2	Container Type	2: Data block
6	2	Code	The corresponding OperationCode sent in the command phase is set.
8	4	TransactionID	This is the number given by the 32-bit unsigned integer created by the host related to all the phases. It starts with 0x00000001 and is incremented by 1 along with the command block issue. When the OperationCode is OpenSession, 0x00000000 is set and 0x00000001 is given by the next command block. When the number reaches the maximum value of the field (0xFFFFFFFE), the next TransactionID becomes 0x00000001.
12	??	Payload	The contents of this field differ depending on the OperationCode.

Do Not Copy

5.3.3 Response Phase

In the response phase, the Generic Container Structure of the response block is sent from the camera to the host in order to indicate whether the command sent in the command phase succeeds or fails.
The contents of the response can be identified by the ResponseCode stored in the Code field. For the ResponseCode, refer to section 6.3.
The Generic Container Structure field data set in the response phase is shown below.

Offset	Size	Field	Description
0	4	Container Length	Indicates the length of this container. Each code has its own container length.
4	2	Container Type	3: Response block
6	2	Code	The ResponseCode is set in order to indicate whether the processing corresponding to the OperationCode sent in the command phase succeeds or fails.
8	4	TransactionID	This is the number given by the 32-bit unsigned integer created by the host related to all the phases. It starts with 0x00000001 and is incremented by 1 along with the command block issue. When the OperationCode is OpenSession, 0x00000000 is set and 0x00000001 is given by the next command block. When the number reaches the maximum value of the field (0xFFFFFFFE), the next TransactionID becomes 0x00000001.
12	4	Response Parameter	This field includes the response parameter. The format and the meaning of the parameter differ depending on the OperationCode and the ResponseCode.

Do Not Copy

5.4 Error Handling

If the following state is detected, the camera returns to the command phase status.

No.	Description
1	Bus reset
2	Reset recovery

5.4.1 Command Block Reception Failure

When the command block reception fails and the reset recovery and the bus reset are not detected, the camera stalls the Bulk-In and the Bulk-Out endpoints and returns to the command phase status.

5.4.2 Command Block Invalidity

When the following error is detected after the command block reception succeeds and the reset recovery and the bus reset are not detected, the camera stalls the Bulk-In and the Bulk-Out endpoints.

No.	Description
1	Container Type of Generic Container Structure is other than the command block.

5.4.3 Command Execution Error

When the command execution error is detected after a valid command block is received, the phase is changed to the response phase and the response code corresponding to the error is set in the Code field of the Generic Container Structure and sent. Stalling is not performed.

Do Not Copy

6 Code

The codes supported by the camera are described.

6.1 ObjectFormat Code

The ObjectFormatCode indicates the format of the objects in the card inserted in the camera (image file and script file) and the related objects (corresponding to the directories and the virtual association representing the relation between the images that conform to the DCF standards and the DCF objects in the camera). The following table represents the ObjectFormatCodes supported by the camera.

ObjectFormatCode	Format	Description
0x3000	Undefined	NDF (dust reference image) NEF (when MTP is not supported) (In the definition of MTP Specification v1.0, it is defined as “Format not defined”.)
0x3001	Association	Association (Indicates the directories or the virtual association representing the relation between the images that conform to the DCF standards and the DCF objects.)
0x3002	Script	Script (only the virtual script file is the target)
0x3008	WAV	AudioClip
0x3800	Unknown Image Object	NEF (when MTP is supported)
0x3801	EXIF/JPEG	JEIDA Standard
0x3808	JFIF	JPEG File Interchange Format (represents the thumbnail format.)
0x300D	MOV	Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF (RGB)	Tag Image File Format
0xB200	HEIF	High Efficiency Image File Format
0xB201	NEV	N-RAW
0xB202	R3D NE	RED RAW
0xB982	MP4 Container	ISO 14496-1

The ObjectFormatCode may be used as one of the parameters in the command phase.
It is also used in the ObjectInfo data set.

Do Not Copy


6.1.1 Association Type

There are various Types in the Association defined by ObjectFormatCode. Association is for representing the folders and the file system. All the objects that belong to the Association correspond to the branches of the tree structure under the Association. The associations to which the objects belong are specified in the ParentObject field of the ObjectInfo data set for each object. Type is specified in the AssociationType field of the ObjectInfo data set for the associations object. The Association Type used in the camera is shown below.

Association Code	Association Type	Description
0x0001	GenericFolder	Indicates the general directory. For the camera, it indicates the DCF image directory and DCF directory.

An example of how the Association is used in the DCF file system for the camera is shown below.
Note, however, that the directory name, the file name, and the ObjectHandle value may differ from the ObjectHandle that is actually used in the camera to simplify the explanation.

ObjectHandle	Description	ObjectFormatCode	ParentObject
0x00000001	¥DCIM folder	0x3001	0x00000000
0x00000002	¥DCIM¥100NIKON	0x3001	0x00000001
0x00000003	¥DCIM¥100NIKON¥DSC_0001.JPG	0x3801	0x00000002
0x00000004	¥DCIM¥100NIKON¥DSC_0002.NEF	0x3000	0x00000002
0x00000005	¥DCIM¥100NIKON¥DSC_0003.JPG	0x3801	0x00000002
0x00000006	¥DCIM¥100NIKON¥DSC_0003.NEF	0x3000	0x00000002

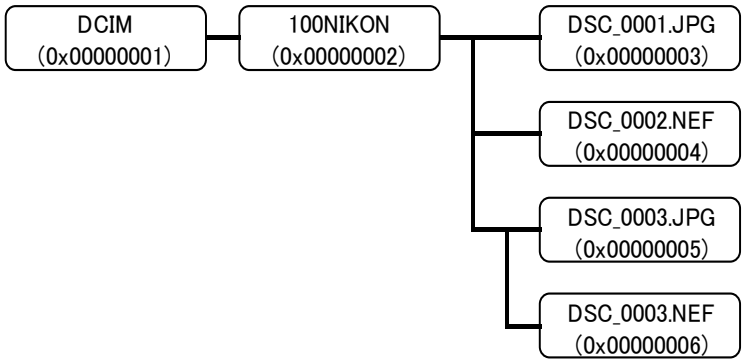

Do Not Copy

6.2 Operation Code

The OperationCode is the command that is used by the host to request the operation of the camera in the command phase. The OperationCode is sent as a part of the command block data set.

OperationDataNone, OperationReceiveData and OperationSendData can execute 4-byte OperationCodes.

OperationCodes that cannot be executed during video recording are indicated in the table below. Access_Denied response is sent when execution is disabled.

The OperationCodes supported by the camera are shown below.

Operation Code	Description	Reference	During video recording
0x1001	GetDeviceInfo	6.2.1.1	✓
0x1002	OpenSession	6.2.1.2	-
0x1003	CloseSession	6.2.1.3	✓
0x1004	GetStorageIDs	6.2.1.4	✓
0x1005	GetStorageInfo	6.2.1.5	✓
0x1006	GetNumObjects	6.2.1.6	✓
0x1007	GetObjectHandles	6.2.1.7	✓
0x1008	GetObjectInfo	6.2.1.8	-
0x1009	GetObject	6.2.1.9	-
0x100A	GetThumb	6.2.1.10	-
0x100B	DeleteObject	6.2.1.11	-
0x100E	InitiateCapture	6.2.1.12	-
0x100F	FormatStore	6.2.1.13	-
0x1012	SetObjectProtection	6.2.1.14	-
0x1014	GetDevicePropDesc	6.2.1.15	✓
0x1015	GetDevicePropValue	6.2.1.16	✓
0x1016	SetDevicePropValue	6.2.1.17	✓
0x101B	GetPartialObject	6.2.1.18	-
0x90C0	InitiateCaptureRecInSdram	6.2.4.2	-
0x90C1	AfDrive	6.2.5.1	✓
0x90C2	ChangeCameraMode	6.2.2.15	-
0x90C3	DeleteImagesInSdram	6.2.3.10	-
0x90C4	GetLargeThumb	6.2.3.6	-
0x90C7	GetEvent	6.2.2.12	✓
0x90C8	DeviceReady	6.2.2.11	✓
0x90C9	SetPreWbData	6.2.8.1	-
0x90CB	AfAndCaptureRecInSdram	6.2.4.3	-
0x90CC	GetPicCtrlData	6.2.9.1	✓
0x90CD	SetPicCtrlData	6.2.9.3	-
0x90CE	DeleteCustomPicCtrl	6.2.9.4	-
0x90CF	GetPicCtrlCapability	6.2.9.5	✓

Do Not Copy

0x9201	StartLiveView	6.2.6.1	✓
0x9202	EndLiveView	6.2.6.2	✓
0x9203	GetLiveViewImage	6.2.6.3	✓
0x9204	MfDrive	6.2.5.3	✓
0x9205	ChangeAfArea	6.2.6.6	✓
0x9206	AfDriveCancel	6.2.5.2	✓
0x9207	InitiateCaptureRecInMedia	6.2.4.1	-
0x9209	GetVendorStorageIDs	6.2.3.1	✓
0x920A	StartMovieRecord	6.2.7.1	-
0x920B	EndMovieRecord	6.2.7.2	✓
0x920C	TerminateCapture	6.2.4.4	-
0x920F	GetFhdPicture	6.2.3.7	-
0x9400	GetPartialObjectHighSpeed	6.2.3.5	-
0x9401	GetIPTCInfo	6.2.10.1	✓
0x9402	StartSpotWb	6.2.8.2	-
0x9403	EndSpotWb	6.2.8.3	-
0x9404	ChangeSpotWbArea	6.2.8.4	-
0x9405	MeasureSpotWb	6.2.8.5	-
0x9406	EndSpotWbResultDisp	6.2.8.6	-
0x940C	CancelImagesInSdram	6.2.3.8	-
0x9412	GetIPTCPresetInfo	6.2.10.2	✓
0x9413	SetIPTCPresetInfo	6.2.10.3	-
0x941C	GetEventEx	6.2.2.13	✓
0x9420	SaveCameraSetting	6.2.2.20	-
0x9421	GetObjectSize	6.2.3.2	-
0x9422	ChangeMonitorOff	6.2.2.17	✓
0x9423	GetLiveViewCompressedSize	6.2.6.5	✓
0x9424	StartTracking	6.2.6.7	✓
0x9425	EndTracking	6.2.6.8	✓
0x9426	ChangeAELock	6.2.4.5	✓
0x9428	GetLiveViewImageEx	6.2.6.4	✓
0x942E	GetHLGQualityData	6.2.7.3	✓
0x942F	SetHLGQualityData	6.2.7.4	-
0x9431	GetPartialObjectEx	6.2.3.4	-
0x9433	InitiatePixelMapping	6.2.4.6	-
0x9434	GetObjectsMetaData	6.2.3.3	-
0x9435	ChangeApplicationMode	6.2.2.16	-
0x9436	ResetMenu	6.2.2.21	-
0x9439	GetVendorCodes	6.2.2.1	✓
0x943A	GetDevicePropDescEx	6.2.2.5	✓
0x943B	GetDevicePropValueEx	6.2.2.6	✓
0x943C	SetDevicePropValueEx	6.2.2.7	✓
0x943D	RegisterDevicePropGroup	6.2.2.8	✓
0x943E	GetDevicePropDescList	6.2.2.9	✓
0x943F	GetDevicePropValueList	6.2.2.10	✓
0x9440	OperationDataNone	6.2.2.2	✓

Do Not Copy

0x9441	OperationReceiveData	6.2.2.3	✓
0x9442	OperationSendData	6.2.2.4	✓
0x9443	GetPicCtrlDataList	6.2.9.2	✓
0x9444	GetPicCtrlCapabilityList	6.2.9.6	✓
0x9445	InitiateOpenCaptureV	6.2.4.7	-
0x9446	TerminateOpenCaptureV	6.2.4.8	-
0x9447	GetOpenCaptureInfo	6.2.4.9	✓
0x944C	GetCommandFeature	6.2.2.24	✓
0x944D	GetPicCtrlHlgDataList	6.2.9.7	✓
0x944E	SetPicCtrlHlgData	6.2.9.8	-
0x944F	GetPicCtrlHlgCapabilityList	6.2.9.9	✓
0x9453	SetPortraitImpressionBalanceData	6.2.2.23	-
0x9454	GetPortraitImpressionBalanceDataList	6.2.2.22	✓
0x9461	ClearEvent	6.2.2.14	✓
0x9463	SetFlickerReductionShutterSpeed	6.2.4.10	✓
0x9464	PowerZoomDrive	6.2.5.4	✓
0x946D	GetCameraSettingData	6.2.2.18	-
0x946E	SendCameraSettingData	6.2.2.19	-
0x9470	GetManualSettingLensData2	6.2.5.5	✓
0x9477	GetVideoCodec	6.2.3.8	-
0x9801	GetObjectPropsSupported	6.2.11.1	✓
0x9802	GetObjectPropDesc	6.2.11.2	✓
0x9803	GetObjectPropValue	6.2.11.3	-
0x9804	SetObjectPropValue	6.2.11.4	-
0x9805	GetObjectPropList	6.2.11.5	-

Do Not Copy

6.2.1 Standard

6.2.1.1 GetDeviceInfo

○ **Command Specifications**

Operation Code	0x1001
Operation Parameter	None
Data	DeviceInfo data set
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the information of the camera (DeviceInfo data set).

The DeviceInfo data set includes information such as the camera version information and the codes supported by the camera.

○ **Command Details**

This operation is the only operation that may be issued inside or outside of a session.

For the format of the DeviceInfo data set sent by the camera, refer to section 9.1.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.1.2 OpenSession

○ **Command Specifications**

Operation Code	0x1002
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode starts the logical connection (session) between the camera and the host.

The SessionID is specified optionally by the host and retained during the session.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	SessionID

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Parameter	The value of the parameter1 is 0x00000000.
Session_Already_Open	The session between the camera and the host has been already started.

Do Not Copy

6.2.1.3 CloseSession

○ **Command Specifications**

Operation Code	0x1003
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode closes the logical connection (session) between the camera and the host.
When this operation is performed, the operation being run is terminated. Besides, the camera state changed after OpenSession returns to the default.

State	Contents of change
During shooting operation	Only the shooting operation currently being performed is executed. For the continuous shooting, it is not continued.
During AF operation	The AF operation by the command stops.
During power-zoom driving	The power-zoom driving by the command stops.
During AE lock	AE lock is released (when the AE lock is not assigned in the camera button).
During remote live view	The camera live view is executed.
In the remote mode	The camera enters the PC camera mode.
The recording destination is “SDRAM” or “Card and SDRAM”. Card and SDRAM	The recording destination is set to “Card”.
In the application mode	Set to OFF.
During forcibly monitor-off	Forcibly monitor-off is released.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Parameter_Not_Supported	Specified parameter is not supported.

Do Not Copy

6.2.1.4 GetStorageIDs

○ **Command Specifications**

Operation Code	0x1004
Operation Parameter	None
Data	StorageIDArray
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns a list of the currently valid StorageIDs. For the application mode, the StorageID with the card not inserted can be acquired by this command. The valid StorageID can be known by using the GetVendorStorageIDs.

○ **Command Details**

The camera returns the StorageID of each slot.
The StorageID of each slot takes the following values.

StorageID	Details
0x00010001	When the card is inserted in the slot1
0x00010000	When the card is not inserted in the slot1
	When the card in the slot1 is being formatted
	When the battery is exhausted
0x00020001	When the card is inserted in the slot2
0x00020000	When the card is not inserted in the slot2
	When the card in the slot2 is being formatted
	When the battery is exhausted

The format of the StorageIDArray that is sent by the camera is shown below.

Each field data is stored in the little-endian format.

Field	Size (bytes)	Data
NumElement	4	0x00000002 (Two elements for the array)
ArrayEntry1	4	StorageID (slot1)
ArrayEntry2	4	StorageID (slot2)

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.1.5 GetStorageInfo

○ **Command Specifications**

Operation Code	0x1005
Operation Parameter	Refer to Operation Parameter in this section.
Data	StorageInfo
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the information of the card inserted in the camera.

○ **Command Details**

The camera returns the StorageInfo data set of the card specified by the StorageID.
The StorageIDs supported by the camera are shown in section 6.2.1.4.
The StorageInfo data set sent by the camera is described in section 9.2.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	StorageID

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_StorageID	The StorageID sent by the camera differs from the StorageID specified by the host.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.

Do Not Copy

6.2.1.6 GetNumObjects

○ **Command Specifications**

Operation Code	0x1006
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	NumObjects

○ **Command Outline**

The operation by this OperationCode obtains the number of objects that are present in the card. The number of objects recorded in the SDRAM is not included.

○ **Command Details**

If the new object is being recorded in the card when this command is received, the processing starts after the acquisition of all the data is completed.

The camera returns the number of objects in the card specified by the StorageID. In addition, Parameter2 and Parameter3, which are optional, can be combined.

Operation Parameter	Value	Details
Parameter1	0xFFFFFFFF	All the cards should be the targets.
	StorageID	The specified card should be the target. Refer to section 6.2.1.4.
Parameter2 (Optional)	0x00000000	All the object formats should be the targets.
	No value	
	0xFFFFFFFF	All the image formats in the card corresponding to the specified StorageID should be the targets.
	ObjectFormatCode	The specified object format should be the target. Refer to section 6.1.
Parameter3 (Optional)	0x00000000	All the directories should be the targets.
	No value	
	0xFFFFFFFF	The objects directly under the root should be the targets.
	ObjectHandle	The objects directly under the specified directory should be the targets.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	StorageID
Parameter2	[ObjectFormatCode]
Parameter3	[ObjectHandle of the directory]

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_StorageID	The StorageID sent by the camera differs from the StorageID specified by the host.
Invalid_Object_Handle	For an invalid object handle
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Specification_By_Format_Unsupported	The specified ObjectFormatCode is not supported.
Invalid_Parent_Object	An ObjectHandle other than that indicating the directory in the card was specified for ObjectHandle (Parameter3) of the specified directory.
	The specified directory does not exist.

Do Not Copy

6.2.1.7 GetObjectHandles

○ **Command Specifications**

Operation Code	0x1007
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectHandleArray
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the handle of the object in the card. The ObjectHandle of the object recorded in the SDRAM is not included.

○ **Command Details**

If the new object is being recorded in the card when this command is received, the processing starts after the acquisition of all the data is completed.

The camera returns the ObjectHandle in the card specified by the StorageID. In addition, Parameter2 and Parameter3, which are optional, can be combined.

Operation Parameter	Value	Details
Parameter1	0xFFFFFFFF	All the cards should be the targets.
	StorageID	The specified card should be the target. Refer to section 6.2.1.4.
Parameter2 (Optional)	0x00000000	All the object formats should be the targets.
	No value	
	0xFFFFFFFF	All the image formats in the card corresponding to the specified StorageID should be the targets.
	ObjectFormatCode	The specified object format should be the target. Refer to section 6.1.
Parameter3 (Optional)	0x00000000	All the directories should be the targets.
	No value	
	0xFFFFFFFF	The objects directly under the root should be the targets.
	ObjectHandle	The objects directly under the specified directory should be the targets.

The format of the ObjectHandleArray that is sent by the camera is shown below.

Each field data is stored in the little-endian format.

Field	Size (bytes)	Data
NumElement	4	The element of the array is N (N indicates the number of objects).
ArrayEntry[0]	4	ObjectHandle [0]
ArrayEntry[1]	4	ObjectHandle [1]
ArrayEntry[2]	4	ObjectHandle [2]
...		

Do Not Copy

ArrayEntry [N - 1]	4	ObjectHandle [N - 1]

Do Not Copy

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	StorageID
Parameter2	[ObjectFormatCode]
Parameter3	[ObjectHandle of the directory]

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_StorageID	The StorageID sent by the camera differs from the StorageID specified by the host.
Invalid_Object_Handle	For an invalid object handle
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Specification_By_Format_Unsupported	The specified ObjectFormatCode is not supported.
Invalid_Parent_Object	An ObjectHandle other than that indicating the directory in the card was specified for ObjectHandle (Parameter3) of the specified directory.
	The specified directory does not exist.

Do Not Copy

6.2.1.8 GetObjectInfo

○ **Command Specifications**

Operation Code	0x1008
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectInfo
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the information of the specified object (ObjectInfo). When a new object is added to the card and the host is informed of the addition of the object by the event, the host acquires the information of the object by this command.

○ **Command Details**

The camera sends the information of the object corresponding to the ObjectHandle specified in Parameter1.

If the specified ObjectHandle is the data in the card, the camera returns the information of the object corresponding to the ObjectHandle.

The ObjectHandle passed by ObjectAddedInSdram should be specified in order to acquire information of the object in the SDRAM. For the ObjectHandle passed by ObjectAddedInSdram, the image data information is sent to the host.
The ObjectInfo data set sent in the data phase differs depending on the directory and the file types.
The ObjectInfo data set of each object is shown in section 9.3.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

Do Not Copy

6.2.1.9 GetObject

○ **Command Specifications**

Operation Code	0x1009
Operation Parameter	Refer to Operation Parameter in this section.
Data	DataObject
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the specified object (DataObject).

○ **Command Details**

The camera sends all the file data (DataObject) corresponding to the specified ObjectHandle to the host.
When the specified ObjectHandle is the data in the card, the camera returns the object corresponding to the ObjectHandle.
The ObjectHandle passed by ObjectAddedInSdram should be specified in order to acquire information of the object in the SDRAM. For the ObjectHandle passed by ObjectAddedInSdram, the image data is sent to the host.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	The ObjectHandle of the directory (Association) is specified.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

Do Not Copy

6.2.1.10 GetThumb

○ **Command Specifications**

Operation Code	0x100A
Operation Parameter	Refer to Operation Parameter in this section.
Data	ThumbnailObject
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the thumbnail data of the specified image/video object (ThumbnailObject).

○ **Command Details**

The camera sends the thumbnail data (ThumbnailObject) corresponding to the specified ObjectHandle to the host.

If the specified ObjectHandle is the data in the card, the camera returns the thumbnail data corresponding to the ObjectHandle.

The ObjectHandle passed by ObjectAddedInSdram should be specified in order to acquire information of the object in the SDRAM. For the ObjectHandle passed by ObjectAddedInSdram, the thumbnail data of the image or the video data is sent to the host.

ThumbnailObject is the thumbnail data of the object (file) specified in ObjectHandle. The size of the ThumbnailObject is 160 x 120 of the small thumbnail size.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
No_Thumbnail_Present	The object corresponding to the specified ObjectHandle does not have a thumbnail.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

Do Not Copy

6.2.1.11 DeleteObject

○ **Command Specifications**

Operation Code	0x100B
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode deletes a specific object saved in the card or all the objects saved in the card. The protected objects are not deleted.

○ **Command Details**

The protected objects are not deleted. An object with an image format that is not supported by the camera is not deleted.
The release is locked until the image deletion is completed.

Operation Parameter	Value	Details
Parameter1	0xFFFFFFFF	All the objects in the card should be the targets.
	ObjectHandle	The specified object should be the target.
Parameter2 (Optional)	0x00000000	All the object formats should be the targets.
	No value	
	ObjectFormatCode	The specified object format should be the target. When 0xFFFFFFFF is specified in Parameter1, all the objects that correspond to the specified object format are deleted.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle
Parameter2	[ObjectFormatCode]

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
Object_Write_Protect	The object corresponding to the specified ObjectHandle is protected.
Partial_Deletion	When the deletion of two or more objects is specified, all the objects are not deleted.

Do Not Copy

Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Store_Read_Only	The card including the specified image is protected.
	All the inserted cards are protected.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Specification_By_Format_Unsupported	The specified ObjectFormatCode is not supported.
Device_Busy	The acquisition operation is being performed when the command processing is started.
Invalid_Parameter	The ObjectFormatCode is specified with the ObjectHandle set to a value other than 0xFFFFFFFF.

Do Not Copy

6.2.1.12 InitiateCapture

○ **Command Specifications**

Operation Code	0x100E
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None
Event Code	Refer to Event Code in this section.

○ **Command Outline**

The operation by this OperationCode starts the camera acquiring one or more new objects (release operation of the camera) according to the current setting. The acquired objects (image data) are always recorded in the card independently of the recording destination property.

○ **Command Details**

The camera starts the release operation when receiving this command. The camera returns OK after starting the release operation. If the AF is required, the camera starts the release operation after finishing the AF. (This command is an activation command, so it returns the response code before the release operation is completed.)
The camera starts acquiring one or more new objects (release operation of the camera) according to the current setting. The acquisition of the new object is performed asynchronously.
Whether the AF is operated when the release is started depends on the setting of the focus-mode selector.

Refer to Command Release Operation (section 11.7) for the details of the command release operation.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	[StorageID]	
	0x00000000	The recording destination specified in the camera.
	StorageID	The specified recording destination.
Parameter2	[ObjectFormatCode]	
	0x00000000	The image quality mode set in the camera.
	ObjectFormatCode	The image quality mode according to the format.
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
General_Error	An error is generated in the camera body when the command processing is started.

Do Not Copy

	All of the following conditions are satisfied, and the AF operation is not focused. - The AF operation mode is set to [Focus priority].
	The aperture value is “F--”.
Invalid_StorageID	The StorageID sent by the camera differs from the StorageID specified by the host.
Invalid_ObjectFormatCode	The format of the ObjectFormatCode is not supported by the camera.
Store_Full	There is not enough free space in the card for recording.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Store_Read_Only	All the inserted cards are protected.
Device_Busy	The acquisition operation is being performed when the command processing is started.
	The shutter-release button is being fully pressed.
Access_Denied	When a retractable lens is mounted, the lens is retracting.
	STM lens is being initialized.
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
	In video mode.
	Shooting cannot be performed due to a camera status caused by factors other than the above.

○ **Event Code**

Event Code	Details
ObjectAdded	A new object is recorded in the card.
StoreFull	There is not enough free space in the card for recording.
CaptureComplete	The acquisition operation of the new object is completed.

Do Not Copy

6.2.1.13 FormatStore

○ **Command Specifications**

Operation Code	0x100F
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode formats the card inserted in the camera.

○ **Command Details**

The camera formats the card specified by the StorageID.
The StorageIDs supported by the camera are shown in section 6.2.1.4.
The FilesystemFormat parameter shown in Parameter2 is optional. However, setting of only 0x0003 indicating the DCF is permitted.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	StorageID
Parameter2	[FilesystemFormat]

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_StorageID	The StorageID sent by the camera differs from the StorageID specified by the host.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Store_Read_Only	The specified card is protected.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	The acquisition operation is being performed when the command processing is started.
Invalid_Parameter	Parameter2 is neither 0x00000000 nor 0x00000003.

Do Not Copy

6.2.1.14 SetObjectProtection

○ **Command Specifications**

Operation Code	0x1012
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets the protection status of an object.

○ **Command Details**

Sets the protection status of the object in the ObjectHandle specified by parameter 1 to the ProtectionStatus of parameter 2.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	ObjectHandle	
Parameter2	ProtectionStatus	
	0x0000	Not protected
	0x0001	Read-only
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	The ObjectHandle of the directory (Association) is specified.
	An object in the SDRAM is specified.
Invalid_Parameter	Specified ProtectionStatus is out of range.
Store_Read_Only	The specified card is protected.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.

Do Not Copy

6.2.1.15 GetDevicePropDesc

○ **Command Specifications**

Operation Code	0x1014
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropDesc data set
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the DevicePropDesc data set corresponding to the specified DevicePropCode.

○ **Command Details**

For the supported DevicePropCode values, refer to section 6.5.

In this OperationCode, only the property of DevicePropCode of 2 bytes can be acquired. To get a 4-byte property, use the GetDevicePropDescEx command (section 6.2.2.5).

For the DevicePropDesc, refer to section 9.4.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	DevicePropCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
DeviceProp_Not_Supported	The specified DevicePropCode is not supported.
	A 4-byte DevicePropCode is specified.

Do Not Copy

6.2.1.16 GetDevicePropValue

○ **Command Specifications**

Operation Code	0x1015
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropValue
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the current value corresponding to the specified DevicePropCode.

○ **Command Details**

For the supported DevicePropCode values and the details of the DevicePropValue, refer to section 6.5.

In this OperationCode, only the property of DevicePropCode of 2 bytes can be acquired. To get a 4-byte property, use the GetDevicePropValueEx command (section 6.2.2.6).

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	DevicePropCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
DeviceProp_Not_Supported	The specified DevicePropCode is not supported.
	A 4-byte DevicePropCode is specified.

Do Not Copy

6.2.1.17 SetDevicePropValue

○ **Command Specifications**

Operation Code	0x1016
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropValue
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None
Event Code	Refer to Event Code in this section.

○ **Command Outline**

The operation by this OperationCode sets the DevicePropValue corresponding to the specified DevicePropCode to the camera.

○ **Command Details**

For the supported DevicePropCode values and the details of the DevicePropValue, refer to section 6.5.

In this OperationCode, only the property of DevicePropCode of 2 bytes can be acquired. To get a 4-byte property, use the SetDevicePropValueEx command (section 6.2.2.7).

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	DevicePropCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
DeviceProp_Not_Supported	The specified DevicePropCode is not supported.
	A 4-byte DevicePropCode is specified.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
	An operation is denied due to the status of the camera.
	The specified DevicePropCode is not permitted for setting.
Device_Busy	The acquisition operation is being performed when the command processing is started, or the AF is being operated.
Invalid_DeviceProp_Format	The size or the format of the DevicePropDesc data set is not appropriate.
Invalid_DeviceProp_Value	The specified DevicePropValue is not supported.

Do Not Copy

6.2.1.18 GetPartialObject

○ **Command Specifications**

Operation Code	0x101B
Operation Parameter	Refer to Operation Parameter in this section.
Data	DataObject
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	The number of bytes actually sent

○ **Command Outline**

The operation by this OperationCode is the same as that of GetObject.

However, the offset and the number of bytes to be acquired can be specified and the object (DataObject) can be acquired partially.

○ **Command Details**

The camera sends the file data (DataObject) of the specified size corresponding to the specified ObjectHandle to the host. When the specified ObjectHandle is the data in the card, the camera returns the object corresponding to the ObjectHandle.

The ObjectHandle passed by ObjectAddedInSdram should be specified in order to acquire information of the object in the SDRAM.

For the DataObject, which is the data to be sent, the file data corresponding to the specified ObjectHandle for MaxSize starting from the position set by the offset is sent to the host. In the case of "(File size - Offset) < MaxSize", the data of "(File size - Offset)", not MaxSize, is sent to the host. The sent number of bytes is stored in ResponseParameter and sent to the host.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle
Parameter2	Offset (Byte)
Parameter3	MaxSize (bytes)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Incomplete_Transfer	Data block transmission failed.
	The size of the object corresponding to the specified ObjectHandle is 4 GB or more.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	The ObjectHandle of the directory (Association) is specified.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
Access_Denied	The video is playing.

Do Not Copy

6.2.2 Vendor

6.2.2.1 GetVendorCodes

○ **Command Specifications**

Operation Code	0x9439
Operation Parameter	None
Data	DevicePropCodeArray
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires an array of vendor definition codes supported by the camera.

○ **Command Details**

The format of the array sent by the camera is shown below.

Field	Size (bytes)	Data
NumElement	4	Number of elements in the array.
ArrayEntry [0]	4	Vendor Code [0]
ArrayEntry [1]	4	Vendor Code [1]
ArrayEntry [2]	4	Vendor Code [2]
・・・		
ArrayEntry [NumElement - 1]	4	Vendor Code [N - 1]

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	Type of code	
	0x09	Vendor OperationCode
	0x0D	Vendor DevicePropCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Parameter	The specified value is out of the range.

Do Not Copy

6.2.2.2 OperationDataNone

○ **Command Specifications**

Operation Code	0x9440
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	Depends on the command.

○ **Command Outline**

This Operation Code executes the command corresponding to the 4-byte extension.

○ **Command Details**

In this Operation Code, it is possible to execute commands that do not have send / receive data.

The Operation Code command specified in Parameter1 is executed.
For Parameters 2 to 5, specify the Operation Parameter corresponding to the command specified in Parameter1.
Operation Parameters specified in Parameters 2 to 5 are shown in each Operation Code definition.

If the command specified in Parameter1 requires Operation Parameter5, it cannot be executed.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Operation Code (4-byte extension) NOTE1
Parameter2	Operation Parameter1 of the command specified in Parameter1
Parameter3	Operation Parameter2 of the command specified in Parameter1
Parameter4	Operation Parameter3 of the command specified in Parameter1
Parameter5	Operation Parameter4 of the command specified in Parameter1

NOTE1) 2-byte Operation Code (upper 2 bytes are 0x0000) command can also be executed.

○ **Response Code**

For the command-specific Response Code, refer to the Response Code of each command.

Response Code	Description
OK	Normal termination
Operation_Not_Supported	An unsupported Operation Code is specified.
Invalid_Parameter	An Operation Code with data is specified.
	The Operation Code of this operation is specified.

Do Not Copy

6.2.2.3 OperationReceiveData

○ **Command Specifications**

Operation Code	0x9441
Operation Parameter	Refer to Operation Parameter in this section.
Data	Depends on the command.
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	Depends on the command.

○ **Command Outline**

This Operation Code executes the command corresponding to the 4-byte extension.

○ **Command Details**

In this Operation Code, it is possible to execute a command that has the data received from the camera.

* The command details for the Operation Parameter are the same as those for the OperationDataNone command (section 6.2.2.2).

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Operation Code (4-byte extension) NOTE1
Parameter2	Operation Parameter1 of the command specified in Parameter1
Parameter3	Operation Parameter2 of the command specified in Parameter1
Parameter4	Operation Parameter3 of the command specified in Parameter1
Parameter5	Operation Parameter4 of the command specified in Parameter1

NOTE1) 2-byte Operation Code (upper 2 bytes are 0x0000) command can also be executed.

○ **Response Code**

For the command-specific Response Code, refer to the Response Code of each command.

Response Code	Description
OK	Normal termination
Operation_Not_Supported	An unsupported Operation Code is specified.
Incomplete_Transfer	Data block transmission failed.
Invalid_Parameter	An Operation Code other than "Camera-> Host" is specified for the data direction.
	The Operation Code of this operation is specified.

Do Not Copy

6.2.2.4 OperationSendData

○ **Command Specifications**

Operation Code	0x9442
Operation Parameter	Refer to Operation Parameter in this section.
Data	Depends on the command.
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	Depends on the command.

○ **Command Outline**

This Operation Code executes the command corresponding to the 4-byte extension.

○ **Command Details**

In this Operation Code, it is possible to execute a command that has the data sent to the camera.

* The command details for the Operation Parameter are the same as those for the OperationDataNone command (section 6.2.2.2).

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Operation Code (4-byte extension) NOTE1
Parameter2	Operation Parameter1
Parameter3	Operation Parameter2
Parameter4	Operation Parameter3
Parameter5	Operation Parameter4

NOTE1) 2-byte Operation Code (upper 2 bytes are 0x0000) command can also be executed.

○ **Response Code**

For the command-specific Response Code, refer to the Response Code of each command.

Response Code	Description
OK	Normal termination
Operation_Not_Supported	An unsupported Operation Code is specified.
Incomplete_Transfer	Data block transmission failed.
Invalid_Parameter	An Operation Code other than "Host -> Camera" is specified for the data direction.
	The Operation Code of this operation is specified.

Do Not Copy

6.2.2.5 GetDevicePropDescEx

○ **Command Specifications**

Operation Code	0x943A
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropDesc Dataset
Data direction	From camera to host
Response Code	Same as GetDevicePropDesc
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the DevicePropDesc data set corresponding to the specified DevicePropCode.

For the DevicePropDesc, refer to section 9.4.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	DevicePropCode (4-byte extension)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
DeviceProp_Not_Supported	The specified DevicePropCode is not supported.

Do Not Copy

6.2.2.6 GetDevicePropValueEx

○ **Command Specifications**

Operation Code	0x943B
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropValue
Data direction	From camera to host
Response Code	Same as GetDevicePropValue
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the current value corresponding to the specified DevicePropCode.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	DevicePropCode (4-byte extension)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
DeviceProp_Not_Supported	The specified DevicePropCode is not supported.

Do Not Copy

6.2.2.7 SetDevicePropValueEx

○ **Command Specifications**

Operation Code	0x943C
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropValue
Data direction	From host to camera
Response Code	Same as SetDevicePropValue.
Response Parameter	None
Event Code	Refer to Event Code in this section.

○ **Command Outline**

The operation by this OperationCode sets the DevicePropValue corresponding to the specified DevicePropCode to the camera.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	DevicePropCode (4-byte extension)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
DeviceProp_Not_Supported	The specified DevicePropCode is not supported.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
	An operation is denied due to the status of the camera.
	The specified DevicePropCode is not permitted for setting.
Device_Busy	The acquisition operation is being performed when the command processing is started.
Invalid_DeviceProp_Format	The size or the format of the DevicePropDesc data set is not appropriate.
Invalid_DeviceProp_Value	The specified DevicePropValue is not supported.

Do Not Copy

6.2.2.8 RegisterDevicePropGroup

○ **Command Specifications**

Operation Code	0x943D
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropCode Array
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	Number of properties registered in the property group

○ **Command Outline**

The operation by this OperationCode registers property group.

○ **Command Details**

The registered property group information is retained until the session with the camera ends. The property group numbers that can be registered are 1 to 32.
If the property group is registered again for the registered property group, it will be overwritten.

If you specify the registered property group when executing the GetDevicePropDescList command (section 6.2.2.9) and GetDevicePropValueList command (section 6.2.2.10), you can get DevicePropDesc DataSet and PropertyValue all at once.

If the property group to be registered contains a DevicePropertyCode that does not exist, that property will not be registered.

The format of the property group to be registered is shown below.

Field	DataSize	Description
NumElement	4	Number of elements in the array.
ArrayEntry[0]	4	DevicePropCode 1
ArrayEntry[1]	4	DevicePropCode 2
...		
ArrayEntry[NumElement-1]	4	DevicePropCode N

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Property group number

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Parameter	The specified value is out of the range.
Invalid_Data	The format of the property group to be registered is incorrect.

Do Not Copy

6.2.2.9 GetDevicePropDescList

○ **Command Specifications**

Operation Code	0x943E
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropDesc List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode is to get the list of the specified DevicePropDesc DataSet.

○ **Command Details**

If you specify the property group number registered with the RegisterDevicePropGroup command (section 6.2.2.8) in Parameter1, you will get a list of registered properties.

The format of the list of properties to be acquired is shown below.

Field	DataSize	Description
NumberOfElements	4	Number of commands in the list.
Element1	DTS	
Element Size	2	Size of the element.
DevicePropDesc DataSet	DTS	See section 9.4.
Element2	DTS	
...		
ElementN	DTS	

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Property group number

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	A property group that is not registered is specified.
Invalid_Parameter	The specified value is out of the range.

Do Not Copy

6.2.2.10 GetDevicePropValueList

○ **Command Specifications**

Operation Code	0x943F
Operation Parameter	Refer to Operation Parameter in this section.
Data	DevicePropValue List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode is to get the list of the current value of the specified DevicePropCode.

○ **Command Details**

If you specify the property group number registered with the RegisterDevicePropGroup command (section 6.2.2.8) in Parameter1, you will get a list of registered properties.

The format of the list of properties to be acquired is shown below.

Field		DataSize	Description
NumberOfElements		4	Number of properties in the list
Element1		DTS	
	DevicePropCode	4	DevicePropCode 1
	DataType	2	DataType of DevicePropCode 1
	DevicePropValue	DTS	Current value of DevicePropCode 1
Element2		DTS	
...			
ElementN		DTS	

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Property group number

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	A property group that is not registered is specified.
Invalid_Parameter	The specified value is out of the range.

Do Not Copy

6.2.2.11 DeviceReady

○ **Command Specifications**

Operation Code	0x90C8
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode checks the action by the activation-type command.

○ **Command Details**

This command is issued after issuing the following activation-type commands in order to check the operation.

Activation-type commands	Reference
InitiateCapture	6.2.1.12
InitiateCaptureRecInMedia	6.2.4.1
InitiateCaptureRecInSdram	6.2.4.2
AfAndCaptureRecInSdram	6.2.4.3
AfDrive	6.2.5.1
MfDrive	6.2.5.3
StartLiveView	6.2.6.1

This command should be issued repeatedly until the operation of the activation-type command is completed.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Device_Busy	The operation of the activation-type command is not finished.
Out_of_Focus	The AF operation by the command is in the non-focused status.
Wb_Preset_Error	The preset measurement release failed.
MfDrive_Step_End	The MF driving reaches the end of steps.
MfDrive_Step_Insufficiency	The driving amount is insufficient.
Bulb_Release_Busy	The bulb shooting is being performed.
Silent_Release_Busy	During the silent photography (Only models that support the silent photography).
MovieFrame_Release_Busy	The frames for the video recording are being saved. (Only for models that support video frame storage)

Do Not Copy

6.2.2.12 GetEvent

○ **Command Specifications**

Operation Code	0x90C7
Operation Parameter	None
Data	Event array
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sends the event retained in the camera to the host.

○ **Command Details**

This OperationCode is a command for compatibility with the GetEventEx command (section 6.2.2.13) and has the following restriction. The GetEventEx command should be used for this camera.

This command cannot handle the events that have two or more parameters.

The format of the event array to be sent by the camera is shown below.

Offset	Value	Name	Description
0	N	EventCount	The number of events
2	EventCode	EventCode [0]	The oldest event
4		EventParameter [0]	Parameter attaching to the oldest event
8	EventCode	EventCode [1]	The second oldest event
10		EventParameter [1]	Parameter attaching to the second oldest event
...			
6 x (N – 1) + 2	EventCode	EventCode [N - 1]	The newest event
6 x (N – 1) + 4		EventParameter [N - 1]	Parameter attaching to the newest event

If there is no event to be sent, the EventCount value is set to 0 and sent to the host.

When an event is sent by this command, the contents of the event queue buffer prepared for the GetEvent command are updated. The sent event is deleted.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.2.13 GetEventEx

○ **Command Specifications**

Operation Code	0x941C
Operation Parameter	Refer to Operation Parameter in this section.
Data	Event array
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sends the event retained in the camera to the host.

○ **Command Details**

The camera sends all the events saved in the event queue buffer prepared for the GetEventEx command.
When Parameter1 has no value or is 0, the event stored in the queue buffer is deleted after sending the event.
If 1 is specified for Parameter1, the event stored in the queue buffer will not be deleted after the event is sent.

The format of the event array to be sent by the camera is shown below. Maximum element is 2048.

Field	DataSize	DataType	Description
NumberOfElements	4	UINT32	The number of events in the list.
Element1 Event Code	2	UINT16	Event Code for element1.
Element1 NumParameters	2	UINT16	Number of parameters for element1.
Element1 Parameter1	4	UINT32	Parameter1 for element1.
Element1 Parameter2	4	UINT32	Parameter2 for element1.
...			
Element1 ParameterN	4	UINT32	Parameter N for element1.
...			
ElementN Event Code	2	UINT16	Event Code for element N.
ElementN NumParameters	2	UINT16	Number of parameters for element N.
ElementN Parameter1	4	UINT32	Parameter1 for element N.
ElementN Parameter2	4	UINT32	Parameter2 for element N.
...			
ElementN ParameterN	4	UINT32	Parameter N for element N.

If there is no event to be sent, the EventCount value is set to 0 and sent to the host.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	[Whether to delete the buffer]	
	No value	The event stored in the queue buffer is deleted after sending the event.
	0	
	1	The event stored in the queue buffer is not

Do Not Copy

		deleted after sending the event
Parameter2	None	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Parameter	The specified value is out of the range.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.2.14 ClearEvent

○ **Command Specifications**

Operation Code	0x9461
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode deletes the event held in the camera.

○ **Command Details**

This command deletes the sent event when it is executed by specifying "1: The event stored in the queue buffer is not deleted after sending the event" in Parameter1 of the GetEventEx command.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.

Do Not Copy

6.2.2.15 ChangeCameraMode

○ **Command Specifications**

Operation Code	0x90C2
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode switches between the PC camera mode and the remote mode.

○ **Command Details**

The camera is set to the mode specified by the ModeValue.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	ModeValue	
	0	Sets to the PC camera mode.
	1	Sets to the remote mode.
Parameter2	None	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified value of ModeValue is out of the range.
Change_CameraMode_Failed	Mode cannot be changed due to shutter-release operation.
	Mode cannot be changed due to AF operation.
	Mode cannot be changed during cleaning image sensor.

Do Not Copy

6.2.2.16 ChangeApplicationMode

○ **Command Specifications**

Operation Code	0x9435
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode switches the application mode.

○ **Command Details**

Refer to section 2.4 for the application mode.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	Mode	
	0	Application mode OFF
	1	Application mode ON
Parameter2	None	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.

Do Not Copy

6.2.2.17 ChangeMonitorOff

○ **Command Specifications**

Operation Code	0x9422
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode changes the monitor forced off state of the camera.

○ **Command Details**

When the camera receives this command, it switches the monitor forced off state.
If “Forced light off” is specified for MonitorOffStatus of Parameter1 while the monitor is on, the monitor turns off.
If "Cancel forced light off" is specified while the monitor is off, the monitor turns on or off according to the camera status.

Monitors targeted by this command are as follows.

- Main monitor (Playback monitor)

The response of the normal end indicates that the request to switch the monitor off state has been received, completion of turning on / off the monitor is not guaranteed.

Refer to MonitorOffStatus property (section 6.5.6.18) for the monitor forced off state.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	MonitorOffStatus	
	0	Cancel forced light off.
	1	Forced light off.
Parameter2	None	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified value is out of the range.
Device_Busy	The acquisition operation is being performed when the command processing is started.
Access_Denied	The battery is exhausted
Hardware_Error	An error is generated in the camera body when the command processing is started.

Do Not Copy

6.2.2.18 GetCameraSettingData

○ **Command Specifications**

Operation Code	0x946D
Operation Parameter	None
Data	CameraSettingData Dataset
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode gets the camera setting file saved on the memory card..

○ **Command Details**

If you are using two memory cards, get the camera setting file from the card in the primary slot (*).

*The primary slot of this camera is slot 1.

CameraSettingData Dataset is as follows.

Field	Size	Description
Camera setting file name	64byte	ASCII: 63 characters maximum +NULL
Camera setting data	-	Contents of the camera setting file name

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	Specified TransactionID is not a valid value.
Parameter_Not_Supported	Specified parameter is not supported.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	The video is playing.
	Camera setting file does not exist on the card.
Store_Not_Available	The card does not exist.
	The card is being initialized.
	The battery is exhausted.
Store_Error	Card access error occurs.
Store_Unformatted	Card is not formatted.

Do Not Copy

6.2.2.19 SendCameraSettingData

○ **Command Specifications**

Operation Code	0x946E
Operation Parameter	None
Data	Camera setting data
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode saves camera setting data to a memory card.

○ **Command Details**

If you are using two memory cards, save the camera settings file to the card in the primary slot.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	Specified TransactionID is not a valid value.
Parameter_Not_Supported	Specified parameter is not supported.
Incomplete_Transfer	Data block transmission failed.
Object_Write_Protect	Camera settings file is protected.
Access_Denied	The video is playing.
Store_Full	There is no free space for saving on the card.
Store_Read_Only	The recording card is protected
Store_Not_Available	The card does not exist.
	The card is being initialized.
	The battery is exhausted.
Store_Error	Card access error occurs.
Store_Unformatted	Card is not formatted.

Do Not Copy

6.2.2.20 SaveCameraSetting

○ **Command Specifications**

Operation Code	0x9420
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode saves the camera setting values. This is the same operation as that of saving the camera setting values when the power switch is turned off.

○ **Command Details**

The camera setting values are stored in the non-volatile area. If this operation is not completed in the case that the power supply is interrupted in saving the setting values, the operation of the camera is not guaranteed after that.

After responding to this command, do not execute any command (other than CloseSession) or do not operate the camera other than power OFF.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Device_Busy	During shooting operation.
Access_Denied	The camera is in the PC camera mode.
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
	The camera cannot save the setting values.

Do Not Copy

6.2.2.21 ResetMenu

○ **Command Specifications**

Operation Code	0x9436
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode resets the camera settings.

○ **Command Details**

The setting value that is specified in Parameter1 (Reset Type) is reset.

In Reset Type where you can specify the bank, specify Bank in Parameter2.
In Reset Type where bank cannot be specified, Bank specification is ignored.

White balance, white balance sub-item, fine tuning values other than preset manual data, and preset manual data number are reset.

In the case of resetting file number sequence, the value of “Custom menu – Shooting/display – File number sequence” is reset.

○ **Operation Parameter**

Operation Parameter	Details		
Parameter1	Reset Type		Bank can be specified
	0x0001	Photo shooting menu	no
	0x0002	White balance (Photography)	no
	0x0102	White balance (Video)	no
	0x0201	Custom menu	no
	0x0202	File number sequence	no
Parameter2	[Bank] Not used with this camera.		
	None	Bank in use (NOTE1)	
	0		
	1	Bank A	
	2	Bank B	
	3	Bank C	
	4	Bank D	
Parameter3	None		

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.

Do Not Copy

Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Parameter	The specified parameter is out of the range.
Access_Denied	When the spot WB acquisition is in standby state.
	[White balance (Photography, Video)] is specified when the AWBLockStatus property (section 6.5.6.8) is set to [Locked].
	[File number sequence] is specified when the HDRMode property (section 6.5.2.70) is set to [On].
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	During shooting operation.

Do Not Copy

6.2.2.22 GetPortraitImpressionBalanceDataList

○ **Command Specifications**

Operation Code	0x9454
Operation Parameter	Refer to Operation Parameter in this section.
Data	PortraitImpressionBalance List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation of this OperationCode acquires the PortraitImpressionBalance List set in the adjustment value of “Portrait Impression Adjustment – Mode”.

It acquires the PortraitImpressionBalance List.

○ **Command Details**

When the mode number is specified in Parameter1, the PortraitImpressionBalance DataSet (section 9.14) of the specified ModeNum is sent to the host.

If 0xFFFFFFFF is specified, all modes are sent to the host.

The data set of PortraitImpressionBalance List is shown below.

Field		DataSize	Description
NumberOfElements		2	Number of modes in the list
Element1		6	
	Element Size	2	Size of the element
	ModeNum	2	Portrait impression adjustment mode number
	PortraitImpressionBalance DataSet	2	Adjustment value of Portrait impression adjustment
...			
ElementN		6	

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	ModeNum	The specified mode number is the same as the PortraitImpressionBalance property (section 6.5.2.60), but [Off] is an invalid value.
	0xFFFFFFFF	All modes
Parameter2	ShootingMode	
	0	Adjustment value of photo shooting menu
	1	Adjustment value of video recording menu
Parameter3	DefaultFlag	
	0	Current setting
	1	Default value

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.2.23 SetPortraitImpressionBalanceData

○ **Command Specifications**

Operation Code	0x9453
Operation Parameter	Refer to Operation Parameter in this section.
Data	PortraitImpressionBalance DataSet
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets PortraitImpressionBalance DataSet to the adjustment value of “Portrait Impression Adjustment – Mode”.

○ **Command Details**

For the format of the PortraitImpressionBalance DataSet, refer to section 9.14.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	ModeNum	The specified mode number is the same as the PortraitImpressionBalance property (section 6.5.2.60), but [Off] is an invalid value.
Parameter2	ShootingMode	
	0	Adjustment value of photo shooting menu
	1	Adjustment value of video recording menu
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	If ShootingMode is set to 0 (photo shooting menu) while the following conditions are met: - The ToneMode property (section 6.5.2.5) is set to [SDR]. - The ActivePicCtrlItem property (section 6.5.14.1) is set to one of the values below (*1).
	If ShootingMode is set to 0 (photo shooting menu) while the following conditions are met: - The ToneMode property is set to [HLG]. - The ActivePicCtrlHlgItem property (section 6.5.14.3) is set to

Do Not Copy

	[Monochrome].
	If ShootingMode is set to 1 (video recording menu) while the following conditions are met: - The tone mode of the video file format is set to [SDR]. - The MovieActivePicCtrlItem property (section 6.5.14.2) is set to one of the values below (*1).
	If ShootingMode is set to 1 (video recording menu) while the following conditions are met: - The tone mode of the video file format is set to [SDR]. - The MovieActivePicCtrlItem property is set to [Same as photo settings]. - The ActivePicCtrlItem property is set to one of the values below. *1 Picture Control settings: ● A monochrome style setting ● Creative Picture Control ● Custom Picture Control with “Flexible Color” registered
	The ShootingMode is set to 1 (video recording menu) while the tone mode of the video file format is set to [N-Log] (*). * Conditions under which the tone mode is [N-Log]: ● The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit(MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log]. ● The MovieFileType property (section 6.5.3.2) is set to [ProRes 422 HQ 10-bit(MOV)] and the MovieProResToneMode property (section 6.5.3.5) is set to [N-Log]. ● The MovieFileType property is set to [ProRes RAW HQ 12-bit(MOV)] and the MovieProResRawHq12bitToneMode property (section 6.5.3.6) is set to [N-Log]. ● The MovieFileType property is set to [N-RAW 12-bit(NEV)] and the MovieNRaw12bitToneMode property (section 6.5.3.4) is set to [N-Log].
	The ShootingMode is set to 1 (video recording menu) while the MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [On].
Invalid_Data	Wrong PortraitImpressionBalance DataSet was specified.

Do Not Copy

6.2.2.24 GetCommandFeature

○ **Command Specifications**

Operation Code	0x944C
Operation Parameter	Refer to Operation Parameter in this section.
Data	CommandFeature DataSet
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the feature information about the specified operation code.

○ **Command Details**

The camera sends the CommandFeature DataSet about the operation code specified by Parameter1 to the host. The CommandFeature DataSet has a fixed length of 32 bytes.

Feature information can be acquired only for commands for which Feature information is defined.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Operation Code
Parameter2	Index (Fixed to 0 with this camera)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Parameter	The specified operation code has no feature information.

Do Not Copy

6.2.3 Vendor (Object)

6.2.3.1 GetVendorStorageIDs

○ **Command Specifications**

Operation Code	0x9209
Operation Parameter	None
Data	StorageIDArray
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns a list of the currently valid StorageIDs.

In the application mode, the StorageID that can be obtained by GetStorageIDs is the one without the card installed, so it is possible to know the valid StorageID by using this Operation.

○ **Command Details**

The camera returns the StorageID of each slot.
The StorageID of each slot takes the following values.

StorageID	Details
0x00010001	When the card is inserted in the slot1
0x00010000	When the card is not inserted in the slot1
	When the card in the slot1 is being formatted
	When the battery is exhausted
0x00020001	When the card is inserted in the slot2
0x00020000	When the card is not inserted in the slot2
	When the card in the slot2 is being formatted
	When the battery is exhausted

The format of the StorageIDArray that is sent by the camera is shown below.

Each field data is stored in the little-endian format.

Field	Size (bytes)	Data
NumElement	4	0x00000002 (Two elements for the array)
ArrayEntry1	4	StorageID (slot1)
ArrayEntry2	4	StorageID (slot2)

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.3.2 GetObjectSize

○ **Command Specifications**

Operation Code	0x9421
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectSize
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the size of the specified object.

○ **Command Details**

When the value of the ObjectCompressedSize returned by GetObjectInfo command is 0xFFFFFFFF, the correct size of the object can be obtained by this operation code.

The ObjectSize transmitted by the camera is 8 bytes of data.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

Do Not Copy

6.2.3.3 GetObjectsMetaData

○ **Command Specifications**

Operation Code	0x9434
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectMetaData Dataset
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the handle and the metadata of the object in the card. The ObjectHandle of the object recorded in the SDRAM is not included.

○ **Command Details**

If the new object is being recorded in the card when this command is received, the processing starts after the acquisition of all the data is completed. The camera returns the ObjectHandle and the metadata in the card specified by the StorageID. In addition, Parameter2 and Parameter3, which are optional, can be combined.

Operation Parameter	Value	Details
Parameter1	0xFFFFFFFF	All the objects in the card should be the targets.
	StorageID	The specified object should be the target.
Parameter2 (optional)	0x00000000	All the object formats should be the targets.
	No value	
	0xFFFFFFFF	All the image formats in the card corresponding to the specified StorageID should be the targets.
	ObjectFormatCode	The specified object format should be the target.
Parameter3 (optional)	0x00000000	All the directories should be the targets. (NOTE1)
	No value	
	ObjectHandle	The objects directly under the specified directory should be the targets.

NOTE1: Since the processing time increases in proportion to the number of objects, if all directories are specified with a large number of objects, it may take time to execute.

Do Not Copy

The format of the ObjectMetaData Dataset sent by the camera is shown below.

ObjectMetaData Dataset

Field		Size (bytes)	DataType	Description
Version		4	UINT32	Dataset version Version 1.00
NumElement		4	UINT32	Number of metadata
ObjectMetaData[0]		16	-	Metadata 1
	ObjectHandle	4	UINT32	Object handle
	ObjectAttribute	4	UINT32	Bit2 and after: Reserved Bit1: Protected Bit0: Rating
	Reserved	1	UINT8	-
	ModificationDate	1	UINT8	Modification date: Second
		1	UINT8	Modification date: Minute
		1	UINT8	Modification date: Hour
		1	UINT8	Modification date: Day
		1	UINT8	Modification date: Month
		2	UINT16	Modification date: Year
ObjectMetaData[1]		16	-	Metadata 2
...				
ObjectMetaData[N - 1]		16	-	Metadata N

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	StorageID
Parameter2	[ObjectFormatCode]
Parameter3	[ObjectHandle of the directory]

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_StorageID	The StorageID sent by the camera differs from the StorageID specified by the host.
Invalid_Object_Handle	For an invalid object handle
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Specification_By_Format_Unsupported	The specified ObjectFormatCode is not supported.
Invalid_Parent_Object	An ObjectHandle other than that indicating the directory in the card was specified for ObjectHandle (Parameter3) of the specified directory.
	The specified directory does not exist.
Device_Busy	The management file is not ready.

Do Not Copy

6.2.3.4 GetPartialObjectEx

○ **Command Specifications**

Operation Code	0x9431
Operation Parameter	Refer to Operation Parameter in this section.
Data	DataObject
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	Refer to Response Parameter in this section.

○ **Command Outline**

The operation of this OperationCode is an extension of GetPartialObject (section 6.2.1.18).

○ **Command Details**

This OperationCode expands each of the Offset, MaxSize, and actual number of bytes sent (Response Parameter) of GetPartialObject. Objects up to a size represented by 8 bytes can be obtained.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle
Parameter2	Offset (Lower 4 bytes)
Parameter3	Offset (Upper 4 bytes)
Parameter4	MaxSize (Lower 4 bytes)
Parameter5	MaxSize (Upper 4 bytes)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	The ObjectHandle of the directory (Association) is specified.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
Access_Denied	The video is playing.

○ **Response Parameter**

Response Parameter	Description
Parameter1	Actual number of bytes sent (Lower 4 bytes)
Parameter2	Actual number of bytes sent (Upper 4 bytes)

Do Not Copy

6.2.3.5 GetPartialObjectHighSpeed

○ **Command Specifications**

Operation Code	0x9400
Operation Parameter	Refer to Operation Parameter in this section.
Data	DataObject
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	Refer to Response Parameter in this section.

○ **Command Outline**

The operation by this OperationCode transfers the file data (DataObject) of the specified size corresponding to the specified ObjectHandle (parameter1) from the camera to the host.

This command is suitable for transferring large files because the time it takes for the camera to read the data from the card is shorter than that of the GetPartialObject command (section 6.2.1.18).

○ **Command Details**

The maximum size of the data transferred by this command is the size of the file specified by the ObjectHandle (parameter1). The data size can be checked by the GetObjectInfo command (section 6.2.1.8).

The following must be satisfied to use this command.

- Turn on application mode by using the ChangeApplicationMode command (section 6.2.2.16).

The command should be issued with Terminate (parameter3) set to “Terminate transferring” in order to cancel the transfer while all data of the specified file are not transferred.

When Terminate (parameter3) is set to “Terminate transferring”, data transfer with 0 byte is performed.

An example of using the virtual file data is shown below. (ObjectHandle = 0x00000001, FileSize = 0x00100000)

In the case that all data are transferred	In the case that data transfer is canceled
The first time: ObjectHandle = 0x00000001 TransferMaxSize = 0x00020000 Terminate = 0x00000000 The second time: ObjectHandle = 0x00000001 TransferMaxSize = 0x00020000 Terminate = 0x00000000 The eighth time (last data acquisition): ObjectHandle = 0x00000001	The first time: ObjectHandle = 0x00000001 TransferMaxSize = 0x00020000 Terminate = 0x00000000 The second time: ObjectHandle = 0x00000001 TransferMaxSize = 0x00020000 Terminate = 0x00000000 The third time (data transfer is canceled): ObjectHandle = 0x00000001

Do Not Copy

TransferMaxSize = 0x00020000 Terminate = 0x00000000	TransferMaxSize = 0x00020000 Terminate = 0x00000001

The information necessary to maintain this command is released in any of the following conditions.

After the information is released, the file data is acquired from the beginning if this command is issued again.

Termination condition
The file data specified by the ObjectHandle (parameter1) has been transferred completely.
The parameter3 (Terminate) of this command is set to “Terminate transferring”.
The interval between the response of this command and the next issue of this command exceeds approx. 60 seconds. * If the file data offset of the response parameter is 0 after the second transfer of divided data and before transfer of all data, it is regarded as a time-out.
A card has been inserted or ejected regardless of whether the card contains the file data specified by the ObjectHandle or not.
The file has been deleted.
Video recording or video playback has started.
Issued the following command. CloseSession command GetObjectHandles command GetObjectInfo command GetObject command GetThumb command DeleteObject command InitiateCapture command FormatStore command SetObjectProtection command GetPartialObject command ChangeApplicationMode command GetCameraSettingData command SendCameraSettingData command SaveCameraSetting command GetObjectSize command GetPartialObjectEx command GetLargeThumb command InitiateCaptureRecInMedia command StartMovieRecord command InitiatePixelMapping command GetVideoCodec command GetObjectPropValue command SetObjectPropValue command GetObjectPropList command

Do Not Copy

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	ObjectHandle	
Parameter2	TransferMaxSize (Byte)	
Parameter3	Terminate	
	0	Continue transferring
	1	Terminate transferring

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Incomplete_Transfer	The data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	In the case of an ObjectHandle other than the image file
	In the case of an ObjectHandle of the SDRAM
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.
Invalid_Parameter	“Terminate” is neither 0 nor 1.
Invalid_Status	The application mode is set to OFF.

○ **Response Parameter**

Response Parameter	Description
Parameter1	The number of bytes actually sent
Parameter2	File data offset before command execution and data transfer (lower 4 bytes)
Parameter3	File data offset before command execution and data transfer (upper 4 bytes)

Do Not Copy

6.2.3.6 GetLargeThumb

○ **Command Specifications**

Operation Code	0x90C4
Operation Parameter	Refer to Operation Parameter in this section.
Data	LargeThumbnail data
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the large thumbnail data of the specified object.

○ **Command Details**

The camera sends all the large thumbnail data corresponding to the specified ObjectHandle to the host.
When the specified ObjectHandle is the data in the card, the camera returns the large thumbnail data corresponding to the ObjectHandle.
The ObjectHandle passed by ObjectAddedInSdram should be specified in order to acquire information of the object in the SDRAM.

The LargeThumbnail data is the large thumbnail data of the object (file) specified by the ObjectHandle. The size of the LargeThumbnail data shall be the reference JPEG image size acquired in order of priority shown in the table below.

Order of priority	Reference (Still image object)	Reference (Video object)
1	MPF class 1	MPF class 1
2	VIEW	MPF class 2
3	MPF class 2	Small thumbnail

* The size of a small thumbnail is the same as the size of thumbnails that can be obtained with the GetThumb command (section 6.2.1.10).

Aspect ratio	VIEW	MPF class 1	MPF class 2
3:2	570x375	640x424	1620x1080
5:4		600x480	1350x1080
4:3		640x480	1440x1080
1:1		480x480	1080x1080
16:9		640x360	1920x1080

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.

Do Not Copy

Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
No_Thumbnail_Present	The object corresponding to the specified ObjectHandle does not have a thumbnail.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

Do Not Copy

6.2.3.7 GetFhdPicture

○ **Command Specifications**

Operation Code	0x920F
Operation Parameter	Refer to Operation Parameter in this section.
Data	FullHD image data
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the FullHD image data of the specified object in the card.

○ **Command Details**

The camera sends all the FullHD image data corresponding to the specified ObjectHandle in the card to the host.

The FullHD image data is a maximum of 1920x1080-size JPEG image.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist. The object other than Jpeg, HEIF, RAW or TIFF is specified.
No_FullHD_Present	An object that corresponds to the specified ObjectHandle is not the FullHD image.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

Do Not Copy

6.2.3.8 GetVideoCodec

○ **Command Specifications**

Operation Code	0x9477
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	Refer to Response Parameter in this section.

○ **Command Outline**

This OperationCode is used to acquire the video codec of the specified object.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	An ObjectHandle that does not refer to a video is specified.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.

○ **Response Parameter**

Response Parameter	Details	
Parameter1	Video Codec	
	0x00	H.264/AVC
	0x01	H.265/HEVC
	0x02	N-RAW
	0x11	ProRes RAW HQ
	0x21	ProRes 422 HQ
	0x31	R3D NE
Parameter2	Bit depth Note: For 8-bit depth, set the value to 8. A value of 0 indicates no data.	

Do Not Copy

6.2.3.9 CancelImagesInSdram

○ **Command Specifications**

Operation Code	0x940C
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode cancels the transfer of a specific object saved in the SDRAM.

○ **Command Details**

This command cancels the transfer of the object corresponding to the specified ObjectHandle. For the ObjectHandle, the ObjectHandle passed by the ObjectAddedInSdram event should be specified. When the object corresponding to the specified ObjectHandle has been already sent to the host or deleted, an error response is made.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Device_Busy	During shooting operation.
	The ObjectAddedInSdram event is not ready for passing.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.

Do Not Copy

6.2.3.10 DeleteImagesInSdram

○ **Command Specifications**

Operation Code	0x90C3
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode deletes a specific object saved in the SDRAM or all the objects saved in the SDRAM.

○ **Command Details**

The object that corresponds to the specified ObjectHandle is deleted. All the objects in the SDRAM are deleted if the value of Parameter1 is 0. During the process of deleting all the objects, the camera does not issue a new ObjectAddedInSdram event.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Device_Busy	During shooting operation.
	The ObjectAddedInSdram event is not ready for passing.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.

Do Not Copy

6.2.4 Vendor (Shooting)

6.2.4.1 InitiateCaptureRecInMedia

○ **Command Specifications**

Operation Code	0x9207
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None
Event Code	Refer to Event Code in this section.

○ **Command Outline**

The operation by this OperationCode makes the camera start the acquisition of one or more new objects (release operation of the camera) according to the current setting. The acquired object (image data) is saved in the specified location.

○ **Command Details**

This command is an activation-type command. OK response is made when the start of the AF operation or the release operation is completed.
After the command is terminated normally, the host should issue the DeviceReady command (section 6.2.2.11) to confirm whether the release operation has been terminated.

The following information can be returned for the DeviceReady command when requesting the release operation.

Response Code	Description
OK	The release operation is normally terminated.
Device_Busy	The AF, the shooting or the continuous shooting operation is being performed
Bulb_Release_Busy	The bulb shooting is being performed.
Silent_Release_Busy	The silent shooting is being performed.
Out_of_Focus	The AF operation is not focused before shooting or during continuous shooting.
Wb_Preset_Error	The preset measurement release failed.
Other Response Code	Some error has occurred when requesting the release.

* For the details, refer to the DeviceReady command.

Whether the AF operation is performed or not depends on the value of CaptureSort (described later) in Parameter1 and the focus mode setting. When the live view is executed, it also depends on the live view mode.

Refer to Command Release Operation (section 11.7) for the details of the command release operation.

Do Not Copy

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	CaptureSort (The details are shown in the table below.)	
Parameter2	SaveMedia	
	0x0000	Card
	0x0001	SDRAM
	0x0002	Card and SDRAM
Parameter3	None	

CaptureSort	Operation	Description
0xFFFFFFFE	Image acquisition release after AF driving	The AF driving is started and then the release operation of the camera is performed. - In photo mode In the case of focus priority, the release operation is started only when the AF is focused after AF driving. Other than in the case of focus priority, the release operation is always started independent of the status after AF driving. - In video mode Because it is fixed to the release priority, the release operation is always started independent of the status after AF driving.
0xFFFFFFFF	Image acquisition release	Normal release operation is performed.
0x00000001	Preset measurement release 1	Stores the acquired preset gain in D1.
0x00000002	Preset measurement release 2	Stores the acquired preset gain in D2.
0x00000003	Preset measurement release 3	Stores the acquired preset gain in D3.
0x00000004	Preset measurement release 4	Stores the acquired preset gain in D4.
0x00000005	Preset measurement release 5	Stores the acquired preset gain in D5.
0x00000006	Preset measurement release 6	Stores the acquired preset gain in D6.
0x00000010	Dust reference image release	Dust reference image release operation is performed. When the shooting succeeds, the operation similar to the image acquisition release is performed hereafter.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the

Do Not Copy

	TransactionID specified by the host.
Invalid_Parameter	The specified CaptureSort or SaveMedia is out of the setting range.
Device_Busy	The acquisition operation is being performed when the command processing is started.
	The shutter-release button is being fully pressed.
	STM lens is being initialized.
Hardware_Error	An error is generated in the camera body when the command processing is started.
Out_of_Focus	All of the following conditions are satisfied, and the AF operation is not focused. - CaptureSort is the image acquisition release after AF driving. - The AF operation mode is set to [Focus priority].
Invalid_Status	The shutter speed is set to Time.
Dust_Reference_Error	The CPU internal lens is not mounted during the dust reference image release.
	The dust reference image release failed.
	The dust reference image release is specified when the HDR mode is set to [On].
	The dust reference image release is specified when the PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].
Wb_Preset_Error	The preset measurement release is specified when the ExposureProgramMode property (section 6.5.1.11) is anything other than [PSAM].
	The preset manual WB data save destination that is specified in the preset measurement release is protected.
	The preset measurement release is specified when the HDR mode is set to ON.
	The preset measurement release is specified when the PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].
	The preset measurement release is specified during PC camera mode.
CameraMode_Not_Adjust_Fnumber	An aperture value error occurs.
Store_Full	There is not enough free space in the card for recording.
	There is no free space on the SDRAM.
Store_Not_Available	The card is being initialized.
	The card does not exist when SaveMedia is set to [Card] or [Card and SDRAM].
	The battery is exhausted.
Store_Error	SaveMedia is [Card] or [Card and SDRAM] and a card access error occurs in the camera.
Store_Unformatted	SaveMedia is [Card] or [Card and SDRAM] and the card is not formatted.
Store_Read_Only	The card that is ready for recording is protected.

Do Not Copy

Access_Denied	When the spot WB acquisition is in standby state.
	When a retractable lens is mounted, the lens is retracting.
	The WarningStatus property (section 6.5.6.25) is “Version upgrade warning when mount adapter is attached”.
	The SpecialShootingMode property (section 6.5.6.3) is set to On (during interval timer shooting/focus shift shooting).
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [On].
	In video mode.
	Shooting cannot be performed due to a camera status caused by factors other than the above.

○ **Event Code**

Response Code	Description
ObjectAdded	A new object is recorded in the card.
StoreFull	There is no free area for recording in the card after shooting.
CaptureComplete	The acquisition operation of the new object is completed.
ObjectAddedInSdram	A new object is recorded in the SDRAM.
CaptureCompleteRecInSdram	All the images captured by this command are sent from the SDRAM to the host completely.

Do Not Copy

6.2.4.2 InitiateCaptureRecInSdram

○ **Command Specifications**

Operation Code	0x90C0
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode makes the camera start the acquisition of one or more new objects (release operation of the camera) according to the current setting. The acquired object (image data) is saved in the SDRAM.

○ **Command Details**

This command performs the same operation as that of the InitiateCaptureRecInMedia command with CaptureSort set to a value other than [Image acquisition release after AF driving] and SaveMedia set to [SDRAM].

The parameters to perform the same operation as that of InitiateCaptureRecInSdram using InitiateCaptureRecInMedia are shown below.

Operation Parameter	
Parameter1 (CaptureSort)	0x00000010(DustOff) 0xFFFFFFFF(Image acquisition release)
Parameter2 (SaveMedia)	0x00000001(SDRAM)

For details, refer to the InitiateCaptureRecInMedia command (section 6.2.4.1).

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	CaptureSort Refer to the InitiateCaptureRecInMedia command.

○ **Response Code**

This section describes only ResponseCodes different from that of the InitiateCaptureRecInMedia command. For the details of other response codes, refer to the InitiateCaptureRecInMedia command.

Response Code	Description
Shutter_Speed_Bulb	The shutter speed is set to Bulb.
Shutter_Speed_Time	The shutter speed is set to Time.

Do Not Copy

6.2.4.3 AfAndCaptureRecInSdram

○ **Command Specifications**

Operation Code	0x90CB
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode starts the AF driving and makes the camera start the acquisition of one or more new objects (release operation of the camera). The acquired object (image data) is saved in the SDRAM.

○ **Command Details**

This command performs the same operation as that of the InitiateCaptureRecInMedia command with CaptureSort set to [Image acquisition release after AF driving] and SaveMedia set to [SDRAM].

The parameters to perform the same operation as that of InitiateCaptureRecInSdram using InitiateCaptureRecInMedia are shown below.

Operation Parameter	None
Parameter1 (CaptureSort)	0xFFFFFFFE (Image acquisition release after AF driving)
Parameter2 (SaveMedia)	0x00000001(SDRAM)

For details, refer to the InitiateCaptureRecInMedia command (section 6.2.4.1).

○ **Response Code**

This section describes only ResponseCodes different from that of the InitiateCaptureRecInMedia command. For the details of other response codes, refer to the InitiateCaptureRecInMedia command.

Response Code	Description
Shutter_Speed_Bulb	The shutter speed is set to Bulb.
Shutter_Speed_Time	The shutter speed is set to Time.

Do Not Copy

6.2.4.4 TerminateCapture

○ **Command Specifications**

Operation Code	0x920C
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode stops the shooting operation executed by the host.

○ **Command Details**

The camera stops the following shooting operation executed by the host.

Shooting operation	Operation after stopping
Bulb Shooting	The images captured until the operation is stopped are recorded in the card or the SDRAM.
Continuous Shooting	If this command is executed during continuous shooting, the shooting operation is terminated.

The transition to the response phase is performed when the start of the shooting stop processing is completed.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	Reserved (0)
Parameter2	Reserved (0)

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.

Do Not Copy

6.2.4.5 ChangeAELock

○ **Command Specifications**

Operation Code	0x9426
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode changes the state of AE lock and AWB lock.

○ **Command Details**

If the white balance is other than auto or natural auto, and LockValue is set to "Locked (hold)" and the lock type is set to "AE/AWB", only the AE lock is enabled.

Even if the ResponseCode of the command is OK, check the AELockStatus property (section 6.5.6.5) and AWBLockStatus property (section 6.5.6.8) to see if the AE / AWB lock status has actually changed.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	LockValue	
	0	Lock released
	1	Locked (hold)
Parameter2	[LockType]	
	None	AE
	0	
	1	AWB
	2	AE/AWB
Parameter3	None	

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Parameter	The specified parameter is out of the range.
Access_Denied	The WarningStatus property (section 6.5.6.25) is one of the following: [Sequence error] [Minimum aperture warning] [Retractable zoom-ring warning].
	When the spot WB acquisition is in standby state.
	During aperture preview.
	The white balance* setting is anything other than auto or natural light auto, and LockType is set to [AWB]. LockType is set to [AWB].
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [On].
Device_Busy	The acquisition operation is being performed when the command processing is started.

*The white balance of the WhiteBalance property (section 6.5.1.4) is targeted in photo mode, and the white balance of the MovieWhiteBalance property (section 6.5.3.15) is targeted in video mode.

Do Not Copy

6.2.4.6 InitiatePixelMapping

○ **Command Specifications**

Operation Code	0x9433
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode starts pixel mapping.

○ **Command Details**

This command is an activation command. The camera returns OK after starting pixel mapping operation.
When a pixel mapping operation is completed, the camera sends the PixelMappingComplete event (section 6.4.2.9).

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Device_Busy	During shooting operation.
	During recording image.
Access_Denied	Sequence error
	The battery is exhausted.
	Temperature in the camera exceeds the specified value.
	Wireless remote control is connected.
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].

Do Not Copy

6.2.4.7 InitiateOpenCaptureV

○ **Command Specifications**

Operation Code	0x9445
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	Refer to Response Parameter in this section.

○ **Command Outline**

The operation by this Operation Code starts interval timer shooting and focus shift shooting.

○ **Command Details**

If interval timer shooting and focus shift shooting have already started, an OK response is given.

If the start of the interval timer shooting is requested while the interval timer shooting is paused, the interval timer shooting is restarted.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	CaptureSort	
	1	Interval Timer Shooting
	2	Focus Shift Shooting

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Parameter_Not_Supported	Specified parameter is not supported.
Store_Full	There is not enough free space in the card for recording.
	There is no free space on the SDRAM.
Invalid_Parameter	The specified CaptureSort is out of the setting range.
Store_Read_Only	The card that is ready for recording is protected.
Access_Denied	Failed to start shooting.
	Focus shift shooting is specified in CaptureSort during interval timer shooting. Interval timer shooting is specified in CaptureSort during focus shift shooting.
	The shutter release mode is set to high-speed frame capture.
	The shutter speed is set to Bulb/Time.
	The HDRMode property (section 6.5.2.70) is set to [On].
	The EnableBracketing property (section 6.5.8.1) is set to [On].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].
	The PixelShiftShootingMode property (section 6.5.2.73) is set to anything other than [Off].

Do Not Copy

	When a retractable lens is mounted, the lens is retracting.
	In video mode.
	The WarningStatus property (section 6.5.6.25) is “Version upgrade warning when mount adapter is attached”.
Store_Not_Available	RecordingMedia property is set to [Card] or [Card and SDRAM] and the card is not inserted.
	All of the following conditions are met and there is no card. CaptureSort is interval timer shooting. Time-lapse video option is enabled for interval timer shooting.
	The battery is exhausted.
Device_Busy	The capturing operation is being performed at the start of command processing.
Store_Error	Card access error occurs.
Store_Unformatted	The card is not formatted.

○ **Response Code**

Response Code	Description
Parameter1	Number of shots
Parameter2	Shooting time [second] (Fixed to 0 for focus shift shooting)

Do Not Copy

6.2.4.8 TerminateOpenCaptureV

○ **Command Specifications**

Operation Code	0x9446
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this Operation Code stops interval timer shooting and focus shift shooting.

○ **Command Details**

This command is an activation command. The camera returns OK after accepting stop request.

When shooting operation is completed, the camera sends OpenCaptureComplete event.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	In video mode.
Capture_Already_Terminated	Shooting has already been completed.

Do Not Copy

6.2.4.9 GetOpenCaptureInfo

○ **Command Specifications**

Operation Code	0x9447
Operation Parameter	Refer to Operation Parameter in this section.
Data	OpenCaptureInfo Dataset
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	-

○ **Command Outline**

The operation by this Operation Code acquires the information of interval timer shooting and focus shift shooting.

○ **Command Details**

You can acquire information on the number of shots and shooting time specified in CaptureSort.

Information can be acquired in the case of CaptureSort specified by the InitiateOpenCaptureV command during shooting, but the number of shots and the time are invalid values (fixed to 0) when the CaptureSort is different.

(Example: The number and time of focus shift shooting are invalid during interval timer shooting) The format of OpenCaptureInfo Dataset is shown below.

Field	Size (bytes)	Description
Version	2	Version of dataset Version 1.00(0x0064)
Shooting condition	2	0: Stop (If the interval timer shooting is paused, it will be stopped.) 1: During interval timer shooting 2: During focus shift shooting *This is set to [Stop] when interval timer shooting is paused.
Number of shots	4	-
Shooting time	4	The time it takes to finish shooting. Unit: seconds Invalid value (fixed to 0) for focus shift shooting

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	CaptureSort	
	1	Interval Timer Shooting
	2	Focus Shift Shooting

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_Parameter	The specified CaptureSort is out of the setting range.

Do Not Copy

6.2.4.10 SetFlickerReductionShutterSpeed

○ **Command Specifications**

Operation Code	0x9463
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this Operation Code sets the shutter speed for high-frequency flicker reduction.

○ **Command Details**

Sets the shutter speed for high-frequency flicker reduction according to the current state (photo mode or video mode). The change direction of the shutter speed specified by Parameter1 is as follows.

- On the high-speed side, it is equivalent to turning the main command dial counterclockwise.

- On the low-speed side, it is equivalent to turning the main command dial clockwise.

One step of the shutter speed change specified by Parameter2 corresponds to one click of the main command dial.

When the shutter speed for high-frequency flicker reduction is set with this command, the normal shutter speed is updated with an approximate value of the shutter speed for high-frequency flicker reduction.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	The change direction of the shutter speed	
	0	High-speed side
	1	Low-speed side
Parameter2	Shutter speed change steps	
	1 to 10	Number of steps

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Parameter	When a parameter other than those defined is specified.
Access_Denied	When the normal shutter speed is other than 1/30 second to 1/8000 second.
	When the following conditions are not met in photo mode. - The HighFrequencyFlickerReduction property (section

Do Not Copy

	6.5.2.61) is set to [On (high-resolution shutter setting)], and - The ExposureProgramMode property (section 6.5.1.11) is [M] or [S].
	When the following conditions are not met in video mode. - The MovieHighFrequencyFlickerReduction property (section 6.5.3.61) is set to [On (high-resolution shutter setting)]. and - The ExposureProgramMode property is [M].

Do Not Copy

6.2.5 Vendor (Lens)

6.2.5.1 AfDrive

○ **Command Specifications**

Operation Code	0x90C1
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode starts the AF driving and has the same function as that of pressing the shutter-release button of the camera body halfway.

○ **Command Details**

This command is an activation command. When the AF driving is started or the camera is in the AF non-driving condition described below, the OK response is made.
After the command is terminated normally, the host should issue the DeviceReady command to confirm the completion of the operation.

The following information can be returned for the DeviceReady command when the AF driving is started.

Response Code	Description
OK	AF driving operation is terminated.
Device_Busy	During AF operation
Out_of_Focus	AF operation failed (out of focus).
Other Response Code	AF operation failed.

* For details, refer to the DeviceReady command (section 6.2.2.11).

If the following conditions are true, the AF operation is not performed and the camera immediately returns OK.

No	AF non-driving condition
1	The value of the FocusMode property (section 6.5.1.7) is 0x0001[MF].
2	The WarningStatus property (section 6.5.6.25) is [Retractable zoom-ring warning].

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Access_Denied	The WarningStatus property (section 6.5.6.25) is set to one of the following: [A non-compatible lens is attached] [Attached a lens that failed firmware upgrade]

Do Not Copy

	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	When the command processing is started, the acquisition operation or the AF operation is being performed.
	STM lens is being initialized.

6.2.5.2 AfDriveCancel

○ **Command Specifications**

Operation Code	0x9206
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode cancels the AF driving.

○ **Command Details**

The camera cancels the AF driving in operation.
The transition to the response phase is performed when the cancellation of the AF driving is completed.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.

Do Not Copy

6.2.5.3 MfDrive

○ **Command Specifications**

Operation Code	0x9204
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode starts the MF driving.

○ **Command Details**

This command is an activation command. OK response is made when the MF driving is started. After the command is terminated normally, the host should issue the DeviceReady command to confirm the completion of the operation.
The following information can be returned for the DeviceReady command when the MF driving is started.

Response Code	Description
OK	MF driving operation is terminated.
Device_Busy	MF is driving.
MfDrive_Step_End	The MF driving reaches the end of steps.
MfDrive_Step_Insufficiency	The driving amount is insufficient.
Other Response Code	The MF driving operation failed.

* For details, refer to the DeviceReady command (section 6.2.2.11).

The camera performs the MF driving based on the contents of DriveType specified by Parameter1. The MF driving amount is based on the contents of StepValue specified by Parameter2. The MF driving operates according to the current position.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	DriveType	
	0x00000001	Infinite -> Nearest
	0x00000002	Nearest -> Infinite
Parameter2	StepValue (driving amount (the number of pulses))	
	From 1 to 32767	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set

Do Not Copy

	to [ON].
Device_Busy	The AF operation is being performed in the camera.
	The AF-F is being set.
	STM lens is being initialized.
	The acquisition operation is being performed when the command processing is started.
Invalid_Parameter	The specified value of DriveType or StepValue is out of the range.
Invalid_Status	The MF driving cannot be performed due to a problem caused by the camera (an error caused by the camera, the CPU internal lens is not mounted, the lens cannot be used, a non-compatible lens is attached, a lens that failed to firmware upgrade is attached, etc.).
	The focus mode is MF.

Do Not Copy

6.2.5.4 PowerZoomDrive

○ **Command Specifications**

Operation Code	0x9464
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	None
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode requests the start/stop of power zoom drive by a power zoom compatible lens.

○ **Command Details**

If a lens that supports power zoom is attached, a normal termination response is returned regardless of whether the power zoom drive started/stopped successfully.
Whether the power zoom is activated or stopped can be confirmed by the change in the FocalLength property (section 6.5.1.6).

If this command is executed with "Start" while the power zoom is being driven, it will be re-driven with the specified parameters.

To execute power zoom at a specified zoom position, set Parameter2 to 3 (specify zoom position) and Parameter4 to the drive position data.

For details, refer to Storing and Recalling the Power Zoom Position (section 2.12).

As for the correspondence between this command for the drive speed of the power zoom and the camera menu, the value obtained by subtracting 5 from the value of Parameter 3 of this command is the same as the menu value.

Speed	Low				High
Parameter3	0	…	5	…	10
Menu	-5		0		+5

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	Power zoom driving	
	0	Stop
	1	Start
Parameter2	Driving direction	
	1	Wide
	2	Tele
	3	Specify zoom position
Parameter3	Driving speed	
	From 0(Low speed) to 10(High speed)	
Parameter4 (optional)	Power zoom drive position data	

Do Not Copy

• When 0 (Stop) is specified for Parameter1, Parameter2 and subsequent parameters are not used.
• Parameter4 is only used when Parameter2 is set to 3 (specify zoom position).

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_Parameter	The specified parameter is out of the range.
Access_Denied	When the power zoom compatible lens in the LensTypeML property (section 6.5.10.2) is set to [Disabled].
	Power zoom and Hi-Res Zoom can be used together (except under the conditions below). · The MoviePowerHiResZoomCollab (section 6.5.4.46) property is set to [Extended] and Hi-Res Zoom is not performed. Note: Refer to the MoviePowerHiResZoomCollab property to determine whether power zoom and Hi-Res Zoom can be used together.
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [On].
	The WarningStatus property (section 6.5.6.25) is set to one of the following, and the driving direction is set to 3 (specify zoom position). · A non-compatible lens is attached. · A lens that failed firmware upgrade is attached. · Retractable zoom-ring warning

Do Not Copy

6.2.5.5 GetManualSettingLensData2

○ **Command Specifications**

Operation Code	0x00009470
Operation Parameter	Refer to Operation Parameter in this section.
Data	ManualSettingLens DataSet
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the information about “Non-CPU lens data” in the setup menu.

○ **Command Details**

The camera sends the information (ManualSettingLens DataSet) about “Non-CPU lens data” of LensNo specified by the parameter1 to the host.
When LensNo is set to 0xFFFFFFFF, the camera sends all the information to the host.

The ManualSettingLens DataSet is shown below.

Field		Size	DataType	Description
Version of dataset		2	UINT16	Version 1.00 (0x0064)
Lens No. being set		4	UINT32	Refer to the ManualSettingLensNo property (section 6.5.5.1).
Number of manual setting lens information (N)		4	UINT32	Acquire one data: 1/ Acquire all data: 20
Manual setting lens information[0] (Lens No. 1 information *)	Focal length	4	UINT32	Refer to the FmmManualSetting2 property (section 6.5.5.2).
	Maximum aperture	2	UINT16	Refer to the F0ManualSetting2 property (section 6.5.5.3).
	Lens name	DTS	String	Refer to the ManualSettingLensName property (section 6.5.5.4).
Manual setting lens information[1]	Focal length	4		Information about the lens No. 2.
	Maximum aperture	2		
	Lens name	DTS		
Manual setting lens information [N - 1]	Focal length	4		Information about the lens No. N.
	Maximum aperture	2		
	Lens name	DTS		

*If you specify the lens number in Prameter1, you can obtain only that information.

Do Not Copy

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	LensNo	
	Refer to the ManualSettingLensNo property.	Acquire one data
	0xFFFFFFFF	Acquire all data
Parameter2	None	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.6 Vendor (LiveView)

6.2.6.1 StartLiveView

○ **Command Specifications**

Operation Code	0x9201
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode makes the camera enter the remote live view status.

○ **Command Details**

This command is an activation-type command. OK response is made when the entry into the remote live view status is started.

When the host gets the response code of normal termination, the host should issue the DeviceReady command to confirm whether the camera enters the remote live view status (and the acquisition of the live view image becomes enabled).

The following information can be returned for the DeviceReady command when entering the remote live view status.

Response Code	Description
OK	The camera has entered the remote live view status.
Device_Busy	The camera is entering the remote live view status.
Other Response Code *	Some error has occurred when entering the remote live view status.

* For details, refer to the DeviceReady command (section 6.2.2.11).

When the live view is active on the camera but the camera does not enter the remote live view status because the StartLiveView command has not been executed, commands such as GetLiveViewImageEx command cannot be executed.

The live view prohibition condition is shown in the LiveViewProhibitionCondition property (section 6.5.11.7). The StartLiveView command must be issued when there is no prohibition factor in the LiveViewProhibitionCondition property. If there is any prohibition factor in the LiveViewProhibitionCondition property, even if the StartLiveView command is issued and the live view is started, the operation is not guaranteed.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Device_Busy	The acquisition operation is being performed when the command processing is started.

Do Not Copy

Hardware_Error	An error is generated in the camera body when the command processing is started.
Invalid_Status	An error caused by the camera (battery empty, warning information) occurs.

Do Not Copy

6.2.6.2 EndLiveView

○ **Command Specifications**

Operation Code	0x9202
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode releases the live view status.

○ **Command Details**

The remote live view status is released and the camera becomes into the camera live view status.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Device_Busy	The live view cannot be terminated because of the camera factor.

Do Not Copy

6.2.6.3 GetLiveViewImage

○ **Command Specifications**

Operation Code	0x9203
Operation Parameter	None
Data	LiveViewObject (without version)
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the newest live view image.
The format of the live view image is JPEG.

○ **Command Details**

This OperationCode is a command for compatibility with the GetLiveViewImageEx command (section 6.2.6.4).

For this camera, GetLiveViewImageEx command should be used.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	The WarningStatus property (section 6.5.6.25) is “Version upgrade warning when mount adapter is attached”.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.6.4 GetLiveViewImageEx

○ **Command Specifications**

Operation Code	0x9428
Operation Parameter	None
Data	LiveViewObject (with version)
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the newest live view image.
The format of the live view image is JPEG.

○ **Command Details**

This command is valid when the camera is in the remote live view condition after executing the StartLiveView command.

The camera sends the newest live view image (LiveViewObject) to the host. LiveViewObject is composed of the display information and the live view image (JPEG). The data set of LiveViewObject is described in section 9.7.

Even if the through image display of the camera is being enlarged during video recording, the live view image transmitted by this command is the whole image.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	The WarningStatus property (section 6.5.6.25) is “Version upgrade warning when mount adapter is attached”.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.6.5 GetLiveViewCompressedSize

○ **Command Specifications**

Operation Code	0x9423
Operation Parameter	None
Data	LiveViewObjectMaxSize Value
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the maximum size (Byte) of LiveViewObject returned by the GetLiveViewImageEx command.

○ **Command Details**

The size of the live view image is calculated with the value set in the LiveViewImageCompression property and LiveViewImageSize property.

The format of LiveViewObjectMaxSize is UINT32.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.6.6 ChangeAfArea

○ **Command Specifications**

Operation Code	0x9205
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode changes the AF area in the live view condition.

○ **Command Details**

This command is valid when the camera is in the remote live view condition after getting the StartLiveView command.

The camera specifies the AF area with the coordinates specified by Parameter1 and Parameter2 set to the center. XValue of Parameter1 and YValue of Parameter2 are used to set the X-axis and the Y-axis, respectively.
The range of XValue and YValue should be the “Whole size” of the header information acquired by the GetLiveViewImageEx command. However, the range that can be specified should be smaller by the half size of the “AF frame size”. When a value that exceeds the setting permitted range is set, the maximum or the minimum value is reflected.

If the image is enlarged during video recording, only the enlarged position is changed without changing the AF area.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	XValue
Parameter2	YValue

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	When the spot WB acquisition is in standby state.
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	The AF operation is being performed in the camera.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.6.7 StartTracking

○ **Command Specifications**

Operation Code	0x9424
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode starts tracking action for auto-area AF, target tracking AF and 3D-tracking, or changes the target of subject recognition.

○ **Command Details**

The specification method of OperationParameter is the same as the command details of ChangeAfArea (section 6.2.6.6).
After this command is executed, the changes in LiveViewObject (section 9.7) acquired by the GetLiveViewImageEx command are shown below.

Conditions		Value of LiveViewObject that changes after this command is executed		
AF area mode	Subject recognition target is detected or not	Tracking state	AF frame center coordinates	Index of selected subject
Auto-area AF	There is a detected subject recognition target at the specified coordinates.	Waiting	-	Index of the subject recognition target at the specified coordinates
	There is no detected subject recognition target at the specified coordinates.	Tracking	Specified coordinates	-
Target tracking AF / 3D-tracking	-	Tracking	Specified coordinates	-

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	XValue
Parameter2	YValue

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	The StillFocusMeteringMode property (section 6.5.2.63) is set to a value other than [Auto-area AF / 3D-tracking] in photo mode.
	The MovieFocusMeteringMode property (section 6.5.3.65) is set to the value other than [Auto-area AF / Target tracking AF] in video mode.
	When the spot WB acquisition is in standby state.
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	During shooting operation.
Invalid_Status	Failed to change the tracking state due to camera-related factors.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.6.8 EndTracking

○ **Command Specifications**

Operation Code	0x9425
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode terminates the tracking operation in auto-area AF, target tracking AF and 3D-tracking.

○ **Command Details**

After executing this command, the tracking state of LiveViewObject acquired by the GetLiveViewImageEx command (section 6.2.6.4) is set to [Waiting].

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Device_Busy	During shooting operation.
Invalid_Status	Failed to change the tracking state due to camera-related factors.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.7 Vendor (Video)

6.2.7.1 StartMovieRecord

○ **Command Specifications**

Operation Code	0x920A
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	Refer to Response Parameter in this section.

○ **Command Outline**

The operation by this OperationCode starts video recording.

○ **Command Details**

This command is accepted only during the live view execution. It is recommended to check the video recording prohibition condition property (MovieRecProhibitionCondition (section 6.5.12.6)) before issuing this command.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	When the spot WB acquisition is in standby state.
	During photo mode.
Invalid_Status	The video recording cannot be started due to an error caused by the camera.
Not_LiveView	The camera is not in live view.

○ **Response Parameter**

Response Parameter	Description
Parameter1	When the response code is OK, the recording media is specified in this field. When the response code is not OK, this field is invalid. 0: Recording in the card 1: Recording in the external recorder 2: Recording in the card and the external recorder
Parameter2	None
Parameter3	None

Do Not Copy

6.2.7.2 EndMovieRecord

○ **Command Specifications**

Operation Code	0x920B
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode finishes video recording.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.

Do Not Copy

6.2.7.3 GetHLGQualityData

○ **Command Specifications**

Operation Code	0x942E
Operation Parameter	None
Data	HLGQuality DataSet
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the HLGQuality DataSet set in "HLG Quality Adjustment" in the video recording menu.

○ **Command Details**

For the format of the HLGQuality DataSet, refer to section 9.11.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.7.4 SetHLGQualityData

○ **Command Specifications**

Operation Code	0x942F
Operation Parameter	None
Data	HLGQuality DataSet
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets the HLGQuality DataSet in "HLG Quality Adjustment" in the video recording menu.

○ **Command Details**

For the format of the HLGQuality DataSet, refer to section 9.11.

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Device_Busy	During shooting operation.
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit (MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to anything other than [HLG].
	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [On].
	Wrong HLGQuality DataSet was specified.
Invalid_Data	

Do Not Copy

6.2.8 Vendor (White Balance)

6.2.8.1 SetPreWbData

○ **Command Specifications**

Operation Code	0x90C9
Operation Parameter	Refer to Operation Parameter in this section.
Data	PreWbThumImage
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets the data in the preset manual white balance data area of the camera.

○ **Command Details**

This command sets the data in the preset manual white balance data area of the camera.

The camera stores the preset white balance gain value specified by PreWbGainValue in the data area specified by PreWbDataIndex and stores the thumbnail image of PreWbThumImage.

The format of PreWbThumImage shall be the same as that of the thumbnail image (JPEG format) recorded in the JPEG file defined in the accompanying document “RAW Data Format for Digital Camera”.

When PreWbThumImageSize is 0, PreWbThumImage is not sent in the data phase and the thumbnail image is not recorded.

Do Not Copy

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	byte3: Reserved(0)	
	byte2: ShootingMode	
	0	Photography
	1	Video
	byte1: RotateThumb (*1)	
	0	Horizontal
	1	Grip side upward
	2	Grip side downward
	byte0: PreWbDataIndex (*2) This is equivalent to the WbPresetDataNo property (section 6.5.2.28).	
Parameter2	PreWbGainValue	
Parameter3	PreWbThumImageSize	

*1: RotateThumb is referred to by the camera when Parameter3 (PreWbThumImageSize) is a value other than 0.

*2: If the value of the WbPresetDataNo property is zero (in the case of a camera with acquired data), no data can be set in the preset manual white balance data area.

The contents of PreWbGainValue are shown below.

Upper 2 Bytes of PreWbGainValue are RGain and lower 2 Bytes are BGain.
The format of RGain and BGain is fixed point. RGain sets Bit 16 to 26 as decimal parts and BGain sets up to Bit 10 as decimal parts.
Since the number of significant digits of the decimal part is 9 bits, the lower 2 bits are ignored.

$$\mathrm{RGain} = \frac{\mathrm{G}}{\mathrm{R}} \times 2048$$
$$\mathrm{BGain} = \frac{\mathrm{G}}{\mathrm{B}} \times 2048$$

The range that can be set for RGain, BGain is as follows.

$$0 \leq \mathrm{RGain} < 8 \times 2048$$
$$0 \leq \mathrm{BGain} < 8 \times 2048$$

PreWbGainValue																
Bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RGain	Integer part					Decimal part										
Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
BGain	Integer part					Decimal part										

PreWbThumImageSize indicates the size of PreWbThumImage. In addition, PreWbThumImage should be the compression quality Fine (1/4 compression) and the size should be 13440 bytes or less.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.

Do Not Copy

Parameter_Not_Supported	Specified parameter is not supported.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	During shooting operation.
Invalid_Parameter	The specified value is out of the range.
Wb_Preset_Error	The specified index of the preset is protected.

Do Not Copy

6.2.8.2 StartSpotWb

○ **Command Specifications**

Operation Code	0x9402
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation performed using this OperationCode sets the spot WB acquisition standby state.

○ **Command Details**

This command is valid when the camera is in the remote live view condition after getting the StartLiveView command.

In photo mode, the camera enters the acquisition standby state for the storage destination specified by the WbPresetDataNo property (section 6.5.2.28).

In video mode, the camera enters the acquisition standby state for the storage destination specified by the MovieWbPresetDataNo property (section 6.5.3.27). However, when MovieWhiteBalance (section 6.5.3.15) is set to [Same as photo settings], the storage destination specified by the WbPresetDataNo property is used.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	The white balance is set to anything other than [Preset manual].
	The application mode is set to [Off].
Device_Busy	The acquisition operation is being performed when the command processing is started.
Invalid_Status	The storage destination of the preset manual WB data is protected.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.8.3 EndSpotWb

○ **Command Specifications**

Operation Code	0x9403
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode cancels the spot WB acquisition standby state.

○ **Command Details**

This command cancels the spot WB acquisition standby state. The OK response is made even when the camera is not in the spot WB acquisition standby state.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Device_Busy	During transition into the spot WB condition
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.8.4 ChangeSpotWbArea

○ **Command Specifications**

Operation Code	0x9404
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode changes the spot WB area in the spot WB acquisition standby state.

○ **Command Details**

This command is valid when the camera is in the spot WB acquisition standby state after getting the StartSpotWb command.

For details, refer to ChangeAfArea (section 6.2.6.6).

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	XValue
Parameter2	YValue

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Invalid_Status	The camera is not in the spot WB acquisition standby state.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.8.5 MeasureSpotWb

○ **Command Specifications**

Operation Code	0x9405
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires the spot WB in the spot WB acquisition standby state.

○ **Command Details**

This command is valid when the camera is in the spot WB acquisition standby state after getting the StartSpotWb command (section 6.2.8.2).

This command is an activation command. When the spot WB acquisition is started, the transition to the response phase is performed.

When receiving this command, the camera acquires the spot WB with the coordinates set by the ChangeSpotWbArea command (section 6.2.8.4).
The spot WB acquisition result is passed by the display information in the LiveViewObject acquired by the GetLiveViewImageEx command (section 6.2.6.4).
After releasing the acquisition result, the camera is in the spot WB acquisition standby state and the acquisition operation can be performed again by executing this command.

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Device_Busy	During transition into the spot WB condition
Invalid_Status	The camera is not in the spot WB acquisition standby state.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.8.6 EndSpotWbResultDisp

○ **Command Specifications**

Operation Code	0x9406
Operation Parameter	None
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode cancels the spot WB acquisition result screen display.

○ **Command Details**

This command cancels the spot WB acquisition result screen display. The OK response is made even while the spot WB acquisition result screen is not displayed.

This command is an activation command. When the cancellation of the spot WB acquisition result screen display is started, the transition to the response phase is performed.

The result of the spot WB acquisition result screen display is passed by the display information in the LiveViewObject acquired by the GetLiveViewImageEx command (section 6.2.6.4).

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Not_LiveView	The camera is not in the remote live view condition.

Do Not Copy

6.2.9 Vendor (Picture Control)

6.2.9.1 GetPicCtrlData

○ **Command Specifications**

Operation Code	0x90CC
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControl DataSet
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires PictureControl DataSet of the specified PicCtrlItem.

○ **Command Details**

The parameter3 is optional and the photo shooting menu or video recording menu can be specified.

For the format of the PictureControl DataSet, refer to section 9.9.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlItem (equivalent to the ActivePicCtrlItem property (section 6.5.14.1))	
Parameter2	DefaultFlag	
	0	Current setting
	1	Default value
Parameter3	[ShootingMode]	
	None	PictureControl data for the photo shooting menu
	0	
	1	PictureControl data for the video recording menu

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.9.2 GetPicCtrlDataList

○ **Command Specifications**

Operation Code	0x9443
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControl List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires PictureControl List of the specified PicCtrlItem.

○ **Command Details**

When PicCtrlItem is specified in Parameter1, the current value and default value of PictureControl DataSet (section 9.9) of the specified PicCtrlItem are sent to the host. When 0xFFFFFFFF is specified, all PicCtrlItems are sent.

If the specified PicCtrlItem is an unregistered custom picture control, NumberOfElements is set to 0. If 0xFFFFFFFF is specified, it will not be added to the list.

The Dataset of Picture Control List is shown below.

Field		DataSize	Description
NumberOfElements		4	Number of PictureControl in the list.
Element1		DTS	
	Element Size	2	Size of the element
	PicCtrlItem	2	Type of Picture Control
	Default PictureControl DataSet	36 or 614	Default value of PictureControl
	Current PictureControl DataSet	36 or 614	Current value of PictureControl
...			
ElementN		DTS	

NOTE) The DataSize of the PictureControl DataSet differs depending on whether CustomCurveFlag is disabled (36 bytes) or enabled (614 bytes).

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlItem	Specified Picture Control (equivalent to the ActivePicCtrlItem property (section 6.5.14.1))
	0xFFFFFFFF	All PictureControl
Parameter2	ShootingMode	
	0	Photo shooting menu
	1	Video recording menu

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.9.3 SetPicCtrlData

○ **Command Specifications**

Operation Code	0x90CD
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControl DataSet
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets PictureControl DataSet to the specified PicCtrlItem.

○ **Command Details**

The parameter3 is optional and the photo shooting menu or video recording menu can be specified.

For the format of the PictureControl DataSet, refer to section 9.9.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlItem (equivalent to the ActivePicCtrlItem property (section 6.5.14.1))	
Parameter2	ModifiedFlag	
	0	The contents of PictureControl DataSet are applied as a new picture control.
	1	The contents of PictureControl DataSet are applied to the current setting value of the existing picture control.
Parameter3	[ShootingMode]	
	None	PictureControl data for the photo shooting menu
	0	
	1	PictureControl data for the video recording menu

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.
Device_Busy	During shooting operation.
Access_Denied	When PicCtrlItem is a Custom Picture Control and ModifiedFlag is set to 1 (existing picture control), the registered base picture control and BasePictureControl in PictureControl DataSet do not match.
	When the ToneMode property (section 6.5.2.5) is set to [HLG], the

Do Not Copy

	ShootingMode is set to 0 (photo shooting menu).
	When the ToneMode is set to [N-Log] or [HLG](*), the ShootingMode is set to 1 (video recording menu). *When any of the following conditions are met: ● - The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit(MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log] or [HLG]. ● The MovieFileType property is set to [N-RAW 12-bit (NEV)] and the MovieNRaw12bitToneMode property (section 6.5.3.4) is set to [N-Log]. ● The MovieFileType property is set to [ProRes 422 HQ 10-bit(MOV)] and the MovieProResToneMode property (section 6.5.3.5) is set to [N-Log]. ● The MovieFileType property is set to [ProRes RAW HQ 12-bit(MOV)] and the MovieProResRawHq12bitToneMode property (section 6.5.3.6) is set to [N-Log].
	The setting is configured to 1 (video shooting menu) while the MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].
	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [On].
	An invalid PictureControl DataSet (section 9.9) is specified.

Do Not Copy

6.2.9.4 DeleteCustomPicCtrl

○ **Command Specifications**

Operation Code	0x90CE
Operation Parameter	Refer to Operation Parameter in this section.
Data	None
Data direction	-
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode deletes the specified custom picture control item.

○ **Command Details**

The format of CustomPicCtrlItem is the same as that of the ActivePicCtrlItem property (section 6.5.14.1).

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	CustomPicCtrlItem	
Parameter2	[ShootingMode]	
	None	PictureControl data for the photo shooting menu
	0	
	1	PictureControl data for the video recording menu
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	During shooting operation.

Do Not Copy

6.2.9.5 GetPicCtrlCapability

○ **Command Specifications**

Operation Code	0x90CF
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControlCapabilityData
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires PictureControlCapability DataSet of the picture control that is the basis of the specified PicCtrlItem.

○ **Command Details**

The parameter2 is optional and the photo shooting menu or video recording menu can be specified.

For the format of the PictureControlCapability DataSet, refer to section 9.10.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlItem (equivalent to the ActivePicCtrlItem property (section 6.5.14.1))	
Parameter2	[ShootingMode]	
	None	PictureControl data for the photo shooting menu
	0	
	1	PictureControl data for the video recording menu
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.9.6 GetPicCtrlCapabilityList

○ **Command Specifications**

Operation Code	0x9444
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControlCapability List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires PictureControlCapability List of the picture control that is the basis of the specified PicCtrlItem.

○ **Command Details**

When PicCtrlItem is specified in Parameter1, the PictureControlCapability DataSet (section 9.10) of the specified PicCtrlItem is sent to the host. When 0xFFFFFFFF is specified, all PicCtrlItems are sent.

If the specified PicCtrlItem is an unregistered custom picture control, NumberOfElements is set to 0. If 0xFFFFFFFF is specified, it will not be added to the list.

The data set of PictureContorl Capability List is shown below.

Field		DataSize	Description
NumberOfElements		4	Number of PictureControl in the list.
Element1		32	
	Element Size	2	Size of the element
	PicCtrlItem	2	Type of Picture Control
	PictureContorlCapability DataSet	28	PictureControl function information
...			
ElementN		32	

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlItem	Specified Picture Control (equivalent to the ActivePicCtrlItem property (section 6.5.14.1))
	0xFFFFFFFF	All PictureControl
Parameter2	ShootingMode	
	0	Photo shooting menu
	1	Video recording menu

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.9.7 GetPicCtrlHlgDataList

○ **Command Specifications**

Operation Code	0x944D
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControlHlg List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this Operation Code acquires the PictureControlHlg DataSet of the PicCtrlHlgItem specified in "Picture Control (HLG)".

○ **Command Details**

When PicCtrlHlgItem is specified in Parameter1, the current value and default value of PictureControlHlg DataSet (section 9.11) of the specified PicCtrlHlgItem are sent to the host. When 0xFFFFFFFF is specified, all PicCtrlHlgItems are targeted.

The data set of PictureControlHlg List is shown below.

Field		DataSize	Description
NumberOfElements		4	Number of Picture Controls (HLG) in the list
Element1		76	
	Element Size	2	Size of the element
	PicCtrlHlgItem	2	Types of Picture Control (HLG)
	Default PictureControlHlg DataSet	36	Default value of Picture Control (HLG)
	Current PictureControlHlg DataSet	36	Current value of Picture Control (HLG)
...			
ElementN		76	

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlHlgItem	Specified Picture Control (HLG) (equivalent to the ActivePicCtrlHlgItem property (section 6.5.14.3))
	0xFFFFFFFF	All PictureControl
Parameter2	None	
Parameter3	None	

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.9.8 SetPicCtrlHlgData

○ **Command Specifications**

Operation Code	0x944E
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControlHlg DataSet
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets PictureControlHlg DataSet to PicCtrlHlgItem specified in "Picture Control (HLG)".

○ **Command Details**

For the format of the PictureControlHlg DataSet, refer to section 9.11.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	PicCtrlHlgItem (equivalent to the ActivePicCtrlHlgItem property (section 6.5.14.3))

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.
Device_Busy	During shooting operation.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
	An invalid PictureControlHlg DataSet (section 9.11) is specified.

Do Not Copy

6.2.9.9 GetPicCtrlHlgCapabilityList

○ **Command Specifications**

Operation Code	0x944F
Operation Parameter	Refer to Operation Parameter in this section.
Data	PictureControlHlgCapability List
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this Operation Code acquires the PictureContorlHlgCapability List of the Picture Control (HLG) that is the basis of the specified PicCtrlHlgItem.

○ **Command Details**

When PicCtrlHlgItem is specified in Parameter1, the PictureControlHlgCapability DataSet (section 9.12) of the specified PicCtrlHlgItem is sent to the host. When 0xFFFFFFFF is specified, all PicCtrlHlgItems are targeted.

The data set of PictureControlHlgCapability List is shown below.

Field		DataSize	Description
NumberOfElements		4	Number of Picture Controls (HLG) in the list
Element1		33	
	Element Size	2	Size of the element
	PicCtrlHlgItem	2	Types of Picture Control (HLG)
	PictureContorlHlgCapability DataSet	29	Picture Control (HLG) function information
...			
ElementN		33	

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PicCtrlHlgItem	Specified Picture Control (HLG) (equivalent to the ActivePicCtrlHlgItem property (section 6.5.14.3))
	0xFFFFFFFF	All PictureControl
Parameter2	None	
Parameter3	None	

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Parameter	The specified parameter is out of the range.
Incomplete_Transfer	Data block transmission failed.

Do Not Copy

6.2.10 Vendor (IPTC)

6.2.10.1 GetIPTCInfo

○ **Command Specifications**

Operation Code	0x9401
Operation Parameter	Refer to Operation Parameter in this section.
Data	Presence or absence of the IPTC information
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the presence or absence of the IPTC information of the specified object.

○ **Command Details**

The camera sends the presence or absence of the IPTC information corresponding to the ObjectHandle specified in Parameter1.

Information to be sent (the transfer data size is 4 bytes) 0: IPTC absent, 1: IPTC present

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object that corresponds to the specified ObjectHandle does not exist.
	An object in the SDRAM other than the ObjectHandle passed by ObjectAddedInSdram is specified.
Store_Not_Available	The card is being initialized.
	The card does not exist.
	The battery is exhausted.

Do Not Copy

6.2.10.2 GetIPTCPresetInfo

○ **Command Specifications**

Operation Code	0x9412
Operation Parameter	Refer to Operation Parameter in this section.
Data	IPTCPreset list
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode obtains the specified IPTC preset information.

○ **Command Details**

The camera sends IPTCPreset list with following format.
Each field data is stored in the little-endian format.

Field	Size(Byte)	Data
NumElement	4	The number of array elements (N is the number of object)
ArrayEntry [0]	DTS	IPTCPresetDataSet [0]
ArrayEntry [1]	DTS	IPTCPresetDataSet [1]
ArrayEntry [2]	DTS	IPTCPresetDataSet [2]
...		
ArrayEntry [N - 1]	DTS	IPTCPresetDataSet [N - 1]

When PresetNo is set to 0, the number of entries in the list is 13.
IPTC preset information is stored in a list in the order of PresetNo.

When PresetNo is more than 1, the number of entry is 1 and the dataset specified by PresetNo is stored in IPTCPresetDataSet[0] field.

The dataset of IPTCPreset is described in section 9.8.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PresetNo	
	0	All preset
	1 to 10	Specified IPTC preset (NMS-IPTC)
	11 to 13	Specified IPTC preset (XMP-IPTC)
Parameter2	None	
Parameter3	None	

Do Not Copy

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Parameter	The specified PresetNo is out of range.

Do Not Copy

6.2.10.3 SetIPTCPresetInfo

○ **Command Specifications**

Operation Code	0x9413
Operation Parameter	Refer to Operation Parameter in this section.
Data	IPTCPreset list
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets the specified IPTC preset information.

○ **Command Details**

The format of the preset list that is set on the camera is described in GetIPTCPresetInfo (section 6.2.10.2).

The IPTC format set in IPTCPresetDataSet differs depending on PresetNo.

When PresetNo is set to 0, 13 items of information should be set. Set IPTC preset information in ascending order of PresetNo in the storage order of the IPTCPreset list.

When PresetNo is more than one, the specified preset information should be set in IPTCPresetDataSet[0] field.

○ **Operation Parameter**

Operation Parameter	Details	
Parameter1	PresetNo	
	0	All preset
	1 to 10	Specified IPTC preset (NMS-IPTC)
	11 to 13	Specified IPTC preset (XMP-IPTC)
Parameter2	None	
Parameter3	None	

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	The PixelShiftShootingStatus property (section 6.5.6.4) is set to [ON].
Device_Busy	During shooting operation.
Invalid_Parameter	The specified PresetNo is out of range.
Invalid_Data	The format of the specified PrisetNo and IPTCPresetDataSet are different.

Do Not Copy

6.2.11 Vendor (MTP)

6.2.11.1 GetObjectPropsSupported

○ **Command Specifications**

Operation Code	0x9801
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectPropCodeArray
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode acquires an array of codes of the object property supported by the camera.

○ **Command Details**

The camera sends the Array of the property corresponding to ObjectFormatCode specified by Parameter1.

The format of ObjectPropCodeArray sent by the camera is shown below.
Each field data is stored in the little-endian format.

For the supported ObjectPropCode values, refer to section 6.6.

Field	Size (bytes)	Data
NumElement	4	The element of the array is N (N indicates the number of objects).
ArrayEntry [0]	2	ObjectPropCode [0]
ArrayEntry [1]	2	ObjectPropCode [1]
ArrayEntry [2]	2	ObjectPropCode [2]
...		
ArrayEntry [N - 1]	2	ObjectPropCode [N - 1]

The camera supports the following ObjectFormatCodes only.

PropertyValue	ObjectFormat
0x3000	Undefined
0x3001	Association
0x3008	WAV
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x380D	TIFF (RGB)
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectFormatCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
ObjectProp_Not_Supported	The specified ObjectFormatCode is not supported.

Do Not Copy

6.2.11.2 GetObjectPropDesc

○ **Command Specifications**

Operation Code	0x9802
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectPropDesc data set
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the ObjectPropDesc data set corresponding to the specified ObjectPropCode and ObjectFormatCode.

○ **Command Details**

For the supported ObjectPropCode values, refer to section 6.6.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectPropCode
Parameter2	ObjectFormatCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
ObjectProp_Not_Supported	The specified ObjectPropCode is not supported.
	The specified ObjectFormatCode is not supported.

Do Not Copy

6.2.11.3 GetObjectPropValue

○ **Command Specifications**

Operation Code	0x9803
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectPropValue
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the current value corresponding to the specified ObjectPropCode.

○ **Command Details**

The camera sends the object property information specified by Parameter2 to the object corresponding to the ObjectHandle specified by Parameter1.

For the supported ObjectPropCode values and the details of ObjectPropValue, refer to section 6.6.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle
Parameter2	ObjectPropCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Invalid_Object_Handle	An object corresponding to the specified ObjectHandle does not exist, or it indicates an object in the SDRAM.
Incomplete_Transfer	Data block transmission failed.
Access_Denied	The video is playing.
ObjectProp_Not_Supported	The specified ObjectPropCode is not supported.

Do Not Copy

6.2.11.4 SetObjectPropValue

○ **Command Specifications**

Operation Code	0x9804
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectPropValue
Data direction	From host to camera
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode sets the value to the specified ObjectPropCode.

○ **Command Details**

Sets the object property information specified by Parameter2 to the object corresponding to the ObjectHandle specified by Parameter1.

For the supported ObjectPropCode values and the details of ObjectPropValue, refer to section 6.6.

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle
Parameter2	ObjectPropCode

○ **Response Code**

Response Code	Description
OK	Normal termination
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Parameter_Not_Supported	Specified parameter is not supported.
Access_Denied	An operation is denied due to the status of the camera.
	Does not allow setting of specified ObjectPropCode.
Device_Busy	Camera is busy and cannot start processing.
Invalid_Object_Handle	An object corresponding to the specified ObjectHandle does not exist, or it indicates an object in the SDRAM.
Invalid_ObjectPropCode	The specified ObjectPropCode is not supported.
Invalid_ObjectProp_Format	Specified ObjectPropValue has incorrect format or size.
Invalid_Objectprop_Value	The specified ObjectPropCode is not supported.

Do Not Copy

6.2.11.5 GetObjectPropList

○ **Command Specifications**

Operation Code	0x9805
Operation Parameter	Refer to Operation Parameter in this section.
Data	ObjectPropList data set
Data direction	From camera to host
Response Code	Refer to Response Code in this section.
Response Parameter	None

○ **Command Outline**

The operation by this OperationCode returns the ObjectPropList data set.

○ **Command Details**

The camera returns the ObjectPropList data set for the object corresponding to the ObjectHandle specified by Parameter1 and the ObjectPropCode (object property) specified by Parameter3. The target can be identified by specifying the optional Parameter2, Parameter4, and Parameter5.

For the supported ObjectPropCode values and the details of ObjectPropValue, refer to section 6.6.

Operation Parameter	Value	Details
Parameter1	0x00000000	The objects directly under the root should be the targets.
	ObjectHandle	The object matching with the specified object handle should be the target.
	0xFFFFFFFF	All the objects should be the targets.
Parameter2 (Optional)	0x00000000	Parameter2 is not specified. The objects with all the object formats should be the targets.
	ObjectFormatCode	The object with the specified format should be the target.
Parameter3	0x00000000	All the objects with the group code specified by Parameter4 should be the targets.
	ObjectPropCode	The object with the specified property should be the target.
	0xFFFFFFFF	All the objects without the group code of 0xFFFFFFFF should be the targets.
Parameter4 (Optional)	ObjectPropGroupCode	The object with the specified group code should be the target. *This is used only when Parameter3 is set to 0x00000000.
Parameter5 (Optional)	No value *1	Only the object specified by Parameter1 should be the target. If Parameter1 is not specified (0x00000000), the camera returns an empty ObjectPropList data set.
	0x00000000	
	Depth	All the objects from the objects specified by Parameter1 to the depth specified by Parameter5

Do Not Copy

		should be the targets.
	0xFFFFFFFF	All the objects included in the folder hierarchy of the object specified by Parameter1 should be the targets. If an object of the file is specified in Parameter1, however, only the object specified by Parameter1 should be the target.

*1 This is the case that ObjectHandle is specified in Parameter1. When Parameter1 is set to 0x00000000, all the objects should be the targets.

Do Not Copy

The format of ObjectPropList sent by the camera is shown below.

Field name	Field order	Size (bytes)	Datatype	Description
NumberOfElements	1	4	UINT32	Number of properties (N) The number of property fields is four times the number of properties.
Element1ObjectHandle	2	4	ObjectHandle	ObjectHandle of the object to which Property 1 is applied
Element1PropertyCode	3	2	Datacode	Datacode that specifies the ObjectPropDesc describing Property 1
Element1Datatype	4	2	Datacode	Specifies DatatypeCode of Property 1.
Element1Value	5	DTS	DTS	Value of Property 1
Element2ObjectHandle	6	4	ObjectHandle	ObjectHandle of the object to which Property 2 is applied
Element2PropertyCode	7	2	Datacode	Datacode that specifies the ObjectPropDesc describing Property 2
Element2Datatype	8	2	Datacode	Specifies DatatypeCode of Property 2.
Element2Value	9	DTS	DTS	Value of Property 2
...				
ElementNObjectHandle	N x 4 - 2	4	ObjectHandle	ObjectHandle of the object to which Property N is applied
ElementNPropertyCode	N x 4 - 1	2	Datacode	Datacode that specifies the ObjectPropDesc describing Property N
ElementNDatatype	N x 4	2	Datacode	Specifies DatatypeCode of Property N.
ElementNValue	N x 4 + 1	DTS	DTS	Value of Property N

○ **Operation Parameter**

Operation Parameter	Details
Parameter1	ObjectHandle
Parameter2	[ObjectFormatCode]
Parameter3	ObjectPropCode
Parameter4	[ObjectPropGroupCode]
Parameter5	[Depth]

○ **Response Code**

Response Code	Description
OK	Normal termination
Parameter_Not_Supported	Specified parameter is not supported.
Session_Not_Open	The session is not started.
Invalid_TransactionID	The TransactionID retained by the camera differs from the TransactionID specified by the host.
Incomplete_Transfer	Data block transmission failed.
Invalid_Object_Handle	An object corresponding to the specified ObjectHandle does not exist, or it indicates an object in the SDRAM.
Store_Not_Available	The card is being initialized.

Do Not Copy

	The card does not exist.
	The battery is exhausted.
Access_Denied	The video is playing.
Specification_By_Format_ Unsupported	The specified ObjectFormatCode is not supported.
Invalid_ObjectPropCode	The specified ObjectPropCode is not supported.

Do Not Copy

6.3 Response Code

The camera returns the response for the processing in the response phase to the command sent from the host to the camera in the command phase. The ResponseCode shows the contents of the response. The relationship between the ResponseCode and the OperationCode sent in the command phase is as shown in section 6.2.

The ResponseCodes supported by the camera are shown below.

Response Code	Description	Reference
0x2001	OK	6.3.1.1
0x2002	General_Error	6.3.1.2
0x2003	Session_Not_Open	6.3.1.3
0x2004	Invalid_TransactionID	6.3.1.4
0x2005	Operation_Not_Supported	6.3.1.5
0x2006	Parameter_Not_Supported	6.3.1.6
0x2007	Incomplete_Transfer	6.3.1.7
0x2008	Invalid_StorageID	6.3.1.8
0x2009	Invalid_Object_Handle	6.3.1.9
0x200A	DeviceProp_Not_Supported	6.3.1.10
0x200B	Invalid_ObjectFormatCode	6.3.1.11
0x200C	Store_Full	6.3.1.12
0x200D	Object_Write_Protect	6.3.1.13
0x200E	Store_Read_Only	6.3.1.14
0x200F	Access_Denied	6.3.1.15
0x2010	No_Thumbnail_Present	6.3.1.16
0x2012	Partial_Deletion	6.3.1.17
0x2013	Store_Not_Available	6.3.1.18
0x2014	Specification_By_Format_Unsupported	6.3.1.19
0x2018	Capture_Already_Terminated	6.3.1.20
0x2019	Device_Busy	6.3.1.21
0x201A	Invalid_Parent_Object	6.3.1.22
0x201B	Invalid_DeviceProp_Format	6.3.1.23
0x201C	Invalid_DeviceProp_Value	6.3.1.24
0x201D	Invalid_Parameter	6.3.1.25
0x201E	Session_Already_Open	6.3.1.26
0x201F	Transaction_Cancelled	6.3.1.27
0xA001	Hardware_Error	6.3.2.1
0xA002	Out_of_Focus	6.3.2.2
0xA003	Change_CameraMode_Failed	6.3.2.3
0xA004	Invalid_Status	6.3.2.4
0xA006	Wb_Preset_Error	6.3.2.5
0xA007	Dust_Reference_Error	6.3.2.6
0xA008	Shutter_Speed_Bulb	6.3.2.7
0xA00A	CameraMode_Not_Adjust_Fnumber	6.3.2.8
0xA00B	Not_LiveView	6.3.2.9

Do Not Copy

0xA00C	MfDrive_Step_End	6.3.2.10
0xA00E	MfDrive_Step_Insufficiency	6.3.2.11
0xA00F	No_FullHD_Present	6.3.2.12
0xA021	Store_Error	6.3.2.13
0xA022	Store_Unformatted	6.3.2.14
0xA200	Bulb_Release_Busy	6.3.2.15
0xA201	Silent_Release_Busy	6.3.2.16
0xA202	MovieFrame_Release_Busy	6.3.2.17
0xA204	Shutter_Speed_Time	6.3.2.18
0xA210	Invalid_Data	6.3.2.19
0xA801	Invalid_ObjectPropCode	6.3.2.20
0xA802	Invalid_ObjectProp_Format	6.3.2.21
0xA803	Invalid_ObjectProp_Value	6.3.2.22
0xA80A	ObjectProp_Not_Supported	6.3.2.23

Do Not Copy

6.3.1 Standard

6.3.1.1 OK

○ **Response Specifications**

Response Code	0x2001

○ **Response Outline**

Indicates that the processing has been terminated normally.

6.3.1.2 General_Error

○ **Response Specifications**

Response Code	0x2002

○ **Response Outline**

Indicates that the processing cannot be terminated normally for some reason.

6.3.1.3 Session_Not_Open

○ **Response Specifications**

Response Code	0x2003

○ **Response Outline**

Indicates that the session is not started.

6.3.1.4 Invalid_TransactionID

○ **Response Specifications**

Response Code	0x2004

○ **Response Outline**

Indicates that the TransactionID retained by the camera differs from the TransactionID specified by the host.

6.3.1.5 Operation_Not_Supported

○ **Response Specifications**

Response Code	0x2005

○ **Response Outline**

Indicates that an OperationCode that is not passed by the DeviceInfo data set is specified.

6.3.1.6 Parameter_Not_Supported

○ **Response Specifications**

Response Code	0x2006

○ **Response Outline**

Indicates that the specification of a parameter is inappropriate for the requested operation.

Do Not Copy

6.3.1.7 Incomplete_Transfer

○ **Response Specifications**

Response Code	0x2007

○ **Response Outline**

Indicates that the transmission/reception of the data block fails.

When the file access fails in the camera body, the camera may return this response.

6.3.1.8 Invalid_StorageID

○ **Response Specifications**

Response Code	0x2008

○ **Response Outline**

Indicates that a StorageID that differs from the StorageID sent by the camera is specified.

6.3.1.9 Invalid_Object_Handle

○ **Response Specifications**

Response Code	0x2009

○ **Response Outline**

Indicates that an invalid object handle is specified or the target object does not exist.

6.3.1.10 DeviceProp_Not_Supported

○ **Response Specifications**

Response Code	0x200A

○ **Response Outline**

Indicates that a DevicePropCode that is not passed by the DeviceInfo data set is specified.

6.3.1.11 Invalid_ObjectFormatCode

○ **Response Specifications**

Response Code	0x200B

○ **Response Outline**

Indicates that the specified ObjectFormatCode is not supported.

6.3.1.12 Store_Full

○ **Response Specifications**

Response Code	0x200C

○ **Response Outline**

Indicates that there is no free space available for recording on the card.

Do Not Copy

6.3.1.13 Object_Write_Protect

○ **Response Specifications**

Response Code	0x200D

○ **Response Outline**

Indicates that the target object is protected.

6.3.1.14 Store_Read_Only

○ **Response Specifications**

Response Code	0x200E

○ **Response Outline**

Indicates that the card used for recording is protected.

6.3.1.15 Access_Denied

○ **Response Specifications**

Response Code	0x200F

○ **Response Outline**

Indicates that the operation is denied because of the camera status.

This means that the operation will be denied unless the camera status is changed.

It is not an event that means the busy status.

6.3.1.16 No_Thumbnail_Present

○ **Response Specifications**

Response Code	0x2010

○ **Response Outline**

Indicates that the target object does not have a thumbnail.

6.3.1.17 Partial_Deletion

○ **Response Specifications**

Response Code	0x2012

○ **Response Outline**

Indicates that although the deletion of two or more objects is commanded, only a part of those are deleted.

This may occur when parts of the target objects are protected.

Do Not Copy

6.3.1.18 Store_Not_Available

○ **Response Specifications**

Response Code	0x2013

○ **Response Outline**

Indicates that the card cannot be accessed because the card is being initialized, the card does not exist, or the battery is exhausted.

6.3.1.19 Specification_By_Format_Unsupported

○ **Response Specifications**

Response Code	0x2014

○ **Response Outline**

Indicates that the specified ObjectFormatCode is not supported.

6.3.1.20 Capture_Already_Terminated

○ **Response Specifications**

Response Code	0x2018

○ **Response Outline**

Indicates that shooting operation was already finished when trying to finish shooting.

6.3.1.21 Device_Busy

○ **Response Specifications**

Response Code	0x2019

○ **Response Outline**

Indicates that the camera is in the busy status.

6.3.1.22 Invalid_Parent_Object

○ **Response Specifications**

Response Code	0x201A

○ **Response Outline**

Indicates that an ObjectHandle other than that indicating a directory is specified for a parameter with which an ObjectHandle of the directory should be specified.

It indicates that the specified directory does not exist.

Do Not Copy

6.3.1.23 Invalid_DeviceProp_Format

○ **Response Specifications**

Response Code	0x201B

○ **Response Outline**

Indicates that the size or the format of the DevicePropDesc data set is inappropriate.

6.3.1.24 Invalid_DeviceProp_Value

○ **Response Specifications**

Response Code	0x201C

○ **Response Outline**

Indicates that the specified DevicePropValue is not supported.

6.3.1.25 Invalid_Parameter

○ **Response Specifications**

Response Code	0x201D

○ **Response Outline**

Indicates that the specified parameter is out of the specifications.

6.3.1.26 Session_Already_Open

○ **Response Specifications**

Response Code	0x201E

○ **Response Outline**

Indicates that the OpenSession operation is specified with a session already started.

The camera supports only one session.

6.3.1.27 Transaction_Cancelled

○ **Response Specifications**

Response Code	0x201F

○ **Response Outline**

Indicates that the transfer was cancelled.

Do Not Copy

6.3.2 Vendor

6.3.2.1 Hardware_Error

○ **Response Specifications**

Response Code	0xA001

○ **Response Outline**

Indicates that any error that prevents the camera from operating has occurred in the camera body.

6.3.2.2 Out_of_Focus

○ **Response Specifications**

Response Code	0xA002

○ **Response Outline**

Indicates that the AF operation is terminated with the non-focused status.

6.3.2.3 Change_CameraMode_Failed

○ **Response Specifications**

Response Code	0xA003

○ **Response Outline**

Indicates that the switching between the PC camera mode and the remote mode failed.

6.3.2.4 Invalid_Status

○ **Response Specifications**

Response Code	0xA004

○ **Response Outline**

Indicates that the operation is invalid depending on the status of the camera.

6.3.2.5 Wb_Preset_Error

○ **Response Specifications**

Response Code	0xA006

○ **Response Outline**

Indicates that the preset measurement release failed.

6.3.2.6 Dust_Reference_Error

○ **Response Specifications**

Response Code	0xA007

○ **Response Outline**

Indicates that the dust reference image release failed.

Do Not Copy

6.3.2.7 Shutter_Speed_Bulb

○ **Response Specifications**

Response Code	0xA008

○ **Response Outline**

Indicates that the shutter speed is Bulb.

6.3.2.8 CameraMode_Not_Adjust_Fnumber

○ **Response Specifications**

Response Code	0xA00A

○ **Response Outline**

Indicates that the aperture value is set to “F-".

6.3.2.9 Not_LiveView

○ **Response Specifications**

Response Code	0xA00B

○ **Response Outline**

Indicates that the camera is not in the live view condition.

6.3.2.10 MfDrive_Step_End

○ **Response Specifications**

Response Code	0xA00C

○ **Response Outline**

Indicates that the MF driving reaches the termination.

6.3.2.11 MfDrive_Step_Insufficiency

○ **Response Specifications**

Response Code	0xA00E

○ **Response Outline**

Indicates that the driving amount is insufficient.

6.3.2.12 No_FullHD_Present

○ **Response Specifications**

Response Code	0xA00F

○ **Response Outline**

Indicates that the target object does not include FullHD image data.

Do Not Copy

6.3.2.13 Store_Error

○ **Response Specifications**

Response Code	0xA021

○ **Response Outline**

Indicates that a damaged card is included in the inserted cards.

6.3.2.14 Store_Unformatted

○ **Response Specifications**

Response Code	0xA022

○ **Response Outline**

Indicates that an unformatted card is included in the inserted cards.

6.3.2.15 Bulb_Release_Busy

○ **Response Specifications**

Response Code	0xA200

○ **Response Outline**

Indicates that bulb shooting is being performed.

6.3.2.16 Silent_Release_Busy

○ **Response Specifications**

Response Code	0xA201

○ **Response Outline**

Indicates that silent shooting is being performed.

6.3.2.17 MovieFrame_Release_Busy

○ **Response Specifications**

Response Code	0xA202

○ **Response Outline**

Indicates that the still image shooting is being performed during video recording.

6.3.2.18 Shutter_Speed_Time

○ **Response Specifications**

Response Code	0xA204

○ **Response Outline**

Indicates that the shutter speed is Time.

Do Not Copy

6.3.2.19 Invalid_Data

○ **Response Specifications**

Response Code	0xA210

○ **Response Outline**

Indicates that the data in the data phase is inappropriate.

6.3.2.20 Invalid_ObjectPropCode

○ **Response Specifications**

Response Code	0xA801

○ **Response Outline**

Indicates that the specified ObjectPropCode is not supported.

6.3.2.21 Invalid_ObjectProp_Format

○ **Response Specifications**

Response Code	0xA802

○ **Response Outline**

Indicates that the size or the type of the specified ObjectProp is not supported.

6.3.2.22 Invalid_ObjectProp_Value

○ **Response Specifications**

Response Code	0xA803

○ **Response Outline**

Indicates that the specified ObjectPropValue is not supported.

6.3.2.23 ObjectProp_Not_Supported

○ **Response Specifications**

Response Code	0xA80A

○ **Response Outline**

Indicates that the specified ObjectPropCode is valid but the camera doesn’t support it.

Do Not Copy

6.4 Event Code

The EventCodes are used when an event is passed asynchronously from the camera to the host.

The following table lists the EventCodes supported by the camera and indicates whether events can be sent via interrupt transfer or commands from the host.

Event Code	Description	Reference	Interrupt transfer	GetEvent command	GetEventEx command
0x4001	CancelTransaction	6.4.1.1	✓	✓	✓
0x4002	ObjectAdded	6.4.1.2	✓	✓	✓
0x4003	ObjectRemoved	6.4.1.3	✓	✓	✓
0x4004	StoreAdded	6.4.1.4	✓	✓	✓
0x4005	StoreRemoved	6.4.1.5	✓	✓	✓
0x4006	DevicePropChanged	6.4.1.6	✓	✓	✓
0x4007	ObjectInfoChanged	6.4.1.7	✓	✓	✓
0x4008	DeviceInfoChanged	6.4.1.8	✓	✓	✓
0x4009	RequestObjectTransfer	6.4.1.9	✓	✓	✓
0x400A	StoreFull	6.4.1.10	✓	✓	✓
0x400C	StorageInfoChanged	6.4.1.11	✓	✓	✓
0x400D	CaptureComplete	6.4.1.12	✓	✓	✓
0xC101	ObjectAddedInSdram	6.4.2.1	-	✓	✓
0xC102	CaptureCompleteRecInSdram	6.4.2.2	-	✓	✓
0xC103	CaptureSkip	6.4.2.3	-	✓	✓
0xC105	MovieRecordInterrupted	6.4.2.6	-	-	✓
0xC108	MovieRecordComplete	6.4.2.5	-	✓	✓
0xC10A	MovieRecordStarted	6.4.2.4	-	✓	✓
0xC10B	PictureControlAdjustChanged	6.4.2.7	-	-	✓
0xC10C	LiveViewStateChanged	6.4.2.8	-	✓	✓
0xC10D	PixelMappingComplete	6.4.2.9	-	✓	✓
0xC10E	ManualSettingLensDataChanged	6.4.2.10	-	✓	✓
0 x C10F	OpenCaptureComplete	6.4.2.11	-	-	✓
0xC125	HlgQualityAdjustChanged	6.4.2.12	-	✓	✓
0xC126	PortraitImpressionBalanceAdjustChanged	6.4.2.13	-	-	✓
0xC127	PictureControlHlgAdjustChanged	6.4.2.14	-	✓	✓

For details on sending the event in the application mode, refer to “Application Mode” (section 2.4).

Do Not Copy

6.4.1 Standard

6.4.1.1 CancelTransaction

○ **Event Specifications**

Event Code	0x4001
Event Parameter1	None

○ **Event Outline**

It is used to inform the host that the processing is canceled. However, it is not used in the camera.

6.4.1.2 ObjectAdded

○ **Event Specifications**

Event Code	0x4002
Event Parameter1	ObjectHandle

○ **Event Outline**

It is used to inform the host that a new object is added to the card.

6.4.1.3 ObjectRemoved

○ **Event Specifications**

Event Code	0x4003
Event Parameter1	ObjectHandle

○ **Event Outline**

It is used to inform the host that a specific object in the card is deleted.

6.4.1.4 StoreAdded

○ **Event Specifications**

Event Code	0x4004
Event Parameter1	StorageID

○ **Event Outline**

It is used to inform the host that the card is inserted in the slot in which the card has not been inserted yet.

The StorageID corresponding to the slot in which the card is inserted is passed as an EventParameter.

Do Not Copy

6.4.1.5 StoreRemoved

○ **Event Specifications**

Event Code	0x4005
Event Parameter1	StorageID

○ **Event Outline**

It is used to inform the host that the card is ejected from the slot in which the card has been inserted.

The StorageID corresponding to the slot in which the card has been inserted is passed as an EventParameter.

It is also used when the card is formatted to inform the host that the card information is invalid. When the formatting is completed, StoreAdded is used to inform the host that the card information is valid.

6.4.1.6 DevicePropChanged

○ **Event Specifications**

Event Code	0x4006
Event Parameter1	PropertyCode

○ **Event Outline**

It is used to inform the host that the setting value of the camera is changed.
The passed setting value is that of DevicePropCode, which is defined in section 6.4.2.13.

If the setting value of the camera is changed by the SetDevicePropValue command from the host, this event is not passed.

When the InterruptIN transfer is used, this event is passed only for the standard property. When the GetEventEx command is used, this event is passed for all the properties.

6.4.1.7 ObjectInfoChanged

○ **Event Specifications**

Event Code	0x4007
Event Parameter1	ObjectHandle

○ **Event Outline**

It is used to inform the host that the ObjectInfo data set corresponding to a specific object in the card has been changed.

6.4.1.8 DeviceInfoChanged

○ **Event Specifications**

Event Code	0x4008
Event Parameter1	None

○ **Event Outline**

It is used to inform the host that the device function is changed.

Do Not Copy

6.4.1.9 RequestObjectTransfer

○ **Event Specifications**

Event Code	0x4009
Event Parameter1	ObjectHandle

○ **Event Outline**

It is used to request the GetObject operation for the ObjectHandle specified by the parameter.

6.4.1.10 StoreFull

○ **Event Specifications**

Event Code	0x400A
Event Parameter1	StorageID

○ **Event Outline**

It is used to inform the host that the card corresponding to the StorageID becomes full.

This event is passed when the card becomes full by operating the shutter-release button of the camera or by recording the video.

6.4.1.11 StorageInfoChanged

○ **Event Specifications**

Event Code	0x400C
Event Parameter1	StorageID

○ **Event Outline**

It is used to inform the host that the free area in the card corresponding to the StorageID is changed.

This event is notified when the setting value of the image size and image quality mode applied to shooting is changed in [Photo shooting menu]-[Image size setting].

6.4.1.12 CaptureComplete

○ **Event Specifications**

Event Code	0x400D
Event Parameter1	TransactionID

○ **Event Outline**

It is used to inform the host that the release operation started by the InitiateCapture command or the InitiateCaptureRecInMedia command is completed.

Do Not Copy

6.4.2 Vendor

6.4.2.1 ObjectAddedInSdram

○ **Event Specifications**

Event Code	0xC101
Event Parameter1	ObjectHandle

○ **Event Outline**

It is used to inform the host that a new object is added to the SDRAM (transmission of the image data to the host becomes enabled).

The ObjectHandle of the new object is passed as an EventParameter.

If the USB cutting occurs with the image data of the recording destination SDRAM saved in the SDRAM and then it is reconnected, the event is passed again.

6.4.2.2 CaptureCompleteRecInSdram

○ **Event Specifications**

Event Code	0xC102
Event Parameter1	None

○ **Event Outline**

It is used to inform the host that all the image data acquired by the release operation started by the InitiateCaptureRecInSdram, the AfAndCaptureRecInSdram, or the InitiateCaptureRecInMedia command is sent to the host completely.

6.4.2.3 CaptureSkip

○ **Event Specifications**

Event Code	0xC103
Event Parameter1	SkipCount

○ **Event Outline**

It is used to inform that shooting was skipped by interval timer shooting.

○ **Event Details**

If a skip occurs during shooting, this event will be notified.

In the case of "number of shots x number of frames per shot", one notification is given for each skip during shooting.

Even if multiple shots are skipped during one shooting, the notification is sent only once for each shooting.

Do Not Copy

6.4.2.4 MovieRecordStarted

○ **Event Specifications**

Event Code	0xC10A
Event Parameter1	RecordKind

○ **Event Outline**

It is used to inform the host that the video recording has started on the camera.
This event is not issued when the video recording has started by using StartMovieRecord command.

The recording method is sent as an EventParameter.

RecordKind	Recording method
0x00000000	Card
0x00000001	External recorder
0x00000002	Card and external recorder

6.4.2.5 MovieRecordComplete

○ **Event Specifications**

Event Code	0xC108
Event Parameter1	RecordKind
Event Parameter2	StopCode

○ **Event Outline**

It is used to inform the host that the video recording is successfully completed.

The recording method and the cause of stop are sent as an EventParameter. For the recording method, see the description for MovieRecordStarted (section 6.4.2.4).

StopCode	Cause of stop
0	Stopping due to user operation
3	Stopping due to reaching recording time

6.4.2.6 MovieRecordInterrupted

○ **Event Specifications**

Event Code	0xC105
Event Parameter1	ErrorCode
Event Parameter2	RecordKind

○ **Event Outline**

It is used to inform the host that the video recording is interrupted.

The recording method and the interruption cause are sent as EventParameter. For the recording method, see the description for MovieRecordStarted (section 6.4.2.4).

ErrorCode	Interruption cause
1	A certain error
2	Low-speed card error

Do Not Copy

6.4.2.7 PictureControlAdjustChanged

○ **Event Specifications**

Event Code	0xC10B
Event Parameter1	PicCtrlItem (ActivePicCtrlItem property)
Event Parameter2	ShootingMode

○ **Event Outline**

It is used to inform the host that any setting value of the picture control was changed, or any setting value of the custom picture control was changed, registerd, renamed or deleted.

In Parameter2, specify whether the photo shooting menu or the video recording menu has changed.

ShootingMode	Menu
0x00000000	Photo shooting menu
0x00000001	Video recording menu

6.4.2.8 LiveViewStateChanged

○ **Event Specifications**

Event Code	0xC10C
Event Parameter1	CameraLiveViewStatus

○ **Event Outline**

It is used to inform the host that the state of live view has changed on the camera.

CameraLiveViewStatus	Description
0	Off
1	On

6.4.2.9 PixelMappingComplete

○ **Event Specifications**

Event Code	0xC10D
Event Parameter1	Result

○ **Event Outline**

It is used to inform the host that pixel mapping initiated by the InitiatePixelMapping command is complete.

Result	Result
0x00000000	Failed
0x00000001	Completed

Do Not Copy

6.4.2.10 ManualSettingLensDataChanged

○ **Event Specifications**

Event Code	0xC10E
Event Parameter1	LensNo

○ **Event Outline**

It is used to inform the host that the information of “Non-CPU lens data” in the setup menu has been changed. The lens No. of the changed lens is passed as an EventParameter.

LensNo	Description
Refer to ManualSettingLensNo property (section 6.5.5.1).	Lens No. of the changed lens
0xFFFFFFFF	All lenses (Not supported on this camera)

6.4.2.11 OpenCaptureComplete

○ **Event Specifications**

Event Code	0xC10F
Event Parameter1	TransactionID
Event Parameter2	EndFactor

○ **Event Outline**

It is used to inform that interval timer shooting and focus shift shooting are completed.

The TransactionID of Parameter1 is the TransactionID of the InitiateOpenCaptureV command. If shooting is started from the camera side, it will be 0.

The end factor is notified with EndFactor of Parameter2.

EndFactor Code	End factor
0x00000000	Shooting completed
0x00000001	No free card space
0x00000002	No free SDRAM space
0xFFFFFFFF	Other factors

6.4.2.12 HlgQualityAdjustChanged

○ **Event Specifications**

Event Code	0xC125
Event Parameter1	None

○ **Event Outline**

It is used to inform that the HLG image quality adjustment settings have been changed.

Do Not Copy

6.4.2.13 PortraitImpressionBalanceAdjustChanged

○ **Event Specifications**

Event Code	0xC126
Event Parameter1	ModeNum (equivalent to the PortraitImpressionBalance property (section 6.5.2.60), but [Off] is an invalid value)
Event Parameter2	ShootingMode

○ **Event Outline**

It is used to notify that the adjustment value of the Portrait impression adjustment has been changed and the changed mode number.

In Parameter2, specify whether the photo shooting menu or the video recording menu has changed.

ShootingMode	Menu
0x00000000	Photo shooting menu
0x00000001	Video recording menu

6.4.2.14 PictureControlHlgAdjustChanged

○ **Event Specifications**

Event Code	0xC127
Event Parameter1	PicCtrlHlgItem (ActivePicCtrlHlgItem property, section 6.5.14.3)

○ **Event Outline**

It is used to notify that each item of Picture Control (HLG) has been changed.

Do Not Copy

6.5 DeviceProp Code

The camera has an attribute that can be changed as an option. The change is made by operating the device property. The property shows the device characteristics. Each property has a corresponding DevicePropCode.

When the setting value of each defined property is changed, the camera sends the DevicePropChanged event including the DevicePropCode in order to inform the host of the change. The camera sends the event as shown below.

1. The camera periodically (every 1 second) checks all the values of DeviceProperty. When a DeviceProperty whose value has changed since the last checking is detected, the camera sends the DevicePropChanged event in order to inform the host of the change. When detecting changes in two or more DeviceProperties, the camera sends the DevicePropChanged event for all the DeviceProperties in succession.
2. When the setting value of the DeviceProperty is changed by the SetDevicePropValue command, the camera does not send the DevicePropChanged event including the changed DevicePropCode. However, if any other DeviceProperty is changed under the influence of the change of the DeviceProperty, the camera sends the DevicePropChanged event for the property.
   For example, if the aperture value is changed by the SetDevicePropValue command when shooting is performed in the A mode (aperture priority), the camera changes the shutter speed automatically. In this case, the camera sends the DevicePropChanged event for the shutter speed.

However, depending on the type of PropertyCode, it is necessary to issue further events following the DevicePropChanged event. It is described in the explanation of each PropertyCode. The error response is made to GetDevicePropDesc, GetDevicePropValue, SetDevicePropValue, and their extended commands as shown below.

1. When either or both of getting/setting are invalid depending on the setting status of the camera for each property, the response of the ResponseCode corresponding to the invalid status is made.
2. When setting is performed for the property that supports getting only, the Access_Denied error response is made.

Regarding the description of the shooting mode of the ExposureProgramMode property (property details, setting prohibition conditions, etc.), the condition includes the case where the ExposureProgramMode property is user mode and the corresponding shooting mode is the same.

Example:

Access_Denied	The ExposureProgramMode property is set to anything other than [PSAM].

In this case, the Access_Denied response is sent even if the ExposureProgramMode property is [User mode] and the UserMode property is not [PSAM].

Properties with values that cannot be configured during spot WB or during video recording are indicated in the table of DevicePropCodes below, rather than in the prohibited conditions of each property. Access_Denied response is sent when the value is set in a state where setting is not possible.

Do Not Copy

The DevicePropCodes supported by the camera are shown below.

Property Code	Description	Reference	During video recording	During spot WB
0x5001	BatteryLevel	6.5.1.1		-
0x5003	ImageSize	6.5.1.2	-	-
0x5004	CompressionSetting	6.5.1.3	-	-
0x5005	WhiteBalance	6.5.1.4	✓	-
0x5007	Fnumber	6.5.1.5	✓	-
0x5008	FocalLength	6.5.1.6		-
0x500A	FocusMode	6.5.1.7		-
0x500B	ExposureMeteringMode	6.5.1.8	-	-
0x500C	FlashMode	6.5.1.9	-	-
0x500D	ExposureTime	6.5.1.10	-	-
0x500E	ExposureProgramMode	6.5.1.11	-	-
0x500F	ExposureIndex	6.5.1.12	✓	-
0x5010	ExposureBiasCompensation	6.5.1.13	-	-
0x5011	DateTime	6.5.1.14	-	-
0x5013	StillCaptureMode	6.5.1.15	✓	-
0x5018	BurstNumber	6.5.1.16	✓	-
0x501E	Artist	6.5.1.17		-
0x501F	Copyright	6.5.1.18		-
0xD016	RawCompressionType	6.5.2.8	-	-
0xD017	WbTuneAuto	6.5.2.17	✓	-
0xD018	WbTuneIncandescent	6.5.2.22	✓	-
0xD019	WbTuneFluorescent	6.5.2.24	✓	-
0xD01A	WbTuneSunny	6.5.2.19	✓	-
0xD01B	WbTuneFlash	6.5.2.25	✓	-
0xD01C	WbTuneCloudy	6.5.2.20	✓	-
0xD01D	WbTuneShade	6.5.2.21	✓	-
0xD01E	WbColorTemp	6.5.2.26	✓	-
0xD01F	WbPresetDataNo	6.5.2.28	✓	-
0xD021	WbPresetDataComment1	6.5.2.29	-	-
0xD022	WbPresetDataComment2	6.5.2.30	-	-
0xD023	WbPresetDataComment3	6.5.2.31	-	-
0xD024	WbPresetDataComment4	6.5.2.32	-	-
0xD026	WbPresetDataValue1	6.5.2.35		-
0xD027	WbPresetDataValue2	6.5.2.36		-
0xD028	WbPresetDataValue3	6.5.2.37		-
0xD029	WbPresetDataValue4	6.5.2.38		-
0xD030	CaptureAreaCrop	6.5.2.4	-	-
0xD032	ColorSpace	6.5.2.53	-	-
0xD034	DecreaseFlicker	6.5.3.60	-	-
0xD038	WbPresetDataComment5	6.5.2.33	-	-
0xD039	WbPresetDataComment6	6.5.2.34	-	-

Do Not Copy

0xD03A	WbTunePreset5	6.5.2.45	✓	-
0xD03B	WbTunePreset6	6.5.2.46	✓	-
0xD03C	WbPresetProtect5	6.5.2.51	-	-
0xD03D	WbPresetProtect6	6.5.2.52	-	-
0xD03E	WbPresetDataValue5	6.5.2.39		-
0xD03F	WbPresetDataValue6	6.5.2.40		-
0xD046	AFStillLockOnAcross	6.5.4.3	-	-
0xD048	DynamicAFonAFC	6.5.4.1	-	-
0xD049	DynamicAFonAFS	6.5.4.2	-	-
0xD04F	FocusAreaSelect	6.5.4.5	-	-
0xD053	EnableCopyright	6.5.5.10	-	-
0xD054	ISOAutoControl	6.5.2.11	-	-
0xD055	IsoStep	6.5.4.7	-	-
0xD056	ExposureEVStep	6.5.4.8	-	-
0xD059	CenterWeightedExRange	6.5.4.10	-	-
0xD05A	ExposureBaseCompMatrix	6.5.4.11	-	-
0xD05B	ExposureBaseCompCenter	6.5.4.12	-	-
0xD05C	ExposureBaseCompSpot	6.5.4.13	-	-
0xD05D	StillFocusMeteringMode	6.5.2.63	-	-
0xD060	IPTCPresetSelect	6.5.5.11	-	-
0xD061	StillFocusMode	6.5.2.62	-	-
0xD067	AngleLevel	6.5.6.22		-
0xD068	CspeedLow	6.5.4.15	-	-
0xD069	BurstMaxNumber	6.5.4.16	-	-
0xD06A	ExposureDelay	6.5.4.19	-	-
0xD06C	NumberingMode	6.5.4.21	-	-
0xD070	NoiseReductionHiIso	6.5.2.55	-	-
0xD072	ArtistV	6.5.5.8	-	-
0xD073	CopyrightV	6.5.5.9	-	-
0xD075	FlashSlowSpeedLimit	6.5.4.31	-	-
0xD078	BracketingType	6.5.8.2	-	-
0xD079	SelectBracketChangeFactor	6.5.4.34	-	-
0xD07A	BracketingOrder	6.5.4.35	-	-
0xD07D	AngleLevelPitching	6.5.6.23		-
0xD07E	AngleLevelYawing	6.5.6.24		-
0xD08A	EnableShutter	6.5.5.15	-	-
0xD08D	EnableAFAreaPoint	6.5.4.4	-	-
0xD090	CommentString	6.5.5.6	-	-
0xD091	EnableComment	6.5.5.7	-	-
0xD092	OrientationSensorMode	6.5.6.19	-	-
0xD093	ManualSettingLensNo	6.5.5.1	-	-
0xD09C	RetractableLensWarning	6.5.10.10		-
0xD09F	MatrixMetering	6.5.4.9	-	-
0xD0A0	MovieRecordScreenSize	6.5.3.7	-	-
0xD0A3	MovieRecordDestination	6.5.3.1	-	-
0xD0A4	MovieRecProhibitionCondition	6.5.12.6		-

Do Not Copy

0xD0AA	MovieWindNoiseReduction	6.5.13.9	✓	-
0xD0AC	MovieRecordingZone	6.5.13.8	✓	-
0xD0AD	MovieISOAutoControl	6.5.3.11	✓	-
0xD0AE	MovieISOAutoHighLimit	6.5.3.10	✓	-
0xD0AF	MovieFileType	6.5.3.2	-	-
0xD0B4	ExposureIndexEx	6.5.2.9	✓	-
0xD0B5	ISOControlSensitivity	6.5.6.14		-
0xD0BA	DiffractionCompensation	6.5.2.57	-	-
0xD0BB	MovieLogOutput	6.5.12.5		-
0xD0BC	MovieAutoDistortion	6.5.3.56	-	-
0xD0BE	RemainingExposureTime	6.5.6.12		-
0xD0C0	EnableBracketing	6.5.8.1	-	-
0xD0C1	AEBracketingStep	6.5.8.4	-	-
0xD0C2	AEBracketingPattern	6.5.8.3	-	-
0xD0C3	AEBracketingCount	6.5.8.9		-
0xD0C4	WBBracketingStep	6.5.8.6	-	-
0xD0C5	WBBracketingPattern	6.5.8.5	-	-
0xD0C6	ADLBracketingPattern	6.5.8.7	-	-
0xD0C7	ADLBracketingStep	6.5.8.8	-	-
0xD0CD	SaveFocusPosition	6.5.5.5	-	-
0xD0E0	LensID	6.5.10.4		-
0xD0E1	LensSort	6.5.10.1		-
0xD0E2	LensTypeF	6.5.10.3		-
0xD0E3	LensFocalMin	6.5.10.5		-
0xD0E4	LensFocalMax	6.5.10.6		-
0xD0E5	LensApatureMin	6.5.10.7		-
0xD0E6	LensApatureMax	6.5.10.8		-
0xD0E7	LensTypeML	6.5.10.2		-
0xD0F7	VignetteControl	6.5.2.56	-	-
0xD0F8	AutoDistortion	6.5.2.58	-	-
0xD0FC	UserMode	6.5.6.2	-	-
0xD100	ShutterSpeed	6.5.6.10	-	-
0xD101	ExternalDC-IN	6.5.15.1		-
0xD102	WarningStatus	6.5.6.25		-
0xD104	AFLockStatus	6.5.6.6		-
0xD105	AELockStatus	6.5.6.5		-
0xD106	FVLockStatus	6.5.6.7		-
0xD109	FlexibleProgram	6.5.6.13	-	-
0xD10B	RecordingMedia	6.5.7.1	-	-
0xD10C	USBSpeed	6.5.16.1		-
0xD10E	Orientation	6.5.6.20		-
0xD112	TVLockSetting	6.5.4.37	-	-
0xD113	AVLockSetting	6.5.4.38	-	-
0xD118	ExposureCompFlashUsed	6.5.4.32	-	-
0xD119	Slot2JpegImageSize	6.5.2.3	-	-
0xD120	ExternalSpeedLightExist	6.5.9.1		-

Do Not Copy

0xD121	ExternalSpeedLightStatus	6.5.9.3		-
0xD122	ExternalSpeedLightSort	6.5.9.2		-
0xD124	FlashCompensation	6.5.9.5		-
0xD125	NewExternalSpeedLightMode	6.5.9.4		-
0xD126	InternalFlashCompensation	6.5.6.9	-	-
0xD12D	ExternalSpeedLightMultiFlashMode	6.5.9.6		-
0xD12E	ConnectionPath	6.5.16.2		-
0xD12F	AWBLockStatus	6.5.6.8		-
0xD130	HDRMode	6.5.2.70	-	-
0xD132	HDRStrength	6.5.2.71	-	-
0xD133	HDRSaveIndividualImages	6.5.2.72	-	-
0xD138	VibrationReduction	6.5.2.68	-	-
0xD141	WbAutoType	6.5.2.16	✓	-
0xD148	Slot2ImageSaveMode	6.5.2.2	-	-
0xD14E	Active-D-Lighting	6.5.2.54	-	-
0xD14F	WbFluorescentType	6.5.2.23	✓	-
0xD150	WbTuneColorTemp	6.5.2.27	✓	-
0xD152	WbTunePreset1	6.5.2.41	✓	-
0xD153	WbTunePreset2	6.5.2.42	✓	-
0xD154	WbTunePreset3	6.5.2.43	✓	-
0xD155	WbTunePreset4	6.5.2.44	✓	-
0xD156	PrimarySlot	6.5.2.1	-	-
0xD158	WbPresetProtect1	6.5.2.47	-	-
0xD159	WbPresetProtect2	6.5.2.48	-	-
0xD15A	WbPresetProtect3	6.5.2.49	-	-
0xD15B	ActiveFolder	6.5.7.2		-
0xD15C	WbPresetProtect4	6.5.2.50	-	-
0xD15E	WbTuneNatural	6.5.2.18	-	-
0xD164	ISOAutoShutterTime	6.5.2.14	-	-
0xD16A	ISOAutoSetting	6.5.2.10	-	-
0xD16E	ExtendedShutterSpeedsManual	6.5.4.20	-	-
0xD17B	ViewMode	6.5.4.22	-	-
0xD17C	MovieAfSpeed	6.5.4.43	-	-
0xD17D	MovieAfSpeedWhenToApply	6.5.4.44	-	-
0xD17E	MovieAfTrackingSensitivity	6.5.4.45	-	-
0xD180	FlushBurstPrioritize	6.5.4.36	-	-
0xD183	ISOAutoHighLimit	6.5.2.12	-	-
0xD199	FlashISOAutoHighLimit	6.5.2.13	-	-
0xD1A2	RemoteLiveViewStatus	6.5.11.2		-
0xD1A4	LiveViewProhibitionCondition	6.5.11.7		-
0xD1A6	LiveViewSelector	6.5.6.1	-	-
0xD1A8	MovieShutterSpeed	6.5.12.2	✓	-
0xD1A9	MovieFnumber	6.5.12.1	✓	-
0xD1AA	MovieExposureIndex (Mode M)	6.5.3.12	✓	-
0xD1AB	MovieExposureBiasCompensation	6.5.12.4	✓	-
0xD1AC	LiveViewImageSize	6.5.11.4	-	-

Do Not Copy

0xD1AF	MovieExposureMeteringMode	6.5.3.63	-	-
0xD1B0	ExposureDisplayStatus	6.5.6.15		-
0xD1B1	ExposureIndicateStatus	6.5.6.16		-
0xD1B2	InfoDisplayErrorStatus	6.5.6.26		-
0xD1B3	ExposureIndicateLightup	6.5.6.17		-
0xD1B4	ContinuousShootingCount	6.5.7.5		-
0xD1B8	CameraLiveViewStatus	6.5.11.1		-
0xD1BA	MonitorOffStatus	6.5.6.18		-
0xD1BB	LiveViewImageStatus	6.5.11.3		-
0xD1BC	LiveViewImageCompression	6.5.11.5	-	-
0xD1BD	LiveViewZoomArea	6.5.11.6	✓	✓
0xD1C5	AutoFlashIsoSensitivityControl	6.5.4.33	-	-
0xD1DE	ExternalRecordingControl	6.5.3.79	-	-
0xD1DF	HighlightBrightness	6.5.4.50	✓	-
0xD1ED	SBIntegrationFlashReady	6.5.9.7		-
0xD1F1	ExposureRemaining	6.5.7.4		-
0xD1F2	ActiveSlot	6.5.7.3		-
0xD1F4	ISOAutoShutterTimeCorrectionValue	6.5.2.15	-	-
0xD1F8	MovieFocusMeteringMode	6.5.3.65	✓	-
0xD1F9	MovieVibrationReduction	6.5.3.73	✓	-
0xD1FA	MovieFocusMode	6.5.3.64	✓	-
0xD1FB	RecordTimeCodes	6.5.3.75	-	-
0xD1FC	CountUpMethod	6.5.3.76	-	-
0xD1FD	TimeCodeOrigin	6.5.3.77	-	-
0xD1FE	DropFrame	6.5.3.78	-	-
0xD200	ActivePicCtrlItem	6.5.14.1	-	-
0xD20F	MovieCaptureAreaCrop	6.5.3.9	-	-
0xD211	MovieWbAutoType	6.5.3.16	✓	-
0xD212	MovieWbTuneAuto	6.5.3.17	✓	-
0xD213	MovieWbTuneIncandescent	6.5.3.22	✓	-
0xD214	MovieWbFluorescentType	6.5.3.23	✓	-
0xD215	MovieWbTuneFluorescent	6.5.3.24	✓	-
0xD216	MovieWbTuneSunny	6.5.3.19	✓	-
0xD218	MovieWbTuneCloudy	6.5.3.20	✓	-
0xD219	MovieWbTuneShade	6.5.3.21	✓	-
0xD21A	MovieWbColorTemp	6.5.3.25	✓	-
0xD21B	MovieWbTuneColorTemp	6.5.3.26	✓	-
0xD21C	MovieWbPresetDataNo	6.5.3.27	✓	-
0xD21D	MovieWbPresetDataComment1	6.5.3.28	-	-
0xD21E	MovieWbPresetDataComment2	6.5.3.29	-	-
0xD21F	MovieWbPresetDataComment3	6.5.3.30	-	-
0xD220	MovieWbPresetDataComment4	6.5.3.31	-	-
0xD221	MovieWbPresetDataComment5	6.5.3.32	-	-
0xD222	MovieWbPresetDataComment6	6.5.3.33	-	-
0xD223	MovieWbPresetDataValue1	6.5.3.34		-
0xD224	MovieWbPresetDataValue2	6.5.3.35		-

Do Not Copy

0xD225	MovieWbPresetDataValue3	6.5.3.36		-
0xD226	MovieWbPresetDataValue4	6.5.3.37		-
0xD227	MovieWbPresetDataValue5	6.5.3.38		-
0xD228	MovieWbPresetDataValue6	6.5.3.39		-
0xD229	MovieWbTunePreset1	6.5.3.40	✓	-
0xD22A	MovieWbTunePreset2	6.5.3.41	✓	-
0xD22B	MovieWbTunePreset3	6.5.3.42	✓	-
0xD22C	MovieWbTunePreset4	6.5.3.43	✓	-
0xD22D	MovieWbTunePreset5	6.5.3.44	✓	-
0xD22E	MovieWbTunePreset6	6.5.3.45	✓	-
0xD22F	MovieWbPresetProtect1	6.5.3.46	-	-
0xD230	MovieWbPresetProtect2	6.5.3.47	-	-
0xD231	MovieWbPresetProtect3	6.5.3.48	-	-
0xD232	MovieWbPresetProtect4	6.5.3.49	-	-
0xD233	MovieWbPresetProtect5	6.5.3.50	-	-
0xD234	MovieWbPresetProtect6	6.5.3.51	-	-
0xD236	MovieNoiseReductionHiIso	6.5.3.53	-	-
0xD237	MovieActivePicCtrlItem	6.5.14.2	-	-
0xD239	ExposureBaseCompHighlight	6.5.4.14	-	-
0xD23A	MovieWhiteBalance	6.5.3.15	✓	-
0xD23B	MovieActive-D-Lighting	6.5.3.52	-	-
0xD23C	MovieWbTuneNatural	6.5.3.18	✓	-
0xD23D	MovieAttenuator	6.5.13.7	✓	-
0xD23E	MovieVignetteControl	6.5.3.54	-	-
0xD23F	MovieDiffractionCompensation	6.5.3.55	-	-
0xD303	UseDeviceStageFlag	6.5.17.3		-
0xD314	ElectronicVR	6.5.3.74	-	-
0xD406	SessionInitiatorVersionInfo	6.5.17.1	-	-
0xD407	PerceivedDeviceType	6.5.17.2		-
0x0001D000	MovieProResToneMode	6.5.3.5	-	-
0x0001D001	MovieH265ToneMode	6.5.3.3	-	-
0x0001D002	SpecialShootingMode	6.5.6.3		-
0x0001D004	MovieOrientationSensorMode	6.5.6.20	-	-
0x0001D005	AFSubjectDetection	6.5.2.66	-	-
0x0001D006	MovieAFSubjectDetection	6.5.3.68	✓	-
0x0001D007	ViewModeEaseOfViewing	6.5.4.24	-	-
0x0001D008	ViewModeWhiteBalance	6.5.4.25	-	-
0x0001D009	ViewModeWbColorTemp	6.5.4.26	-	-
0x0001D00A	ViewModeWbTuneColorTemp	6.5.4.27	-	-
0x0001D00B	ViewModePictureControl	6.5.4.28	-	-
0x0001D00C	ViewModeBrightenShadow	6.5.4.29	-	-
0x0001D00E	StarlightView	6.5.4.30	-	-
0x0001D00F	MovieTVLockSetting	6.5.4.40	-	-
0x0001D010	MovieAVLockSetting	6.5.4.41	-	-
0x0001D011	SilentMode	6.5.5.14	✓	-
0x0001D012	ShutterSoundEffect	6.5.5.12	-	-

Do Not Copy

0x0001D014	AFWhenSubjectNotDetected	6.5.3.70	-	-
0x0001D015	FocusPointLock	6.5.4.39	-	-
0x0001D016	MovieFocusPointLock	6.5.4.42	-	-
0x0001D017	SkinSoftening	6.5.2.59	-	-
0x0001D018	MovieSkinSoftening	6.5.3.57	-	-
0x0001D019	PortraitImpressionBalance	6.5.2.60	-	-
0x0001D01A	MoviePortraitImpressionBalance	6.5.3.59	-	-
0x0001D01B	MovieExtendedShutterSpeedsManual	6.5.4.48	-	-
0x0001D01C	ToneMode	6.5.2.5	-	-
0x0001D01D	ActivePicCtrlHlgItem	6.5.14.3	-	-
0x0001D01F	MovieExtendedIsoStepManual	6.5.4.47	-	-
0x0001D025	PreCapturePreReleaseBurst	6.5.4.17	-	-
0x0001D026	PreCapturePostReleaseBurst	6.5.4.18	-	-
0x0001D028	MovieNRaw12bitToneMode	6.5.3.4	-	-
0x0001D029	MovieProResRawHq12bitToneMode	6.5.3.6	-	-
0x0001D02A	MovieQualityNRaw	6.5.3.8	-	-
0x0001D031	HighFrequencyFlickerReduction	6.5.2.61	-	-
0x0001D032	MovieHighFrequencyFlickerReduction	6.5.3.62	✓	-
0x0001D033	HiResZoom	6.5.3.80	-	-
0x0001D036	ViewModeShowEffectsOfSettings	6.5.4.23	-	-
0x0001D03C	LinkVRToFocusPoint	6.5.2.69	-	-
0x0001D03D	FlickerReductionShutterSpeed	6.5.6.11		-
0x0001D03E	MFSubjectDetectionArea	6.5.2.67	-	-
0x0001D03F	MovieMFSubjectDetectionArea	6.5.3.71	-	-
0x0001D041	EnableDXImageSize	6.5.2.6	-	-
0x0001D042	ImageSizeDX	6.5.2.7	-	-
0x0001D044	MovieDigitalFlickerReduction	6.5.3.61	-	-
0x0001D045	PixelShiftShootingMode	6.5.2.75	-	-
0x0001D046	WideAreaAFC1	6.5.2.64	-	-
0x0001D047	WideAreaAFC2	6.5.2.65	-	-
0x0001D048	MovieWideAreaAFC1	6.5.3.66	✓	-
0x0001D049	MovieWideAreaAFC2	6.5.3.67	✓	-
0x0001D04A	FmmManualSetting2	6.5.5.2	-	-
0x0001D04B	F0ManualSetting2	6.5.5.3	-	-
0x0001D04C	ManualSettingLensName	6.5.5.4	-	-
0x0001D04D	AudioInputSelection	6.5.13.5	-	-
0x0001D04E	PixelShiftShootingNumberOfShots	6.5.2.76	-	-
0x0001D04F	PixelShiftShootingDelay	6.5.2.77	-	-
0x0001D050	PixelShiftShootingInterval	6.5.2.78	-	-
0x0001D051	PixelShiftShootingStatus	6.5.6.4		-
0x0001D05F	ProductReviewMode	6.5.3.69	✓	-
0x0001D060	VideoSelfTimer	6.5.3.72	✓	-
0x0001D062	DehazeMode	6.5.2.73	-	-
0x0001D063	DehazeStrength	6.5.2.74	-	-
0x0001D064	MovieBreathingCompensation	6.5.3.57	-	-
0x0001D065	Movie32bitFloatAudioRecording	6.5.13.1	-	-

Do Not Copy

0x0001D067	MovieOZOAudioControl	6.5.13.2	-	-
0x0001D068	MovieAudioDirectivity	6.5.13.3	✓	-
0x0001D069	MovieSelfPortraitModeOriented	6.5.13.4	✓	-
0x0001D070	MovieAudioInputSensitivity	6.5.13.6	✓	-
0x0001D071	MoviePowerHiResZoomCollab	6.5.4.46	-	-
0x0001D072	RECStartEndSound	6.5.5.13	-	-
0x0001D073	PowerZoomPosition	6.5.10.9		-
0x0001D074	MovieShutterMode	6.5.4.49	-	-
0x0001D075	MovieShutterAngle	6.5.12.3	✓	-
0x0001D09D	MovieBaseISOSensitivity	6.5.3.13	-	-
0x0001D09E	MovieISOSensitivity	6.5.3.14	-	-
0x0001D0A1	FocusDisplayAFC	6.5.4.6	-	-

Do Not Copy

6.5.1 Standard

6.5.1.1 BatteryLevel

○ **Property Specifications**

Property Code	0x5001
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	100 [100 %]
Property Value	From 1 [1 %] to 100 [100 %]

○ **Property Outline**

Indicates “Remaining battery level” of the camera.

○ **Property Details**

When the battery level is reduced, the PropertyValues sent by the camera are: 1%, 20%, 40%, 60%, 80%, and 100% only.

The relationship between the PropertyValue and the remaining battery level display is shown below.

Property Value	Remaining battery level display
100	5 / 5
80	4 / 5
60	3 / 5
40	2 / 5
20	1 / 5
1	1 / 5 (blinking)

When the remaining battery level is 1% and the shutter release is disabled, the following settings are made.

No.	Description
1	The WarningStatus property (section 6.5.6.25) is set to “Battery exhausted”.
2	The LiveViewProhibitionCondition property (section 6.5.11.7) is set to “Battery exhausted”.

Do Not Copy

6.5.1.2 ImageSize

○ **Property Specifications**

Property Code	0x5003
DataType	String
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	Size L
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image size” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

	PropertyValue			
CaptureAreaCrop	FX	DX	1:1	16:9
Size L	6048x4032	3984x2656	4032x4032	6048x3400
Size M	4528x3024	2976x1992	3024x3024	4528x2544
Size S	3024x2016	1984x1328	2016x2016	3024x1696

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The CompressionSetting property (section 6.5.1.3) is set to [RAW].
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].

Do Not Copy

6.5.1.3 CompressionSetting

○ **Property Specifications**

Property Code	0x5004
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	2 [JPEG (NORMAL)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image quality mode” that is set in the camera.

○ **Property Details**

This property indicates the control value in the camera, not a setting value in the menu. This is a value including RAW when the Plus RAW function is valid.

When StorageInfo DataSet (section 9.2) is changed according to the change of this property, the StorageInfoChanged event (section 6.4.1.11) is issued.

When the StillCaptureMode property (section 6.5.1.15) is "High-Speed Frame Capture", it operates with JPEG (NORMAL).

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	JPEG (BASIC)
1	JPEG (BASIC★)
2	JPEG (NORMAL)
3	JPEG (NORMAL★)
4	JPEG (FINE)
5	JPEG (FINE★)
7	RAW
8	RAW+JPEG (BASIC)
9	RAW+JPEG (BASIC★)
10	RAW+JPEG (NORMAL)
11	RAW+JPEG (NORMAL★)
12	RAW+JPEG (FINE)
13	RAW+JPEG (FINE★)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The StillCaptureMode property is set to "High-Speed Frame Capture".
	In video mode.

Do Not Copy

6.5.1.4 WhiteBalance

○ **Property Specifications**

Property Code	0x5005
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0002 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “White Balance” that is set in the camera.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	Auto
0x0004	Sunny
0x0005	Fluorescent
0x0006	Incandescent
0x0007	Flash
0x8010	Cloudy
0x8011	Shade
0x8012	Choose color temperature
0x8013	Preset manual
0x8016	Natural light auto

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.1.5 Fnumber

○ **Property Specifications**

Property Code	0x5007
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	(Minimum value in the setting range)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Aperture value” with the CPU internal lens mounted.

○ **Property Details**

When the LensSort property (section 6.5.10.1) is [Not mounted], the enumeration cannot be created. Therefore, the number of enumeration values shall be 1 and the enumeration value, the DefaultValue, and the PropertyValue shall be the same value.
For models that support the exposure meter interlocking lever, it changes depending on the F0ManualSetting2 property (section 6.5.5.3) and the state of the exposure meter interlocking lever. The value shall be 1 EV except the maximum aperture value. It is set to 0 if the model does not support the exposure meter interlocking lever or if the aperture value cannot be acquired.

If an aperture value error occurs, the number of enumeration values shall be 1 and the enumeration value, the DefaultValue, and the PropertyValue shall be 0xFFFF.

○ **Property Value**

The PropertyValue should be a hundred times the aperture value.
The PropertyValue changes depending on the value of the ExposureEVStep property (section 6.5.4.8).
The setting range of PropertyValue changes depending on the lens and the magnification setting.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [A] or [M].
	The LensSort property (section 6.5.10.1) is [Not mounted].
	The WarningStatus property (section 6.5.6.25) is one of the following: [Sequence error] [Bulb warning / Time warning] [Retractable zoom-ring warning] [Shutter speed incompatibility, HDR shooting not possible]
	The AVLockSetting property (section 6.5.4.38) is set to [On].
	An aperture value error occurs.

Do Not Copy

6.5.1.6 FocalLength

○ **Property Specifications**

Property Code	0x5008
DataType	UINT32
Description form	Range
Get / Set	Get
Default Value	(Minimum value in the setting range)
Property Value	The value of a hundred times the focal length

○ **Property Outline**

Indicates “Focal length” with the CPU internal lens mounted.

○ **Property Details**

The setting range of PropertyValue changes depending on the lens and the magnification setting.

When the LensSort property (section 6.5.10.1) is [Not mounted], the PropertyValue is not fixed.

Do Not Copy

6.5.1.7 FocusMode

○ **Property Specifications**

Property Code	0x500A
DataType	UINT16
Description form	Enumeration
Get / Set	Get
Default Value	0X8012 [AF mode auto-switch]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Focus mode” that is set in the camera.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	Photo mode	Video mode
0x0001	Manual focus (MF)	✓	✓
0x8010	Single AF(AF-S)	✓	✓
0x8011	Continuous AF(AF-C)	✓	✓
0x8012	AF mode auto-switch (AF-A)	✓	-
0x8013	Full time AF(AF-F)	-	✓

Do Not Copy

6.5.1.8 ExposureMeteringMode

○ **Property Specifications**

Property Code	0x500B
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0003 [Matrix metering]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Metering mode” that is set in the camera.
Use the MovieExposureMeteringMode property (section 6.5.3.63) for the exposure metering mode in video mode.

○ **Property Details**

In the following cases, this property operates with center-weighted metering.

- The LensSort property (section 6.5.10.1) is set to [Not mounted] and highlight-weighted metering is selected.
- When the lens information is not registered in “Non-CPU lens data” menu, the LensSort property is set to [Not mounted] and matrix metering is selected.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	Center-weighted metering
0x0003	Matrix metering
0x0004	Spot metering
0x8010	Highlight-weighted metering

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AELockStatus property (section 6.5.6.5) is [Locked].

Do Not Copy

6.5.1.9 FlashMode

○ **Property Specifications**

Property Code	0x500C
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x8010 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Flash mode” that is set in the camera.

○ **Property Details**

If the ExposureProgramMode property (section 6.5.1.11) is P/S/A/M, the NewExternalSpeedLightMode property (section 6.5.9.4) is set to multi-flash, and rear-curtain sync has been set, normal flash will be set.

The camera display status depends on the value of the ExposureProgramMode property (section 6.5.1.11). In addition, it also differs according to the speedlight condition.

When the camera is in the Access_Denied condition of this property or in video mode, this property is set to [Flash off].

The camera display status with the speedlight firing is shown below.

Shooting mode or selected scene	Normal flash	Normal flash + slow shutter	Rear curtain flash	Red-eye reduction flash	Red-eye reduction flash + slow shutter	Flash off
P / A	Normal flash	Normal flash + slow shutter	Rear curtain flash	Red-eye reduction flash	Red-eye reduction flash + slow shutter	Flash off
S / M	Normal flash	-	Rear curtain flash	Red-eye reduction flash	-	Flash off
Auto	Normal flash	-	-	Red-eye reduction flash	-	Flash off
User mode	According to the ExposureProgramMode property set in user mode.					

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	Flash off
0x0004	Red-eye reduction flash
0x8010	Normal flash
0x8011	Normal flash + slow shutter

Do Not Copy

0x8012	Rear curtain flash
0x8013	Red-eye reduction + slow shutter

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The HDRMode property (section 6.5.2.70) is set to [On].
	The SilentMode property (section 6.5.5.14) is set to [On].
	During SB setting warning.
	An SB setting error has occurred.
	Image dust off data is being acquired.
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	The PixelShiftShootingMode property (section 6.5.2.75) is set to [On].
	In video mode.

Do Not Copy

6.5.1.10 ExposureTime

○ **Property Specifications**

Property Code	0x500D
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	(Minimum value in the setting range)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Shutter speed” that is set in the camera.

Since there are shutter speeds that cannot be expressed with this property, use the ShutterSpeed (section 6.5.6.10) property to obtain an accurate shutter speed.

For the shutter speed in video mode, the MovieShutterSpeed property (section 6.5.12.2) should be used.

○ **Property Details**

Setting prohibition conditions, contents of enumeration values, and factors for changing enumeration values are the same as for the ShutterSpeed property, but since the unit of PropertyValue is 1/10000, there is a range that is grouped together.
The handling within the range summarized below is described.

PropertyValue	Shutter speed	
	Get	Set (*)
1	Shutter speed faster than 1/5000	1/10000 1/8000
2	1/5000 1/4000	1/4000
3	1/3200 1/3000	1/3200 1/3000
6	1/1600 1/1500	1/1600 1/1500

NOTE1) Where there are multiple descriptions, the shutter speed that can be set depending on the state of the camera is set.

○ **Property Value**

Shutter speed:

Shutter speed x 10000 [unit: 1/10000 sec.]

Special values other than shutter speed:

PropertyValue	Description
0xFFFFFFFF	Bulb Shooting
0xFFFFFFFD	Time Shooting

* (Example) PropertyValue of shutter speed

Shutter speed 1/250 sec.: PropertyValue = 40

Shutter speed 25 sec.: PropertyValue = 250000

Do Not Copy

6.5.1.11 ExposureProgramMode

○ **Property Specifications**

Property Code	0x500E
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0002 [Program auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Shooting mode” that is set in the camera.

○ **Property Details**

If [User mode] is set as the shooting mode, the shooting mode set in the UserMode property (section 6.5.6.2) will be used.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	Used setting
0x0001	[M] Manual	-
0x0002	[P] Program auto	-
0x0003	[A] Aperture priority auto	-
0x0004	[S] Shutter priority auto	-
0x8010	[AutoMode] AUTO	-
0x8050	[UserMode] U1	UserMode
0x8051	[UserMode] U2	
0x8052	[UserMode] U3	
0x8053	[UserMode] U4	

Do Not Copy

6.5.1.12 ExposureIndex

○ **Property Specifications**

Property Code	0x500F
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	100 [ISO 100]
Property Value	Refer to the ExposureIndexEx property.

○ **Property Outline**

Indicates “ISO sensitivity” that is set in the camera.
Refer to the MovieExposureIndex property (section 6.5.3.12) for the ISO sensitivity in video mode.

○ **Property Details**

The maximum ISO sensitivity that can be represented by this property is limited to the values that can be handled within 16 bit. Therefore, if the camera is set to an ISO sensitivity that exceeds 16 bit, the value of this property will be the maximum ISO sensitivity that can be represented with 16 bit.

Use the ExposureIndexEx property (section 6.5.2.9) when dealing with ISO sensitivities over 16 bit.

Do Not Copy

6.5.1.13 ExposureBiasCompensation

○ **Property Specifications**

Property Code	0x5010
DataType	INT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [0.0 EV]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the compensation value of “Exposure compensation” that is set in the camera. For the exposure compensation in video mode, the MovieExposureBiasCompensation property (section 6.5.12.3) should be used.

○ **Property Value**

Valid PropertyValues are listed below.

The value of PropertyValue changes depending on the value of the ExposureEVStep property (section 6.5.4.8).

Property Value	Description	ExposureEVStep		
		1/3 step	1/2 step	1 step
+5000	+5.0 EV	✓	✓	✓
+4666	+4.7 EV	✓	-	✓
+4500	+4.5 EV	-	✓	-
+4333	+4.3 EV	✓	-	✓
+4000	+4.0 EV	✓	✓	✓
+3666	+3.7 EV	✓	-	✓
+3500	+3.5 EV	-	✓	-
+3333	+3.3 EV	✓	-	✓
+3000	+3.0 EV	✓	✓	✓
+2666	+2.7 EV	✓	-	✓
+2500	+2.5 EV	-	✓	-
+2333	+2.3 EV	✓	-	✓
+2000	+2.0 EV	✓	✓	✓
+1666	+1.7 EV	✓	-	✓
+1500	+1.5 EV	-	✓	-
+1333	+1.3 EV	✓	-	✓
+1000	+1.0 EV	✓	✓	✓
+666	+0.7 EV	✓	-	✓
+500	+0.5 EV	-	✓	-
+333	+0.3 EV	✓	-	✓
0	0.0 EV	✓	✓	✓
-333	-0.3 EV	✓	-	✓
-500	-0.5 EV	-	✓	-
-666	-0.7 EV	✓	-	✓
-1000	-1.0 EV	✓	✓	✓

Do Not Copy

-1333	-1.3 EV	✓	-	✓
-1500	-1.5 EV	-	✓	-
-1666	-1.7 EV	✓	-	✓
-2000	-2.0 EV	✓	✓	✓
-2333	-2.3 EV	✓	-	✓
-2500	-2.5 EV	-	✓	-
-2666	-2.7 EV	✓	-	✓
-3000	-3.0 EV	✓	✓	✓
-3333	-3.3 EV	✓	-	✓
-3500	-3.5 EV	-	✓	-
-3666	-3.7 EV	✓	-	✓
-4000	-4.0 EV	✓	✓	✓
-4333	-4.3 EV	✓	-	✓
-4500	-4.5 EV	-	✓	-
-4666	-4.7 EV	✓	-	✓
-5000	-5.0 EV	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	In video mode.

Do Not Copy

6.5.1.14 DateTime

○ **Property Specifications**

Property Code	0x5011
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	20200101T000000 [00:00:00, Jan. 1, 2020]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Date and time” that is set in the camera.

○ **Property Details**

The format of PropertyValue is a Unicode string of “YYYYMMDDThhmmss” where YYYY is the year, MM is the month, DD is the day of the month, T is a constant character, hh is the hours, mm is the minutes, and ss is the seconds past the minute, in accordance with the ISO8601 standards.
The PropertyValue is the date and time obtained by “UTC + Time zone difference + Daylight saving time”.
The setting range of PropertyValue is from 20000101T000000 to 20991231T235959.

The format of PropertyValue is shown below.

Field	Size (bytes)	Data	Description
NumChar	1	0x10	The number of characters in the string. It is sixteen (including the null character).
StringChars	32		Unicode string “YYYYMMDDThhmmss”

The DevicePropChanged event (section 6.4.1.6) is not issued even if this PropertyValue has changed.

Do Not Copy

6.5.1.15 StillCaptureMode

○ **Property Specifications**

Property Code	0x5013
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0001 [Single-frame shooting]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Release mode” that is set in the camera.

○ **Property Details**

If the ToneMode property (section 6.5.2.5) is set to [HLG] and the camera release mode is "Continuous high-speed shooting (extended)" or "High-speed frame capture", the PropertyValue of this property is fixed to "Continuous high-speed shooting".

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0001	Single-frame shooting
0x0002	Continuous high-speed shooting
0x8010	Continuous low-speed shooting
0x8011	Self-timer
0x8019	Continuous high-speed shooting (Extended)
0x810F	High-speed frame capture (C15)
0x811E	High-speed frame capture (C30)
0x813C	High-speed frame capture (C60)
0x8178	High-speed frame capture (C120)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	When [Self-timer] or [High-speed frame capture] is set while PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].

Do Not Copy

6.5.1.16 BurstNumber

○ **Property Specifications**

Property Code	0x5018
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	1 [One frame]
Property Value	From 1 [One frame] to 65535 [65535 frames]

○ **Property Outline**

Indicates “The number of continuous shooting frames” captured by the command.

○ **Property Details**

For shooting by the command processing, the continuous shooting is performed until the number of frames set by this property is reached.

Refer to Continuous Shooting (section 11.7.1) for the maximum number of continuous shots.

Do Not Copy

6.5.1.17 Artist

○ **Property Specifications**

Property Code	0x501E
DataType	String
Description form	None
Get / Set	Get
Default Value	NULL (0x00) 0 character
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Artist” that is set in the camera.

○ **Property Details**

For the “Artist” setting, the ArtistV property (section 6.5.5.8) should be used.
The PropertyValue is an optional string of 36 characters or shorter (not including the null character).
If the artist is not set in the camera, the value is zero length string (not including the null character).

6.5.1.18 Copyright

○ **Property Specifications**

Property Code	0x501F
DataType	String
Description form	None
Get / Set	Get
Default Value	NULL (0x00) 0 character
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Copyright” that is set in the camera.

○ **Property Details**

For the “Copyright” setting, the CopyrightV property (section 6.5.5.9) should be used.
The PropertyValue is an optional string of 54 characters or shorter (not including the null character).
If the copyright is not set in the camera, the value is zero length string (not including the null character).

Do Not Copy

6.5.2 Vendor (Photo Shooting Menu)

6.5.2.1 PrimarySlot

○ **Property Specifications**

Property Code	0xD156
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [Slot 1]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Primary slot” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Slot 1
2	Slot 2

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The HDRMode property (section 6.5.2.70) is set to [On].

Do Not Copy

6.5.2.2 Slot2ImageSaveMode

○ **Property Specifications**

Property Code	0xD148
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Overflow]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Secondary slot function” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Overflow
1	Backup
2	RAW primary - JPEG secondary
4	JPEG primary - JPEG secondary

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The HDRMode property (section 6.5.2.70) is set to [On].

Do Not Copy

6.5.2.3 Slot2JpegImageSize

○ **Property Specifications**

Property Code	0xD119
DataType	String
Description form	Enumeration
Get / Set	Get / Set
Default Value	Size M
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Secondary slot function – JPEG+JPEG division recording] in the photo shooting menu.

Specify the image size to be saved in JPEG + JPEG division recording.

○ **Property Value**

Valid PropertyValues are listed below.

The PropertyValue changes depending on the value of the CaptureAreaCrop property (section 6.5.2.4). The size is the same as the ImageSize property (section 6.5.1.2).

PropertyValue	Description
Same as size L of ImageSize property	Size L
Same as size M of ImageSize property	Size M
Same as size S of ImageSize property	Size S

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The HDRMode property (section 6.5.2.70) is set to [On].

Do Not Copy

6.5.2.4 CaptureAreaCrop

○ **Property Specifications**

Property Code	0xD030
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [FX]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image area - Choose image area” in the photo shooting menu.

○ **Property Details**

If the StillCaptureMode property (section 6.5.1.15) is set to high-speed frame capture, this property will be as follows.

StillCaptureMode property	Property Value
High-speed frame capture (C15/C30/C60)	For [1:1] or [16:9], FX
High-speed frame capture (C120)	DX

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	FX
2	DX
4	1:1
5	16:9

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	A DX lens is mounted on the camera.
	The StillCaptureMode property is set to [High-speed frame capture (C120)].
	[1:1] or [16:9] is set when the StillCaptureMode property is set to [High-speed frame capture].

Do Not Copy

6.5.2.5 ToneMode

○ **Property Specifications**

Property Code	0x0001D01C
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [SDR]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Tone Mode” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	SDR
2	HLG

Do Not Copy

6.5.2.6 EnableDXImageSize

○ **Property Specifications**

Property Code	0x0001D041
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image size – Enable image size (DX)” in the photo shooting menu.

○ **Property Details**

If this property is ON, CaptureAreaCrop (section 6.5.2.4) is [DX], and the setting prohibition conditions are not met, the setting value of ImageSizeDX (section 6.5.2.7) will be the image size that is applied when shooting.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The CompressionSetting property (section 6.5.1.3) is set to [RAW].
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].

Do Not Copy

6.5.2.7 ImageSizeDX

○ **Property Specifications**

Property Code	0x0001D042
DataType	String
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	Size L
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image size – Image size (DX)” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

PropertyValue is the same as the value for [DX] in the ImageSize property (section 6.5.1.2).

Property Value	Description
Same as DX size L of ImageSize property	Size L
Same as DX size M of ImageSize property	Size M
Same as DX size S of ImageSize property	Size S

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The CompressionSetting property (section 6.5.1.3) is set to [RAW].
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].

Do Not Copy

6.5.2.8 RawCompressionType

○ **Property Specifications**

Property Code	0xD016
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	3 [High efficiency★]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “NEF (RAW) recording” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Lossless compressed
3	High efficiency★
4	High efficiency

Do Not Copy

6.5.2.9 ExposureIndexEx

○ **Property Specifications**

Property Code	0xD0B4
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	100 [ISO100]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “ISO sensitivity settings – ISO sensitivity” in the photo shooting menu.

This property is the 32bit-expanded version of the ExposureIndex property (section 6.5.1.12). It allows you to handle ISO sensitivities over 16 bit.
Refer to the MovieExposureIndex property (section 6.5.3.12) for the ISO sensitivity in video mode.

○ **Property Details**

If the following conditions apply, the lower and upper limits of ISO sensitivity will be restricted. The valid setting range can be confirmed in the descriptor of this property.

No	Conditions
1	The ToneMode property (section 6.5.2.5) is set to [HLG].

○ **Property Value**

Valid PropertyValues are listed below.

The value of PropertyValue changes depending on the value of the IsoStep property (section 6.5.4.7).

Property Value	Description	IsoStep	
		1/3 step	1 step
50	Lo 1.0	✓	✓
64	Lo 0.7	✓	-
80	Lo 0.3	✓	-
100	100	✓	✓
125	125	✓	-
160	160	✓	-
200	200	✓	✓
250	250	✓	-
320	320	✓	-
400	400	✓	✓
500	500	✓	-
640	640	✓	-
800	800	✓	✓
1000	1000	✓	-
1250	1250	✓	-
1600	1600	✓	✓

Do Not Copy

2000	2000	✓	-
2500	2500	✓	-
3200	3200	✓	✓
4000	4000	✓	-
5000	5000	✓	-
6400	6400	✓	✓
8000	8000	✓	-
10000	10000	✓	-
12800	12800	✓	✓
16000	16000	✓	-
20000	20000	✓	-
25600	25600	✓	✓
32000	32000	✓	-
40000	40000	✓	-
51200	51200	✓	✓
64000	64000	✓	✓
80000	Hi 0.3	✓	-
102400	Hi 0.7	✓	-
128000	Hi 1.0	✓	✓
204800	Hi 1.7	✓	✓

Do Not Copy

6.5.2.10 ISOAutoSetting

○ **Property Specifications**

Property Code	0xD16A
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	1 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the Auto setting for “ISO sensitivity settings – ISO sensitivity” in the photo shooting menu.

○ **Property Details**

This property represents the ISO sensitivity auto control setting status when the ExposureProgramMode property (section 6.5.1.11) is anything other than PSAM.
If the ExposureProgramMode property is PSAM, PropertyValue is undefined.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	On
1	Off

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property is [PSAM].

Do Not Copy

6.5.2.11 ISOAutoControl

○ **Property Specifications**

Property Code	0xD054
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “ISO sensitivity settings – Auto ISO sensitivity control” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.2.12 ISOAutoHighLimit

○ **Property Specifications**

Property Code	0xD183
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	64000 [ISO 64000]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “ISO sensitivity settings – Auto ISO sensitivity control – Maximum sensitivity” in the photo shooting menu.

○ **Property Details**

If the following conditions apply, the lower and upper limits of ISO sensitivity will be restricted. The valid setting range can be confirmed in the descriptor of this property.

No	Conditions
1	The ToneMode property (section 6.5.2.5) is set to [HLG].

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
200 – 204800	Refer to the ExposureIndexEx property (section 6.5.2.9).

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ISOAutoControl property (section 6.5.2.11) is set to [Off].

Do Not Copy

6.5.2.13 FlashISOAutoHighLimit

○ **Property Specifications**

Property Code	0xD199
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0xFFFFFFFF [The setting in the case that the flash is not attached]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “ISO sensitivity settings – Auto ISO sensitivity control – Maximum sensitivity with flash” in the photo shooting menu.

○ Property Details

If the following conditions apply, the lower and upper limits of ISO sensitivity will be restricted. The valid setting range can be confirmed in the descriptor of this property.

No	Conditions
1	The ToneMode property (section 6.5.2.5) is set to [HLG].

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
200 – 204800	Refer to the property value of ISOAutoHighLimit (section 6.5.2.12).
0xFFFFFFFF	The setting in the case that the flash is not attached.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ISOAutoControl property (section 6.5.2.11) is set to [Off].

Do Not Copy

6.5.2.14 ISOAutoShutterTime

○ **Property Specifications**

Property Code	0xD164
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0xFFFFFFFF [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “ISO sensitivity settings – Auto ISO sensitivity control – Minimum shutter speed” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00011F40	1/8000 sec.
0x00011900	1/6400 sec.
0x00011770	1/6000 sec.
0x00011388	1/5000 sec.
0x00010FA0	1/4000 sec.
0x00010C80	1/3200 sec.
0x000109C4	1/2500 sec.
0x000107D0	1/2000 sec.
0x00010640	1/1600 sec.
0x000104E2	1/1250 sec.
0x000103E8	1/1000 sec.
0x00010320	1/800 sec.
0x00010280	1/640 sec.
0x000101F4	1/500 sec.
0x00010190	1/400 sec.
0x00010140	1/320 sec.
0x000100FA	1/250 sec.
0x000100C8	1/200 sec.
0x000100A0	1/160 sec.
0x0001007D	1/125 sec.
0x00010064	1/100 sec.
0x00010050	1/80 sec.
0x0001003C	1/60 sec.
0x00010032	1/50 sec.
0x00010028	1/40 sec.
0x0001001E	1/30 sec.
0x00010019	1/25 sec.
0x00010014	1/20 sec.
0x0001000F	1/15 sec.
0x0001000D	1/13 sec.

Do Not Copy

0x0001000A	1/10 sec.
0x00010008	1/8 sec.
0x00010006	1/6 sec.
0x00010005	1/5 sec.
0x00010004	1/4 sec.
0x00010003	1/3 sec.
0x000A0019	1/2.5 sec.
0x00010002	1/2 sec.
0x000A0010	1/1.6 sec.
0x000A000D	1/1.3 sec.
0x00010001	1 sec.
0x00020001	2 sec.
0x00040001	4 sec.
0x00080001	8 sec.
0x000F0001	15 sec.
0x001E0001	30 sec.
0xFFFFFFFF	Auto

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ISOAutoControl property (section 6.5.2.11) is set to [Off].

Do Not Copy

6.5.2.15 ISOAutoShutterTimeCorrectionValue

○ **Property Specifications**

Property Code	0xD1F4
DataType	INT8
Description form	Range
Get / Set	Get / Set
Default Value	0
Property Value	-2 to +2

○ **Property Outline**

Indicates the correction value when “ISO sensitivity settings – Auto ISO sensitivity control – Minimum shutter speed” in the photo shooting menu is [Auto].

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ISOAutoControl property (section 6.5.2.11) is set to [Off].
	The ISOAutoShutterTime property (section 6.5.2.14) is not set to [Auto].

Do Not Copy

6.5.2.16 WbAutoType

○ **Property Specifications**

Property Code	0xD141
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	2 [Keep white]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the type of “White balance - Auto” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Keep overall atmosphere
1	Keep warm lighting colors
2	Keep white

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.17 WbTuneAuto

○ **Property Specifications**

Property Code	0xD017
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Auto” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.18 WbTuneNatural

○ **Property Specifications**

Property Code	0xD15E
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Natural light auto” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

6.5.2.19 WbTuneSunny

○ **Property Specifications**

Property Code	0xD01A
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Direct sunlight” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Do Not Copy

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.20 WbTuneCloudy

○ **Property Specifications**

Property Code	0xD01C
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Cloudy” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

6.5.2.21 WbTuneShade

○ **Property Specifications**

Property Code	0xD01D
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Shade” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.22 WbTuneIncandescent

○ **Property Specifications**

Property Code	0xD018
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Incandescent” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.23 WbFluorescentType

○ **Property Specifications**

Property Code	0xD14F
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	3 [White fluorescent lamp]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the light source of “White balance - Fluorescent” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
3	White fluorescent lamp
4	Day white fluorescent lamp
5	Daylight fluorescent lamp

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.24 WbTuneFluorescent

○ **Property Specifications**

Property Code	0xD019
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Fluorescent” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.25 WbTuneFlash

○ **Property Specifications**

Property Code	0xD01B
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Flash” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.26 WbColorTemp

○ **Property Specifications**

Property Code	0xD01E
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	5000 [K]
Property Value	From 2500 [K] to 10000 [K] (increases/decreases in 10K increments)

○ **Property Outline**

Indicates the color temperature (K) of “White balance – Choose color temp.” in the photo shooting menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

6.5.2.27 WbTuneColorTemp

○ **Property Specifications**

Property Code	0xD150
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine-tuning volume of “White balance – Choose color temp.” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set

Do Not Copy

	to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.28 WbPresetDataNo

○ **Property Specifications**

Property Code	0xD01F
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	1 [d-1]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “White balance – Preset manual” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	d-1
2	d-2
3	d-3
4	d-4
5	d-5
6	d-6

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].
	The MovieWhiteBalance property (section 6.5.3.15) is set to anything other than [Same as photo settings] during video recording.

Do Not Copy

6.5.2.29 WbPresetDataComment1

○ **Property Specifications**

Property Code	0xD021
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-1” in the photo shooting menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataComment1 property (section 6.5.3.28)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect1 property (section 6.5.2.47) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.30 WbPresetDataComment2

○ **Property Specifications**

Property Code	0xD022
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-2” in the photo shooting menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataComment2 property (section 6.5.3.29)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect2 property (section 6.5.2.48) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.31 WbPresetDataComment3

○ **Property Specifications**

Property Code	0xD023
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-3” in the photo shooting menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataComment3 property (section 6.5.3.30)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect3 property (section 6.5.2.49) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.32 WbPresetDataComment4

○ **Property Specifications**

Property Code	0xD024
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-4” in the photo shooting menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataComment4 property (section 6.5.3.31)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect4 property (section 6.5.2.50) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.33 WbPresetDataComment5

○ **Property Specifications**

Property Code	0xD038
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-5” in the photo shooting menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataComment5 property (section 6.5.3.32)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect5 property (section 6.5.2.51) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.34 WbPresetDataComment6

○ **Property Specifications**

Property Code	0xD039
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-6” in the photo shooting menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataComment6 property (section 6.5.3.33)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect6 property (section 6.5.2.52) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.35 WbPresetDataValue1

○ **Property Specifications**

Property Code	0xD026
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-1” in the photo shooting menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataValue1 property (section 6.5.3.34)

6.5.2.36 WbPresetDataValue2

○ **Property Specifications**

Property Code	0xD027
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-2” in the photo shooting menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataValue2 property (section 6.5.3.35)

Do Not Copy

6.5.2.37 WbPresetDataValue3

○ **Property Specifications**

Property Code	0xD028
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-3” in the photo shooting menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataValue3 property (section 6.5.3.36)

6.5.2.38 WbPresetDataValue4

○ **Property Specifications**

Property Code	0xD029
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-4” in the photo shooting menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataValue4 property (section 6.5.3.37)

Do Not Copy

6.5.2.39 WbPresetDataValue5

○ **Property Specifications**

Property Code	0xD03E
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-5” in the photo shooting menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataValue5 property (section 6.5.3.38)

6.5.2.40 WbPresetDataValue6

○ **Property Specifications**

Property Code	0xD03F
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-6” in the photo shooting menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetDataValue6 property (section 6.5.3.39)

Do Not Copy

6.5.2.41 WbTunePreset1

○ **Property Specifications**

Property Code	0xD152
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-1” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbTunePreset1 property (section 6.5.3.40)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect1 property (section 6.5.2.47) is [On].
	The WbPresetDataNo property (section 6.5.2.28) is set to anything other than [d-1].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.42 WbTunePreset2

○ **Property Specifications**

Property Code	0xD153
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-2” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbTunePreset2 property (section 6.5.3.41)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect2 property (section 6.5.2.48) is [On].
	The WbPresetDataNo property (section 6.5.2.28) is set to anything other than [d-2].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.43 WbTunePreset3

○ **Property Specifications**

Property Code	0xD154
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-3” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbTunePreset3 property (section 6.5.3.42)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect3 property (section 6.5.2.49) is [On].
	The WbPresetDataNo property (section 6.5.2.28) is set to anything other than [d-3].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.44 WbTunePreset4

○ **Property Specifications**

Property Code	0xD155
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-4” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbTunePreset4 property (section 6.5.3.43)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect4 property (section 6.5.2.50) is [On].
	The WbPresetDataNo property (section 6.5.2.28) is set to anything other than [d-4].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.45 WbTunePreset5

○ **Property Specifications**

Property Code	0xD03A
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-5” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbTunePreset5 property (section 6.5.3.44)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect5 property (section 6.5.2.51) is [On].
	The WbPresetDataNo property (section 6.5.2.28) is set to anything other than [d-5].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.46 WbTunePreset6

○ **Property Specifications**

Property Code	0xD03B
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-6” in the photo shooting menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbTunePreset6 property (section 6.5.3.45)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The WbPresetProtect6 property (section 6.5.2.52) is [On].
	The WbPresetDataNo property (section 6.5.2.28) is set to anything other than [d-6].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.47 WbPresetProtect1

○ **Property Specifications**

Property Code	0xD158
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-1” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetProtect1 property (section 6.5.3.46)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.48 WbPresetProtect2

○ **Property Specifications**

Property Code	0xD159
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-2” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetProtect2 property (section 6.5.3.47)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.49 WbPresetProtect3

○ **Property Specifications**

Property Code	0xD15A
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-3” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetProtect3 property (section 6.5.3.48)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.50 WbPresetProtect4

○ **Property Specifications**

Property Code	0xD15C
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-4” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetProtect4 property (section 6.5.3.49)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.51 WbPresetProtect5

○ **Property Specifications**

Property Code	0xD03C
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-5” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetProtect5 property (section 6.5.3.50)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.52 WbPresetProtect6

○ **Property Specifications**

Property Code	0xD03D
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-6” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieWbPresetProtect6 property (section 6.5.3.51)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.2.53 ColorSpace

○ **Property Specifications**

Property Code	0xD032
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [sRGB]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Color space” in the photo shooting menu.

○ **Property Details**

If the ToneMode property (section 6.5.2.5) is “HLG”, “BT.2100” is added to the PropertyValue of this property.
This property is "BT.2100" when the ToneMode property is "HLG".

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	sRGB
1	Adobe RGB
100	BT.2100 (only when the ToneMode property is [HLG])

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property is set to [HLG].

Do Not Copy

6.5.2.54 Active-D-Lighting

○ **Property Specifications**

Property Code	0xD14E
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Active D-Lighting” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High
0x0005	Extra high
0xFFFF	Auto

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ToneMode property (section 6.5.2.5) is set to [HLG].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].

Do Not Copy

6.5.2.55 NoiseReductionHiIso

○ **Property Specifications**

Property Code	0xD070
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0003 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “High ISO NR” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High

Do Not Copy

6.5.2.56 VignetteControl

○ **Property Specifications**

Property Code	0xD0F7
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0003 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Vignette control” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieVignetteControl property (section 6.5.3.54)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High

Do Not Copy

6.5.2.57 DiffractionCompensation

○ **Property Specifications**

Property Code	0xD0BA
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Diffraction compensation” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieDiffractionCompensation property (section 6.5.3.55)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.2.58 AutoDistortion

○ **Property Specifications**

Property Code	0xD0F8
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Auto distortion control” in the photo shooting menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: MovieAutoDistortion property (section 6.5.3.56)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The LensTypeML property (section 6.5.10.2) is set to [Lens whose automatic distortion correction is always effective].

Do Not Copy

6.5.2.59 SkinSoftening

○ **Property Specifications**

Property Code	0x0001D017
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Skin Softening” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	The HDRMode property (section 6.5.2.70) is set to [On].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].

Do Not Copy

6.5.2.60 PortraitImpressionBalance

○ **Property Specifications**

Property Code	0x0001D019
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Portrait Impression Adjustment” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	Mode 1
2	Mode 2
3	Mode 3

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property (section 6.5.2.5) is set to [SDR], and the ActivePicCtrlItem property (section 6.5.14.1) is set to one of the values below. ● A monochrome style setting ● Creative Picture Control ● Custom Picture Control with “Flexible Color” registered
	The ToneMode property is set to [HLG] and the ActivePicCtrlHlgItem property (section 6.5.14.3) is set to [Monochrome].

Do Not Copy

6.5.2.61 HighFrequencyFlickerReduction

○ **Property Specifications**

Property Code	0x0001D031
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “High-frequency flicker reduction shooting” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On (High resolution shutter setting)

Do Not Copy

6.5.2.62 StillFocusMode

○ **Property Specifications**

Property Code	0xD061
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	5 [AF-A]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Focus mode” in photo shooting.

○ **Property Details**

If the following conditions are satisfied, the camera operates in MF mode even when this property is set to AF.

- The CPU lens is not mounted.
- The switches on the camera or lens are set to MF.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	AF-S
1	AF-C
4	MF
5	AF-A

Do Not Copy

6.5.2.63 StillFocusMeteringMode

○ **Property Specifications**

Property Code	0xD05D
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0X8011 [Auto-area AF]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “AF-area mode” in photo shooting.

○ **Property Details**

In the following cases, this property is set to single-point AF mode. When the following state is canceled without changing the AF area mode, it returns to the AF area mode which was set immediately before.

- The StillFocusMode property (section 6.5.2.62) is set to [MF].
- An AF area mode that cannot be selected is set when the StillFocusMode property is changed.

○ **Property Value**

Valid PropertyValues are listed below.

The value of PropertyValue changes depending on the still image focus mode setting.

Property Value	Description	Still image focus mode setting			
		MF	AF-S	AF-C	AF-A
0x0002	Dynamic AF (S)	-	-	✓	✓
0x8010	Single-point AF	✓	✓	✓	✓
0x8011	Auto-area AF	-	✓	✓	✓
0x8012	3D-Tracking	-	-	✓	✓
0x8013	Dynamic AF(M)	-	-	✓	✓
0x8014	Dynamic AF(L)	-	-	✓	✓
0x8017	Pinpoint AF	-	✓	-	-
0x8018	Wide-area AF (S)	-	✓	✓	✓
0x8019	Wide-area AF (L)	-	✓	✓	✓
0x801E	Wide-area AF (C1)	-	✓	✓	✓
0x801F	Wide-area AF (C2)	-	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The photo focus mode is set to the manual focus. NOTE) Except when the focus mode is set to MF due to the CPU lens not attached or the operation with the camera dial/switch.

Do Not Copy

6.5.2.64 WideAreaAFC1

○ **Property Specifications**

Property Code	0x0001D046
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x1503 [21×3]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the focus area size of “AF-area mode – Wide area AF(C1)” in the photo shooting menu.

○ **Property Details**

In this property, the upper Byte of Property Value is treated as the focus area size in the horizontal direction, and the lower Byte is treated as the focus area size in the vertical direction.

Example: If PropertyValue is 0x1507, the focus area size is 21 in the horizontal direction and 7 in the vertical direction, making it "21 x 7".

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Specifiable Values	Description
Upper Byte	Odd numbers from 1 to 21	Horizontal focus area size
Lower Byte	Odd numbers from 1 to 13	Vertical focus area size

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for StillFocusMeteringMode (section 6.5.2.63) apply.

Do Not Copy

6.5.2.65 WideAreaAFC2

○ **Property Specifications**

Property Code	0x0001D047
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x030D [3x13]
Property Value	Same as the WideAreaAFC1 property (section 6.5.2.64).

○ **Property Outline**

Indicates the focus area size of “AF-area mode – Wide area AF(C2)” in the photo shooting menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for StillFocusMeteringMode (section 6.5.2.63) apply.

Do Not Copy

6.5.2.66 AFSubjectDetection

○ **Property Specifications**

Property Code	0x0001D005
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Subject detection setting in AF/MF” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	Auto
2	People
3	Animal
4	Vehicle
5	Birds
6	Airplanes

Do Not Copy

6.5.2.67 MFSubjectDetectionArea

○ **Property Specifications**

Property Code	0x0001D03E
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Subject detection area in MF” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00	OFF
0x01	Wide area (S)
0x02	Wide area (L)
0xFF	Whole area

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The AFSubjectDetection property (section 6.5.2.66) is set to [Off].

Do Not Copy

6.5.2.68 VibrationReduction

○ **Property Specifications**

Property Code	0xD138
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Vibration reduction” in the photo setting menu.

○ **Property Details**

The supported Property Value differs depending on the type of attached lens.

○ **Property Value**

Valid PropertyValues are listed below.

When the lens anti-vibration mode is [Normal] or [Sports]:

Property Value	Description
0	Off
1	Normal
2	Sports

When the lens anti-vibration mode is only [Normal]:

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The mounted lens has VR switch.
	The LensSort property (section 6.5.10.1) is set to [Not mounted] and the FmmManualSetting2 property (section 6.5.5.2) is set to [0.0 mm].
	The PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].

Do Not Copy

6.5.2.69 LinkVRToFocusPoint

○ **Property Specifications**

Property Code	0x0001D03C
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Link VR to AF point” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.2.70 HDRMode

○ **Property Specifications**

Property Code	0xD130
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 x 0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “HDR (high dynamic range) – HDR mode” in the photo shooting menu.

○ **Property Details**

When the StillCaptureMode property (section 6.5.1.15) is [Continuous low-speed shooting] or [Continuous high-speed shooting], HDR is applied to only the first image with the continuous shot operation.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0001	On (single photo)
0x0101	On (Continuous)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	The ToneMode property (section 6.5.2.5) is set to [HLG].
	The EnableBracketing property (section 6.5.8.1) is set to [On].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].
	The PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].

Do Not Copy

6.5.2.71 HDRStrength

○ **Property Specifications**

Property Code	0xD132
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0xFFFF [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “HDR (high dynamic range) – HDR strength” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	Low
0x0003	Normal
0x0004	High
0x0005	Extra high
0xFFFF	Auto

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the HDRMode property (section 6.5.2.70) apply.

Do Not Copy

6.5.2.72 HDRSaveIndividualImages

○ **Property Specifications**

Property Code	0xD133
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [HDR (high dynamic range) – Save individual images (RAW)] in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the HDRMode property (section 6.5.2.70) apply.

Do Not Copy

6.5.2.73 DehazeMode

○ **Property Specifications**

Property Code	0x0001D062
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Dehaze – Dehaze mode] in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0001	On (single photo)
0x0101	On (Continuous)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	The ToneMode property (section 6.5.2.5) is set to [HLG].
	The Active-D-Lighting property (section 6.5.2.54) is set to anything other than [Off].
	The SkinSoftening property (section 6.5.2.59) is set to anything other than [Off].
	The HDRMode property (section 6.5.2.70) is set to [On].
	The EnableBracketing property (section 6.5.8.1) is set to [On].
	The PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].
	There are images in SDRAM that have not yet been transferred.
Device_Busy	Buffer in use.

Do Not Copy

6.5.2.74 DehazeStrength

○ **Property Specifications**

Property Code	0x0001D063
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	7
Property Value	1 to 9

○ **Property Outline**

Indicates [Dehaze – Dehaze strength] in the photo shooting menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the DehazeMode property (section 6.5.2.73) apply.

Do Not Copy

6.5.2.75 PixelShiftShootingMode

○ **Property Specifications**

Property Code	0x0001D045
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Pixel shift shooting – Pixel shift shooting mode” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0001	On (Single)
0x0101	On (Continuous)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The HDRMode property (section 6.5.2.70) is set to [On].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].
	The EnableBracketing property (section 6.5.8.1) is set to [On].
	The StillCaptureMode property (section 6.5.1.15) is set to [Self-timer] or [High-speed frame capture].
	Image dust off data is being acquired.

Do Not Copy

6.5.2.76 PixelShiftShootingNumberOfShots

○ **Property Specifications**

Property Code	0x0001D04E
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	16 [16 frames]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Pixel shift shooting – Number of shots” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
4	4 shots
8	8 shots
16	16 shots
32	32 shots

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the PixelShiftShootingMode property (section 6.5.2.75) apply.

Do Not Copy

6.5.2.77 PixelShiftShootingDelay

○ **Property Specifications**

Property Code	0x0001D04F
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	2 [2 sec.]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Pixel shift shooting – Delay” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	1 sec.
2	2 sec.
3	3 sec.
5	5 sec.
10	10 sec.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the PixelShiftShootingMode property (section 6.5.2.75) apply.

Do Not Copy

6.5.2.78 PixelShiftShootingInterval

○ **Property Specifications**

Property Code	0x0001D050
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [0 sec.]
Property Value	From 0 [0 sec.] to 30 [30 sec.]

○ **Property Outline**

Indicates “Pixel shift shooting – Interval time” in the photo shooting menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the PixelShiftShootingMode property (section 6.5.2.75) apply.

Do Not Copy

6.5.3 Vendor (Video Recording Menu)

6.5.3.1 MovieRecordDestination

○ **Property Specifications**

Property Code	0xD0A3
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [Slot 1]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Destination” in the video recording menu.

If a card is not inserted in the slot that is set in this property, the video is recorded on the card that is inserted in the other slot.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Slot 1
2	Slot 2

Do Not Copy

6.5.3.2 MovieFileType

○ **Property Specifications**

Property Code	0xD0AF
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x00010800 [H.265 8-bit(MOV)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video file type” in the video recording menu.

○ **Property Details**

The meaning of each bit of the Property Value is as follows.

Bit	Bit number	Description
24-31	8	Reserved(0)
16-23	8	Video codec
8-15	8	Bit depth
0-7	8	File container

➢ Video codec

Value	Description
0x00	H.264/AVC
0x01	H.265/HEVC
0x02	N-RAW
0x10	ProRes 422 HQ
0x11	ProRes RAW HQ
0x31	R3D NE

➢ Bit depth

Assign the bit depth value as it is.

➢ File container

Value	Description
0	MOV
1	MP4
2	NEV
3	R3D

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	Tone Mode
0x00000801	H.264 8-bit(MP4)	SDR Locked

Do Not Copy

0x00010800	H.265 8-bit(MOV)	SDR Locked
0x00010A00	H.265 10-bit(MOV)	MovieH265ToneMode (section 6.5.3.3)
0x00100A00	ProRes 422 HQ 10-bit(MOV)	MovieProResToneMode (section 6.5.3.5)
0x00110C00	ProRes RAW HQ 12-bit(MOV)	MovieProResRawHq12bitToneMode (section 6.5.3.6)
0x00310C03	R3D NE 12-bit(R3D)	Log3G10 fixed
0x00020C02	N-RAW 12-bit(NEV)	MovieNRaw12bitToneMode (section 6.5.3.4)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The setting is configured to [R3D NE 12-bit(R3D)] while the ExposureProgramMode property (section 6.5.1.11) is set to [Auto Mode].

Do Not Copy

6.5.3.3 MovieH265ToneMode

○ **Property Specifications**

Property Code	0x0001D001
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [SDR]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Video file type - H.265 10-bit (MOV) tone mode] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	SDR
1	N-Log
2	HLG

Do Not Copy

6.5.3.4 MovieNRaw12bitToneMode

○ **Property Specifications**

Property Code	0x0001D028
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [SDR]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Video file type – N-RAW 12-bit (NEV) tone mode] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	SDR
1	N-Log

Do Not Copy

6.5.3.5 MovieProResToneMode

○ **Property Specifications**

Property Code	0x0001D000
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [SDR]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Video file type - ProRes 422 HQ 10-bit(MOV) tone mode] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	SDR
1	N-Log

Do Not Copy

6.5.3.6 MovieProResRawHq12bitToneMode

○ **Property Specifications**

Property Code	0x0001D029
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [SDR]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Video file type - ProRes RAW HQ 12-bit(MOV) tone mode] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	SDR
1	N-Log

Do Not Copy

6.5.3.7 MovieRecordScreenSize

○ **Property Specifications**

Property Code	0xD0A0
DataType	UINT64
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0F000870001E0000 [3840×2160 30p]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image size/frame rate” in the video recording menu.

○ **Property Details**

This property represents the setting value of the menu, but if the setting prohibition condition is met, it represents the control value of the camera.

The meaning of each bit of the Property Value is as follows.

Bit	Bit number	Description
48-63	16	Horizontal resolution
32-47	16	Vertical resolution
24-31	8	Reserved(0)
16-23	8	Frame rate
14-15	2	Scan type
8-13	6	Special shooting
0-7	8	Special shooting supplementary information

➢ Horizontal resolution / Vertical resolution / Frame rate

The resolution or frame rate values are assigned.

➢ Scan type

Value	Description
0	p (Progressive)
1	i (Interlace)
2 – 3	Reserved

➢ Special shooting

Value	Description
0	Normal
1	Slow-motion
2	Crop
3 – 63	Reserved

Do Not Copy

➢ Special shooting supplementary information

If there is no supplementary information, it is fixed to 0.

In the case of slow motion, the value is 10 times the slow magnification.

Value	Description
40	x4 slow-motion
50	x5 slow-motion

○ **Property Value**

Valid PropertyValues are listed below.

The PropertyValue changes depending on the setting of the MovieFileType property (section 6.5.3.2).

Table 6.5-1 YUV Video

Property Value	Description	Video file format		
		H.264	H.265	ProRes 422
0x15000BD0003C0000	5376×3024 60p	-	✓	-
0x15000BD000320000	5376×3024 50p	-	✓	-
0x15000BD0001E0000	5376×3024 30p	-	✓	✓
0x15000BD000190000	5376×3024 25p	-	✓	✓
0x15000BD000180000	5376×3024 24p	-	✓	✓
0x0F00087000780000	3840×2160 120p	-	✓	-
0x0F00087000640000	3840×2160 100p	-	✓	-
0x0F000870003C0000	3840×2160 60p	-	✓	✓
0x0F00087000320000	3840×2160 50p	-	✓	✓
0x0F000870001E0000	3840×2160 30p	-	✓	✓
0x0F00087000190000	3840×2160 25p	-	✓	✓
0x0F00087000180000	3840×2160 24p	-	✓	✓
0x0780043800F00000	1920×1080 240p	-	✓	-
0x0780043800C80000	1920×1080 200p	-	✓	-
0x0780043800780000	1920×1080 120p	-	✓	✓
0x0780043800640000	1920×1080 100p	-	✓	✓
0x07800438003C0000	1920×1080 60p	✓	✓	✓
0x0780043800320000	1920×1080 50p	✓	✓	✓
0x07800438001E0000	1920×1080 30p	✓	✓	-
0x0780043800190000	1920×1080 25p	✓	✓	-
0x0780043800180000	1920×1080 24p	✓	✓	-
0x07800438001E0128	1920×1080 30p 4x Slow	✓	-	-
0x0780043800190128	1920×1080 25p 4x Slow	✓	-	-
0x0780043800180132	1920×1080 24p 5x Slow	✓	-	-

Table 6.5-2 RAW Video

Property Value	Description	Video file format		
		N-RAW	R3D NE	ProRes RAW
0x17A00D4A003C0000	[FX] 6048×3402 60p	✓	✓	-
0x17A00D4A00320000	[FX] 6048×3402 50p	✓	✓	-
0x17A00D4A001E0000	[FX] 6048×3402 30p	✓	✓	✓

Do Not Copy

0x17A00D4A00190000	[FX] 6048×3402 25p	✓	✓	✓
0x17A00D4A00180000	[FX] 6048×3402 24p	✓	✓	✓
0x0FC008DC003C0000	[FX] 4032×2268 60p	✓	✓	✓
0x0FC008DC00320000	[FX] 4032×2268 50p	✓	✓	✓
0x0FC008DC001E0000	[FX] 4032×2268 30p	✓	✓	✓
0x0FC008DC00190000	[FX] 4032×2268 25p	✓	✓	✓
0x0FC008DC00180000	[FX] 4032×2268 24p	✓	✓	✓
0x0F9008C000780000	[DX] 3984×2240 120p	✓	✓	-
0x0F9008C000640000	[DX] 3984×2240 100p	✓	✓	-
0x0F9008C0003C0000	[DX] 3984×2240 60p	✓	✓	✓
0x0F9008C000320000	[DX] 3984×2240 50p	✓	✓	✓
0x0F9008C0001E0000	[DX] 3984×2240 30p	✓	✓	✓
0x0F9008C000190000	[DX] 3984×2240 25p	✓	✓	✓
0x0F9008C000180000	[DX] 3984×2240 24p	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	[5376×3024] or [1920×1080 240p/200p] is set when the DX lens is attached.

Do Not Copy

6.5.3.8 MovieQualityNRaw

○ **Property Specifications**

Property Code	0x0001D02A
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [High Quality]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video Quality” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Normal Quality
1	High Quality

Do Not Copy

6.5.3.9 MovieCaptureAreaCrop

○ **Property Specifications**

Property Code	0xD20F
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [FX]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Image area - Choose image area] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	FX
2	DX

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The MovieRecordScreenSize property (section 6.5.3.7) is set to [5376×3024], [3840×2160 120p/100p], or [1920×1080 240p/200p] and slow-motion video.
	A DX lens is mounted on the camera.

Do Not Copy

6.5.3.10 MovieISOAutoHighLimit

○ **Property Specifications**

Property Code	0xD0AE
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	51200 [ISO 51200]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video ISO sensitivity settings – Maximum sensitivity” in the video recording menu.

○ **Property Details**

When the following conditions are satisfied, the minimum value and maximum value for Video ISO sensitivity are limited. The valid setting range can be confirmed in the descriptor of this property.

No	Conditions
1	The MovieLogOutput property (section 6.5.12.5) is [On].
2	The MovieFileType property (section 6.5.3.2) is set to [ProRes RAW HQ 12-bit(MOV)] or [N-RAW 12-bit(NEV)].

○ **Property Value**

Valid PropertyValues are listed below.

The value of PropertyValue changes depending on the value of the IsoStep property (section 6.5.4.7).

Property Value	Description	IsoStep	
		1/3 step	1 step
200	200	✓	✓
250	250	✓	-
320	320	✓	-
400	400	✓	✓
500	500	✓	-
640	640	✓	-
800	800	✓	✓
1000	1000	✓	-
1250	1250	✓	-
1600	1600	✓	✓
2000	2000	✓	-
2500	2500	✓	-
3200	3200	✓	✓
4000	4000	✓	-
5000	5000	✓	-
6400	6400	✓	✓
8000	8000	✓	-

Do Not Copy

10000	10000	✓	-
12800	12800	✓	✓
16000	16000	✓	-
20000	20000	✓	-
25600	25600	✓	✓
32000	32000	✓	-
40000	40000	✓	-
51200	51200	✓	✓
64000	Hi 0.3	✓	-
80000	Hi 0.7	✓	-
102400	Hi 1.0	✓	✓
204800	Hi 2.0	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].

Do Not Copy

6.5.3.11 MovieISOAutoControl

○ **Property Specifications**

Property Code	0xD0AD
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video ISO sensitivity settings – Auto ISO control (mode M)” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than M during video recording.
	The MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].

Do Not Copy

6.5.3.12 MovieExposureIndex (Mode M)

○ **Property Specifications**

Property Code	0xD1AA
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	100 [ISO 100]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [ISO sensitivity settings – ISO sensitivity (mode M)] in the video recording menu.

○ **Property Details**

When the following conditions are satisfied, the minimum value and maximum value for Video ISO sensitivity are limited. The valid setting range can be confirmed in the descriptor of this property.

No	Conditions
1	The MovieLogOutput property (section 6.5.12.5) is [On].
2	The MovieFileType property (section 6.5.3.2) is set to [ProRes RAW HQ 12-bit(MOV)] or [N-RAW 12-bit(NEV)].
3	The MovieFileType property is set to [H.265 10-bit (MOV)], and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log] or [HLG].
4	The MovieFileType property is set to [ProRes 422 HQ 10-bit (MOV)] and MovieProResToneMode property (section 6.5.3.5) is set to [N-Log].

The settable ISO sensitivity values change depending on the value of the IsoStep property (section 6.5.4.7).
When the MovieExtendedIsoStepManual property (section 6.5.4.47) is [On (1/6 steps)], the values of 1/6 steps are listed regardless of the value of the IsoStep property.

○ **Property Value**

Valid PropertyValues are listed below.

If the tone mode of the video file format is N-Log, values below ISO800 are Lo sensitivity.
* PropertyValue with Lo notation in the content is targeted.

Property Value	Description	ISO sensitivity step value		
		1/6 step	1/3 step	1 step
100	100	✓	✓	✓
110	110	✓	-	-
125	125	✓	✓	-
140	140	✓	-	-
160	160	✓	✓	-
180	180	✓	-	-
200	200(Lo 2.0)	✓	✓	✓
220	220	✓	-	-

Do Not Copy

250	250(Lo 1.7)	✓	✓	-
280	280	✓	-	-
320	320(Lo 1.3)	✓	✓	-
360	360	✓	-	-
400	400(Lo 1.0)	✓	✓	✓
450	450	✓	-	-
500	500(Lo 0.7)	✓	✓	-
560	560	✓	-	-
640	640(Lo 0.3)	✓	✓	-
720	720	✓	-	-
800	800	✓	✓	✓
900	900	✓	-	-
1000	1000	✓	✓	-
1100	1100	✓	-	-
1250	1250	✓	✓	-
1400	1400	✓	-	-
1600	1600	✓	✓	✓
1800	1800	✓	-	-
2000	2000	✓	✓	-
2200	2200	✓	-	-
2500	2500	✓	✓	-
2800	2800	✓	-	-
3200	3200	✓	✓	✓
3600	3600	✓	-	-
4000	4000	✓	✓	-
4500	4500	✓	-	-
5000	5000	✓	✓	-
5600	5600	✓	-	-
6400	6400	✓	✓	✓
7200	7200	✓	-	-
8000	8000	✓	✓	-
9000	9000	✓	-	-
10000	10000	✓	✓	-
11400	11400	✓	-	-
12800	12800	✓	✓	✓
14400	14400	✓	-	-
16000	16000	✓	✓	-
18000	18000	✓	-	-
20000	20000	✓	✓	-
22800	22800	✓	-	-
25600	25600	✓	✓	✓
28800	28800	✓	-	-
32000	32000	✓	✓	-
36000	36000	✓	-	-
40000	40000	✓	✓	-
45600	45600	✓	-	-

Do Not Copy

51200	51200	✓	✓	✓
64000	Hi 0.3	✓	✓	-
80000	Hi 0.7	✓	✓	-
102400	Hi 1.0	✓	✓	✓
204800	Hi 2.0	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The ExposureProgramMode property is set to anything other than M during video recording.
	The MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].

Do Not Copy

6.5.3.13 MovieBaseISOSensitivity

○ **Property Specifications**

Property Code	0x0001D09D
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [Low sensitivity]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [ISO sensitivity settings – Base ISO sensitivity] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Low sensitivity
2	High sensitivity

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to anything other than [R3D NE 12-bit(R3D)].
	The ExposureProgramMode property (section 6.5.1.11) is set to [Auto Mode].

Do Not Copy

6.5.3.14 MovieISOSensitivity

○ **Property Specifications**

Property Code	0x0001D09E
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	800 [ISO800]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [ISO sensitivity settings – ISO sensitivity] in the video recording menu.

○ **Property Details**

This changes the lower and upper limits of ISO sensitivity according to the MovieBaseISOSensitivity property (section 6.5.3.13).

The settable ISO sensitivity values change depending on the value of the IsoStep property (section 6.5.4.7).
When the MovieExtendedIsoStepManual property (section 6.5.4.47) is [On (1/6 steps)], the values of 1/6 steps are listed regardless of the value of the IsoStep property.

○ **Property Value**

Valid PropertyValues are listed below.

Table 6.5-3 Base ISO Sensitivity: Low Sensitivity

Property Value	Description	ISO sensitivity step value		
		1/6 step	1/3 step	1 step
200	200	✓	✓	✓
220	220	✓	-	-
250	250	✓	✓	-
280	280	✓	-	-
320	320	✓	✓	-
360	360	✓	-	-
400	400	✓	✓	✓
450	450	✓	-	-
500	500	✓	✓	-
560	560	✓	-	-
640	640	✓	✓	-
720	720	✓	-	-
800	800	✓	✓	✓
900	900	✓	-	-
1000	1000	✓	✓	-
1100	1100	✓	-	-
1250	1250	✓	✓	-
1400	1400	✓	-	-
1600	1600	✓	✓	✓
1800	1800	✓	-	-

Do Not Copy

2000	2000	✓	✓	-
2200	2200	✓	-	-
2500	2500	✓	✓	-
2800	2800	✓	-	-
3200	3200	✓	✓	✓

Table 6.5-4 Base ISO Sensitivity: High Sensitivity

Property Value	Description	ISO sensitivity step value		
		1/6 step	1/3 step	1 step
1600	1600	✓	✓	✓
1800	1800	✓	-	-
2000	2000	✓	✓	-
2200	2200	✓	-	-
2500	2500	✓	✓	-
2800	2800	✓	-	-
3200	3200	✓	✓	✓
3600	3600	✓	-	-
4000	4000	✓	✓	-
4500	4500	✓	-	-
5000	5000	✓	✓	-
5600	5600	✓	-	-
6400	6400	✓	✓	✓
7200	7200	✓	-	-
8000	8000	✓	✓	-
9000	9000	✓	-	-
10000	10000	✓	✓	-
11400	11400	✓	-	-
12800	12800	✓	✓	✓
14400	14400	✓	-	-
16000	16000	✓	✓	-
18000	18000	✓	-	-
20000	20000	✓	✓	-
22800	22800	✓	-	-
25600	25600	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to anything other than [R3D NE 12-bit(R3D)].
	The ExposureProgramMode property (section 6.5.1.11) is set to [Auto Mode].

Do Not Copy

6.5.3.15 MovieWhiteBalance

○ **Property Specifications**

Property Code	0xD23A
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0002 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “White Balance” in the video recording menu.

○ **Property Details**

When the property value is set to [Same as photo settings], the white balance value that is set in the WhiteBalance (section 6.5.1.4) is applied to the video white balance. In this case, the photo white balance setting is used for video setting as in the following table.

Description	Property
Auto – Type	WbAutoType (section 6.5.2.16)
Auto - FineTune	WbTuneAuto (section 6.5.2.17)
Incandescent - FineTune	WbTuneIncandescent (section 6.5.2.22)
Fluorescent - Type	WbFluorescentType (section 6.5.2.23)
Fluorescent - FineTune	WbTuneFluorescent (section 6.5.2.24)
Sunny - FineTune	WbTuneSunny (section 6.5.2.19)
Flash - FineTune	WbTuneFlash (section 6.5.2.25)
Cloudy - FineTune	WbTuneCloudy (section 6.5.2.20)
Shade - FineTune	WbTuneShade (section 6.5.2.21)
Choose color temp - Value	WbColorTemp (section 6.5.2.26)
Choose color temp - FineTune	WbTuneColorTemp (section 6.5.2.27)
Natural light auto - FineTune	WbTuneNatural (section 6.5.2.18)
Preset manual	WbPresetDataNo (section 6.5.2.28)

Regardless of whether the PropertyValue is [Same as photo settings], each of the following white balance settings is linked with the still image setting.

Description	Property
Preset manual-D1- Comment	WbPresetDataComment1 (section 6.5.2.29)
Preset manual-D2- Comment	WbPresetDataComment2 (section 6.5.2.30)
Preset manual-D3- Comment	WbPresetDataComment3 (section 6.5.2.31)
Preset manual-D4- Comment	WbPresetDataComment4 (section 6.5.2.32)
Preset manual-D5- Comment	WbPresetDataComment5 (section 6.5.2.33)
Preset manual-D6- Comment	WbPresetDataComment6 (section 6.5.2.34)
Preset manual-D1- Data	WbPresetDataValue1 (section 6.5.2.35)
Preset manual-D2- Data	WbPresetDataValue2 (section 6.5.2.36)
Preset manual-D3- Data	WbPresetDataValue3 (section 6.5.2.37)
Preset manual-D4- Data	WbPresetDataValue4 (section 6.5.2.38)
Preset manual-D5- Data	WbPresetDataValue5 (section 6.5.2.39)

Do Not Copy

Preset manual-D6- Data	WbPresetDataValue6 (section 6.5.2.40)
Preset manual-D1- FineTune	WbTunePreset1 (section 6.5.2.41)
Preset manual-D2- FineTune	WbTunePreset2 (section 6.5.2.42)
Preset manual-D3- FineTune	WbTunePreset3 (section 6.5.2.43)
Preset manual-D4- FineTune	WbTunePreset4 (section 6.5.2.44)
Preset manual-D5- FineTune	WbTunePreset5 (section 6.5.2.45)
Preset manual-D6- FineTune	WbTunePreset6 (section 6.5.2.46)
Preset manual-D1- Protect	WbPresetProtect1 (section 6.5.2.47)
Preset manual-D2- Protect	WbPresetProtect2 (section 6.5.2.48)
Preset manual-D3- Protect	WbPresetProtect3 (section 6.5.2.49)
Preset manual-D4- Protect	WbPresetProtect4 (section 6.5.2.50)
Preset manual-D5- Protect	WbPresetProtect5 (section 6.5.2.51)
Preset manual-D6- Protect	WbPresetProtect6 (section 6.5.2.52)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	Auto
0x0004	Sunny
0x0005	Fluorescent
0x0006	Incandescent
0x8010	Cloudy
0x8011	Shade
0x8012	Choose color temperature
0x8013	Preset manual
0x8015	Same as photo settings
0x8016	Natural light auto

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	[Same as photo settings] is set during video recording.
	AWBLockStatus property (section 6.5.6.8) is set to [Locked].
	The setting is configured to [Auto], [Natural light auto], or [Same as photo settings] while the MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].

Do Not Copy

6.5.3.16 MovieWbAutoType

○ **Property Specifications**

Property Code	0xD211
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	2 [Keep white]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the type of “White balance - Auto” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Keep overall atmosphere
1	Keep warm lighting colors
2	Keep white

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.17 MovieWbTuneAuto

○ **Property Specifications**

Property Code	0xD212
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Auto” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.18 MovieWbTuneNatural

○ **Property Specifications**

Property Code	0xD23C
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Natural light auto” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

6.5.3.19 MovieWbTuneSunny

○ **Property Specifications**

Property Code	0xD216
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Direct sunlight” in the video recording menu.

See section 11.5 for details on fine-tuning values.

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.20 MovieWbTuneCloudy

○ **Property Specifications**

Property Code	0xD218
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Cloudy” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

6.5.3.21 MovieWbTuneShade

○ **Property Specifications**

Property Code	0xD219
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Shade” in the video recording menu.

See section 11.5 for details on fine-tuning values.

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.22 MovieWbTuneIncandescent

○ **Property Specifications**

Property Code	0xD213
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Incandescent” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.23 MovieWbFluorescentType

○ **Property Specifications**

Property Code	0xD214
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	3 [White fluorescent lamp]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the light source of “White balance - Fluorescent” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
3	White fluorescent lamp
4	Day white fluorescent lamp
5	Daylight fluorescent lamp

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.24 MovieWbTuneFluorescent

○ **Property Specifications**

Property Code	0xD215
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance - Fluorescent” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.25 MovieWbColorTemp

○ **Property Specifications**

Property Code	0xD21A
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	5000 [K]
Property Value	From 2500 [K] to 10000 [K] (increases/decreases in 10K increments)

○ **Property Outline**

Indicates the color temperature (K) of “White balance – Choose color temp.” in the video recording menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

6.5.3.26 MovieWbTuneColorTemp

○ **Property Specifications**

Property Code	0xD21B
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine tuning volume of “White balance – Choose color temp.” in the video recording menu.

See section 11.5 for details on fine-tuning values.

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.27 MovieWbPresetDataNo

○ **Property Specifications**

Property Code	0xD21C
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	1 [d-1]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “White balance – Preset manual” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	d-1
2	d-2
3	d-3
4	d-4
5	d-5
6	d-6

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].
	The MovieWhiteBalance property (section 6.5.3.15) is set to [Same as photo settings] during video recording.

Do Not Copy

6.5.3.28 MovieWbPresetDataComment1

○ **Property Specifications**

Property Code	0xD21D
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-1” in the video recording menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataComment1 property (section 6.5.2.29)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect1 property (section 6.5.3.46) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.29 MovieWbPresetDataComment2

○ **Property Specifications**

Property Code	0xD21E
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-2” in the video recording menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataComment2 property (section 6.5.2.30)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect2 property (section 6.5.3.47) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.30 MovieWbPresetDataComment3

○ **Property Specifications**

Property Code	0xD21F
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-3” in the video recording menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataComment3 property (section 6.5.2.31)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect3 property (section 6.5.3.48) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.31 MovieWbPresetDataComment4

○ **Property Specifications**

Property Code	0xD220
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-4” in the video recording menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataComment4 property (section 6.5.2.32)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect4 property (section 6.5.3.49) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.32 MovieWbPresetDataComment5

○ **Property Specifications**

Property Code	0xD221
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-5” in the video recording menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataComment5 property (section 6.5.2.33)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect5 property (section 6.5.3.50) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.33 MovieWbPresetDataComment6

○ **Property Specifications**

Property Code	0xD222
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	36 characters of spaces (0x20)
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the comment of “White balance – Preset manual – d-6” in the video recording menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the string is shorter than 36 characters, the shortage is padded with spaces (0x20). For characters that can be input (ASCII code), refer to section 10.1.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataComment6 property (section 6.5.2.34)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect6 property (section 6.5.3.51) is [On].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.34 MovieWbPresetDataValue1

○ **Property Specifications**

Property Code	0xD223
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-1” in the video recording menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataValue1 property (section 6.5.2.35)

6.5.3.35 MovieWbPresetDataValue2

○ **Property Specifications**

Property Code	0xD224
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-2” in the video recording menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataValue2 property (section 6.5.2.36)

Do Not Copy

6.5.3.36 MovieWbPresetDataValue3

○ **Property Specifications**

Property Code	0xD225
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-3” in the video recording menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataValue3 property (section 6.5.2.37)

6.5.3.37 MovieWbPresetDataValue4

○ **Property Specifications**

Property Code	0xD226
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-4” in the video recording menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataValue4 property (section 6.5.2.38)

Do Not Copy

6.5.3.38 MovieWbPresetDataValue5

○ **Property Specifications**

Property Code	0xD227
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-5” in the video recording menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataValue5 property (section 6.5.2.39)

6.5.3.39 MovieWbPresetDataValue6

○ **Property Specifications**

Property Code	0xD228
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x08000800 [Rgain: 1.0, Bgain: 1.0]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates the white balance data of “White balance – Preset manual – d-6” in the video recording menu.

○ **Property Details**

Refer to PreWbGainValue in SetPreWbData (section 6.2.8.1) for the format of the PropertyValue.

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetDataValue6 property (section 6.5.2.40)

Do Not Copy

6.5.3.40 MovieWbTunePreset1

○ **Property Specifications**

Property Code	0xD229
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-1” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbTunePreset1 property (section 6.5.2.41)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect1 property (section 6.5.3.46) is [On].
	The MovieWbPresetDataNo property (section 6.5.3.27) is set to anything other than [d-1].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.41 MovieWbTunePreset2

○ **Property Specifications**

Property Code	0xD22A
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-2” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbTunePreset2 property (section 6.5.2.42)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect2 property (section 6.5.3.47) is [On].
	The MovieWbPresetDataNo property (section 6.5.3.27) is set to anything other than [d-2].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.42 MovieWbTunePreset3

○ **Property Specifications**

Property Code	0xD22B
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-3” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbTunePreset3 property (section 6.5.2.43)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect3 property (section 6.5.3.48) is [On].
	The MovieWbPresetDataNo property (section 6.5.3.27) is set to anything other than [d-3].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.43 MovieWbTunePreset4

○ **Property Specifications**

Property Code	0xD22C
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-4” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbTunePreset4 property (section 6.5.2.44)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect4 property (section 6.5.3.49) is [On].
	The MovieWbPresetDataNo property (section 6.5.3.27) is set to anything other than [d-4].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.44 MovieWbTunePreset5

○ **Property Specifications**

Property Code	0xD22D
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-5” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbTunePreset5 property (section 6.5.2.45)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect5 property (section 6.5.3.50) is [On].
	The MovieWbPresetDataNo property (section 6.5.3.27) is set to anything other than [d-5].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.45 MovieWbTunePreset6

○ **Property Specifications**

Property Code	0xD22E
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the white balance fine tuning volume of “White balance – Preset manual – d-6” in the video recording menu.

See section 11.5 for details on fine-tuning values.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbTunePreset6 property (section 6.5.2.46)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The MovieWbPresetProtect6 property (section 6.5.3.51) is [On].
	The MovieWbPresetDataNo property (section 6.5.3.27) is set to anything other than [d-6].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.46 MovieWbPresetProtect1

○ **Property Specifications**

Property Code	0xD22F
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-1” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetProtect1 property (section 6.5.2.47)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.47 MovieWbPresetProtect2

○ **Property Specifications**

Property Code	0xD230
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-2” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetProtect2 property (section 6.5.2.48)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.48 MovieWbPresetProtect3

○ **Property Specifications**

Property Code	0xD231
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-3” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetProtect3 property (section 6.5.2.49)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.49 MovieWbPresetProtect4

○ **Property Specifications**

Property Code	0xD232
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-4” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetProtect4 property (section 6.5.2.50)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.50 MovieWbPresetProtect5

○ **Property Specifications**

Property Code	0xD233
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-5” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetProtect5 property (section 6.5.2.51)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.51 MovieWbPresetProtect6

○ **Property Specifications**

Property Code	0xD234
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the protection of “White balance – Preset manual – d-6” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: WbPresetProtect6 property (section 6.5.2.52)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AWBLockStatus property (section 6.5.6.8) is set to [Locked].

Do Not Copy

6.5.3.52 MovieActive-D-Lighting

○ **Property Specifications**

Property Code	0xD23B
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Active D-Lighting” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High
0x0005	Extra high

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [PSAM].
	The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit (MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log] or [HLG].
	The MovieFileType property is set to [ProRes 422 HQ 10-bit(MOV)] and the MovieProResToneMode property (section 6.5.3.5) is set to [N-Log].
	The MovieFileType property is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)

Do Not Copy

6.5.3.53 MovieNoiseReductionHiIso

○ **Property Specifications**

Property Code	0xD236
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0003 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “High ISO NR” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit(MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log].
	The MovieFileType property is set to [ProRes 422 HQ 10-bit(MOV)] and the MovieProResToneMode property (section 6.5.3.5) is set to [N-Log].
	The MovieFileType property is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)

Do Not Copy

6.5.3.54 MovieVignetteControl

○ **Property Specifications**

Property Code	0xD23E
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0x0003 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Vignette control” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: VignetteControl property (section 6.5.2.56)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High

Do Not Copy

6.5.3.55 MovieDiffractionCompensation

○ **Property Specifications**

Property Code	0xD23F
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Diffraction compensation” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: DiffractionCompensation property (section 6.5.2.57)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)

Do Not Copy

6.5.3.56 MovieAutoDistortion

○ **Property Specifications**

Property Code	0xD0BC
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Auto distortion control” in the video recording menu.

○ **Property Details**

The properties of this setting are in both the photo shooting menu and the video recording menu, and if you change one of them, the settings will be the same.

Linked properties: AutoDistortion property (section 6.5.2.58)

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The LensTypeML property (section 6.5.10.2) is set to [Lens whose automatic distortion correction is always effective].

Do Not Copy

6.5.3.57 MovieBreathingCompensation

○ **Property Specifications**

Property Code	0x0001D064
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Breathing compensation] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The MovieRecordScreenSize property (section 6.5.3.7) is set to [1920×1080 240p/200p].
	A lens without breathing compensation capability is in use while the MovieAutoDistortion property (section 6.5.3.56) is set to [Off].

Do Not Copy

6.5.3.58 MovieSkinSoftening

○ **Property Specifications**

Property Code	0x0001D018
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Skin Softening” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0002	Low
0x0003	Normal
0x0004	High
0x0064	Same as photo settings

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit(MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log].
	The MovieFileType property is set to [ProRes 422 HQ 10-bit(MOV)] and the MovieProResToneMode property (section 6.5.3.5) is set to [N-Log].
	The MovieFileType property is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The frame rate of the MovieRecordScreenSize property (section 6.5.3.7) is [100p] or higher.

Do Not Copy

6.5.3.59 MoviePortraitImpressionBalance

○ **Property Specifications**

Property Code	0x0001D01A
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Portrait Impression Adjustment” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	Mode 1
2	Mode 2
3	Mode 3

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The tone mode of the video file format is set to [SDR] and the MovieActivePicCtrlItem property (section 6.5.14.2) is set to one of the values below (*1).
	If all of the following conditions are met: - The tone mode of the video file format is set to [SDR]. - The MovieActivePicCtrlItem property is set to [Same as photo settings]. - The ActivePicCtrlItem property (section 6.5.14.1) is set to one of the values below. *1 Picture Control settings: ● Monochrome style Picture Control ● Creative Picture Control ● Custom Picture Control with “Flexible Color” registered
	The tone mode of the video file format is set to [N-Log] (*). * Conditions under which the tone mode is [N-Log]: ● The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit(MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log]. ● The MovieFileType property is set to [ProRes 422 HQ 10-bit(MOV)] and the MovieProResToneMode property (section 6.5.3.5) is set to [N-

Do Not Copy

	Log]. ● The MovieFileType property is set to [ProRes RAW HQ 12-bit] and the MovieProResRawHq12bitToneMode property (section 6.5.3.6) is set to [N-Log]. ● The MovieFileType property is set to [N-RAW 12-bit (NEV)] and the MovieNRaw12bitToneMode property (section 6.5.3.4) is set to [N-Log].
	The MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].

6.5.3.60 DecreaseFlicker

○ **Property Specifications**

Property Code	0xD034
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0xFF [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of [Flicker reduction – Frequency] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00	50 Hz
0x01	60 Hz
0xFF	Auto

Do Not Copy

6.5.3.61 MovieDigitalFlickerReduction

○ **Property Specifications**

Property Code	0x0001D044
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Flicker reduction – Digital flicker reduction” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.3.62 MovieHighFrequencyFlickerReduction

○ **Property Specifications**

Property Code	0x0001D032
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “High frequency flicker reduction shooting” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On (High resolution shutter setting)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieShutterMode property (section 6.5.4.49) is set to [Shutter Angle].

Do Not Copy

6.5.3.63 MovieExposureMeteringMode

○ **Property Specifications**

Property Code	0xD1AF
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0003 [Matrix metering]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Exposure metering mode” in video Lv.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	Center-weighted metering
0x0003	Matrix metering
0x8010	Highlight-weighted metering

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The AELockStatus property (section 6.5.6.5) is [Locked].

Do Not Copy

6.5.3.64 MovieFocusMode

○ **Property Specifications**

Property Code	0xD1FA
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	2 [AF-F]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Focus mode” in video recording.

○ **Property Details**

If the following conditions are satisfied, the camera operates in MF mode even when this property is set to AF.

- The CPU lens is not mounted.
- The switches on the camera or lens are set to MF.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	AF-S
1	AF-C
2	AF-F
4	MF

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Product review mode is enabled. Product review mode is enabled when the following conditions are met. - The ProductReviewMode property (section 6.5.3.69) is set to [On] or [On (customize focus area)] and this property is set to anything other than [MF].

Do Not Copy

6.5.3.65 MovieFocusMeteringMode

○ **Property Specifications**

Property Code	0xD1F8
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0X8011 [Auto-area AF]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “AF-area mode” in video recording.

○ **Property Details**

In the following cases, this property is set to single-point AF mode. When the following state is canceled without changing the AF area mode, it returns to the AF area mode which was set immediately before.

- The MovieFocusMode property (section 6.5.3.64) is set to [MF].

○ **Property Value**

Valid PropertyValues are listed below.

The value of PropertyValue changes depending on the value of the video focus mode.

Property Value	Description	Video focus mode setting			
		MF	AF-S	AF-C	AF-F
0x8010	Single-point AF	✓	✓	✓	✓
0x8011	Auto-area AF	-	✓	✓	✓
0x8018	Wide-area AF (S)	-	✓	✓	✓
0x8019	Wide-area AF (L)	-	✓	✓	✓
0x801E	Wide-area AF (C1)	-	✓	✓	✓
0x801F	Wide-area AF (C2)	-	✓	✓	✓
0x8033	Target tracking AF	-	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The video focus mode is set to the manual focus. NOTE) Except when the focus mode is set to MF due to the CPU lens not attached or the operation with the camera dial/switch.
	Hi-Res Zoom is controlled to be ON. Note: Refer to the HiResZoom property (section 6.5.3.80) for the conditions under which Hi-Res Zoom is controlled to be ON.
	Product review mode is enabled. Refer to the MovieFocusMode property (section 6.5.3.64) for

Do Not Copy

	the conditions under which product review mode is enabled.

Do Not Copy

6.5.3.66 MovieWideAreaAFC1

○ **Property Specifications**

Property Code	0x0001D048
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x1503 [21×3]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “AF-area mode – Wide area AF(C1)” in the video recording menu.

○ **Property Details**

In this property, the upper Byte of Property Value is treated as the focus area size in the horizontal direction, and the lower Byte is treated as the focus area size in the vertical direction.

Example: If PropertyValue is 0x1507, the focus area size is 21 in the horizontal direction and 7 in the vertical direction, making it "21 x 7".

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Specifiable Values	Description
Upper 1 Byte	Odd numbers from 1 to 21	Horizontal focus area size
Lower 1 Byte	Odd numbers from 1 to 11	Vertical focus area size

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the MovieFocusMeteringMode property (section 6.5.3.65) apply.

Do Not Copy

6.5.3.67 MovieWideAreaAFC2

○ **Property Specifications**

Property Code	0x0001D049
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x030B [3×11]
Property Value	Same as the MovieWideAreaAFC1 property (section 6.5.3.66).

○ **Property Outline**

Indicates “AF-area mode – Wide area AF(C2)” in the video recording menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the MovieFocusMeteringMode property (section 6.5.3.65) apply.

Do Not Copy

6.5.3.68 MovieAFSubjectDetection

○ **Property Specifications**

Property Code	0x0001D006
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Subject detection setting in AF/MF – Subject detection” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	Auto
2	People
3	Animal
4	Vehicle
5	Birds
6	Airplanes

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Product review mode is enabled. Refer to the MovieFocusMode property (section 6.5.3.64) for the conditions under which product review mode is enabled.

Do Not Copy

6.5.3.69 ProductReviewMode

○ **Property Specifications**

Property Code	0x0001D05F
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0000 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Product review mode] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0001	On
0x0101	On (customize focus area)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFocusMode property (section 6.5.3.64) is set to [MF].
	Hi-Res Zoom is enabled during video recording. * Refer to the HiResZoom property (section 6.5.3.80) for the conditions under which Hi-Res Zoom is enabled.
	The LiveViewZoomArea property (section 6.5.11.6) is not set to [Entire display]. However, this does not apply under any of the following conditions. - During video recording - While connected via HDMI

Do Not Copy

6.5.3.70 AFWhenSubjectNotDetected

○ **Property Specifications**

Property Code	0x0001D014
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Subject detection setting in AF/MF – AF drive when subject is not detected” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.3.71 MovieMFSubjectDetectionArea

○ **Property Specifications**

Property Code	0x0001D03F
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Subject detection area in MF” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00	Off
0x01	Wide area (S)
0x02	Wide area (L)
0xFF	Whole area

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieAFSubjectDetection property (section 6.5.3.68) is set to [Off].
	Hi-Res Zoom is controlled to be ON. Note: Refer to the HiResZoom property (section 6.5.3.80) for the conditions under which Hi-Res Zoom is controlled to be ON.

Do Not Copy

6.5.3.72 VideoSelfTimer

○ **Property Specifications**

Property Code	0x0001D060
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the [Video self-timer] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
2	2 sec.
10	10 sec.

Do Not Copy

6.5.3.73 MovieVibrationReduction

○ **Property Specifications**

Property Code	0xD1F9
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	2 [Sports]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Vibration reduction” in the video recording menu.

○ **Property Details**

The supported Property Value differs depending on the type of attached lens.

○ **Property Value**

Valid PropertyValues are listed below.

When the lens anti-vibration mode is [Normal] or [Sports]:

Property Value	Description
0	Off
1	Normal
2	Sports
100	Same as photo settings

When the lens anti-vibration mode is only [Normal]:

Property Value	Description
0	Off
1	On
100	Same as photo settings

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The mounted lens has VR switch.
	The LensSort property (section 6.5.10.1) is set to [Not mounted] and the FmmManualSetting2 property (section 6.5.5.2) is set to [0.0 mm].

Do Not Copy

6.5.3.74 ElectronicVR

○ **Property Specifications**

Property Code	0xD314
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Electronic VR” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The MovieRecordScreenSize property (section 6.5.3.7) is set to any of the following. ・5376×3024 ・3840×2160 120p/100p ・1920×1080 240p/200p/120p/100p ・Slow-motion video
	Hi-Res Zoom is controlled to be ON. Note: Refer to the HiResZoom property (section 6.5.3.80) f or the conditions under which Hi-Res Zoom is controlled to be ON.

Do Not Copy

6.5.3.75 RecordTimeCodes

○ **Property Specifications**

Property Code	0xD1FB
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Time codes – Recording time codes” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On
2	On (with HDMI external output)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	During time not set warning.

Do Not Copy

6.5.3.76 CountUpMethod

○ **Property Specifications**

Property Code	0xD1FC
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Rec Run]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Time codes – Count up method” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Rec Run
1	Free Run

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The RecordTimeCodes property (section 6.5.3.75) is set to [Off].
	During time not set warning.
	When connection with ATOMOS AirGlu BT is ON.

Do Not Copy

6.5.3.77 TimeCodeOrigin

○ **Property Specifications**

Property Code	0xD1FD
DataType	AUINT8
Description form	None
Get / Set	Get, Get / Set
Default Value	Array[0]: 2 [Current time] From Array[1] to [4]: 0
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Time codes – Time code origin” in the video recording menu.

○ **Property Details**

If Array[0] (Time code origin nformation) is set to the value other than 1 (Manual input), it is as follows.

Get/Set	Description
Get operation	The values from Array[1] to Array[4] are not fixed.
Set operation	Any values set from Array[1] to Array[4] are ignored.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	
NumElement	Time code origin information, number of elements for time	
Array[0]	Time code origin nformation	
	0	Reset
	1	Manual input
	2	Current time
Array[1]	Hour (From 00 to 23)	
Array[2]	Minute (From 00 to 59)	
Array[3]	Second (From 00 to 59)	
Array[4]	Frame *1 24fps (From 00 to 23) 25/50/100/200fps (From 00 to 24) 30/60/120/240fps (From 00 to 29)	

*1 The range of the settable value changes depending on the frame rate of the MovieRecordScreenSize property (section 6.5.3.7).

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The RecordTimeCodes property (section 6.5.3.75) is set to [Off].

Do Not Copy

	During time not set warning.
	When connection with ATOMOS AirGlu BT is ON.

Do Not Copy

6.5.3.78 DropFrame

○ **Property Specifications**

Property Code	0xD1FE
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Time codes – Drop frame” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The RecordTimeCodes property (section 6.5.3.75) is set to [Off].
	During time not set warning.
	When connection with ATOMOS AirGlu BT is ON.

Do Not Copy

6.5.3.79 ExternalRecordingControl

○ **Property Specifications**

Property Code	0xD1DE
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “External recording control (HDMI)” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.3.80 HiResZoom

○ **Property Specifications**

Property Code	0x0001D033
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Hi-Res Zoom” in the video recording menu.

○ **Property Details**

Hi-Res Zoom is controlled to be ON when this property is set to “ON” and none of the prohibited conditions below apply.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The MovieCaptureAreaCrop property (section 6.5.3.9) is set to [FX], and the MovieRecordScreenSize property (section 6.5.3.7) is set to any of the following. ・5376×3024 ・1920×1080 240p/200p/120p/100p ・Slow-motion video
	The MovieCaptureAreaCrop property (section 6.5.3.9) is set to [DX], and the MovieRecordScreenSize property is set to any of the following. ・3840×2160

Do Not Copy

6.5.4 Vendor (Custom Settings Menu)

6.5.4.1 DynamicAFonAFC

○ **Property Specifications**

Property Code	0xD048
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Release]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Focus – AF-C priority selection” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Release
2	Focus/ Release
3	Focus

6.5.4.2 DynamicAFonAFS

○ **Property Specifications**

Property Code	0xD049
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	3 [Focus]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Focus – AF-S priority selection” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Release
3	Focus

Do Not Copy

6.5.4.3 AFStillLockOnAcross

○ **Property Specifications**

Property Code	0xD046
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	3
Property Value	From 1 [High sensitivity] to 5 [Low sensitivity]

○ **Property Outline**

Indicates “Focus – Focus tracking with lock-on – Across” in the custom settings menu.

Do Not Copy

6.5.4.4 EnableAFAreaPoint

○ **Property Specifications**

Property Code	0xD08D
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [All points]
Property Value	Refer to Property Value in this section.

○ **Property Outline**


Indicates “Focus – Number of focus points” in the custom settings menu.

○ **Property Details**

If the selected focus point is not included in the skip when the focus points are switched from all points to skip, the selected focus point is changed automatically.

A change pattern of focus points is shown below.

The focus points on the left figure (All points) are changed to the focus points on the right figure (Skip).

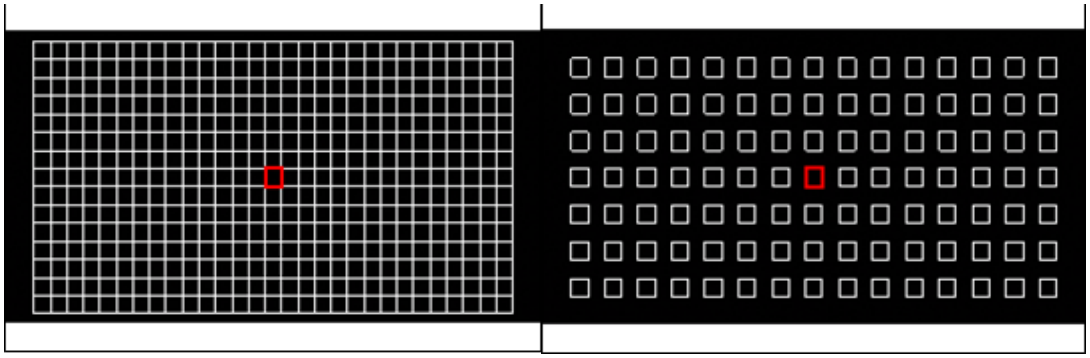

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	All points
1	Skip

Do Not Copy

6.5.4.5 FocusAreaSelect

○ **Property Specifications**

Property Code	0xD04F
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Focus – Focus point wrap-around” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

6.5.4.6 FocusDisplayAFC

○ **Property Specifications**

Property Code	0x0001D0A1
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Focus – Focus point display – AF-C in-focus display] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.4.7 IsoStep

○ **Property Specifications**

Property Code	0xD055
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	2 [1/3 step]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Metering/exposure – ISO sensitivity step value” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
2	1/3 step
6	1 step

6.5.4.8 ExposureEVStep

○ **Property Specifications**

Property Code	0xD056
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	2 [1/3 step (correction 1/3 step)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Metering/exposure – EV steps for exposure cntrl” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
2	1/3 step (correction 1/3 step)
3	1/2 step (correction 1/2 step)
6	1 step (correction 1/3 step)

Do Not Copy

6.5.4.9 MatrixMetering

○ **Property Specifications**

Property Code	0xD09F
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Metering/exposure – Face detection on matrix metering] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.4.10 CenterWeightedExRange

○ **Property Specifications**

Property Code	0xD059
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [Standard]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Metering/exposure – Center-weighted area” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Small
1	Standard
0xFF	Average

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.4.11 ExposureBaseCompMatrix

○ **Property Specifications**

Property Code	0xD05A
DataType	INT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [0.0 EV]
Property Value	From -6 [-1.0 EV] to +6 [+1.0 EV]

○ **Property Outline**

Indicates “Metering/exposure – Fine-tune optimal exposure - Matrix metering” in the custom settings menu.

6.5.4.12 ExposureBaseCompCenter

○ **Property Specifications**

Property Code	0xD05B
DataType	INT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [0.0 EV]
Property Value	From -6 [-1.0 EV] to +6 [+1.0 EV]

○ **Property Outline**

Indicates “Metering/exposure – Fine-tune optimal exposure - Center-weighted metering” in the custom settings menu.

Do Not Copy

6.5.4.13 ExposureBaseCompSpot

○ **Property Specifications**

Property Code	0xD05C
DataType	INT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [0.0 EV]
Property Value	From -6 [-1.0 EV] to +6 [+1.0 EV]

○ **Property Outline**

Indicates “Metering/exposure – Fine-tune optimal exposure - Spot metering” in the custom settings menu.

6.5.4.14 ExposureBaseCompHighlight

○ **Property Specifications**

Property Code	0xD239
DataType	INT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [0.0 EV]
Property Value	From -6 [-1.0 EV] to +6 [+1.0 EV]

○ **Property Outline**

Indicates “Metering/exposure – Fine-tune optimal exposure - Highlight-weighted metering” in the custom settings menu.

Do Not Copy

6.5.4.15 CspeedLow

○ **Property Specifications**

Property Code	0xD068
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	5 [5 fps]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Shooting/display – Continuous low-speed” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	1 fps
2	2 fps
3	3 fps
4	4 fps
5	5 fps
6	6 fps
7	7 fps

Do Not Copy

6.5.4.16 BurstMaxNumber

○ **Property Specifications**

Property Code	0xD069
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [No limit]
Property Value	0 [No limit], From 1 [One frame] to 200 [200 frames]

○ **Property Outline**

Indicates “Shooting/display – Max. continuous release” in the custom settings menu.

○ **Property Details**

1 to 50 frames can be set in 1 frame units, 50 to 100 frames can be set in 10 frame units, and 100 to 200 frames can be set in 20 frame units.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Value	A value that does not satisfy the frame unit is set.

Do Not Copy

6.5.4.17 PreCapturePreReleaseBurst

○ **Property Specifications**

Property Code	0x0001D025
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – Pre-capture Setting – Pre-release burst] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
3	0.3 sec.
5	0.5 sec.
10	1.0 sec.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property (section 6.5.2.5) is set to [HLG].

Do Not Copy

6.5.4.18 PreCapturePostReleaseBurst

○ **Property Specifications**

Property Code	0x0001D026
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0xFF [Maximum]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – Pre-capture Setting – Post-release burst] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
10	1.0 sec.
20	2.0 sec.
30	3.0 sec.
0xFF	Maximum

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property (section 6.5.2.5) is set to [HLG].

Do Not Copy

6.5.4.19 ExposureDelay

○ **Property Specifications**

Property Code	0xD06A
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – Exposure delay mode] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
2	0.2 sec.
5	0.5 sec.
10	1 sec.
20	2 sec.
30	3 sec.

Do Not Copy

6.5.4.20 ExtendedShutterSpeedsManual

○ **Property Specifications**

Property Code	0xD16E
DataType	UINT8
Description form	Enumeration
Get / Set	Get/Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – Extended Shutter Speed (M)] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].

Do Not Copy

6.5.4.21 NumberingMode

○ **Property Specifications**

Property Code	0xD06C
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Shooting/display – File number sequence” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The HDRMode property (section 6.5.2.70) is set to [On].

Do Not Copy

6.5.4.22 ViewMode

○ **Property Specifications**

Property Code	0xD17B
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Priority to shooting settings]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – View mode (photo Lv)] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Priority to shooting settings
1	Ease of viewing

Do Not Copy

6.5.4.23 ViewModeShowEffectsOfSettings

○ **Property Specifications**

Property Code	0x0001D036
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Only when flash is not used]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – View mode (photo Lv) – Show effects of settings] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Only when flash is not used
1	Always

Do Not Copy

6.5.4.24 ViewModeEaseOfViewing

○ **Property Specifications**

Property Code	0x0001D007
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – View mode (photo Lv) – Ease of viewing] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Auto
1	Custom

Do Not Copy

6.5.4.25 ViewModeWhiteBalance

○ **Property Specifications**

Property Code	0x0001D008
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Use shooting settings]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Shooting/display – View mode (photo Lv) – Ease of viewing – Custom – White balance] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Use shooting settings
1	Auto
2	Choose color temperature

Do Not Copy

6.5.4.26 ViewModeWbColorTemp

○ **Property Specifications**

Property Code	0x0001D009
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	5000 [K]
Property Value	From 2500 [K] to 10000 [K] (increases/decreases in 10K increments)

○ **Property Outline**

Indicates the color temperature value (K) of [Shooting/display – View mode (photo Lv) – Ease of viewing – Custom – White balance – Color temperature settings] in the custom settings menu.

Do Not Copy

6.5.4.27 ViewModeWbTuneColorTemp

○ **Property Specifications**

Property Code	0x0001D00A
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	612
Property Value	0 to 1224

○ **Property Outline**

Indicates the fine adjustment value of [Shooting/display – View mode (photo Lv) – Ease of viewing – Custom – White balance – Color temperature settings] in the custom settings menu.

See section 11.5 for details on fine-tuning values.

Do Not Copy

6.5.4.28 ViewModePictureControl

○ **Property Specifications**

Property Code	0x0001D00B
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Use shooting settings]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the settings of [Shooting/display – View mode (photo Lv) – Ease of viewing – Custom – Picture control] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Use shooting settings
1	Ease of viewing

Do Not Copy

6.5.4.29 ViewModeBrightenShadow

○ **Property Specifications**

Property Code	0x0001D00C
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the settings of [Shooting/display – View mode (photo Lv) – Ease of viewing – Custom – Shadow correction] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	+1
2	+2
3	+3

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property (section 6.5.2.5) is set to [HLG].

Do Not Copy

6.5.4.30 StarlightView

○ **Property Specifications**

Property Code	0x0001D00E
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the settings of [Shooting/display – Starlight view (photo Lv)] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.4.31 FlashSlowSpeedLimit

○ **Property Specifications**

Property Code	0xD075
DataType	UINT32
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 x 0001003C [1/60 s]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Bracketing/flash – Flash shutter speed” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0001003C	1/60 sec.
0x0001001E	1/30 sec.
0x0001000F	1/15 sec.
0x00010008	1/8 sec.
0x00010004	1/4 sec.
0x00010002	1/2 sec.
0x00010001	1 sec.
0x00020001	2 sec.
0x00040001	4 sec.
0x00080001	8 sec.
0x000F0001	15 sec.
0x001E0001	30 sec.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.4.32 ExposureCompFlashUsed

○ **Property Specifications**

Property Code	0xD118
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Entire frame]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Bracketing/flash – Exposure comp. for flash” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Entire frame
1	Background only

Do Not Copy

6.5.4.33 AutoFlashIsoSensitivityControl

○ **Property Specifications**

Property Code	0xD1C5
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Subject and background]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Bracketing/flash – Auto Flash ISO Sensitivity Control” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Subject and background
1	Subject only

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.4.34 SelectBracketChangeFactor

○ **Property Specifications**

Property Code	0xD079
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Flash/speed]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Bracketing/flash – Auto bracketing (mode M)” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Flash/speed
1	Flash/speed/aperture
2	Flash/aperture
3	Flash
4	Flash/ISO sensitivity

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.4.35 BracketingOrder

○ **Property Specifications**

Property Code	0xD07A
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [[0] -> [-] -> [+]]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Bracketing/flash – Bracketing order” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	[0] -> [-] -> [+]
1	[-] -> [0] -> [+]

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.4.36 FlushBurstPrioritize

○ **Property Specifications**

Property Code	0xD180
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [Dimming accuracy priority]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Bracketing/flash – Continuous shooting when using flash] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Speed priority
1	Dimming accuracy priority

Do Not Copy

6.5.4.37 TVLockSetting

○ **Property Specifications**

Property Code	0xD112
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Controls – Control lock – Shutter speed lock] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [S] or [M].
	Error / warning displayed on shutter speed or aperture value display. (Either the shutter speed or aperture value turns off)
	On the card unformatted error.
	A lens that failed firmware upgrade is attached.

Do Not Copy

6.5.4.38 AVLockSetting

○ **Property Specifications**

Property Code	0xD113
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Controls – Control lock – Aperture lock] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [A] or [M].
	Error / warning displayed on shutter speed or aperture value display. (Either the shutter speed or aperture value turns off)
	On the card unformatted error.
	A lens that failed firmware upgrade is attached.

Do Not Copy

6.5.4.39 FocusPointLock

○ **Property Specifications**

Property Code	0x0001D015
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Controls – Control lock – Focus point lock” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.4.40 MovieTVLockSetting

○ **Property Specifications**

Property Code	0x0001D00F
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video – Control lock – Shutter speed lock” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [M].
	Error / warning displayed on shutter speed or aperture value display. (Either the shutter speed or aperture value turns off)
	On the card unformatted error.
	A lens that failed firmware upgrade is attached.

Do Not Copy

6.5.4.41 MovieAVLockSetting

○ **Property Specifications**

Property Code	0x0001D010
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video – Control lock – Aperture lock” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [A] or [M].
	Error / warning displayed on shutter speed or aperture value display. (Either the shutter speed or aperture value turns off)
	On the card unformatted error.
	A lens that failed firmware upgrade is attached.

Do Not Copy

6.5.4.42 MovieFocusPointLock

○ **Property Specifications**

Property Code	0x0001D016
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video – Control lock – Focus point lock” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.4.43 MovieAfSpeed

○ **Property Specifications**

Property Code	0xD17C
DataType	INT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0
Property Value	From -5[Low speed] to 5[High speed]

○ **Property Outline**

Indicates “Video – AF speed” in the custom settings menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Product review mode is enabled. Refer to the MovieFocusMode property (section 6.5.3.64) for the conditions under which product review mode is enabled.

Do Not Copy

6.5.4.44 MovieAfSpeedWhenToApply

○ **Property Specifications**

Property Code	0xD17D
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Always]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video – AF speed – When to apply” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Always
1	Only while recording

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Product review mode is enabled. Refer to the MovieFocusMode property (section 6.5.3.64) for the conditions under which product review mode is enabled.

Do Not Copy

6.5.4.45 MovieAfTrackingSensitivity

○ **Property Specifications**

Property Code	0xD17E
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	4
Property Value	From 1 [High sensitivity] to 7 [Low sensitivity]

○ **Property Outline**

Indicates “Video – AF tracking sensitivity” in the custom settings menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Product review mode is enabled. Refer to the MovieFocusMode property (section 6.5.3.64) for the conditions under which product review mode is enabled.

Do Not Copy

6.5.4.46 MoviePowerHiResZoomCollab

○ **Property Specifications**

Property Code	0x0001D071
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0201 [On (synch)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Video – Power/Hi-Res Zoom collab] in the custom settings menu.

○ **Property Details**

Power zoom and Hi-Res Zoom can be used together when all of the conditions below are met.

- A lens that supports power zoom and the PZ3 command is attached.
- In video mode.
- Hi-Res Zoom is controlled to be ON. (Refer to the HiResZoom property (section 6.5.3.80) for the conditions under which the setting is controlled to be ON.)
- This property is set to “ON” (extended or synced).

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Off
0x0101	On (extend)
0x0201	On (synch)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The LensTypeML property (section 6.5.10.2) satisfies the following conditions. · Power zoom lens is enabled · Power zoom lens (PZ3 command support) is disabled

Do Not Copy

6.5.4.47 MovieExtendedIsoStepManual

○ **Property Specifications**

Property Code	0x0001D01F
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video – Extended ISO Step (M mode)” in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On (1/6 step)

Do Not Copy

6.5.4.48 MovieExtendedShutterSpeedsManual

○ **Property Specifications**

Property Code	0x0001D01B
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Video – Extended Shutter Speed (M mode)” in the custom settings menu.

○ **Property Details**

If the MovieRecordScreenSize property (section 6.5.3.7) is set to [120p/100p] or slow-motion video, the shutter speed will not be extended even when this property is set to [On].

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieShutterMode property (section 6.5.4.49) is set to [Shutter Angle].

Do Not Copy

6.5.4.49 MovieShutterMode

○ **Property Specifications**

Property Code	0x0001D074
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [Shutter speed]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Video – Shutter mode] in the custom settings menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Shutter speed
2	Shutter angle

Do Not Copy

6.5.4.50 HighlightBrightness

○ **Property Specifications**

Property Code	0xD1DF
DataType	UINT16
Description form	Range
Get / Set	Get / Set
Default Value	250
Property Value	From 120 to 255 (step size is 5)

○ **Property Outline**

Indicates [Video – Zebra Pattern - Brightness detection range] in the custom settings menu.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].

Do Not Copy

6.5.5 Vendor (Setup Menu)

6.5.5.1 ManualSettingLensNo

○ **Property Specifications**

Property Code	0xD093
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [No.1]
Property Value	From 0 [No. 1] to 19 [No. 20]

○ **Property Outline**

Indicates “Non-CPU lens data – Lens number” in the setup menu.

Do Not Copy

6.5.5.2 FmmManualSetting2

○ **Property Specifications**

Property Code	0x0001D04A
DataType	UINT32
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [0.0 mm]
Property Value	From 0 [0.0 mm] to 999900 [9999.0 mm] (StepSize is 10)

○ **Property Outline**

Indicates “Non-CPU lens data – Focal length (mm)” in the setup menu.

○ **Property Details**

The value of PropertyValue is a hundred times the focal length (mm).

Values below 100.0 mm can be adjusted in steps of 0.1 mm, and values of 100.0 mm or greater can be adjusted in steps of 1.0 mm.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Value	A decimal value is entered when the focal length is 100.0 mm or more.

Do Not Copy

6.5.5.3 F0ManualSetting2

○ **Property Specifications**

Property Code	0x0001D04B
DataType	UINT16
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [F0.00]
Property Value	From 0 [F0.00] to 9990 [F99.90]

○ **Property Outline**

Indicates “Non-CPU lens data – Maximum aperture” in the setup menu.

○ **Property Details**

The value of PropertyValue should be a hundred times the maximum aperture value.

Values below F10.00 can be adjusted in steps of F0.01, and values of F10.00 or greater can be adjusted in steps of F0.1.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Value	The second decimal place is entered when the maximum aperture value is F10.00 or higher.

Do Not Copy

6.5.5.4 ManualSettingLensName

○ **Property Specifications**

Property Code	0x0001D04C
DataType	String
Description form	None
Get / Set	Get, Get / Set
Default Value	NULL (0x00) 0 character
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates [Non-CPU lens data – Lens name] in the setup menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character).
If the [Lens name] is not configured on the camera, the length of the string is 0 (not including the null character).
For characters that can be input (ASCII code), refer to section 10.1.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.

Do Not Copy

6.5.5.5 SaveFocusPosition

○ **Property Specifications**

Property Code	0xD0CD
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Save focus position” in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.5.6 CommentString

○ **Property Specifications**

Property Code	0xD090
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	NULL (0x00) 0 character
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Image comment” in the setup menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters (not including the null character). When the comment is not set in the camera, the length of the string is 0 (not including the null character).
The DevicePropChanged event (section 6.4.1.6) is not issued even if this PropertyValue has changed.

For characters that can be input (ASCII code), refer to section 10.1.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.

Do Not Copy

6.5.5.7 EnableComment

○ **Property Specifications**

Property Code	0xD091
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Image comment – Attach comment” in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.5.8 ArtistV

○ **Property Specifications**

Property Code	0xD072
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	NULL (0x00) 0 character
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Artist” in the setup menu.

○ **Property Details**

The PropertyValue is an optional string of 36 characters or shorter (not including the null character).
If the artist is not set in the camera, the value is zero length string (not including the null character).

For characters that can be input (ASCII code), refer to section 10.1.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 36 characters is set.

6.5.5.9 CopyrightV

○ **Property Specifications**

Property Code	0xD073
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	NULL (0x00) 0 character
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Copyright” in the setup menu.

○ **Property Details**

The PropertyValue is an optional string of 54 characters or shorter (not including the null character).
If the copyright is not set in the camera, the value is zero length string (not including the null character).

For characters that can be input (ASCII code), refer to section 10.1.

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Invalid_DeviceProp_Format	A string exceeding 54 characters is set.

6.5.5.10 EnableCopyright

○ **Property Specifications**

Property Code	0xD053
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	(Depends on the user setting)

○ **Property Outline**

Indicates “Copyright information – Attach copyright information” in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.5.11 IPTCPresetSelect

○ **Property Specifications**

Property Code	0xD060
DataType	UINT8
Description form	Range
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [IPTC – Attach IPTC when shooting] in the setup menu.

○ **Property Details**

Preset Nos. 1 to 10 are NMS-IPTC, and Preset Nos. 11 to 13 are XMP-IPTC presets.

○ **Property Value**

Property Value	Description
0	Off
1 to 13	Preset No. (from 1 to 13)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	A number with unregistered preset data is specified.

Do Not Copy

6.5.5.12 ShutterSoundEffect

○ **Property Specifications**

Property Code	0x0001D012
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Sound effect – Shutter sound effect – Shutter sound] in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The SilentMode property (section 6.5.5.13) is set to [On] and headphones are not connected.

Do Not Copy

6.5.5.13 RECStartEndSound

○ **Property Specifications**

Property Code	0x0001D072
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Sound effect – REC start/end sound setting – REC start/end sound] in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the ShutterSoundEffect property (section 6.5.5.12) apply.

Do Not Copy

6.5.5.14 SilentMode

○ **Property Specifications**

Property Code	0x0001D011
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Silent mode” in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.5.15 EnableShutter

○ **Property Specifications**

Property Code	0xD08A
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	1 [Enable release]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Slot empty release lock” in the setup menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Release locked
1	Enable release

Do Not Copy

6.5.6 Vendor (Camera Information)

6.5.6.1 LiveViewSelector

○ **Property Specifications**

Property Code	0xD1A6
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Photo mode]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the state of live view mode.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Photo mode
1	Video mode

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The camera is in the PC camera mode.

Do Not Copy

6.5.6.2 UserMode

○ **Property Specifications**

Property Code	0xD0FC
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	19 [P]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the [User mode] set on the camera.

○ **Property Details**

This property is the shooting mode used when [User mode] is set in the ExposureProgramMode property (section 6.5.1.11).
If U1 is set in the ExposureProgramMode property, it represents the U1 shooting mode. Similarly, when anything other than U1 is set, it represents the shooting mode that corresponds to [User mode].

The value obtained if it is not set to [User mode] is not guaranteed.

The settable value for this property is [PSAM].

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
19	P
20	S
21	A
22	M
23	Auto

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [User mode].
	This property is set to [Auto].
	[Auto] is configured.

Do Not Copy

6.5.6.3 SpecialShootingMode

○ **Property Specifications**

Property Code	0x0001D002
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the shooting status of interval timer shooting and focus shift shooting.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On (interval timer shooting)
2	On (focus shift shooting)

When PropertyValue is the interval timer shooting, the command processing and property setting shown below are prohibited, and the Access_Denied response is performed.

Operation Code	Description	Conditions
0x100F	FormatStore	-
0x90C0	InitiateCaptureRecInSdram	-
0x9207	InitiateCaptureRecInMedia	-
0x9402	StartSpotWb	-
0x9420	SaveCameraSetting	-
0x9433	InitiatePixelMapping	-
0x9436	ResetMenu	-

Property Code	Description	Conditions
0x500C	FlashMode	When shooting interval priority is enabled
0x5011	DateTime	-
0xD078	BracketingType	-
0xD0C0	EnableBracketing	-
0xD0C1	AEBracketingStep	-
0xD0C2	AEBracketingPattern	-
0xD0C4	WBBracketingStep	-
0xD0C5	WBBracketingPattern	-
0xD0C6	ADLBracketingPattern	-
0xD0C7	ADLBracketingStep	-
0xD126	InternalFlashCompensation	When shooting interval priority is enabled
0xD130	HDRMode	-
0xD132	HDRStrength	-
0xD133	HDRSaveIndividualImages	-

Do Not Copy

0x0001D01C	ToneMode	-
0x0001D045	PixelShiftShootingMode	-
0x0001D04E	PixelShiftShootingNumberOfShots	-
0x0001D04F	PixelShiftShootingDelay	-
0x0001D050	PixelShiftShootingInterval	-
0x0001D062	DehazeMode	-
0x0001D063	DehazeStrength	-

When PropertyValue is the focus shift shooting, the command processing and property setting shown below are prohibited, and the Access_Denied response is performed.

Operation Code	Description	Conditions
0x100B	DeleteObject	-
0x100F	FormatStore	-
0x90C0	InitiateCaptureRecInSdram	-
0x90CD	SetPicCtrlData	When registering a custom picture control
0x90CE	DeleteCustomPicCtrl	-
0x9207	InitiateCaptureRecInMedia	-
0x9402	StartSpotWb	-
0x9420	SaveCameraSetting	-
0x9433	InitiatePixelMapping	-
0x9436	ResetMenu	-

Property Code	Description	Conditions
0x5003	ImageSize	-
0x5004	CompressionSetting	-
0x5011	DateTime	-
0xD016	RawCompressionType	-
0xD030	CaptureAreaCrop	-
0xD05D	StillFocusMeteringMode	-
0xD061	StillFocusMode	-
0xD078	BracketingType	-
0xD0C0	EnableBracketing	-
0xD0C1	AEBracketingStep	-
0xD0C2	AEBracketingPattern	-
0xD0C4	WBBracketingStep	-
0xD0C5	WBBracketingPattern	-
0xD0C6	ADLBracketingPattern	-
0xD0C7	ADLBracketingStep	-
0xD130	HDRMode	-
0xD132	HDRStrength	-
0xD133	HDRSaveIndividualImages	-
0xD148	Slot2ImageSaveMode	-
0xD156	PrimarySlot	-
0x0001D01C	ToneMode	-
0x0001D041	EnableDXImageSize	-
0x0001D042	ImageSizeDX	-

Do Not Copy

0x0001D045	PixelShiftShootingMode	-
0x0001D04E	PixelShiftShootingNumberOfShots	-
0x0001D04F	PixelShiftShootingDelay	-
0x0001D050	PixelShiftShootingInterval	-
0x0001D062	DehazeMode	-
0x0001D063	DehazeStrength	-

Do Not Copy

6.5.6.4 PixelShiftShootingStatus

○ **Property Specifications**

Property Code	0x0001D051
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates pixel shift shooting status.

○ **Property Details**

When PropertyValue is [ON], setting of all properties is prohibited, and when set, an Access_Denied response is generated.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	ON (During pixel shift shooting)

Do Not Copy

6.5.6.5 AELockStatus

○ **Property Specifications**

Property Code	0xD105
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Lock released]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the AE lock status.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Lock released
1	Locked

6.5.6.6 AFLockStatus

○ **Property Specifications**

Property Code	0xD104
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Lock released]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the AF lock status.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Lock released
1	Locked

Do Not Copy

6.5.6.7 FVLockStatus

○ **Property Specifications**

Property Code	0xD106
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Lock released]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the FV lock status.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Lock released
1	Locked

6.5.6.8 AWBLockStatus

○ **Property Specifications**

Property Code	0xD12F
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Lock released]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the AWB lock status.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Lock released
1	Locked

Do Not Copy

6.5.6.9 InternalFlashCompensation

○ **Property Specifications**

Property Code	0xD126
DataType	INT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0
Property Value	-18 to +6

○ **Property Outline**

Indicates “Flash compensation value” of the camera in units of 1/6 EV.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	ExposureEVStep		
		1/3 step	1/2 step	1 step
-18	-3.0EV	✓	✓	✓
-16	-2.7EV	✓	-	✓
-15	-2.5EV	-	✓	-
-14	-2.3EV	✓	-	✓
-12	-2.0EV	✓	✓	✓
-10	-1.7EV	✓	-	✓
-9	-1.5EV	-	✓	-
-8	-1.3EV	✓	-	✓
-6	-1.0EV	✓	✓	✓
-4	-0.7EV	✓	-	✓
-3	-0.5EV	-	✓	-
-2	-0.3EV	✓	-	✓
0	0.0EV	✓	✓	✓
2	0.3EV	✓	-	✓
3	0.5EV	-	✓	-
4	0.7EV	✓	-	✓
6	1.0EV	✓	✓	✓

The StepSize of this property changes depending on the value of the ExposureEVStep property (section 6.5.4.8).

ExposureEVStep	StepSize
1/3 step	2
1/2 step	3
1 step	2

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	Prohibited conditions for the FlashMode property (section 6.5.1.9) apply.
	In video mode.

Do Not Copy

6.5.6.10 ShutterSpeed

○ **Property Specifications**

Property Code	0xD100
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	(Minimum value in the setting range)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Shutter speed” that is set in the camera.

For the shutter speed in video mode, the MovieShutterSpeed property (section 6.5.12.2) should be used.

○ **Property Details**

This property can handle the 1/1000 or faster shutter speed in addition to the ExposureTime property (section 6.5.1.10). In this property, the upper 2 bytes of PropertyValue are treated as the numerator of the shutter speed, and the lower 2 bytes are treated as the denominator.

If the enum value changes, update the enum value and DefaultValue. Enumerated values vary depending on the following factors.

Table 6.5-5 Associated properties

Property	Reference	
ExposureProgramMode	6.5.1.11	Shooting mode
ExtendedShutterSpeedsManual	6.5.4.20	Extended shutter speeds (M)
StillCaptureMode	6.5.1.15	Release mode
ExposureEVStep	6.5.4.8	Exposure step value
ExternalSpeedLightExist	6.5.9.1	Speedlight attached
NewExternalSpeedLightMode	6.5.9.4	Speedlight flash mode
FlashMode	6.5.1.9	Flash mode
FlashSlowSpeedLimit	6.5.4.31	Flash shutter speed limit

Bulb shooting and time shooting are added when the shooting mode is M.
In addition, when a bulb warning/time warning occurs while using shooting mode S, only the value corresponding to the current value (bulb shooting/time shooting) is added to the enumerated value.

Shutter speeds exceeding 30 sec. are added when the shooting mode is M and the shutter speed extension in M mode is set to [On].

Do Not Copy

When the StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture (C15/C30/C60)], the slow shutter speed is limited to 1/60 second. When the StillCaptureMode property is set to [High-speed frame capture (C120)], the slow shutter speed is limited to 1/125 second.

If the camera is equipped with a speedlight, it depends on the following factors:

Shutter speed on the high-speed side:

The value is limited to the slower value between the flash shooting synchronization speed and the limit of the speedlight.

The value is not limited when the auto FP is supported by the flash mode of the speedlight and the flash shooting synchronization speed is set to the auto FP.

Shutter speed on the low-speed side:

If both the flash mode and shooting mode are set to the values shown below, the shutter speed is limited to the value set for the flash shutter speed limit.

Flash mode	Shooting mode
Red-eye reduction flash	P
Normal flash	A

○ **Property Value**

Valid PropertyValues are listed below.

Shutter speed:

Property Value	Description
Upper 2 bytes	Numerator of the shutter speed
Lower 2 bytes	Denominator of the shutter speed

Special values other than shutter speed:

Property Value	Description
0xFFFFFFFF	Bulb Shooting
0xFFFFFFFD	Time Shooting

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [S] or [M].
	The WarningStatus property (section 6.5.6.25) is set to one of the following. [Sequence error] [Minimum aperture warning] [Retractable zoom-ring warning]
	Bulb shooting or time shooting is set when the WarningStatus property is [Bulb warning / Time warning].
	The TVLockSetting property (section 6.5.4.37) is set to [On].
	In video mode.

Do Not Copy

6.5.6.11 FlickerReductionShutterSpeed

○ **Property Specifications**

Property Code	0x0001D03D
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	(Minimum shutter speed for high frequency flicker reduction)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates shutter speed for high frequency flicker reduction set in the camera.

○ **Property Details**

You can get the shutter speed according to the current state (photo mode or video mode).

This property expresses the denominator value of the shutter speed with PropertyValue to the first decimal place.

If the Access_Denied condition of the SetFlickerReductionShutterSpeed command (section 6.2.4.10) is satisfied, the high-frequency flicker reduction control will be turned off, and the property value will be invalid and set to "0".

○ **Property Value**

Valid PropertyValues are listed below.

The denominator value of the shutter speed for high frequency flicker reduction x 10.

(Example) Shutter speed 1/8192.0 seconds: PropertyValue = 81920

(Example) Shutter speed 1/32.2 sec: PropertyValue = 322

Do Not Copy

6.5.6.12 RemainingExposureTime

○ **Property Specifications**

Property Code	0xD0BE
DataType	UINT16
Description form	Range
Get / Set	Get
Default Value	0 second
Property Value	From 0 to 900 second

○ **Property Outline**

Indicates the remaining exposure time for photo shooting.

○ **Property Details**

The DevicePropChanged event is transmitted when the shooting mode is set to M and shooting is performed at the extended shutter speed. If this PropertyValue changes under any other conditions, the event is not issued.

Do Not Copy

6.5.6.13 FlexibleProgram

○ **Property Specifications**

Property Code	0xD109
DataType	INT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [0.0 EV]
Property Value	From -30 [-5 EV] to +30 [+5 EV]

○ **Property Outline**

Indicates the program shift value in units of 1/6 EV.

○ **Property Details**

When the value of the ExposureProgramMode property (section 6.5.1.11) is a value other than [P], the value of PropertyValue is not valid but set to 0.

The StepSize of the property changes depending on the value of the ExposureEVStep property (section 6.5.4.8).

ExposureEVStep	StepSize
1/3 step	2
1/2 step	3
1 step	6

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [P].
	Displaying an error / warning that prohibits program shift setting.
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	In video mode.

Do Not Copy

6.5.6.14 ISOControlSensitivity

○ **Property Specifications**

Property Code	0xD0B5
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	100 [ISO 100]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates ISO sensitivity that is controlled by the camera.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	Property Value	Description
50	ISO50	6400	ISO6400
56	ISO56	7200	ISO7200
64	ISO64	8000	ISO8000
72	ISO72	9000	ISO9000
80	ISO80	10000	ISO10000
90	ISO90	11000	ISO11000
100	ISO100	12800	ISO12800
110	ISO110	14400	ISO14400
125	ISO125	16000	ISO16000
140	ISO140	18000	ISO18000
160	ISO160	20000	ISO20000
180	ISO180	22000	ISO22000
200	ISO200	25600	ISO25600
220	ISO220	28800	ISO28800
250	ISO250	32000	ISO32000
280	ISO280	36000	ISO36000
320	ISO320	40000	ISO40000
360	ISO360	45600	ISO45600
400	ISO400	51200	ISO51200
450	ISO450	57600	ISO57600
500	ISO500	64000	ISO64000
560	ISO560	72000	ISO72000
640	ISO640	80000	ISO80000
720	ISO720	91200	ISO91200
800	ISO800	102400	ISO102400
900	ISO900	115000	ISO115000
1000	ISO1000	128000	ISO128000
1100	ISO1100	144000	ISO144000
1250	ISO1250	160000	ISO160000
1400	ISO1400	182000	ISO182000

Do Not Copy

1600	ISO1600	204800	ISO204800
1800	ISO1800		
2000	ISO2000		
2200	ISO2200		
2500	ISO2500		
2800	ISO2800		
3200	ISO3200		
3600	ISO3600		
4000	ISO4000		
4500	ISO4500		
5000	ISO5000		
5600	ISO5600		

For the Hi/Lo sensitivity range, refer to the ExposureIndexEx property (section 6.5.2.9) for photo mode and the MovieExposureIndex property (section 6.5.3.12) for video mode.

Do Not Copy

6.5.6.15 ExposureDisplayStatus

○ **Property Specifications**

Property Code	0xD1B0
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Normal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the display status of the shutter speed and the aperture value in the camera.

○ **Property Details**

It is 1 (only shutter speed is blinking) during bulb/time warning.

○ **Property Value**

Valid PropertyValues are listed below.

		Shutter speed	
		Normal	Blinking
Aperture value	Normal	0	1
	Blinking	2	3

Do Not Copy

6.5.6.16 ExposureIndicateStatus

○ **Property Specifications**

Property Code	0xD1B1
DataType	INT8
Description form	Range
Get / Set	Get
Default Value	0 [0.0 EV]
Property Value	From -60 [-10 EV] to +60 [+10 EV]

○ **Property Outline**

Indicates the display value of the indicator in units of 1/6 EV.

When the ExposureIndicateLightup property (section 6.5.6.17) is [Off], the value of PropertyValue is not fixed.

6.5.6.17 ExposureIndicateLightup

○ **Property Specifications**

Property Code	0xD1B3
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the indicator display On/Off.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	On
1	Off

Do Not Copy

6.5.6.18 MonitorOffStatus

○ **Property Specifications**

Property Code	0xD1BA
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Not monitor-off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the camera monitor off state. The actual monitor control status is not shown.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Not monitor-off
1	Monitor-off

Do Not Copy

6.5.6.19 OrientationSensorMode

○ **Property Specifications**

Property Code	0x0000D092
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Record camera orientation – Photo] in the playback menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.6.20 MovieOrientationSensorMode

○ **Property Specifications**

Property Code	0x0001D004
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [On]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Record camera orientation – Video] in the playback menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

6.5.6.21 Orientation

○ **Property Specifications**

Property Code	0xD10E
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Landscape or not fixed]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the orientation information.

○ **Property Details**

For photo mode, refer to the OrientationSensorMode property (section 6.5.6.19). For video mode, refer to the MovieOrientationSensorMode property (section 6.5.6.20). If set to [Off], the PropertyValue will be either [Landscape] or [Not fixed].

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Landscape or not fixed
1	Portrait (grip side upward)
2	Portrait (grip side downward)
3	Landscape (upside down)

Do Not Copy

6.5.6.22 AngleLevel

○ **Property Specifications**

Property Code	0xD067
DataType	INT32
Description form	None
Get / Set	Get
Default Value	0 [Horizontal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the level angle information of the camera.

○ **Property Details**

The valid angle information is shown below.

From 0.0 degrees to 359.9999847412109375 degrees

The angle information is 0.0 degrees when the camera is in the horizontal state. The angle increases as the camera is rotated counterclockwise viewing from the person who operates the camera.

When the camera is rotated clockwise starting from 0.0 degrees, the angle becomes 359.9999847412109375 degrees or smaller.
When the camera is rotated counterclockwise starting from 359.9999847412109375 degrees, the angle becomes 0.0 degrees or larger.

The angle information is displayed in green when it is horizontal or vertical in the virtual horizon of the setup menu.
Add +0.5 degrees to the angle information and omit the value below the decimal section. When the result is 0 or a multiple of 90 degrees, it is judged to be horizontal or vertical.

The DevicePropChanged event (section 6.4.1.6) is not issued even if this PropertyValue has changed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
Upper 16 bits	Integer section of the angle information
Lower 16 bits	Decimal section of the angle information

*When the angle information cannot be acquired or it is not reliable, the PropertyValue is set to 0xFFFFFFFF.

Do Not Copy

6.5.6.23 AngleLevelPitching

○ **Property Specifications**

Property Code	0xD07D
DataType	INT32
Description form	None
Get / Set	Get
Default Value	0 [Horizontal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the level angle information (pitching) of the camera.

○ **Property Details**

The valid angle information is shown below.

For the data type, the signed 32-bit fixed-point system is used, and the integer section and the decimal section use the upper 16 bits and the lower 16 bits, respectively.
The angle information is 0.0 or 180.0 degrees when the camera is in the horizontal state. The angle range is ±15 degrees from 0.0 or 180.0 degrees.

Camera orientation	Lens orientation	Angle range	Horizontal
Landscape	Up	0.0 to 60.0	0.0
	Down	0.0, from 359.9999847412109375 to 300.0	
Landscape (upside down)	Up	180.0 to 120.0	180.0
	Down	180.0 to 240.0	

The angle information is displayed in green when it is horizontal in the virtual horizon of the setup menu. Add +0.5 degrees to the angle information and omit the value below the decimal section. When the result is 0.0 or 180.0 degrees, it is judged to be horizontal.

The DevicePropChanged event (section 6.4.1.6) is not issued even if this PropertyValue has changed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
Upper 16 bits	Integer section of the angle information
Lower 16 bits	Decimal section of the angle information

*When the angle information cannot be acquired or it is not reliable, the PropertyValue is set to 0xFFFFFFFF.

Do Not Copy

6.5.6.24 AngleLevelYawing

○ **Property Specifications**

Property Code	0xD07E
DataType	INT32
Description form	None
Get / Set	Get
Default Value	0 [Horizontal]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the level angle information (yawing) of the camera.

○ **Property Details**

The valid angle information is shown below.
For the data type, the signed 32-bit fixed-point system is used, and the integer section and the decimal section use the upper 16 bits and the lower 16 bits, respectively.
The angle information is 0.0 or 180.0 degrees when the camera is in the horizontal state. The angle range is ±15 degrees from 0.0 or 180.0 degrees.

Camera orientation	Lens orientation	Angle range	Horizontal
Portrait (grip side upward)	Up	0.0 to 60.0	0.0
	Down	0.0, from 359.9999847412109375 to 300.0	
Portrait (grip side downward)	Up	180.0 to 120.0	180.0
	Down	180.0 to 240.0	

The angle information is displayed in green when it is horizontal in the virtual horizon of the setup menu. Add +0.5 degrees to the angle information and omit the value below the decimal section. When the result is 0.0 or 180.0 degrees, it is judged to be horizontal.

The DevicePropChanged event (section 6.4.1.6) is not issued even if this PropertyValue has changed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
Upper 16 bits	Integer section of the angle information
Lower 16 bits	Decimal section of the angle information

*When the angle information cannot be acquired or it is not reliable, the PropertyValue is set to 0xFFFFFFFF.

Do Not Copy

6.5.6.25 WarningStatus

○ **Property Specifications**

Property Code	0xD102
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0 [No warning]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the camera warning information.

○ **Property Value**

Valid PropertyValues are listed below.

When the PropertyValue is set to any value other than 0, the release is locked.
The PropertyValue takes the following values in the bit assignment. (1: Valid, 0: Invalid)

Bit	Description
Bit15 to Bit31	Reserved
Bit14	A lens that failed firmware upgrade is attached.
Bit13	A lens that failed to firmware upgrade is attached.
Bit12	Shutter speed incompatibility, HDR shooting not possible warning
Bit11	Version upgrade warning when mount adapter is attached
Bit10	Retractable zoom-ring warning
Bit9	Reserved
Bit8	Shooting error
Bit7	Reserved
Bit6	Bulb warning / Time warning
Bit5	Minimum aperture warning
Bit4	Reserved
Bit3	Reserved
Bit2	Reserved
Bit1	Battery exhausted
Bit0	Sequence error

Do Not Copy

6.5.6.26 InfoDisplayErrorStatus

○ **Property Specifications**

Property Code	0xD1B2
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the error display status of the INFO display on the monitor.

○ **Property Details**

The error display conditions indicated by this property are as shown in the table below.

Name	Timing for starting message of errors and warning	Finish timing
Release sequence error	After the release sequence is completed	Generation cause released
Card access error	When the card is inserted or the card is accessed	Generation cause released
Battery ID unauthentication error	When a battery other than the exclusive ID battery is mounted	Generation cause released
Minimum aperture warning	When the Fmin detection switch is turned Off	Generation cause released
Card write-protected & not-formatted warning	When a card is inserted with the recording destination set to “Card (Card and SDRAM)” or when the recording destination is set to “Card (Card and SDRAM)” while a card is inserted	Generation cause released
Card not-formatted warning	Same as the above	Generation cause released
Card write-protected warning	Same as the above	Generation cause released
Battery exhausted (shutter release disabled) warning	After the shutter-release button is pressed fully	Generation cause released

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.7 Vendor (Recording Destination)

6.5.7.1 RecordingMedia

○ **Property Specifications**

Property Code	0xD10B
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Card]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the recording destination of the images.

○ **Property Details**

For details, see Recording Destination (section 2.6).

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Card
1	SDRAM
2	Card and SDRAM

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The SpecialShootingMode property (section 6.5.6.3) is set to On (during interval timer shooting/focus shift shooting).

Do Not Copy

6.5.7.2 ActiveFolder

○ **Property Specifications**

Property Code	0xD15B
DataType	UINT16
Description form	Range
Get / Set	Get
Default Value	100
Property Value	100 to 999

○ **Property Outline**

Indicates the folder number of the recording location.

6.5.7.3 ActiveSlot

○ **Property Specifications**

Property Code	0xD1F2
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the recording destination slot when the recording destination is a card.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Card not inserted
1	Slot 1
2	Slot 2
3	Slot 1 & slot 2

Do Not Copy

6.5.7.4 ExposureRemaining

○ **Property Specifications**

Property Code	0xD1F1
DataType	UINT32
Description form	Range
Get / Set	Get
Default Value	0 [0 frames]
Property Value	0 [0 frames] to 4294967295 [4294967295 frames]

○ **Property Outline**

Indicates the number of frames that can be recorded on the card.

○ **Property Details**

The value changes depending on the setting of the camera. When a card is not inserted in the camera, it should be 0 frames.

6.5.7.5 ContinuousShootingCount

○ **Property Specifications**

Property Code	0xD1B4
DataType	UINT16
Description form	Range
Get / Set	Get
Default Value	0 [0 frames]
Property Value	From 0 [0 frames] to 999 [999 frames]

○ **Property Outline**

Indicates the number of frames that can be recorded in continuous shooting by the command.

The number of frames that can be recorded using continuous shooting can be acquired with any setting value of the RecordingMedia property (section 6.5.7.1).

○ **Property Details**

The number of continuous shooting frames changes depending on the following setting values on the camera.

Set contents	Property
Image quality mode	CompressionSetting property (section 6.5.1.3)
Image size	ImageSize property (section 6.5.1.2) EnableDXImageSize property (section 6.5.2.6) ImageSizeDX property (section 6.5.2.7)
High ISO noise reduction	NoiseReductionHiIso property (section 6.5.2.55)
HDR	HDRMode property (section 6.5.2.70)
Max. continuous release	BurstMaxNumber property (section 6.5.4.16)
Choose image area	CaptureAreaCrop property (section 6.5.2.4)
NEF (RAW) recording – Compression Type	RawCompressionType property (section 6.5.2.8)
Pre-release burst	PreCapturePreReleaseBurst property (section 6.5.4.17)
Post-release burst	PreCapturePostReleaseBurst property (section 6.5.4.18)

Do Not Copy

Silent mode	SilentMode property (section 6.5.5.14)
Photo/Video switching lever	LiveViewSelector property (section 6.5.6.1)

Do Not Copy

6.5.8 Vendor (Bracketing)

6.5.8.1 EnableBracketing

○ **Property Specifications**

Property Code	0xD0C0
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Auto bracketing - Auto bracketing shooting” in the photo shooting menu.

○ **Property Details**

In some cases, the PropertyValue may be changed to [Off] depending on the combination of the BracketingType property (section 6.5.8.2) setting and other settings.

The conditions for canceling the bracketing are described below.

No	Conditions	BracketingType property				
		AE Flash	AE	Flash	WB	ADL
1	ExposureEVStep property (section 6.5.4.8) changed	On	On	On	Off	Off
2	CompressionSetting property changed to RAW or RAW + JPEG	Off	Off	Off	On	Off
3	Change SilentMode property	Off	Off	On	Off	Off
4	StillCaptureMode property changed to [Continuous high-speed shooting (Extended)]	Off	Off	On	Off	Off
5	StillCaptureMode property changed to [High-Speed Frame Capture]	On*	On*	On*	On*	On*
6	FlashMode property (section 6.5.1.9) changed to [Flash off].	Off	Off	On*	Off	Off

NOTE) PropertyValue temporarily becomes "OFF". When the condition is canceled, the PropertyValue returns to "ON".

For video mode, bracketing shooting is not performed even if this property is set to [On].

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	The HDRMode property (section 6.5.2.70) is set to [On].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].
	The PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].
	If the BracketingType (section 6.5.8.2) property is [Flash bracketing] and one of the following is satisfied: - The SilentMode property (section 6.5.5.14) is set to [On]. - The FlashMode property (section 6.5.1.9) is set to [Flash off]. - The StillCaptureMode property is set to "Continuous high-speed shooting (Extended)".
	The BracketingType property is set to [WB bracketing] and the CompressionSetting property (section 6.5.1.3) is set to [RAW] or [RAW + JPEG].
	The BracketingType property is set to [ADL bracketing] and the ToneMode property (section 6.5.2.5) is set to [HLG].

Do Not Copy

6.5.8.2 BracketingType

○ **Property Specifications**

Property Code	0xD078
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [AE & flash bracketing]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Auto bracketing - Auto bracketing set” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	AE & flash bracketing
1	AE bracketing
2	Flash bracketing
3	WB bracketing
4	ADL bracketing

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is set to anything other than [PSAM].
	The StillCaptureMode property (section 6.5.1.15) is set to [High-speed frame capture].
	The HDRMode property (section 6.5.2.70) is set to [On].
	The DehazeMode property (section 6.5.2.73) is set to anything other than [Off].
	The PixelShiftShootingMode property (section 6.5.2.75) is set to anything other than [Off].

Do Not Copy

6.5.8.3 AEBracketingPattern

○ **Property Specifications**

Property Code	0xD0C2
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0403 [3 images (normal, under and over)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the number of images to be captured for AE bracketing or flash bracketing of “Auto bracketing” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0403	3 images (normal, under and over)
0x0405	5 images (normal, 2 unders and 2 overs)
0x0407	7 images (normal, 3 unders and 3 overs)
0x0409	9 images (normal, 4 unders and 4 overs)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for BracketingType (section 6.5.8.2) apply.
	The BracketingType property (section 6.5.8.2) is set to [WB bracketing] or [ADL bracketing].
	[7 images (normal, 3 unders and 3 overs)] or [9 images (normal, 4 unders and 4 overs)] is set when the AEBracketingStep property is set to [2.0], [2.3], [2.5], [2.7] or [3.0].

Do Not Copy

6.5.8.4 AEBracketingStep

○ **Property Specifications**

Property Code	0xD0C1
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	6 [1.0]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the steps for AE bracketing or flash bracketing of “Auto bracketing” in the photo shooting menu.

○ **Property Details**

When the value of the ExposureEVStep property (section 6.5.4.8) is changed, the PropertyValue is set to 1.0.

○ **Property Value**

Valid PropertyValues are listed below.

PropertyValue changes depending on the value of ExposureEVStep property.

Property Value	Description	ExposureEVStep		
		1/3 step	1/2 step	1 step
2	0.3	✓	-	-
3	0.5	-	✓	-
4	0.7	✓	-	-
6	1.0	✓	✓	✓
8	1.3	✓	-	-
9	1.5	-	✓	-
10	1.7	✓	-	-
12	2.0	✓	✓	✓
14	2.3	✓	-	-
15	2.5	-	✓	-
16	2.7	✓	-	-
18	3.0	✓	✓	✓

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
	Prohibited conditions for BracketingType (section 6.5.8.2) apply.
	The BracketingType property (section 6.5.8.2) is set to [WB bracketing] or [ADL bracketing].

Do Not Copy

6.5.8.5 WBBracketingPattern

○ **Property Specifications**

Property Code	0xD0C5
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0403 [3 images (normal, under and over)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the number of images to be captured for WB bracketing of “Auto bracketing” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0403	3 images (normal, under and over)
0x0405	5 images (normal, 2 unders and 2 overs)
0x0407	7 images (normal, 3 unders and 3 overs)
0x0409	9 images (normal, 4 unders and 4 overs)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for BracketingType (section 6.5.8.2) apply.
	The BracketingType property (section 6.5.8.2) is set to anything other than [WB bracketing].

Do Not Copy

6.5.8.6 WBBracketingStep

○ **Property Specifications**

Property Code	0xD0C4
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [1 EV]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the steps for WB bracketing of “Auto bracketing” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	1 step
2	2 step
3	3 step

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for BracketingType (section 6.5.8.2) apply.
	The BracketingType property (section 6.5.8.2) is set to anything other than [WB bracketing].

Do Not Copy

6.5.8.7 ADLBracketingPattern

○ **Property Specifications**

Property Code	0xD0C6
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0002 [2 shots]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the number of images to be captured for ADL bracketing of “Auto bracketing” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0002	2 shots (Off -> User setting)
0x0003	3 shots (Off -> Low -> Normal)
0x0004	4 shots (Off -> Low -> Normal -> High)
0x0005	5 shots (Off -> Low -> Normal -> High -> Extra high)

* For the user setting, the setting value of the ADLBracketingStep property (section 6.5.8.8) should be used.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for BracketingType (section 6.5.8.2) apply.
	The BracketingType property (section 6.5.8.2) is set to anything other than [ADL bracketing].

Do Not Copy

6.5.8.8 ADLBracketingStep

○ **Property Specifications**

Property Code	0xD0C7
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0xFFFF [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the ''ADL effect'' when shooting two ADL bracketing images for ''Auto bracketing'' in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0xFFFF	Auto
0x0002	Low
0x0003	Normal
0x0004	High
0x0005	Extra high

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for BracketingType (section 6.5.8.2) apply.
	The BracketingType property (section 6.5.8.2) is set to anything other than [ADL bracketing].

Do Not Copy

6.5.8.9 AEBracketingCount

○ **Property Specifications**

Property Code	0xD0C3
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	1
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the number of the image (nth image) to be captured next for AE bracketing and ADL bracketing.

○ **Property Details**

When the EnableBracketing property (section 6.5.8.1) is set to [Off] and the BracketingType property (section 6.5.8.2) is set to [WB bracketing], the value of PropertyValue is not fixed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1 to 9	AE bracketing
1 to 5	ADL bracketing

Do Not Copy

6.5.9 Vendor (Speedlight)

6.5.9.1 ExternalSpeedLightExist

○ **Property Specifications**

Property Code	0xD120
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Not mounted]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the mounting status of the speedlight.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Not mounted
1	Mounted

Do Not Copy

6.5.9.2 ExternalSpeedLightSort

○ **Property Specifications**

Property Code	0xD122
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Noncommunication]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the communication status of the speedlight.

○ **Property Details**

When the ExternalSpeedLightExist property (section 6.5.9.1) is set to [Not mounted], the value of the PropertyValue is not fixed.

If the speedlight for old-type communication is mounted, the PropertyValue becomes [Noncommunication].

For the communication status types of the speedlight, refer to “Speedlight Types” (section 11.6).

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Noncommunication
2	CLS (New-type communication) with the operating and setting section
3	CLS (New-type communication) without the operating and setting section

Do Not Copy

6.5.9.3 ExternalSpeedLightStatus

○ **Property Specifications**

Property Code	0xD121
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Not charged]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the charge status of the speedlight.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Not charged
1	Ready

*When the ExternalSpeedLightExist property (section 6.5.9.1) is set to [Not mounted], the value of the PropertyValue is not fixed.

Do Not Copy

6.5.9.4 NewExternalSpeedLightMode

○ **Property Specifications**

Property Code	0xD125
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the flash mode of the speedlight (CLS).

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	i-TTL balanced fill flash
2	i-TTL fill flash
3	Auto aperture
4	Non-TTL auto
5	Distance-priority manual
6	Manual flash
7	Repeating-flash

*When the ExternalSpeedLightExist property (section 6.5.9.1) is set to [Not mounted], the value of the PropertyValue is not fixed.

*When the ExternalSpeedLightSort property (section 6.5.9.2) is set to anything other than [CLS], the value of PropertyValue is not fixed.

Do Not Copy

6.5.9.5 FlashCompensation

○ **Property Specifications**

Property Code	0xD124
DataType	INT8
Description form	Range
Get / Set	Get
Default Value	0 [0.0 EV]
Property Value	From -18 [-3.0 EV] to +18 [+3.0 EV]

○ **Property Outline**

Indicates the flash compensation value in units of 1/6 EV.

○ **Property Details**

When the ExternalSpeedLightExist property (section 6.5.9.1) is set to [Not mounted], the value of the PropertyValue is not fixed.
When the ExternalSpeedLightSort property (section 6.5.9.2) is set to anything other than [CLS], the value of PropertyValue is not fixed.

The value of PropertyValue is valid when the values of the ExternalSpeedLightSort property and the NewExternalSpeedLightMode property (section 6.5.9.4) are as shown in the table below. Under conditions other than those indicated in the table below, the value of PropertyValue is 0.

ExternalSpeedLightSort	NewExternalSpeedLightMode
Noncommunication	(Invalid)
CLS	TTL-BL flash i-TTL fill flash Auto aperture Distance-priority manual

Do Not Copy

6.5.9.6 ExternalSpeedLightMultiFlashMode

○ **Property Specifications**

Property Code	0xD12D
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Stand-alone flash]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the commander mode of the speedlight.

○ **Property Details**

When the ExternalSpeedLightExist property (section 6.5.9.1) is set to [Not mounted], the value of the PropertyValue is not fixed.
When the ExternalSpeedLightSort property (section 6.5.9.2) is set to anything other than [CLS], the value of PropertyValue is not fixed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Stand-alone flash (Commander mode is invalid or not supported)
1	Other flash units (Commander mode is valid)

Do Not Copy

6.5.9.7 SBIntegrationFlashReady

○ **Property Specifications**

Property Code	0xD1ED
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Not charged]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the information about the ready state of the external flash displayed in the flash info of the INFO display.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Not charged
1	Ready

Do Not Copy

6.5.10 Vendor (Lens)

6.5.10.1 LensSort

○ **Property Specifications**

Property Code	0xD0E1
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	1 [CPU lens mounted]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the mounting status of the CPU lens.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Not mounted (lens not mounted or non-CPU lens mounted)
1	Mounted

Do Not Copy

6.5.10.2 LensTypeML

○ **Property Specifications**

Property Code	0xD0E7
DataType	UINT64
Description form	None
Get / Set	Get
Default Value	0
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates information on the ML lens.
The LensTypeF property (section 6.5.10.3) is enabled only when the mount adapter of this property is valid.

○ **Property Value**

Valid PropertyValues are listed below. It is invalid when bit is 0, and valid when it is 1.

Bit	Description
Bit11 to Bit63	Reserved
Bit10	Power zoom lens (PZ3 command support)
Bit9	Power zoom lens (PZ2 command support)
Bit8	Power zoom lens
Bit7	Lens whose automatic distortion correction is always effective
Bit6	Lens supporting automatic distortion correction
Bit5	DX lens (Lens for Nikon digital cameras)
Bit4	VR lens (with anti-vibration mechanism)
Bit1 to Bit3	Reserved
Bit0	Mount adapter

Do Not Copy

6.5.10.3 LensTypeF

○ **Property Specifications**

Property Code	0xD0E2
DataType	UINT64
Description form	None
Get / Set	Get
Default Value	1 [D-type lens]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates information on the F-CPU lens.
When the mount adapter is set to invalid in the LensTypeML property (section 6.5.10.2), the value of this property is fixed to zero.

○ **Property Value**

Valid PropertyValues are listed below. It is invalid when bit is 0, and valid when it is 1.

Bit	Description
Bit9 to Bit63	Reserved
Bit8	STM lens
Bit7	E-type lens (electromagnetic diaphragm)
Bit6	Retractable lens
Bit5	Lens supporting automatic distortion correction
Bit4	AF-S lens
Bit3	DX lens (Lens for Nikon digital cameras)
Bit2	VR lens (with anti-vibration mechanism)
Bit1	G-type lens (without aperture dial)
Bit0	D-type lens (with distance encoder)

Do Not Copy

6.5.10.4 LensID

○ **Property Specifications**

Property Code	0xD0E0
DataType	UINT16
Description form	None
Get / Set	Get
Default Value	0
Property Value	(Depends on the lens type)

○ **Property Outline**

Indicates the ID of the CPU lens.

○ **Property Details**

The value of PropertyValue indicates an ID (2Byte).
When the value of the LensSort property (section 6.5.10.1) is set to [Not mounted], the value of PropertyValue is fixed to zero.

Do Not Copy

6.5.10.5 LensFocalMin

○ **Property Specifications**

Property Code	0xD0E3
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	5000 [50 mm]
Property Value	(Depends on the lens type)

○ **Property Outline**

Indicates the focal length at the Wide-end with the CPU lens mounted.

○ **Property Details**

The value of PropertyValue should be a hundred times the focal length (mm).
When the value of the LensSort property (section 6.5.10.1) is set to [Not mounted], the value of PropertyValue is not fixed.

6.5.10.6 LensFocalMax

○ **Property Specifications**

Property Code	0xD0E4
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	5000 [50 mm]
Property Value	(Depends on the lens type)

○ **Property Outline**

Indicates the focal length at the Tele-end with the CPU lens mounted.

○ **Property Details**

The value of PropertyValue should be a hundred times the focal length (mm).
When the value of the LensSort property (section 6.5.10.1) is set to [Not mounted], the value of PropertyValue is not fixed.

Do Not Copy

6.5.10.7 LensApatureMin

○ **Property Specifications**

Property Code	0xD0E5
DataType	UINT16
Description form	None
Get / Set	Get
Default Value	140 [F 1.4]
Property Value	(Depends on the lens type)

○ **Property Outline**

Indicates the maximum aperture value at the Wide-end with the CPU lens mounted.

○ **Property Details**

The value of PropertyValue should be a hundred times the maximum aperture value.
When the value of the LensSort property (section 6.5.10.1) is set to [Not mounted], the value of PropertyValue is not fixed.

6.5.10.8 LensApatureMax

○ **Property Specifications**

Property Code	0xD0E6
DataType	UINT16
Description form	None
Get / Set	Get
Default Value	1600 [F16]
Property Value	(Depends on the lens type)

○ **Property Outline**

Indicates the maximum aperture value at the Tele-end with the CPU lens mounted.

○ **Property Details**

The value of PropertyValue should be a hundred times the maximum aperture value.
When the value of the LensSort property (section 6.5.10.1) is set to [Not mounted], the value of PropertyValue is not fixed.

Do Not Copy

6.5.10.9 PowerZoomPosition

○ **Property Specifications**

Property Code	0x0001D073
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0
Property Value	(Depends on the lens type)

○ **Property Outline**

Indicates the drive position data of the power zoom lens.

○ **Property Value**

This property indicates the drive position data of power zoom lenses that support the PZ2 command.

If the power zoom lens bit of the LensTypeML property (section 6.5.10.2) is disabled, the value of the property is set to 0.

Do Not Copy

6.5.10.10 RetractableLensWarning

○ **Property Specifications**

Property Code	0xD09C
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the retractable lens warning condition.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	(Retractable lens warning) Off
1	(Retractable lens warning) On

Do Not Copy

6.5.11 Vendor (LiveView)

6.5.11.1 CameraLiveViewStatus

○ **Property Specifications**

Property Code	0xD1B8
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the status of the live view in the camera.

○ **Property Details**

This property is set to “On” when live view is active.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

6.5.11.2 RemoteLiveViewStatus

○ **Property Specifications**

Property Code	0xD1A2
DataType	UINT8
Description form	Range
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the status of the remote live view.

○ **Property Details**

This property is set to “On” when the StartLiveView command is executed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

Do Not Copy

6.5.11.3 LiveViewImageStatus

○ **Property Specifications**

Property Code	0xD1BB
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Live view image is not available]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the status of the live view image acquired by the GetLiveViewImage command.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Live view image is not available.
1	Live view image is available.

Do Not Copy

6.5.11.4 LiveViewImageSize

○ **Property Specifications**

Property Code	0xD1AC
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	2 [Equivalent to VGA]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the size of the live view image acquired by the GetLiveViewImage command.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Equivalent to QVGA (up to 320x240)
2	Equivalent to VGA (up to 640x480)
3	Equivalent to XGA (up to 1024x768)

Do Not Copy

6.5.11.5 LiveViewImageCompression

○ **Property Specifications**

Property Code	0xD1BC
DataType	UINT8
Description form	Enumeration
Get / Set	Get / Set
Default Value	0 [Basic – Size priority]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the quality of the live view image acquired by the GetLiveViewImage command.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Basic – Size priority
1	Basic – Quality priority
2	Normal – Size priority
3	Normal – Quality priority
4	Fine – Size priority
5	Fine – Quality priority

Do Not Copy

6.5.11.6 LiveViewZoomArea

○ **Property Specifications**

Property Code	0xD1BD
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Entire display]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the zoom-area of the live view image.

○ **Property Details**

Available property value changes depending on the display device on the camera. If you set a value that is not supported on the display device, it is changed to another area that has the same magnification.

When recording video or connected to HDMI in video mode, the live view image of the GetLiveViewImageEx command (section 6.2.6.4) will not be magnified even if this property is set to anything other than [Entire display]. (The live view image on the camera side is enlarged)

While recording video, this property restricts magnification to 1× (100%) only.

In the following cases, the values that can be specified are limited, and the enumerated values vary.

- When spot WB acquisition is in standby state...
  Magnification: 200% or more cannot be used.
- When in video mode, MovieRecordScreenSize property (section 6.5.3.7) is "1920x1080", and video recording or HDMI connection...
  Magnification: 50% cannot be used.

Do Not Copy

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Display device		Description
	Image monitor	Electronic viewfinder	
0	✓	-	Entire display
300	✓	-	Zoom area: 300x200 Magnification: Ultra-high magnification (400%)
600	✓	-	Zoom area: 600x400 Magnification: High magnification (200%)
1200	✓	-	Zoom area: 1200x800 Magnification: Actual size (100%)
2400	✓	-	Zoom area: 2400x1600 Magnification: Low magnification (50%)

The magnification is the magnification relative to the size of the display device.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Not_LiveView	The camera is not in live view.
Access_Denied	The zoom value was changed to anything other than [Actual size (100%)], [Entire display] while recording a video.
	The MovieFileType property (section 6.5.3.2) is set to any of the following during video recording. ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
Device_Busy	During pre-release capture recording

Do Not Copy

6.5.11.7 LiveViewProhibitionCondition

○ **Property Specifications**

Property Code	0xD1A4
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x00000000
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the live view prohibition condition. If there is any prohibition factor in this property, the StartLiveView command must not be issued. If the StartLiveView command is issued and the live view is started when there is any prohibition factor in this property, the operation is not guaranteed.

○ **Property Value**

Valid PropertyValues are listed below.
The PropertyValue takes the following values in the bit assignment. (1: Valid, 0: Invalid)

Bit	Description
Bit29 to Bit31	Reserved
Bit28	Lens error Version upgrade warning when mount adapter is attached
Bit18 to Bit27	Reserved
Bit17	The live view cannot be started when the temperature rises.
Bit16	Reserved
Bit15	Processing by shooting Until the shooting operation ends
Bit9 to Bit14	Reserved
Bit8	Battery exhausted
From Bit3 to Bit7	Reserved
Bit2	Sequence error
Bit0 to Bit1	Reserved

*When the PropertyValue is a value other than 0, the live view cannot be started.

Do Not Copy

6.5.12 Vendor (Video)

6.5.12.1 MovieFnumber

○ **Property Specifications**

Property Code	0xD1A9
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	The minimum value of the enumeration
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the aperture value that is used in video mode.

○ **Property Details**

When the LensSort property (section 6.5.10.1) is [Not mounted], the enumeration cannot be created. Therefore, the number of enumeration values shall be 1 and the enumeration value, the DefaultValue, and the PropertyValue shall be the same value.
For models that support the exposure meter interlocking lever, it changes depending on the F0ManualSetting2 property (section 6.5.5.3) and the state of the exposure meter interlocking lever. The value shall be 1 EV except the maximum aperture value. It is set to 0 if the model does not support the exposure meter interlocking lever or if the aperture value cannot be acquired.

If an aperture value error occurs, the number of enumeration values shall be 1 and the enumeration value, the DefaultValue, and the PropertyValue shall be 0xFFFF.

If not in video mode, the number of enumeration values shall be 1 and the enumeration value, the DefaultValue, and the PropertyValue shall be 0 because the value is not fixed.

○ **Property Value**

When the ExposureProgramMode property (section 6.5.1.11) is M or A, the PropertyValue is set to the value of the Fnumber property (section 6.5.1.5) just before the start of video mode. When the ExposureProgramMode property (section 6.5.1.11) is anything other than M or A, the PropertyValue is set to a value determined by the camera.

The PropertyValue should be a hundred times the aperture value.
The PropertyValue changes depending on the value of the ExposureEVStep property (section 6.5.4.8).
The setting range of PropertyValue changes depending on the lens and the magnification setting.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [A] or [M].
	The LensSort property (section 6.5.10.1) is [Not mounted].
	The WarningStatus property (section 6.5.6.25) is one of the following: [Sequence error]

Do Not Copy

	[Retractable zoom-ring warning].
	The MovieAVLockSetting property (section 6.5.4.41) is [On].
	An aperture value error occurs.
	During photo mode.

Do Not Copy

6.5.12.2 MovieShutterSpeed

○ **Property Specifications**

Property Code	0xD1A8
DataType	UINT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0001003C [1/ 60]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the shutter speed that is used in video mode.

○ **Property Details**

In this property, the upper 2 bytes of PropertyValue are treated as the numerator of the shutter speed, and the lower 2 bytes are treated as the denominator.

If the enum value changes, update the enum value and DefaultValue. Enumerated values vary depending on the following factors.

Table 6.5-6 Associated properties

Property	Reference	
ExposureEVStep	6.5.4.8	Exposure step value
ExternalSpeedLightExist	6.5.9.1	Speedlight attached
MovieRecordScreenSize	6.5.3.7	Image size / Frame rate
MovieExtendedShutterSpeedsManual	6.5.4.48	Extended shutter speed (S/M mode)
MovieDigitalFlickerReduction	6.5.3.61	Digital flicker reduction

The shutter speed on the low-speed side changes depending on the setting of the video frame rate. The relationship between each frame rate and the shutter speed is shown below.
In addition, if the extended shutter speed (S/M mode) is valid and the video frame rate setting is not 100 fps or the 120fps, shutter speed becomes 1/4 seconds regardless of the setting of the video frame rate.

Video frame rate	ExposureEVStep		
	1/3 step	1/2 step	1 step
120fps	1/125	1/125	1/125
100fps	1/100	1/90	1/125
60fps	1/60	1/60	1/60
50fps	1/50	1/60	1/60
30fps	1/30	1/30	1/30
25fps	1/25	1/30	1/30
24fps	1/25	1/30	1/30

Do Not Copy

When digital flicker reduction is effective, the shutter speed on the low speed side changes depending on the detected light source frequency.

- Light source frequency: 100Hz

Video frame rate	ExposureEVStep		
	1/3 step	1/2 step	1 step
60fps	1/160	1/180	1/250
50fps	1/100	1/125	1/125
30fps	1/60	1/60	1/60
25fps	1/50	1/60	1/60
24fps	1/50	1/60	1/60

- Light source frequency: 120Hz

Video frame rate	ExposureEVStep		
	1/3 step	1/2 step	1 step
60fps	1/125	1/125	1/125
50fps	1/100	1/125	1/125
30fps	1/60	1/60	1/60
25fps	1/50	1/60	1/60
24fps	1/50	1/60	1/60

○ **Property Value**

Valid PropertyValues are listed below.

Shutter speed:

Property Value	Description
Upper 2 bytes	Numerator of the shutter speed
Lower 2 bytes	Denominator of the shutter speed

* (Example) PropertyValue of shutter speed

For 1/250 sec. PropertyValue = 0x000100FA

For 25 sec. PropertyValue = 0x00190001

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [S] or [M].
	The MovieTVLockSetting property (section 6.5.4.40) is [On].
	The MovieShutterMode property (section 6.5.4.49) is set to [Shutter Angle].
	The WarningStatus property (section 6.5.6.25) is one of the following: [Sequence error]

Do Not Copy

	[Minimum aperture warning] [Retractable zoom-ring warning].
	During photo mode.

Do Not Copy

6.5.12.3 MovieShutterAngle

○ **Property Specifications**

Property Code	0x0001D075
DataType	INT32
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	180° [18000]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the shutter angle that is used in video mode.

○ **Property Details**

The value of PropertyValue is the shutter angle times 100.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
560	5.6°
1120	11.2°
2250	22.5°
4500	45°
7200	72°
8640	86.4°
9000	90°
10800	108°
14400	144°
17280	172.8°
18000	180°
21600	216°
28800	288°
34600	346°
36000	360°

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ExposureProgramMode property (section 6.5.1.11) is anything other than [M] or [S].
	The MovieTVLockSetting property (section 6.5.4.40) is [On].
	The MovieShutterMode property (section 6.5.4.49) is set to [Shutter Speed].
	The WarningStatus property (section 6.5.6.25) is set to one of the following. · Sequence error

Do Not Copy

	· Minimum aperture warning · Retractable zoom-ring warning
	During photo mode.

Do Not Copy

6.5.12.4 MovieExposureBiasCompensation

○ **Property Specifications**

Property Code	0xD1AB
DataType	INT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [0.0 EV]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the compensation value of the exposure compensation that is used in video mode.

○ **Property Value**

Valid PropertyValues are listed below.

The value of PropertyValue changes depending on the value of the ExposureEVStep property (section 6.5.4.8).

Property Value	Description	ExposureEVStep		
		1/3 step	1/2 step	1 step
+3000	+3.0 EV	✓	✓	✓
+2666	+2.7 EV	✓	-	✓
+2500	+2.5 EV	-	✓	-
+2333	+2.3 EV	✓	-	✓
+2000	+2.0 EV	✓	✓	✓
+1666	+1.7 EV	✓	-	✓
+1500	+1.5 EV	-	✓	-
+1333	+1.3 EV	✓	-	✓
+1000	+1.0 EV	✓	✓	✓
+666	+0.7 EV	✓	-	✓
+500	+0.5 EV	-	✓	-
+333	+0.3 EV	✓	-	✓
0	0.0 EV	✓	✓	✓
-333	-0.3 EV	✓	-	✓
-500	-0.5 EV	-	✓	-
-666	-0.7 EV	✓	-	✓
-1000	-1.0 EV	✓	✓	✓
-1333	-1.3 EV	✓	-	✓
-1500	-1.5 EV	-	✓	-
-1666	-1.7 EV	✓	-	✓
-2000	-2.0 EV	✓	✓	✓
-2333	-2.3 EV	✓	-	✓
-2500	-2.5 EV	-	✓	-
-2666	-2.7 EV	✓	-	✓
-3000	-3.0 EV	✓	✓	✓

Do Not Copy

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	During photo mode.

6.5.12.5 MovieLogOutput

○ **Property Specifications**

Property Code	0xD0BB
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the state of N-log/HDR(HLG) control in the camera.

○ **Property Details**

The output destination of the control state changes depending on the value of the MovieFileType property (section 6.5.3.2).
If the MovieFileType property is [H.265 10-bit (MOV)], refer to the MovieH265ToneMode property (section 6.5.3.3). For [ProRes 422 HQ 10-bit (MOV)], see the MovieProResToneMode property (section 6.5.3.5).

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off (Not outputting)
1	On (Outputting)

Do Not Copy

6.5.12.6 MovieRecProhibitionCondition

○ **Property Specifications**

Property Code	0xD0A4
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x00000000
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the video recording prohibition condition.

○ **Property Details**

When the PropertyValue is a value other than 0, the video recording cannot be started. When the live view is not started, the value of PropertyValue is not fixed. Even if a value has been entered, it is not guaranteed.

○ **Property Value**

Valid PropertyValues are listed below.

The PropertyValue takes the following values in the bit assignment. (1: Valid, 0: Invalid)

Bit	Description
Bit21 to Bit31	Reserved
Bit20	Both of the following conditions are met. - The MovieFileType property (section 6.5.3.2) is set to any of the following: ・ProRes 422 HQ 10-bit(MOV) ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV), and - The recording destination card falls under any of the following: ・The card is an SD card. ・The format is FAT32.
Bit19	During warning / error of lens factor
Bit18	Sequence error
Bit15 to Bit17	Reserved
Bit14	The camera is not in the application mode.
Bit13	During photo mode
Bit12	During enlarged display of live view
Bit11	Card is protected.
Bit10	During video recording
Bit9	There are images or videos not recorded in the buffer.
Bit4 to Bit8	Reserved
Bit3	No free area in the card

Do Not Copy

Bit2	Card not formatted
Bit1	Card access error
Bit0	No card (when waiting for synchronous recording by an external recording device, 0: Invalid even if there is no card)

Do Not Copy

6.5.13 Vendor (Sound)

6.5.13.1 Movie32bitFloatAudioRecording

○ **Property Specifications**

Property Code	0x0001D065
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [32-bit float recording] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The input microphone is connected via an XLR adapter.
	The MovieFileType property (section 6.5.3.2) is set to [H.264 8-bit(MP4)].

Do Not Copy

6.5.13.2 MovieOZOAudioControl

○ **Property Specifications**

Property Code	0x0001D067
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Built-in microphone settings – Audio control (OZO audio)] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The MovieFileType property (section 6.5.3.2) is set to any of the following. ・ProRes 422 HQ 10-bit(MOV) ・ProRes RAW HQ 12-bit(MOV) ・R3D NE 12-bit(R3D) ・N-RAW 12-bit(NEV)
	The MovieFileType property is set to [H.265 (8-bit, 10-bit)], and the MovieRecordScreenSize property is set to any of the following. ・3840×2160 120p/100p ・1920×1080 240p/200p/120p/100p
	The MovieRecordScreenSize property is set to slow-motion video.

Do Not Copy

6.5.13.3 MovieAudioDirectivity

○ **Property Specifications**

Property Code	0x0001D068
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0x0004 [Stereo (binaural)]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Built-in microphone settings – Directivity settings] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below. Refer to HDR

Property Value	Description
0x0101	Front (narrow)
0x0001	Front
0x0002	Omni-directional
0x0003	Rear
0x0004	Stereo (binaural)

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the MovieOZOAudioControl property (section 6.5.13.2) apply.

Do Not Copy

6.5.13.4 MovieSelfPortraitModeOriented

○ **Property Specifications**

Property Code	0x0001D069
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates [Built-in microphone settings – Self-recording priority setting] in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	Front

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	Prohibited conditions for the MovieOZOAudioControl property (section 6.5.13.2) apply.

Do Not Copy

6.5.13.5 AudioInputSelection

○ **Property Specifications**

Property Code	0x0001D04D
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [Microphone]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “External mic/line input” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Microphone
2	Line

Do Not Copy

6.5.13.6 MovieAudioInputSensitivity

○ **Property Specifications**

Property Code	0x0001D070
DataType	INT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	Auto [0xFF]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Audio input sensitivity” in the video recording menu.

○ **Property Details**

If the Movie32bitFloatAudioRecording property (section 6.5.13.1) is [Off], [Auto] is added to the PropertyValue of this property.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0xFF	Auto
0 to 20	Manual sensitivity

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The input microphone is connected via an XLR adapter.
	Any of the following conditions are met: ・The audio input sensitivity is zero. ・The setting is configured to zero when the audio input sensitivity is set to [Auto] or a value between 1 and 20. ・The Movie32bitFloatAudioRecording property is [On].
	The MovieRecordScreenSize property (section 6.5.3.7) is set to slow-motion video.

Do Not Copy

6.5.13.7 MovieAttenuator

○ **Property Specifications**

Property Code	0xD23D
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Attenuator” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The input microphone is connected via an XLR adapter.
	The MovieAudioInputSensitivity property (section 6.5.13.6) is set to zero during video recording.
	The MovieRecordScreenSize property (section 6.5.3.7) is set to slow-motion video.

Do Not Copy

6.5.13.8 MovieRecordingZone

○ **Property Specifications**

Property Code	0xD0AC
DataType	UINT8
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	0 [Wide range]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Frequency response” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Wide range
1	Vocal range

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The input microphone is connected via an XLR adapter.
	The Movie32bitFloatAudioRecording property (section 6.5.13.1) is [On] and the input microphone is an external microphone.
	The MovieAudioInputSensitivity property (section 6.5.13.6) is set to zero during video recording.
	The MovieRecordScreenSize property (section 6.5.3.7) is set to slow-motion video.

Do Not Copy

6.5.13.9 MovieWindNoiseReduction

○ **Property Specifications**

Property Code	0xD0AA
DataType	UINT8
Description form	Range
Get / Set	Get, Get / Set
Default Value	0 [Off]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates “Wind noise reduction” in the video recording menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Off
1	On

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The input microphone is anything other than the built-in microphone.
	The MovieAudioInputSensitivity property (section 6.5.13.6) is set to zero during video recording.
	The MovieRecordScreenSize property (section 6.5.3.7) is set to slow-motion video.

Do Not Copy

6.5.14 Vendor (Picture Control)

6.5.14.1 ActivePicCtrlItem

○ **Property Specifications**

Property Code	0xD200
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	8 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the picture control item whose setting is currently valid.

○ **Property Details**

Only registered custom picture controls are enumerated.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	PictureControl Type
1	Standard	-
2	Neutral	-
3	Vivid	-
4	Monochrome	Monochrome style Picture Control
5	Portrait	-
6	Landscape	-
7	Flat	-
8	Auto	-
9	Flat Monochrome	Monochrome style Picture Control
10	Deep Tone Monochrome	Monochrome style Picture Control
11	Rich Tone Portrait	-
101	Dream	Creative Picture Control
102	Morning	
103	Pop	
104	Sunday	
105	Somber	
106	Drama	
107	Silence	
108	Bleach	
109	Melancholic	
110	Pure	
111	Denim	
112	Toy	
113	Sepia	
114	Blue	
115	Red	

Do Not Copy

116	Pink	
117	Charcoal	
118	Graphite	
119	Binary	
120	Carbon	
201 to 209	Custom Picture Control (from 1 to 9)	A custom picture control is a type of picture control based on it.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property (section 6.5.2.5) is set to [HLG].

Do Not Copy

6.5.14.2 MovieActivePicCtrlItem

○ **Property Specifications**

Property Code	0xD237
DataType	UINT16
Description form	Enumeration
Get / Set	Get / Set
Default Value	8 [Auto]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the picture control item whose setting is currently valid in the video recording menu.

○ **Property Details**

Only registered custom picture controls are enumerated.

When the property value is set to [Same as photo settings], the Picture Control specified for ActivePicCtrlItem (section 6.5.14.1) is used.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description	PictureControl Type
1	Standard	-
2	Neutral	-
3	Vivid	-
4	Monochrome	Monochrome style Picture Control
5	Portrait	-
6	Landscape	-
7	Flat	-
8	Auto	-
9	Flat Monochrome	Monochrome style Picture Control
10	Deep Tone Monochrome	Monochrome style Picture Control
11	Rich Tone Portrait	-
100	Same as photo settings	-
101	Dream	Creative Picture Control
102	Morning	
103	Pop	
104	Sunday	
105	Somber	
106	Drama	
107	Silence	
108	Bleach	
109	Melancholic	
110	Pure	
111	Denim	
112	Toy	
113	Sepia	
114	Blue	

Do Not Copy

115	Red	
116	Pink	
117	Charcoal	
118	Graphite	
119	Binary	
120	Carbon	
201 to 209	Custom Picture Control (from 1 to 9)	A custom picture control is a type of picture control based on it.

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	If the ToneMode is set to N-Log or HLG (If any of the following conditions are met). ● - The MovieFileType property (section 6.5.3.2) is set to [H.265 10-bit(MOV)] and the MovieH265ToneMode property (section 6.5.3.3) is set to [N-Log] or [HLG]. ● The MovieFileType property is set to [ProRes 422 HQ 10-bit(MOV)], and the MovieProResToneMode property (section 6.5.3.5) is set to [N-Log]. ● The MovieFileType property is set to [N-RAW 12-bit (NEV)] and the MovieNRaw12bitToneMode property (section 6.5.3.4) is set to [N-Log]. ● The MovieFileType property is set to [ProRes RAW HQ 12-bit(MOV)], and the MovieProResRawHq12bitToneMode property (section 6.5.3.6) is set to [N-Log].
	The MovieFileType property (section 6.5.3.2) is set to [R3D NE 12-bit(R3D)].

Do Not Copy

6.5.14.3 ActivePicCtrlHlgItem

○ **Property Specifications**

Property Code	0x0001D01D
DataType	UINT16
Description form	Enumeration
Get / Set	Get, Get / Set
Default Value	1 [Standard]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the setting of “Picture Control (HLG)” in the photo shooting menu.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	Standard
4	Monochrome
7	Flat

○ **Response Code**

When the value is set under the following conditions, an error response is made as shown below and the value cannot be set.

Response Code	Description
Access_Denied	The ToneMode property (section 6.5.2.5) is set to [SDR].

Do Not Copy

6.5.15 Vendor (Power Supply)

6.5.15.1 ExternalDC-IN

○ **Property Specifications**

Property Code	0xD101
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [Not connected]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the AC adapter connection status.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	Not connected
1	Connected

Do Not Copy

6.5.16 Vendor (USB)

6.5.16.1 USBSpeed

○ **Property Specifications**

Property Code	0xD10C
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	2 [Super-Speed]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the maximum data transfer speed of USB.

When the Super-Speed is not selected, the property value is High-Speed.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
1	High-Speed
2	Super-Speed

Do Not Copy

6.5.16.2 ConnectionPath

○ **Property Specifications**

Property Code	0xD12E
DataType	UINT8
Description form	Enumeration
Get / Set	Get
Default Value	0 [USB]
Property Value	Refer to Property Value in this section.

○ **Property Outline**

Indicates the connection path for PTP communication.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0	USB
2	Built-in Wi-Fi
3	Wired LAN

Do Not Copy

6.5.17 Vendor (MTP)

6.5.17.1 SessionInitiatorVersionInfo

○ **Property Specifications**

Property Code	0xD406
DataType	String
Description form	None
Get / Set	Get / Set
Default Value	“Windows/6.0.5330.0 MTPClassDriver/6.0.5330.0” [Session initiator version information character string]
Property Value	(Depends on the camera setting)

○ **Property Outline**

Indicates the version information of the host in open session.

○ **Property Details**

The PropertyValue should be a PTP string of 255 characters or shorter.
(HTTP 1.1 spec (RFC 2068) User Agent string format)

6.5.17.2 PerceivedDeviceType

○ **Property Specifications**

Property Code	0xD407
DataType	UINT32
Description form	None
Get / Set	Get
Default Value	0x00000001 [Digital still camera]
Property Value	0x00000001 [Digital still camera]

○ **Property Outline**

Indicates the type of the device.

6.5.17.3 UseDeviceStageFlag

○ **Property Specifications**

Property Code	0xD303
DataType	UINT8
Description form	None
Get / Set	Get
Default Value	0x01 [On]
Property Value	0x01 [On]

○ **Property Outline**

Indicates that the device can use Device Stage when the PropertyValue is a value other than 0. Windows searches the metadata of Device Stage in the metadata service until the device installation is completed. If the metadata of Device Stage in the server of Microsoft cannot be acquired, Windows displays Baseline Experience instead of Device Stage.

Do Not Copy

6.6 ObjectProp Code

Each of the objects in the camera has various sorts of specific information. As a method of transmission/reception of object information, an operation already exists in the PTP for operating the ObjectInfo data set. However, this is a static data set that cannot be expanded and includes basic information on the object. Various metadata concerning objects can be handled by operating the object property. Each object property has a corresponding ObjectPropCode.

The ObjectPropCodes supported by the camera are shown below.

Object Code	Description	Reference
0xDC01	StorageID	6.6.1.1
0xDC02	ObjectFormat	6.6.1.2
0xDC03	ProtectionStatus	6.6.1.3
0xDC04	ObjectSize	6.6.1.4
0xDC07	ObjectFilename	6.6.1.5
0xDC08	DateCreated	6.6.1.6
0xDC09	DateModified	6.6.1.7
0xDC0B	ParentObject	6.6.1.8
0xDC0D	Hidden	6.6.1.9
0xDC41	PersistentUniqueObjectIdentifier	6.6.1.10
0xDC44	Name	6.6.1.11
0xDC81	RepresentativeSampleFormat	6.6.2.1
0xDC82	RepresentativeSampleSize	6.6.2.2
0xDC83	RepresentativeSampleHeight	6.6.2.3
0xDC84	RepresentativeSampleWidth	6.6.2.4
0xDC86	RepresentativeSampleData	6.6.2.5
0xDC87	Width	6.6.3.1
0xDC88	Height	6.6.3.2
0xDC8A	Rating	6.6.3.3
0xDCD3	ImageBitDepth	6.6.3.4
0xDC89	Duration	6.6.4.1
0xDE93	SampleRate	6.6.4.2
0xDE94	NumberOfChannels	6.6.4.3
0xDE95	AudioBitDepth	6.6.4.4
0xDE97	ScanType	6.6.4.5
0xDE9A	AudioBitRate	6.6.4.6
0xDE9B	VideoFourCCCode	6.6.4.7
0xDE9C	VideoBitRate	6.6.4.8
0xDE9D	FramesPerThousandSeconds	6.6.4.9

Do Not Copy

6.6.1 Object Information

6.6.1.1 StorageID

○ **Property Specifications**

Property Code	0xDC01
DataType	UINT32
Get / Set	Get
Default Value	0x00010001
Group Code	0x00000001
Form Flag	0x00 (None)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the StorageID of the object. (It is the same value as that of the first field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00010001	Slot 1
0x00020001	Slot 2

Do Not Copy

6.6.1.2 ObjectFormat

○ **Property Specifications**

Property Code	0xDC02
DataType	UINT16
Get / Set	Get
Default Value	0x3000
Group Code	0x00000001
Form Flag	0x00 (None)
Property Value	Refer to the ObjectFormat Code (6.1) section.

○ **Property Outline**

This indicates the ObjectFormatCode of the object. (It is the same value as that of the second field of the ObjectInfo data set.)

It is applied to the objects of all the formats supported by the camera.

Do Not Copy

6.6.1.3 ProtectionStatus

○ **Property Specifications**

Property Code	0xDC03
DataType	UINT16
Get / Set	Get
Default Value	0x0000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the protection status of the object. (It is the same value as that of the third field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Not protected
0x0001	Protection is set.

Do Not Copy

6.6.1.4 ObjectSize

○ **Property Specifications**

Property Code	0xDC04
DataType	UINT64
Get / Set	Get
Default Value	0x0000000000000000
Group Code	0x00000001
Form Flag	0x00 (None)
Property Value	(Object size)

○ **Property Outline**

This indicates the size of the object in units of bytes. (It is the same value as that of the fourth field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.

Do Not Copy

6.6.1.5 ObjectFilename

○ **Property Specifications**

Property Code	0xDC07
DataType	String
Get / Set	Get
Default Value	0x00 (Null)
Group Code	0x00000001
Form Flag	0x05 (RegEx)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates an optional string that shows the file name of an object. (It is the same value as that of the sixteenth field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.
However, the ObjectPropDesc returned in the Image format differs from that returned in the Association format.

○ **Property Value**

Valid PropertyValues are listed below.

ObjectFormat	RegEx
Association	[0-9]{3}[_a-zA-Z0-9]{5}
Other than Association	[_a-zA-Z]{4}[0-9]{4}¥.[a-zA-Z]{3}

Do Not Copy

6.6.1.6 DateCreated

○ **Property Specifications**

Property Code	0xDC08
DataType	String
Get / Set	Get
Default Value	0x00 (Null)
Group Code	0x00000001
Form Flag	0x03 (DateTime)
Property Value	(Date and time of object creation)

○ **Property Outline**

This indicates a string that shows the date and time of object creation. (It is the same value as that of the seventeenth field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.

Do Not Copy

6.6.1.7 DateModified

○ **Property Specifications**

Property Code	0xDC09
DataType	String
Get / Set	Get
Default Value	0x00 (Null)
Group Code	0x00000001
Form Flag	0x03 (DateTime)
Property Value	(Date and time of object update)

○ **Property Outline**

This indicates a string that shows the date and time of object update. (It is the same value as that of the eighteenth field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.

Do Not Copy

6.6.1.8 ParentObject

○ **Property Specifications**

Property Code	0xDC0B
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x00 (None)
Property Value	(ObjectHandle of the parent object of the specified object)

○ **Property Outline**

This indicates the ObjectHandle of the parent object of the object. (It is the same value as that of the twelfth field of the ObjectInfo data set.)
It is applied to the objects of all the formats supported by the camera.

Do Not Copy

6.6.1.9 Hidden

○ **Property Specifications**

Property Code	0xDC0D
DataType	UINT16
Get / Set	Get
Default Value	0x0000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	(Hidden attribute of the object)

○ **Property Outline**

This indicates a hidden attribute of the object.
It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3000	Undefined
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Displayed object
0x0001	Hidden object

Do Not Copy

6.6.1.10 PersistentUniqueObjectIdentifier

○ **Property Specifications**

Property Code	0xDC41
DataType	UINT128
Get / Set	Get
Default Value	0x00^16
Group Code	0x00000001
Form Flag	0x00 (None)
Property Value	(Object-specific identifier)

○ **Property Outline**

This indicates an object-specific identifier (PUOID).
It is applied to the objects of all the formats supported by the camera.

The generation rule of the PUOID is shown below.

0 through 3	4 through 15
ObjectHandle (4 bytes)	Reserved (0)

Do Not Copy

6.6.1.11 Name

○ **Property Specifications**

Property Code	0xDC44
DataType	String
Get / Set	Get
Default Value	0x00 (Null)
Group Code	0x00000001
Form Flag	0x00 (None)
Property Value	(File name of an object)

○ **Property Outline**

This indicates an optional string that shows the file name of an object. (It should be the same value as that of ObjectFilename.)
It is applied to the objects of all the formats supported by the camera.

Do Not Copy

6.6.2 Thumbnail

6.6.2.1 RepresentativeSampleFormat

○ **Property Specifications**

Property Code	0xDC81
DataType	UINT16
Get / Set	Get
Default Value	0x3000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the ObjectFormatCode of the thumbnail image.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

PropertyValue	Setting
0x3000	Undefined
0x3808	JFIF
0x380D	TIFF

Do Not Copy

6.6.2.2 RepresentativeSampleSize

○ **Property Specifications**

Property Code	0xDC82
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	From 0 to 0x00010000

○ **Property Outline**

This indicates the size of the thumbnail in bytes.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.2.3 RepresentativeSampleHeight

○ **Property Specifications**

Property Code	0xDC83
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	0 to 120

○ **Property Outline**

This indicates the height of the thumbnail in pixels.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.2.4 RepresentativeSampleWidth

○ **Property Specifications**

Property Code	0xDC84
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	0 to 160

○ **Property Outline**

This indicates the width of the thumbnail in pixels.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.2.5 RepresentativeSampleData

○ **Property Specifications**

Property Code	0xDC86
DataType	AUINT8
Get / Set	Get
Default Value	0x00000000
Group Code	0xFFFFFFFF
Form Flag	0x06 (ByteArray)
Property Value	From 0 to 0x00010000

○ **Property Outline**

This indicates the thumbnail data.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.3 Image Information

6.6.3.1 Width

○ **Property Specifications**

Property Code	0xDC87
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	0 to 10000

○ **Property Outline**

This indicates the width of the object in pixels.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.3.2 Height

○ **Property Specifications**

Property Code	0xDC88
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	0 to 10000

○ **Property Outline**

This indicates the height of the object in pixels.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.3.3 Rating

○ **Property Specifications**

Property Code	0xDC8A
DataType	UINT16
Get / Set	Get / Set
Default Value	0
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	0 to 100

○ **Property Outline**

This indicates the rating of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0x380D	TIFF
0xB200	HEIF
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

If you set a value of 100 or less that does not correspond to the following, it will be rounded down.

Example: If you set 60, it will be 50.

Property Value	Rating setting
0	Off
1	★
25	★★
50	★★★
75	★★★★
100	★★★★★

Do Not Copy

6.6.3.4 ImageBitDepth

○ **Property Specifications**

Property Code	0xDCD3
DataType	UINT32
Get / Set	Get
Default Value	0x0000000C
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the bit depth of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3800	Unknown Image Object
0x3801	EXIF/JPEG
0x380D	TIFF
0xB200	HEIF

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000000C	12bit
0x0000000E	14bit
0x00000018	24bit

Do Not Copy

6.6.4 Video Information

6.6.4.1 Duration

○ **Property Specifications**

Property Code	0xDC89
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	From 0 to 0x001B773F (1799999msec)

○ **Property Outline**

This indicates the length of the object in msec.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3008	WAV
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.4.2 SampleRate

○ **Property Specifications**

Property Code	0xDE93
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the sample rate of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3008	WAV
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00000000	0 Hz (no sound)/Unknown
0x00002EE0	12.000 Hz
0x5DC0	24.000 Hz
0x0000BB80	48.000 Hz

Do Not Copy

6.6.4.3 NumberOfChannels

○ **Property Specifications**

Property Code	0xDE94
DataType	UINT16
Get / Set	Get
Default Value	0x0000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the number of channels of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3008	WAV
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Unused (no sound)/Unknown
0x0001	Monaural (1ch)
0x0002	Stereo (2ch)

Do Not Copy

6.6.4.4 AudioBitDepth

○ **Property Specifications**

Property Code	0xDE95
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the audio bit depth of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3008	WAV
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
16	16bit
24	24bit
32	32-bit float

Do Not Copy

6.6.4.5 ScanType

○ **Property Specifications**

Property Code	0xDE97
DataType	UINT16
Get / Set	Get
Default Value	0x0000
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the scan type of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x0000	Unused

Do Not Copy

6.6.4.6 AudioBitRate

○ **Property Specifications**

Property Code	0xDE9A
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	From 0x00000000 (No sound/Unknown) to 0x00177000

○ **Property Outline**

This indicates the audio bit rate of the object.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x3008	WAV
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.4.7 VideoFourCCCode

○ **Property Specifications**

Property Code	0xDE9B
DataType	UINT32
Get / Set	Get
Default Value	0x31637661
Group Code	0x00000001
Form Flag	0x02 (Enumeration)
Property Value	Refer to Property Value in this section.

○ **Property Outline**

This indicates the FourCC code for the video codec.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

○ **Property Value**

Valid PropertyValues are listed below.

Property Value	Description
0x00000000	Indefinite (ProRes 422 HQ/ProRes RAW/TICO RAW)
0x31637661	“avc1”
0x31637668	“hvc1”

Do Not Copy

6.6.4.8 VideoBitRate

○ **Property Specifications**

Property Code	0xDE9C
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	From 0x00000000 (Unknown) to 0xFFFFFFFF

○ **Property Outline**

This indicates the number of bits of the object processed per sec.
The PropertyValue should be a value obtained by multiplying the maximum number of bytes per sec. of the object by 8 (bit).

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

6.6.4.9 FramesPerThousandSeconds

○ **Property Specifications**

Property Code	0xDE9D
DataType	UINT32
Get / Set	Get
Default Value	0x00000000
Group Code	0x00000001
Form Flag	0x01 (Range)
Property Value	(Frame rate of the object)

○ **Property Outline**

This indicates the frame rate of the object.

Since the value of the property is represented by 1/1000 frame, 29.97fps becomes 29970.

It is applied to the objects of the following formats.

ObjectFormatCode	Description
0x300D	MOV Apple QuickTime Video Format (H.264/AVC)
0xB201	NEV
0xB202	R3D NE
0xB982	MP4 Container

Do Not Copy

7 Data Type

7.1 DataTypeCode

The standard data types used by the camera are shown below.

DataTypeCode	Type	Description
0x0001	INT8	Signed 8-bit integer
0x0002	UINT8	Unsigned 8-bit integer
0x0003	INT16	Signed 16-bit integer
0x0004	UINT16	Unsigned 16-bit integer
0x0005	INT32	Signed 32-bit integer
0x0006	UINT32	Unsigned 32-bit integer
0x0007	INT64	Signed 64-bit integer
0x0008	UINT64	Unsigned 64-bit integer
0x0009	INT128	Signed 128-bit integer
0x000A	UINT128	Unsigned 128-bit integer
0x4001	AINT8	Signed 8-bit integer array
0x4002	AUINT8	Unsigned 8-bit integer array
0x4003	AINT16	Signed 16-bit integer array
0x4004	AUINT16	Unsigned 16-bit integer array
0x4005	AINT32	Signed 32-bit integer array
0x4006	AUINT32	Unsigned 32-bit integer array
0x4007	AINT64	Signed 64-bit integer array
0x4008	AUINT64	Unsigned 64-bit integer array
0x4009	AINT128	Signed 128-bit integer array
0x400A	AUINT128	Unsigned 128-bit integer array
0xFFFF	STR	Variable length Unicode character string

Do Not Copy

7.2 Character String Format

The field representing the character string complies with the following format.

Each field data is stored in the little endian format.

Field	Size (bytes)	Data	Description
NumChar	1	N	Represents the number of characters in the string. The terminating null character is included. The maximum number of characters is 255.
StringChars [0]	2		Unicode character
StringChars [1]	2		Unicode character
...			
StringChars [N - 1]	2	0x0000	Unicode character (null)

7.3 Date Format

The character string representing the date complies with the following format.

The date and time is shown in the form of the most significant value through the least significant value according to the format of ISO8601 standard. This is a Unicode string format of “YYYYMMDDThhmmss” where YYYY is the year, MM is the month, DD is the day of the month, T is a constant character, hh is the hours, mm is the minutes, and ss is the seconds past the minute. This is a Unicode string format of “YYYYMMDDThhmmss” where YYYY is the year, MM is the month, DD is the day of the month, T is a constant character, hh is the hours, mm is the minutes, and ss is the seconds past the minute. The data is stored in the following array for the transmission/reception between the camera and the host.

Field	Size (bytes)	Data	Description
NumChar	1	0x10	Represents the number of characters in the string. The terminating null character is included. The number of characters in the string representing the time is sixteen.
StringChars	32		Unicode string “YYYYMMDDThhmmss”

When the format setting is “YYYYMMDDThhmmss.xx”, the data following “YYYYMMDDThhmmss” should be ignored for use.

Do Not Copy

7.4 Array Format

The array type complies with the following format. Each field data is stored in the little endian format.

Field	Size (bytes)	Data
NumElement	4	The element of the array is N (N indicates the number of objects).
ArrayEntry [0]	ElementSize	ArrayData [0]
ArrayEntry [1]	ElementSize	ArrayData [1]
ArrayEntry [2]	ElementSize	ArrayData [2]
...		
ArrayEntry [N - 1]	ElementSize	ArrayData [N - 1]

ElementSize: Data size of ArrayData

Do Not Copy

8 ObjectHandle

The ObjectHandle is used to represent the individual objects in the camera (image file, non-image file, directories, and the virtual association representing the relations of the images and the DCF objects conforming to the DCF standards).

The ObjectHandle is unsigned 32 bits. A unique value is set for the ObjectHandle indicating each object. The specified ObjectHandle is fixed in one session.

8.1 ObjectHandle of the Object Recorded in the Card

The camera sets a 4-byte unique value freely for the ObjectHandle created for the data in the card by the camera. The host application does not care the contents.

8.2 ObjectHandle of the Object Recorded in the SDRAM

The object recorded in the SDRAM is the image file only.

The host can access the image data in the SDRAM by specifying the ObjectHandle passed by ObjectAddedInSdram.

8.3 Addition of the ObjectHandle

The camera acts as shown below when an object is newly added to the card during one session.

No.	Description
1	In accordance with the ObjectHandle format defined in this section, the camera specifies a unique ObjectHandle that is not coordinated with other ObjectHandles already specified for the newly added object.
2	The camera sends the ObjectAdded event including the specified ObjectHandle as a parameter to the host. At this time, FreeSpaceInBytes and FreeSpaceInImages indicated in the StorageInfo data set are updated immediately.

Do Not Copy

9 DataSet

The camera transmits the information about the camera to the host by using some data sets. The data sets supported by the camera and their contents are shown below.

9.1 DeviceInfo DataSet

The DeviceInfo data set is sent by the operation of the GetDeviceInfo command.

Each field data is stored in the little endian format.

The information sent by the DeviceInfo data set is shown below.

Field	Description
StandardVersion	The highest version of the standard that can support the device.
VendorExtensionID	The vendor extension ID used by the device.
VendorExtensionVersion	The vendor-specific version number of extensions that are supported.
VendorExtensionDesc	An optional string used to hold a human-readable description of the VendorExtensionID.
FunctionalMode	An optional field used to hold the functional mode.
OperationsSupported	An array of OperationCodes supported by the camera.
EventsSupported	An array of EventCodes supported by the camera.
DevicePropertiesSupported	An array of DevicePropCodes supported by the camera.
CaptureFormats	An array of ObjectFormatCodes that can be created by the camera with InitiateCapture.
ImageFormats	An array of ObjectFormatCodes supported by the camera.
Manufacture	An optional human-readable string used to indicate the device manufacturer.
Model	An optional human-readable string used to indicate the device name.
DeviceVersion	An optional human-readable string used to indicate the version of the device.
SerialNumber	An optional human-readable string used to indicate the serial number of the camera.

Field	Size (bytes)	Data	DataType	Description
StandardVersion	2	0x0064		Version 1.00
VendorExtensionID	4	0xFFFFFFFF		-
VendorExtensionVersion	2	0x006E		Version 1.10
VendorExtensionDesc	69	0x22 0x4D00 0x6900 0x6300 0x7200	String	UNICODE character string “Microsoft.com/DeviceServices: 1.0”

Do Not Copy

		0x6F00 0x7300 0x6F00 0x6600 0x7400 0x2E00 0x6300 0x6F00 0x6D00 0x2F00 0x4400 0x6500 0x7600 0x6900 0x6300 0x6500 0x5300 0x6500 0x7200 0x7600 0x6900 0x6300 0x6500 0x7300 0x3A00 0x2000 0x3100 0x2E00 0x3000 0x0000		
FunctionalMode	2	0x0000		Normal mode
OperationsSupported	238	0x0000007E 0x1001 0x1002 0x1003 0x1004 0x1005 0x1006 0x1007 0x1008 0x1009 0x100A 0x100B 0x100E 0x100F 0x1012 0x1014	Array	OperationCode supported by the camera This varies depending on whether the connection destination is MTP or not. Other than MTP: 0x9801 Not supported. 0x9802 Not supported. 0x9803 Not supported. 0x9804 Not supported. 0x9805 Not supported.

Do Not Copy

		0x1015 0x1016 0x101B 0x90C0 0x90C1 0x90C2 0x90C3 0x90C4 0x90C7 0x90C8 0x90C9 0x90CB 0x90CC 0x90CD 0x90CE 0x90CF 0x9201 0x9202 0x9203 0x9204 0x9205 0x9206 0x9207 0x9209 0x920A 0x920B 0x920C 0x920F 0x9400 0x9401 0x9402 0x9403 0x9404 0x9405 0x9406 0x940C 0x9412 0x9413 0x941C 0x9420 0x9421 0x9422 0x9423 0x9424 0x9425 0x9426 0x9428 0x942E		

Do Not Copy

		0x942F 0x9431 0x9433 0x9434 0x9435 0x9436 0x9439 0x943A 0x943B 0x943C 0x943D 0x943E 0x943F 0x9440 0x9441 0x9442 0x9443 0x9444 0x9445 0x9446 0x9447 0x944C 0x944D 0x944E 0x944F 0x9453 0x9454 0x9455 0x9456 0x9457 0x9458 0x9459 0x945A 0x9463 0x9464 0x946D 0x946E 0x9461 0x9470 0x9476 0x9477 0x9520 0x9521 0x9522 0x9523 0x9527 0x9528 0x9529		

Do Not Copy

		0x9530 0x9535 0x9801 0x9802 0x9803 0x9804 0x9805		
EventsSupported	56	0x0000001E 0x4001 0x4002 0x4003 0x4004 0x4005 0x4006 0x4007 0x4008 0x4009 0x400A 0x400C 0x400D 0xC101 0xC102 0xC105 0xC108 0xC10A 0xC10B 0xC10C 0xC10D 0xC10E 0xC125 0xC126 0xC127 0xC128 0xC700	Array	EventCode supported by the camera
DevicePropertiesSupported	46	0x00000015 0x5001 0x5003 0x5004 0x5005 0x5007 0x5008 0x500A 0x500B 0x500C 0x500D 0x500E 0x500F	Array	DevicePropertyCode supported by the camera The vendor codes are not enumerated in this field. The vendor codes can be acquired using the GetVendorCodes command (section 6.2.2.1).

Do Not Copy

		0x5010 0x5011 0x5013 0x5018 0x501E 0x501F 0xD303 0xD406 0xD407		
CaptureFormats	8	0x00000002 0x3801 0x3800	Array	ObjectFormatCode that can be created by the camera with InitiateCapture. This varies depending on whether the connection destination is MTP or not. MTP: 0x3000 Not supported. Other than MTP: 0x3800 Not supported
ImageFormats	26	0x0000000B 0x3801 0x3800 0x3001 0x3008 0x380D 0x3000 0x300D 0xB200 0xB201 0xB202 0xB982	Array	ObjectFormatCode supported by the camera. This varies depending on whether the connection destination is MTP or not. MTP: 0x3002 Not supported. Other than MTP: 0x3800 Not supported
Manufacture	37	0x12 0x4E00 0x6900 0x6B00 0x6F00 0x6E00 0x2000 0x4300 0x6F00 0x7200 0x7000 0x6F00 0x7200 0x6100 0x7400 0x6900 0x6F00 0x6E00	String	UNICODE character string “Nikon Corporation”

Do Not Copy

		0x0000		
Model	7	0x03 0x5A00 0x5200 0x0000	String	UNICODE character string “ZR”
DeviceVersion	13	0x06 0xXX00 0xXX00 0xXX00 0xXX00 0xXX00 0x0000	String	UNICODE character string The device version is stored in XX. In the case of V1.00, it is as follows. 0x5600 0x3100 0x2E00 0x3000 0x3000
SerialNumber	67	0x21 0xXX00 0xXX00 0xXX00 0xXX00 0xXX00

		0x0000		

Do Not Copy

9.2 StorageInfo DataSet

The StorageInfo data set is sent by the operation of the GetStorageInfo command. This data set indicates information about the storage medium (card). Each field data is stored in the little endian format.

Information sent by the StorageInfo data set is shown below.

Field	Description
StorageType	Indicates the type of the card. Removable Ram is set.
FilesystemType	Indicates the filesystem of the card. It conforms to the DCF.
AccessCapability	Indicates the access right for the card. When the card is not locked, it is read-only and the image deletion is allowed. When the card is locked, it is read-only and the image deletion is not allowed.
MaxCapacity	Indicates the capacity of the card. It depends on the card used.
FreeSpaceInBytes	Indicates the free space in the card. It depends on the card used and the space that is currently used.
FreeSpaceInImages	Indicates the number of images that can be recorded in the free space of the card. It is the number of images captured in the mode that is currently set in the camera. It depends on the card used and the space that is currently used.
StorageDescription	Indicates a human-readable text description of the card. This field is not used for the camera.
VolumeLabel	Indicates the volume label of the card. It is described in a human-readable character string (Unicode character string).

Field	Size (bytes)	Data	DataType	Description
StorageType	2	0x0004		Removable Ram
FilesystemType	2	0x0003		Based on the DCF
AccessCapability	2	0x0002 0x0001 (Card lock)		Read-Only with Object Deletion Read-Only without Object Deletion (Card lock)
MaxCapacity	8			Depends on the card.
FreeSpaceInBytes	8			Depends on the card and the space used.
FreeSpaceInImages	4			Depends on the card and the space used.
StorageDescription	1	0x00		-
VolumeLabel			String	UNICODE character string

Do Not Copy

9.3 ObjectInfo DataSet

The ObjectInfo data set is sent by the operation of the GetObjectInfo command and the SendPartialObjectInfo command.
This data set indicates information about the objects in the card.

Each field data in which the data type is not specified is stored in the little endian format.

Field	Description
StorageID	Indicates the StorageID of the card.
ObjectFormat	This indicates the ObjectFormatCode of the object.
ProtectionStatus	This indicates the protection status of the object.
ObjectCompressedSize	This indicates the size of the object in units of bytes. 0xFFFFFFFF for over 4GB.
ThumbFormat	Indicates the ObjectFormat of the thumbnail.
ThumbCompressedSize	This indicates the size of the thumbnail in bytes.
ThumbPixWidth	This indicates the width of the thumbnail in pixels.
ThumbPixHeight	This indicates the height of the thumbnail in pixels.
ImagePixWidth	Indicates the image width in pixels.
ImagePixHeight	Indicates the image height in pixels.
ImageBitDepth	Indicates the bit depth of the image.
ParentObject	This indicates the ObjectHandle of the parent object of the object.
AssociationType	Indicates the association type. It is used for the object of the association type.
AssociationDesc	Indicates the descriptor parameter of the association. This field is not used for the camera.
SequenceNumber	Indicates the component of the association. This field is not used for the camera.
Filename	This indicates an optional string that shows the file name of an object.
CaptureDate	This indicates a string that shows the date and time of object creation.
ModificationDate	This indicates a string that shows the date and time of object update. When the object does not have a date and time of modification, the same date and time as that of the object creation is stored.
Keywords	Indicates the character string showing the image-related keyword. This field is not used for the camera.

Do Not Copy

9.3.1 Directory/Virtual Association DataSet

Field	Size (bytes)	Data	DataType	Description
StorageID	4	StorageID		StorageID
ObjectFormat	2	0x3001		Association (Refer to ObjectFormatCode.)
ProtectionStatus	2	0x0000		-
ObjectCompressedSize	4	0x00000000		-
ThumbFormat	2	0x0000		-
ThumbCompressedSize	4	0x00000000		-
ThumbPixWidth	4	0x00000000		-
ThumbPixHeight	4	0x00000000		-
ImagePixWidth	4	0x00000000		-
ImagePixHeight	4	0x00000000		-
ImageBitDepth	4	0x00000000		-
ParentObject	4	ObjectHandle		ObjectHandle of the parent directory DCIM folder: 0x00000000
AssociationType	2	0x0001		GenericFolder
AssociationDesc	4	0x00000000		-
SequenceNumber	4	0x00000000		-
Filename			String	UNICODE character string
CaptureDate			String	Date and time of capture (Unicode character string) (Not used for the virtual association)
ModificationDate			String	Date and time of modification (Unicode character string) (Not used for the virtual association)
Keywords	1	0x00		-

Do Not Copy

9.3.2 Image File DataSet

Field	Size (bytes)	Data	DataType	Description
StorageID	4	StorageID		StorageID SDRAM image: 0x00000000
ObjectFormat	2			0x3000 (Undefined) 0x3801 (EXIF) 0x380D (TIFF)
ProtectionStatus	2			0x0001 (with protection setting), 0x0000 (without protection setting)
ObjectCompressedSize	4			File size
ThumbFormat	2	0x3808		JFIF (Refer to ObjectFormatCode.)
ThumbCompressedSize	4			Thumbnail size
ThumbPixWidth	4	0x000000A0		Horizontal size of the thumbnail (160)
ThumbPixHeight	4	0x00000078		Vertical size of the thumbnail (120)
ImagePixWidth	4			Horizontal size of the main image
ImagePixHeight	4			Vertical size of the main image
ImageBitDepth	4	0x00000000		-
ParentObject	4	ObjectHandle		ObjectHandle of the parent directory
AssociationType	2	0x0000		-
AssociationDesc	4	0x00000000		-
SequenceNumber	4	0x00000000		-
Filename			String	File name character string (Unicode character string) “File name.extension” is set for the images recorded in the card with the recording destination set to “Card” or “Card and SDRAM”. “DSC_0000.extension” is set for the images whose recording destination is the SDRAM. For the images recorded in the SDRAM with the recording destination set to “Card and SDRAM”, the name including the folder name and the file name of the image recorded in the card simultaneously is set. “Folder name¥(backslash)file name.extension”. If the image deletion is performed by operating the camera during the card recording while “Card and SDRAM” recording is set in the application

Do Not Copy

				mode, the file name of the image with the recording destination SDRAM may be “DSC_0000.extension” in some cases. When the object format is “Undefined”, the extension is NEF (RAW) or NDF (dust reference image).
CaptureDate			String	Date and time of capture (Unicode character string)
ModificationDate			String	Date and time of modification (Unicode character string)
Keywords	1	0x00		-

Do Not Copy

9.3.3 Script File Data Set

Field	Size (bytes)	Data	DataType	Description
StorageID	4	0x00000000		
ObjectFormat	2	0x3002		Script (Refer to ObjectFormatCode.)
ProtectionStatus	2	0x0000		Not protected
ObjectCompressedSize	4			File size
ThumbFormat	2	0x0000		-
ThumbCompressedSize	4	0x00000000		-
ThumbPixWidth	4	0x00000000		-
ThumbPixHeight	4	0x00000000		-
ImagePixWidth	4	0x00000000		-
ImagePixHeight	4	0x00000000		-
ImageBitDepth	4	0x00000000		-
ParentObject	4	0x00000000		-
AssociationType	2	0x0000		-
AssociationDesc	4	0x00000000		-
SequenceNumber	4	0x00000000		-
Filename			String	File name (Unicode character string) (“DDISCVRY.DPS” or “DREQUEST.DPS”)
CaptureDate			String	Date and time of creation (Unicode character string)
ModificationDate			String	Date and time of modification (Unicode character string)
Keywords	1	0x00		-

Do Not Copy

9.3.4 Video File DataSet

Field	Size (bytes)	Data	DataType	Description
StorageID	4	StorageID		StorageID Image: 0x00000000
ObjectFormat	2			0x300D (MOV) 0xB201 (NEV) 0xB202 (R3D) 0xB982 (MP4)
ProtectionStatus	2			0x0001 (with protection setting) 0x0000 (without protection setting)
ObjectCompressedSize	4			File size
ThumbFormat	2	0x3808		JFIF (Refer to ObjectFormatCode.)
ThumbCompressed Size	4			Thumbnail size
ThumbPixWidth	4	0x000000A0		Horizontal size of the thumbnail (160)
ThumbPixHeight	4	0x00000078		Vertical size of the thumbnail (120)
ImagePixWidth	4			Horizontal size of the main video
ImagePixHeight	4			Vertical size of the main video
ImageBitDepth	4	0x00000000		-
ParentObject	4	ObjectHandle		ObjectHandle of the parent directory
AssociationType	2	0x0000		-
AssociationDesc	4	0x00000000		-
SequenceNumber	4	0x00000000		-
Filename			String	File name character string (Unicode character string) “File name.MOV”
CaptureDate			String	Date and time of capture (Unicode character string)
ModificationDate			String	Date and time of modification (Unicode character string)
Keywords	1	0x00		-

Do Not Copy

9.3.5 WAV File Data Set

Field	Size (bytes)	Data	DataType	Description
StorageID	4	StorageID		StorageID
ObjectFormat	2	0x3008		WAV
ProtectionStatus	2			0x0001 (with protection setting) 0x0000 (without protection setting)
ObjectCompressedSize	4			File size
ThumbFormat	2	0x0000		-
ThumbCompressedSize	4	0x00000000		-
ThumbPixWidth	4	0x00000000		-
ThumbPixHeight	4	0x00000000		-
ImagePixWidth	4	0x00000000		-
ImagePixHeight	4	0x00000000		-
ImageBitDepth	4	0x00000000		-
ParentObject	4	ObjectHandle		ObjectHandle of the parent directory
AssociationType	2	0x0000		-
AssociationDesc	4	0x00000000		-
SequenceNumber	4	0x00000000		-
Filename			String	File name character string (Unicode character string)
CaptureDate			String	Date and time of capture (Unicode character string)
ModificationDate			String	Date and time of modification (Unicode character string)
Keywords	1	0x00		-

Do Not Copy

9.4 DevicePropDesc DataSet

The DevicePropDesc data set is sent by the operation of the GetDevicePropDesc command. This data set indicates information about the settings and the attribute of the device.

Each field data in which the data type is not specified is stored in the little endian format.

Field	Description
DevicePropCode	Indicates DevicePropCode of the property.
DataType	Indicates the data type of the property.
GetSet	Indicates the access attribute of the property.
Factory Default Value	Indicates the default value of the property.
Current Value	Indicates the current value of the property.
FormFlag	Indicates the property description data set.

Field	Size (bytes)	Data	DataType	Description
DevicePropertyCode	2 or 4	DevicePropCode		DevicePropCode supported by the camera. *When acquiring with the GetDevicePropDescEx command and the GetDevicePropDescList command, the Field Size of DevicePropCode is 4 bytes.
DataType	2			Indicates the data type of the property. It differs depending on each property. Refer to DataTypeCode (section 7.1).
GetSet	1			Indicates whether the property is for reading only or for both reading and writing. 0x00: Reading only (Get) 0x01: Reading/writing (Get/Set)
FactoryDefaultValue	DTS			Default value. It differs depending on each property.
CurrentValue	DTS			Current value. It differs depending on each property.
FormFlag	1			Indicates the property description data set. 0x00: None 0x01: Range 0x02: Enumeration
FORM	DTS			The contents of the field depend on the FormFlag field.

Do Not Copy

				It does not exist when the FormFlag field is set to 0.

Do Not Copy

9.5 ObjectPropDesc DataSet

The ObjectPropDesc data set is sent by the operation of the GetObjectPropDesc command. This data set indicates information about the settings and the attribute of the object.

Each field data in which the data type is not specified is stored in the little endian format.

Field	Description
ObjectPropertyCode	Indicates ObjectPropCode of the property.
DataType	Indicates the data type of the property.
GetSet	Indicates the access attribute of the property.
Default Value	Indicates the default value of the property.
Group Code	Indicates the search group of the property.
FormFlag	Indicates the property description data set.

Field	Size (bytes)	Data	DataType	Description
ObjectPropertyCode	2	ObjectPropCode	UINT16	ObjectPropCode supported by the camera
DataType	2	DataTypeCode	UINT16	Indicates the data type of the property. It differs depending on each property. Refer to DataTypeCode (section 7.1).
GetSet	1		UINT8	Indicates whether the property is for reading only or for both reading and writing. 0x00: Reading only (Get) 0x01: Reading/writing (Get/Set)
DefaultValue	DTS			The default value in the camera. It differs depending on each property.
Group Code	4		UINT32	Search group
FormFlag	1		UINT8	Indicates the property description data set. 0x00: None 0x01: Range 0x02: Enumeration 0x03: Time 0x04: Fixed-length array 0x05: Regular expression 0x06: Byte string 0xFF: LongString
FORM	DTS			The contents of the field depend on the FormFlag field. It does not exist when the FormFlag field is set to 0.

Do Not Copy

9.6 Property Description DataSet

The property description data set is set in the FORM field of the DevicePropDesc data set and the ObjectPropDesc data set.

9.6.1 Range Form

Field	Size (bytes)	Description
MinimumValue	DTS	The minimum value supported by the PropertyValue
MaximumValue	DTS	The maximum value supported by the PropertyValue
StepSize	DTS	The property supports the value indicated as shown below. MinimumValue + N x StepSize * N: From 0 to the maximum value * PropertyValue: Smaller than the Maximum Value

9.6.2 Enumeration Form

Field	Size (bytes)	Description
NumberOfValue	2	Indicates the number of values of the PropertyValue supported by the property.
SupportedValue1	DTS	The property supports this PropertyValue.
SupportedValue2	DTS	The property supports this PropertyValue.
SupportedValue3	DTS	The property supports this PropertyValue.
...		
SupportedValueM	DTS	The property supports this PropertyValue.

9.6.3 Time Form

For the time form, the FORM field does not exist.
The time form is represented by a Unicode character string in the ISO standard format. (Refer to ISO8601.)

YYYYMMDDThhmmss.s	
YYYY	Year
MM	Month (from 01 to 12)
DD	Date (from 01 to 31)
T	Fixed character
hh	Hour starting from 0 a.m. (from 00 to 23)
mm	Minutes (from 00 to 59)
ss.s	Seconds

Do Not Copy

9.6.4 Fixed-Length Array Form

Field	Size (bytes)	Description
Length	2	It is an unsigned 16-bit integer and indicates the number of array elements.

9.6.5 Regular Expression Form

Field	Size (bytes)	Description
RegEx	DTS	It indicates the regular expression for creating the PropertyValue correctly.

9.6.6 Byte String Form

Field	Description
MaxLength	It indicates the maximum length of the byte string.

9.6.7 LongString Form

Field	Description
MaxLength	It indicates the maximum length of the LongString. The property includes the data type of AUINT16. (Characters coded by 2-byte Unicode characters as defined in ISO10646.)

Do Not Copy

9.7 LiveViewObject DataSet

9.7.1 DataSet with Version

	Field			Offset	Size	Description
Display information	Version			0	2Byte	Major version (0x02)
				2	2Byte	Minor version (0x01)
	Reserved			4	4Byte	
	Display information area size			8	4Byte	
	Live view image area size			12	4Byte	
	Whole size		Horizontal size	16	2Byte	Standard of the coordinates
			Vertical size	18	2Byte	
	Display area size		Horizontal size	20	2Byte	The whole size is equal to the display area size when the image is not enlarged.
			Vertical size	22	2Byte	
	Display center coordinates		Horizontal size	24	2Byte	
			Vertical size	26	2Byte	
	Live view image: image size		Horizontal size	28	2Byte	The size set in the LiveViewImageSize property becomes the image size.
			Vertical size	30	2Byte	
	Live view image: image quality			32	1 byte	The quality is set in the LiveViewImageCompression property.
	Reserved			33	7Byte	
	AF driving enabled status			40	1 byte	0: AF driving disabled, 1: AF driving enabled
	Focus driving status			41	1 byte	0: Not driving, 1: Driving
	Focus detection result			42	1 byte	0: No information, 1: Not focused, 2: Focused
	AF mode state			43	1 byte	0: Other 1: Subject detection AF 2: Auto-area AF / Target tracking AF / 3D-Tracking AF
	AF area number			44	1 byte	From 0 to 64 (The number of subjects when using subject detection)
	Index of selected subject			45	1 byte	0 to 34
	Tracking state			46	1 byte	0: Waiting 2: Tracking
	Reserved			47	1 byte	
	0 ...	AF frame size	Horizontal size	48	2Byte	Region of the AF frame size and the AF frame center coordinates for 96 areas.

Do Not Copy

	95		Vertical size	50	2Byte	
		AF frame center coordinates	Horizontal position	52	2Byte	
			Vertical position	54	2Byte	
	Remaining time of video recording			816	4Byte	From 0 to 7500000 [msec] * It is valid during the video recording state.
	Elapsed video recording time			820	4Byte	From 0 to 7500000 [msec] * It is valid during the video recording state.
	Sound indicator (peak value)		L	824	1 byte	0 to 14
			R	825	1 byte	0 to 14
	Sound indicator (current value)		L	826	1 byte	0 to 14
			R	827	1 byte	0 to 14
	Video recording information			828	1 byte	0: During LV execution 1: During video recording
	State of synchronous recording by the external recorder (NOTE1)			829	1 byte	0: Synchronous recording cannot be performed 1: Synchronous recording standby (Synchronous recording can be performed but does not start) 2: Synchronous recording is being performed
	Reserved			830	1 byte	
	Time code status			831	1 byte	0: Off, 1: On
	Time code count			832	1 byte	Hour
				833	1 byte	Minute
				834	1 byte	Seconds
				835	1 byte	Frame
	Countdown time			836	2Byte	Counts down every second starting from 3600 (one hour) (Counts down starting from thirty seconds when temperature rises)
	Spot WB condition			838	1 byte	0: Off 1: On standby (not acquired) 2: During acquisition operation 3: On standby (acquisition success) 4: On standby (acquisition failure)
	Rotation			839	1 byte	0: Off, 1: Rotate counterclockwise, 2: Rotate clockwise, 3: Upside down
	Level angle information		Rolling	840	4Byte	
			Pitching	844	4Byte	
			Yawing	848	4Byte	
	Using white balance for photo Lv			852	1 byte	0: Off 1: On

Do Not Copy

	Imaging temperature status	853	1 byte	0: Normal 1: Medium temperature (low) 2: Medium temperature (high) 3: High temperature 4: Countdown display
	Reserved	854	170Byte	
Live view image	Image data	1024		

The data specifications for LiveViewObject (With Version) are shown below.

No.	Description
1	The size of the display information is 1024 bytes.
2	When the electronic VR is ON, the image is 90% of angle of view.

The values of AF frame size and AF frame center coordinates are shown below.

No.	Description
1	The AF frame size and the AF frame center coordinates for the number of [AF area number] are valid.

Refer to the following property about the value for virtual horizon.

No.	Description
1	AngleLevel property (section 6.5.6.22)
2	AngleLevelPitching property (section 6.5.6.23)
3	AngleLevelYawing property (section 6.5.6.24)

The details of the AF mode state are shown below.

No.	Description
1	The AF mode state becomes [1:Subject detect AF] under the following conditions. - The camera detects subjects when the AF area mode is [Wide-area AF], [Auto-area AF], [Target tracking AF] or [3-D Tracking].
2	The AF mode state becomes [2:Auto-area AF/ Target tracking AF/3-D Tracking] under the following conditions. - The camera doesn't detect subjects when the AF area mode is [Auto-area AF], [Target tracking AF] or [3-D Tracking].
3	The AF mode state becomes [0:Other] under the following conditions. - When the conditions of No1 and No2 are not met.

Do Not Copy

9.7.2 DataSet without Version

	Field		Size	Description
	Display information area size		4Byte	
	Live view image area size		4Byte	
Display information	Live view image: image size	Horizontal size	2Byte	The size set in the LiveViewImageSize property becomes the image size.
		Vertical size	2Byte	
	Whole size	Horizontal size	2Byte	Standard of the coordinates
		Vertical size	2Byte	
	Display area size	Horizontal size	2Byte	The whole size is equal to the display area size when the image is not enlarged.
		Vertical size	2Byte	
	Display center coordinates	Horizontal size	2Byte	
		Vertical size	2Byte	
	AF frame size	Horizontal size	2Byte	
		Vertical size	2Byte	
	AF frame center coordinates	Horizontal size	2Byte	
		Vertical size	2Byte	
	Reserved		4Byte	
	Selected focus area		1 byte	0 to 51
	Rotation		1 byte	0: Off, 1: Rotate counterclockwise, 2: Rotate clockwise, 3: Upside down
	Focus driving status		1 byte	0: Not driving, 1: Driving
	Reserved		1 byte	
	Reserved		4Byte	
	Reserved		2Byte	
	Countdown time		2Byte	Counts down every second starting from 3600 (one hour) (Counts down starting from thirty seconds when temperature rises)
	Focus detection result		1 byte	0: No information, 1: Not focused, 2: Focused
	AF driving enabled status		1 byte	0: AF driving disabled, 1: AF driving enabled
	Reserved		2Byte	
	Level angle	Rolling	4Byte	

Do Not Copy

	information	Pitching	4Byte	
		Yawing	4Byte	
	Remaining time of video recording		4Byte	From 0 to 7500000 [msec] * It is valid during the video recording state.
	Video recording information		1 byte	0: During LV execution 1: During video recording
	Subject detection AF mode state		1 byte	0: Subject detection AF is not set. 1: Subject detection AF is set.
	The number of detected subjects		1 byte	0 to 35
	Index of selected subject		1 byte	0 to 34
	0 … 34 AF frame size	Horizontal size	2Byte	Area of the AF frame size and the AF frame center coordinates for thirty-five persons (4 Byte + 4 Byte) x 35 persons; 280 Byte in total
		Vertical size	2Byte	
	AF frame center coordinates	Horizontal position	2Byte	
		Vertical position	2Byte	
	Sound indicator (peak value)	L	1 byte	0 to 14
		R	1 byte	0 to 14
	Sound indicator (current value)	L	1 byte	0 to 14
		R	1 byte	0 to 14
	Reserved		1 byte	
	Reserved		1 byte	
	Reserved		1 byte	
	Spot WB condition		1 byte	0: Off 1: On standby (not acquired) 2: During acquisition operation 3: On standby (acquisition success) 4: On standby (acquisition failure)
	Reserved		24Byte	
Live view image	Image data			

The data specifications for LiveViewObject (No Version) are shown below.

No.	Description
1	The size of the display information is 376Byte.
2	When the electronic VR is ON, the image is 90% of angle of view.

Do Not Copy

Refer to the following property about the value for virtual horizon.

No.	Description
1	AngleLevel property (section 6.5.6.22)
2	AngleLevelPitching property (section 6.5.6.23)
3	AngleLevelYawing property (section 6.5.6.24)

The details of the case in which the subject detection AF mode state is set to “1: Subject detection AF is set” are shown below.

No.	Description
1	When the camera detects subject, the subject detection AF mode state is set to “1: Subject detection AF” is set”, and AF frame size and AF center coordinate for subject detection become valid.

Do Not Copy

9.8 IPTCPreset Data Set

The IPTCPreset data set is transmitted by the operation of the GetIPTCPresetInfo command or the SetIPTCPresetInfo command.

9.8.1 NMS-IPTC

NMS-IPTC deta is described below.

Field	Size(Byte)	Data	DataType	Description
DatasetVersion	2	0x00C9	UINT16	Version of this dataset Version 2.01
IPTC Type	1	1	UINT8	IPTC data format 1: NMS-IPTC 2: XMP-IPTC
Reserved	5	-	-	
Profile			AUINT8	Profile name ASCII: Maximum 18Byte+NULL
NMS Data		-	-	NMS format IPTC data
Caption			AUINT8	Caption UTF-8: Maximum 2000Byte+NULL
EventID			AUINT8	Event ID UTF-8: Maximum 64Byte+NULL
Headline			AUINT8	Headline UTF-8: Maximum 256Byte+NULL
ObjectName			AUINT8	ObjectName UTF-8: Maximum 256Byte+NULL
City			AUINT8	City UTF-8: Maximum 256Byte+NULL
State			AUINT8	State UTF-8: Maximum 256Byte+NULL
Country			AUINT8	Country UTF-8: Maximum 256Byte+NULL
Category			AUINT8	Category ASCII: Maximum 256Byte+NULL
SuppCat			AUINT8	Supplemental Categories UTF-8: Maximum 256Byte+NULL
Byline			AUINT8	Byline UTF-8: Maximum 256Byte+NULL
BylineTitle			AUINT8	BylineTitle UTF-8: Maximum 256Byte+NULL
WriterEditor			AUINT8	Writer/Editor UTF-8: Maximum 256Byte+NULL
Credit			AUINT8	Credit UTF-8: Maximum 256Byte+NULL
Source			AUINT8	Source UTF-8: Maximum 256Byte+NULL

Do Not Copy

* Each element terminates with NULL. The maximum byte count equals the byte count that can be input plus 1.

The length of each element is variable. If the element is empty, the element count is 0x00000000 and no element exists.

9.8.2 XMP-IPTC

XMP-IPTC deta is described below.

Field	Size(Byte)	Data	DataType	Description
DatasetVersion	2	0x00C9	UINT16	Version of this dataset Version 2.01
IPTC Type	1	2	UINT8	IPTC data format 1: NMS-IPTC 2: XMP-IPTC
Reserved	5	-	-	
Profile			AUINT8	Profile ASCII: Maximum 18Byte+NULL
XMP Data			AUINT8	XMP format IPTC data Maximum 30Kbyte

The length of each element is variable. If the element is empty, the element count is 0x00000000 and no element exists.

Do Not Copy

9.9 PictureControl DataSet

The PictureControl DataSet is sent by operating the SetPicCtrlData command or GetPicCtrlData command.

The PictureControl DataSet indicates information about a Picture Control.

Field	Size	Reference
BasePictureControl	2	9.9.1
RegistrationName	20	9.9.2
ApplyLevel	1	9.9.3
QuickSharpFlag	1	9.9.4
QuickSharp	1	9.9.5
Sharpening	1	9.9.6
MiddleRangeSharpening	1	9.9.7
Clarity	1	9.9.8
Contrast	1	9.9.9
Brightness	1	9.9.10
Saturation	1	9.9.11
Hue	1	9.9.12
FilterEffects	1	9.9.13
Toning	1	9.9.14
ToningDensity	1	9.9.15
CustomCurveFlag	1	9.9.16
CustomCurveData	0 or 578	9.9.17

The values for Sharpening, MiddleRangeSharpening, Clarity, Contrast, Brightness, Saturation, Hue and ToningDensity are shown below.

Value	Description
-128	Auto
-N	-N x 0.25
...	
-1	-0.25
0	0
1	0.25
...	
N	N x 0.25

Do Not Copy

9.9.1 BasePictureControl

This is the type of Picture Control on which the Custom Picture Control is based.
If the picture control is pre-installed, this indicates the picture control.
The value is zero for unused custom picture control.

Value	Description
1	Standard
2	Neutral
3	Vivid
4	Monochrome
5	Portrait
6	Landscape
7	Flat
8	Auto
9	Flat Monochrome
10	Deep Tone Monochrome
11	Rich Tone Portrait
101	Dream
102	Morning
103	Pop
104	Sunday
105	Somber
106	Drama
107	Silence
108	Bleach
109	Melancholic
110	Pure
111	Denim
112	Toy
113	Sepia
114	Blue
115	Red
116	Pink
117	Charcoal
118	Graphite
119	Binary
120	Carbon

9.9.2 RegistrationName

This is the registration name of picture control.
The size is fixed to 20Bytes (ASCII: 19Bytes + NULL).

9.9.3 ApplyLevel

This is the effect level of the Picture Control.

Do Not Copy

Value	Description
0	0
10	10
20	20
30	30
40	40
50	50
60	60
70	70
80	80
90	90
100	100

Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
0			0 10 20 30 40 50 60 70 80 90 100			

Do Not Copy

9.9.4 QuickSharpFlag

This is the state of the quick sharpening control for a picture control.
If QuickSharpFlag is set to [Valid] when setting a picture control, the values of Sharpening, MiddleRangeSharpening and Clarity are ignored.

Value	Description
0	Off
1	On

9.9.5 QuickSharp

This is the quick sharpening control for a picture control.

Value	Description
-128	Auto
-2	-2
-1	-1
0	0
1	1
2	2

Available values for each picture control are shown below.
If QuickSharpFlag is set to [Invalid] when setting a picture control, [Auto] cannot be set.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
-2 to 2	-128 From -2 to 2		-2 to 2			

Do Not Copy

9.9.6 Sharpening

This is the sharpening control for a picture control.

Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
-8 -4 0 4 8	-128 (when QuickSharp is set to [Auto]) -12 to 36					

9.9.7 MiddleRangeSharpening

This is the middle-range sharpening control for a picture control.

Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
-8 -4 0 4 8	-128 (when QuickSharp is set to [Auto]) -20 to 20					

Do Not Copy

9.9.8 Clarity

This is the clarity control for a picture control.
Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
-8 -4 0 4 8	-128 (when QuickSharp is set to [Auto]) -20 to 20					

9.9.9 Contrast

This is the contrast control for a picture control.
Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
-8 -4 0 4 8	-128 From -12 to 12		-12 to 12			

Do Not Copy

9.9.10 Brightness

This is the brightness control for a picture control.
Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
0	-6 to 6		0			

9.9.11 Saturation

This is the saturation control for a picture control.
Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
-8 -4 0 4 8	-128 From -12 to 12	0	-12 to 12		0	

Do Not Copy

9.9.12 Hue

This is the hue control for a picture control.
Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
0	-12 to 12	0	-12 to 12	0		

9.9.13 FilterEffects

This is the filter effect for a picture control.

Value	Description
0	Off
1	Yellow
2	Orange
3	Red
4	Green

Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
0		0 to 4	0		0 to 4	

Do Not Copy

9.9.14 Toning

This is the toning control for a picture control.

If toning can be selected and toning is set to [B&W] when setting a picture control, the value of ToningDensity is ignored.

Value	Description
0	B&W
1	Sepia
2	Cyanotype
3	Red
4	Yellow
5	Green
6	Blue Green
7	Blue
8	Purple Blue
9	Red Purple

Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
0		0 to 9	0			0 to 9

9.9.15 ToningDensity

This is the toning (density) control for a picture control.
Available values for each picture control are shown below.

Auto	Standard Vivid Portrait Rich Tone Portrait Landscape Neutral Flat	Monochrome Flat Monochrome Deep Tone Monochrome	Dream Morning Pop Sunday	Somber Dramatic Silence Bleached Melancholic Pure Denim Toy	Sepia Blue Red Pink	Charcoal Graphite Binary Carbon
0		0 to 28	0		0 to 28	

Do Not Copy

9.9.16 CustomCurveFlag

This is the state of custom curve for a picture control.
[Valid] is available only for a custom picture control.

Value	Description
0	Off
1	On

9.9.17 CustomCurveData

This is the custom curve data for a picture control.
The data format for a custom curve is described in LUT Format (section 9.9.17.1).
If the CustomCurveFlag is set to [Invalid], this is not used.

9.9.17.1 LUT Format

The LUT data consists of the header (64 bytes) for use by the host, followed by 514 bytes (2 bytes x 257 points) of LUT data. The header format is specified by the host (The stored location for such as the line point of the LUT to be sent, the data for reproducing the LUT at the time of reading). The camera does not care about the header contents. However, since 2 bytes of the header is used for judging whether header data is present on the camera, it is necessary to set data in the header.

The LUT format is as follows.

Byte	Description
0 to 63	Lut Header
64, 65	Data0
66, 67	Data1
...	
576, 577	Data256

Do Not Copy

As an example of the Lut header, the contents of the header set by the application made by Nikon are shown below.

Byte	Description	Range
1	ID (Byte1)	0x49
2	ID (Byte2)	0x30
3	Input Minimum (Black Point)	0-255
4	Input Maximum	0-255
5	Output Minimum	0-255
6	Output Maximum	0-255
7	Gamma (integer portion)	0-20
8	Gamma (fractional portion)	0-100
9	Number of Spline Points	2-20
10, 11	Spline Point1 (x, y)	0-255, 0-255
12, 13	Spline Point2 (x, y)	0-255, 0-255
...		
48, 49	Spline Point20 (x, y)	0-255, 0-255
50 to 64	Reserved	0

Do Not Copy

9.10 PictureControlCapability DataSet

The PictureControlCapability DataSet is sent by operating the GetPicCtrlCapability command. The PictureControlCapability DataSet indicates information about the function of a picture control.

Field	Size	Data	Description
ApplyLevelCapability	1	0x00: Not selectable 0x80: Selectable 0x01: Auto is available 0x81: Selectable and AUTO is available	Apply level: Selectability and availability of AUTO
QuickSharpCapability	1		Quick sharpening: Selectability and availability of AUTO
SharpeningCapability	1		Sharpening: Selectability and availability of AUTO
MiddleRangeSharpeningCapability	1		Middle range sharpening: Selectability and availability of AUTO
ClarityCapability	1		Clarity: Selectability and availability of AUTO
ContrastCapability	1		Contrast: Selectability and availability of AUTO
BrightnessCapability	1		Brightness: Selectability and availability of AUTO
SaturationCapability	1		Saturation: Selectability and availability of AUTO
HueCapability	1		Hue: Selectability and availability of AUTO
FilterEffectsCapability	1		Filter effect: Selectability and availability of AUTO
ToningCapability	1		Toning: Selectability and availability of AUTO
ToningDensityCapability	1		Toning (density): Selectability and availability of AUTO
DefaultQuickSharpLevel	1	QuickSharp (section 9.9.5)	The default value of QuickSharp
DefaultLevel[0]	3	DefaultLevel (section 9.10.1)	QuickSharp -2
DefaultLevel[1]	3		QuickSharp -1
DefaultLevel[2]	3		QuickSharp 0
DefaultLevel[3]	3		QuickSharp +1
DefaultLevel[4]	3		QuickSharp +2

9.10.1 DefaultLevel

The information for the default level used in the PictureControlCapability DataSet is shown below.

Field	Size	Reference
Sharpening	1	9.9.6
MiddleRangeSharpening	1	9.9.7

Do Not Copy

Clarity	1	9.9.8

Do Not Copy

9.11 PictureControlHlg DataSet

PictureControlHlg DataSet is transferred by the operation of SetPicCtrlHlgData command or GetPicCtrlHlgDataList command.

PictureControlHlg DataSet provides information about Picture Control (HLG).

Field	Size	Reference
BasePictureControl	2	9.9.1
RegistrationName	20	9.9.2
ApplyLevel	1	9.9.3
QuickSharpFlag	1	9.9.4
QuickSharp	1	9.11.1
Sharpening	1	9.9.6
MiddleRangeSharpening	1	9.9.7
Clarity	1	9.9.8
Contrast	1	9.11.2
Highlight	1	9.11.3
Shadow	1	9.11.4
Saturation	1	9.11.5
Hue	1	9.9.12
FilterEffects	1	9.9.13
Toning	1	9.9.14
ToningDensity	1	9.9.15

Fields other than QuickSharp, Contrast, Highlight, Shadow, and Saturation have the same available values as PictureControl DataSet (Standard, Monochrome, Flat), so refer to PictureControl DataSet.

9.11.1 QuickSharp

Indicates a quick sharpening of Picture Control (HLG).

Value	Description
-2	-2
-1	-1
0	0
1	1
2	2

The values available for each Picture Control (HLG) are shown below.

Standard Flat	Monochrome
-2 to 2	

Do Not Copy

9.11.2 Contrast

Indicates the contrast of Picture Control (HLG).

The values available for each Picture Control (HLG) are shown below.

Standard Flat	Monochrome
-12 to 12	

9.11.3 Highlight

Indicates the hilight of Picture Control (HLG).

The values available for each Picture Control (HLG) are shown below.

Standard Flat	Monochrome
-12 to 12	

9.11.4 Shadow

Indicates the shadow of Picture Control (HLG).

The values available for each Picture Control (HLG) are shown below.

Standard Flat	Monochrome
-12 to 12	

9.11.5 Saturation

Indicates the saturation of Picture Control (HLG).

The values available for each Picture Control (HLG) are shown below.

Standard Flat	Monochrome
-12 to 12	0

Do Not Copy

9.12 PictureControlHlgCapability DataSet

PictureControlHlgCapability DataSet is transferred by the operation of GetPicCtrlHlgCapabilityList command.
PictureControlHlgCapability DataSet provides information about the functions of Picture Control (HLG).

Field	Size	Data	Description
ApplyLevelCapability	1	0x00: Not selectable 0x80: Selectable	Apply level: Selectability
QuickSharpCapability	1		Quick sharpening: Selectability
SharpeningCapability	1		Sharpening: Selectability
MiddleRangeSharpeningCapability	1		Middle range sharpening: Selectability
ClarityCapability	1		Clarity: Selectability
ContrastCapability	1		Contrast: Selectability
Highlight	1		Highlight: Selectability
Shadow	1		Shadow: Selectability
SaturationCapability	1		Saturation: Selectability
HueCapability	1		Hue: Selectability
FilterEffectsCapability	1		Filter effect: Selectability
ToningCapability	1		Toning: Selectability
ToningDensityCapability	1		Toning (density): Selectability
DefaultQuickSharpLevel	1	QuickSharp (section 9.9.5)	The default value of QuickSharp
DefaultLevel[0]	3	DefaultLevel (section 9.10.1)	QuickSharp -2
DefaultLevel[1]	3		QuickSharp -1
DefaultLevel[2]	3		QuickSharp 0
DefaultLevel[3]	3		QuickSharp +1
DefaultLevel[4]	3		QuickSharp +2

DefaultQuickSharpLevel and DefaultLevel have the same range of data as PictureControl DataSet, so refer to them.

Do Not Copy

9.13 HLGQuality DataSet

The HLGQuality DataSet provides information about HLG image quality adjustments sent by operating the SetHLGQualityData or GetHLGQualityData commands.

The details of the HLG Quality Data Set are shown below.

Field	Size	Range	Description
QuickSharpFlag	1	0: Invalid 1: Valid	Flag for quick sharpening If this value is [valid] when setting HLG, the value of Sharpening, MiddleRangeSharpening and Clarityis ignored.
QuickSharp	1	-2 to +2	Quick sharpening
Sharpening	1	-12 to +36	Sharpening
MiddleRangeSharpening	1	-20 to +20	Middle range sharpening
Clarity	1	-20 to +20	Clarity
Contrast	1	-12 to +12	Contrast
Saturation	1	-12 to +12	Saturation (Color intensity)
Hue	1	-12 to +12	Hue

Sharpening, MiddleRangeSharpening, Clarity, Contrast, Saturation, and Hue have a resolution of 0.25, so the value set for the camera is in 0.25 increments. The values used are shown below.

Value	Description
-N	-N x 0.25
...	
-1	-0.25
0	0
1	0.25
...	
N	N x 0.25

Do Not Copy

9.14 PortraitImpressionBalance DataSet

PortraitImpressionBalance DataSet is transferred by the operation of SetPortraitImpressionBalanceData command or GetPortraitImpressionBalanceDataList command and contains information about portrait impression adjustment.

The details of PortraitImpressionBalance DataSet are shown below.

Field	Size	Range	Description
Brightness	1	-6 to +6	Brightness
Hue	1	-6 to +6	Hue

Since the setting resolution of Brightness and Hue is 0.5, the value set for the camera is in 0.5 increments. The values used are shown below.

Value	Description
-N	-N x 0.5
...	
-1	-0.5
0	0
1	0.5
...	
N	N x 0.5

Do Not Copy

10 Data Format

10.1 ASCII Codes

For the property related to the comment of the camera, only the following 90 characters of ASCII codes can be input.

SP	!	"	#	$	%	&	'	(	)	*	+	,	-	.	/
:	;	<	=	>	?	@	[	]	_	{	}				
0	1	2	3	4	5	6	7	8	9						
A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
Q	R	S	T	U	V	W	X	Y	Z						
a	b	c	d	E	f	g	h	i	j	k	l	m	n	o	p
q	r	s	t	U	v	w	x	y	z						

In addition to the above characters, following five characters can be used in the ManualSettingLensName property (section 6.5.5.4) CommentString property (section 6.5.5.6), ArtistV property (section 6.5.5.8) and CopyrightV property (section 6.5.5.9).

¥	^	`	|	~

7-Bit ASCII Code Table (JIS Roman letter set: C0, GL)								
	0x0?	0x1?	0x2?	0x3?	0x4?	0x5?	0x6?	0x7?
0x?0	NUL	DLE	SP	0	@	P	`	p
0x?1	SOH	DC1	!	1	A	Q	a	q
0x?2	STX	DC2	"	2	B	R	b	r
0x?3	ETX	DC3	#	3	C	S	c	s
0x?4	EOT	DC4	$	4	D	T	d	t
0x?5	ENQ	NAK	%	5	E	U	e	u
0x?6	ACK	SYN	&	6	F	V	f	v
0x?7	BEL	ETB	'	7	G	W	g	w
0x?8	BS	CAN	(	8	H	X	h	x
0x?9	HT	EM	)	9	I	Y	i	y
0x?a	LF	SUB	*	:	J	Z	j	z
0x?b	VT	ESC	+	;	K	[	k	{
0x?c	FF	FS	,	<	L	¥	l	|
0x?d	CR	GS	-	=	M	]	m	}
0x?e	SO	RS	.	>	N	^	n	~
0x?f	SI	US	/	?	O	_	o	DEL

Do Not Copy

11 Appendices

11.1 Properties Affected by Mounting the CPU Lens

The following properties are affected by mounting the CPU lens.

Property	Reference
LensSort	6.5.10.1
Fnumber	6.5.1.5
FocalLength	6.5.1.6
LensTypeML	6.5.10.2
LensTypeF	6.5.10.3
LensID	6.5.10.4
LensFocalMin	6.5.10.5
LensFocalMax	6.5.10.6
LensApatureMin	6.5.10.7
LensApatureMax	6.5.10.8
MovieFnumber	6.5.12.1

11.2 Properties Affected by Mounting the Speedlight

Property	Speedlight mounted		Speedlight not mounted
	CLS	Noncommunication	
ExternalSpeedLightExist	Mounted	Mounted	Not mounted
ExternalSpeedLightSort	CLS	Noncommunication	Not fixed
ExternalSpeedLightStatus	On	On	Not fixed
NewExternalSpeedLightMode	On	Not fixed	Not fixed
FlashCompensation	Valid/Not fixed	Not fixed	Not fixed
ExposureTime	Bulb ～ (*1) (*2)	Bulb ～ (*1)	Bulb ～ 1/8000
ShutterSpeed	Bulb ～ (*1) (*2)	Bulb ～ (*1)	Bulb ～ 1/8000

*1: Flash shooting synchronization speed

*2: Speed limit of the speedlight

Do Not Copy

11.3 Properties Affected by the Shooting Mode

Property	Shooting mode			
	M	P	A	S
ExposureProgramMode	M	P	A	S
Fnumber	Get / Set (*1)	Get	Get / Set (*1)	Get
ExposureTime	Get / Set	Get	Get	Get / Set (*2)
ShutterSpeed	Get / Set	Get	Get	Get / Set
FlexibleProgram	Not fixed	Get / Set	Not fixed	Not fixed

*1: Setting is disabled when a lens other than the CPU lens is mounted.

*2: Setting is disabled with Bulb.

Do Not Copy

11.4 Properties Affected by Time Zone

The UTC is retained in the camera. When displaying the time on the menu or getting/setting the DateTime property, “Time zone” and “Daylight saving time” in the camera are considered.

When getting the DateTime property, the calculated value shown below is passed to the host.

Time in the camera + Time zone difference + Daylight saving time

When the camera settings are as shown in the table below, the calculation is “13:00:00 + 09:00 + 0:00” and the value passed to the host is “2006/06/01 22:00:00”.

Time in the camera (UTC)	2006/06/01 13:00:00
Time zone	UTC+9 (Tokyo, Seoul)
Daylight saving time	None

When the DateTime property is set, the value calculated as shown below is set in the camera.

Time set by the host - Time zone difference - Daylight saving time

When the camera settings are as shown in the table below and the time set by the host is “2006/06/01 13:00:00”, the calculation is “13:00:00 - 09:00 - 0:00” and the time setting in the camera is “2006/06/01 04:00:00”.


Time zone	UTC+9 (Tokyo, Seoul)
Daylight saving time	None

Do Not Copy

11.5 White Balance Fine Tuning Coordinates

The relationship between the values of PropertyValue of the property affecting the white balance fine tuning and the actual setting coordinates is shown below.

On the B axis: in steps of 0.5; on the G-M axis: in steps of 0.25

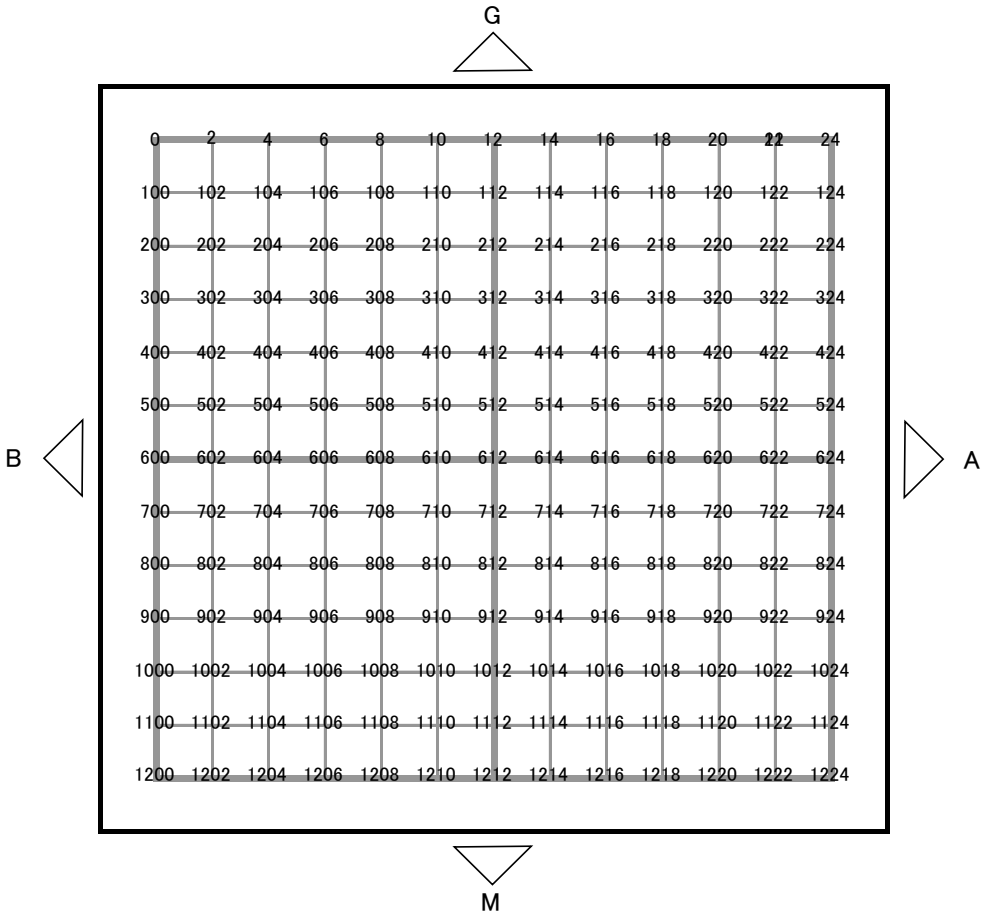

Do Not Copy

11.6 Speedlight Types

The communication status types of the speedlight are shown below.

CLS (New-type communication) with the operating and setting section	CLS (New-type communication) without the operating and setting section	Old-type communication	Noncommunication	Mounting not detected
SB-5000 SB-910 SB-900 SB-800 SB-700 SB-600 SU-800	SB-500 SB-400 SB-300	SB-80DX SB-50DX SB-28DX SB-28D SB-28 SB-27 SB-26 SB-25 SB-24	SB-30 SB-29 SB-29S SB-23 SB-22 SB-22S SB-21A SB-21B SB-20 SB-19 SB-18 SB-17 SB-16A SB-16B SB-15 SB-14 SB-12 SB-11 SB-10 SB-E	SB-9 SB-8 SB-7 SB-6 SB-5 SB-4 SB-3 SB-2 SB-1

*For old-type communication and noncommunication, mounting is not detected in the camera.

Do Not Copy

11.7 Command Release Operation

The operation by the command release is described in this section.

11.7.1 Continuous Shooting

When the continuous shooting mode is other than high-speed frame capture, the number of images that can be captured continuously by the continuous shooting is the smallest number among the following property combination.

Property
BurstNumber (section 6.5.1.16)
ContinuousShootingCount (section 6.5.7.5)

When the continuous shooting mode is high-speed frame capture, the number of images that can be shot continuously is the number of images in the ContinuousShootingCount property.

The availability of continuous shooting in the release mode of StillCaptureMode (section 6.5.1.15) is described below.

Release mode	BurstNumber	Description
Single-frame shooting	Off	Only one image can be captured.
Continuous high-speed shooting Continuous low-speed shooting Continuous high-speed shooting (Extended)	On	Among the BurstNumber setting value, the number of images that can be recorded in the SDRAM that is calculated in the camera, and the number of remaining images for recording while the bracketing is being performed, until the least number is reached, the acquisition of the new objects can be performed. Only one image can be captured when the internal flash is enabled or the HDR mode is set.
High-speed frame capture	Off	The number of shots of the ContinuousShootingCount property is taken.
Self-timer	Off	Only one image can be captured. StillCaptureMode is temporarily set to the single frame when release.

11.7.2 AF Operation

- AF is performed in accordance with the setting of the FocusMode property (section 6.5.1.7).

11.7.3 Preset WB Acquisition

Preset WB acquisition is performed with a release sequence.
Refer to the InitiateCaptureRecInMedia command (6.2.4.1) for information about preset measurement release (6.2.8.2).

*Refer to the StartSpotWb command for more information about the preset WB acquisition operation performed using spot WB.

Do Not Copy

11.7.4 Event on the Release Operation

When the release operation is started, one or more new objects are created. When the new objects are recorded, the camera generates the asynchronous interrupt event to inform the host of the addition of the new objects.

The new object addition event includes the ObjectHandle indicating the new object that is created. If two or more new objects are created, the new object addition event is issued two or more times.

When all the new objects that can be acquired are recorded, the camera issues the capturing completion event to the host to inform that the acquisition of all the new objects is completed.

The new object addition event and the capturing completion event vary depending on the recording destination. The following table shows the correspondence of the destination to the event.

Recording Destination	New object addition event	Capturing completion event
Card	ObjectAdded	CaptureComplete
SDRAM	ObjectAddedInSdram	CaptureCompleteInSdram
Card and SDRAM	ObjectAdded and ObjectAddedInSdram	CaptureComplete and CaptureCompleteInSdram

When the recording destination is set to [Card and SDRAM], the order of issuing the new object addition event is not decided and the events are issued in order of completing image recording.

The capturing completion event is issued in the same way; the event of the recording destination in which acquisition of all the new objects is completed first, is issued first.

11.7.5 Recovery from the Sequence Error

When Bit0 of the WarningStatus property (section 6.5.6.25) is set to 1 [Sequence error] and a release operation is performed using a command, the sequence error is cleared if it is recoverable. When it is cancelled, the release is not started and the command is terminated.

Do Not Copy