


EXERCISE 1: Configure D1 and D2 as DHCP server for VLAN 10

For D1:

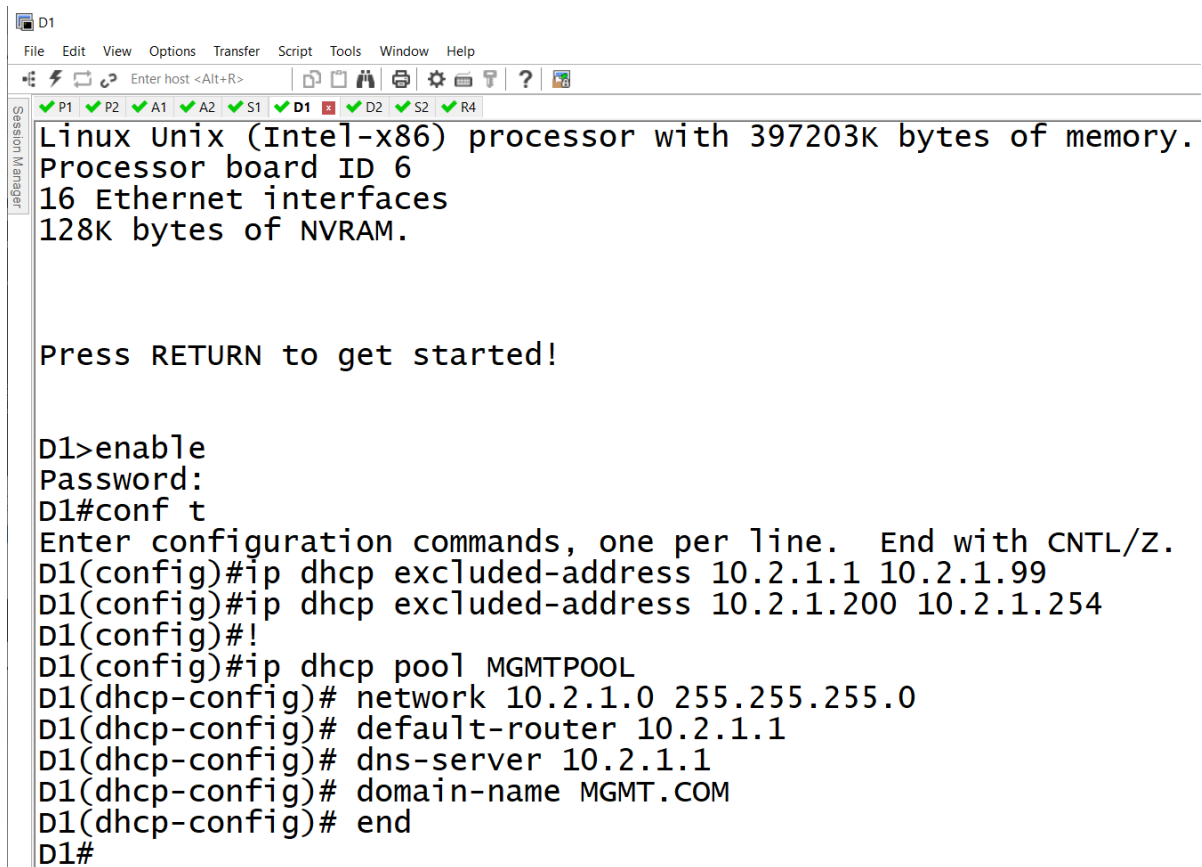


```
D1
File Edit View Options Transfer Script Tools Window Help
Enter host <Alt+R>
P1 P2 A1 A2 S1 D1 D2 S2 R4
Linux Unix (Intel-x86) processor with 397203K bytes of memory.
Processor board ID 6
16 Ethernet interfaces
128K bytes of NVRAM.

Press RETURN to get started!

D1>enable
Password:
D1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
D1(config)#ip dhcp excluded-address 10.2.1.1 10.2.1.99
D1(config)#ip dhcp excluded-address 10.2.1.200 10.2.1.254
D1(config)#!
D1(config)#ip dhcp pool MGMTPOOL
D1(dhcp-config)# network 10.2.1.0 255.255.255.0
D1(dhcp-config)# default-router 10.2.1.1
D1(dhcp-config)# dns-server 10.2.1.1
D1(dhcp-config)# domain-name MGMT.COM
D1(dhcp-config)# end
D1#
```

For D2:

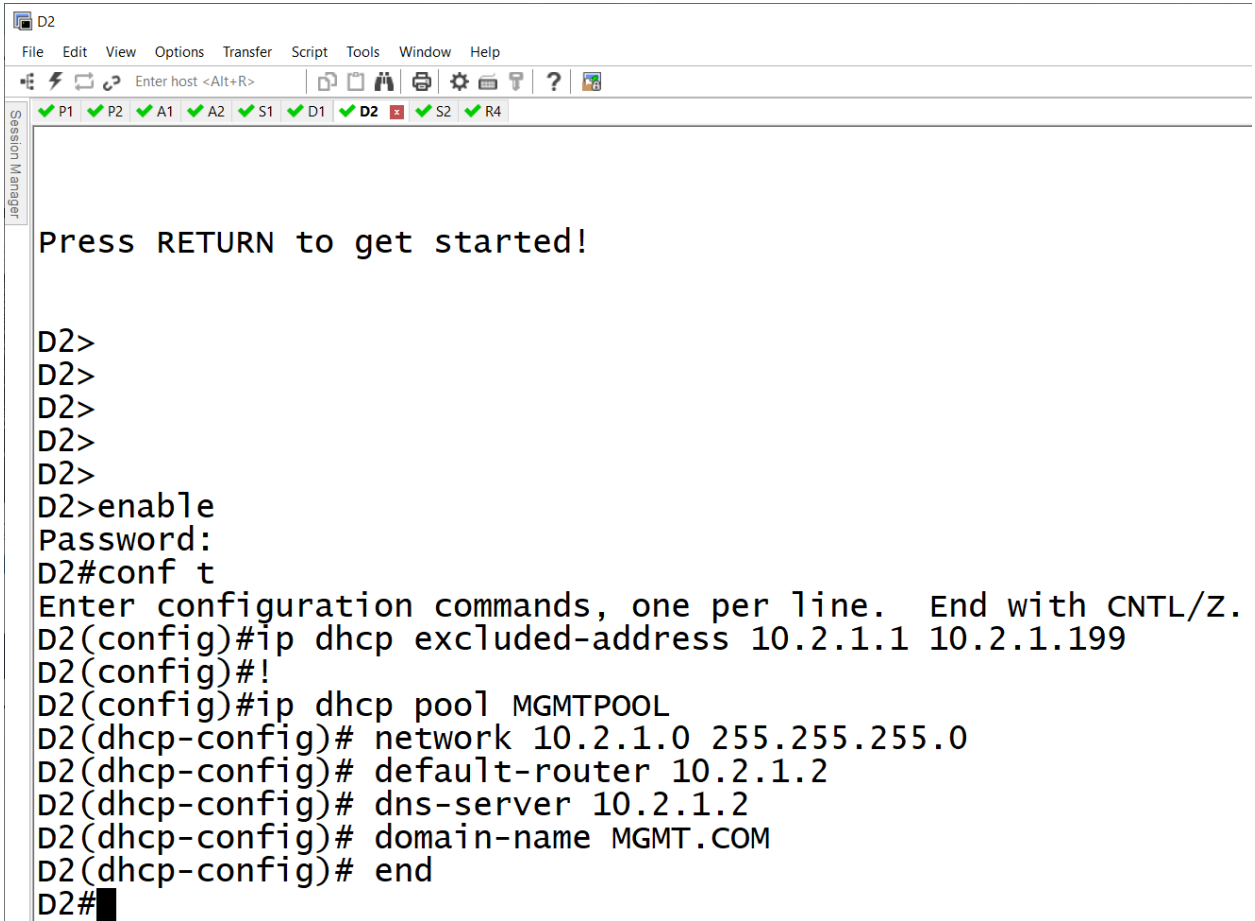

```
D2
File Edit View Options Transfer Script Tools Window Help
Enter host <Alt+R>
P1 P2 A1 A2 S1 D1 D2 S2 R4
Session Manager

Press RETURN to get started!

D2>
D2>
D2>
D2>
D2>
D2>enable
Password:
D2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
D2(config)#ip dhcp excluded-address 10.2.1.1 10.2.1.199
D2(config)#!
D2(config)#ip dhcp pool MGMTPOOL
D2(dhcp-config)# network 10.2.1.0 255.255.255.0
D2(dhcp-config)# default-router 10.2.1.2
D2(dhcp-config)# dns-server 10.2.1.2
D2(dhcp-config)# domain-name MGMT.COM
D2(dhcp-config)# end
D2#
```


Configure P1 and P2 as DHCP Clients with their VLANs.

Configure A1:

```
A1
File Edit View Options Transfer Script Tools Window Help
Enter host <Alt+R>
[P1] [P2] [A1] [A2] [S1] [D1] [D2] [S2] [R4]
Session Manager
1004 fddinet-default act/unsup
1005 trnet-default act/unsup
A1#
A1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
A1(config)# interface e0/0
A1(config-if)# switchport mode access
A1(config-if)# switch access vlan 10
A1(config-if)# end
A1#show vlan brief

VLAN Name Status Ports
-----
1 default active Et1/1, Et1/2, Et1/3, Et2/0
Et2/1, Et2/2, Et2/3, Et3/0
Et3/1, Et3/2, Et3/3
10 Management active Et0/0
20 DNS active
100 Server active
1002 fddi-default act/unsup
1003 token-ring-default act/unsup
1004 fddinet-default act/unsup
1005 trnet-default act/unsup
A1#
```

Configure A2:

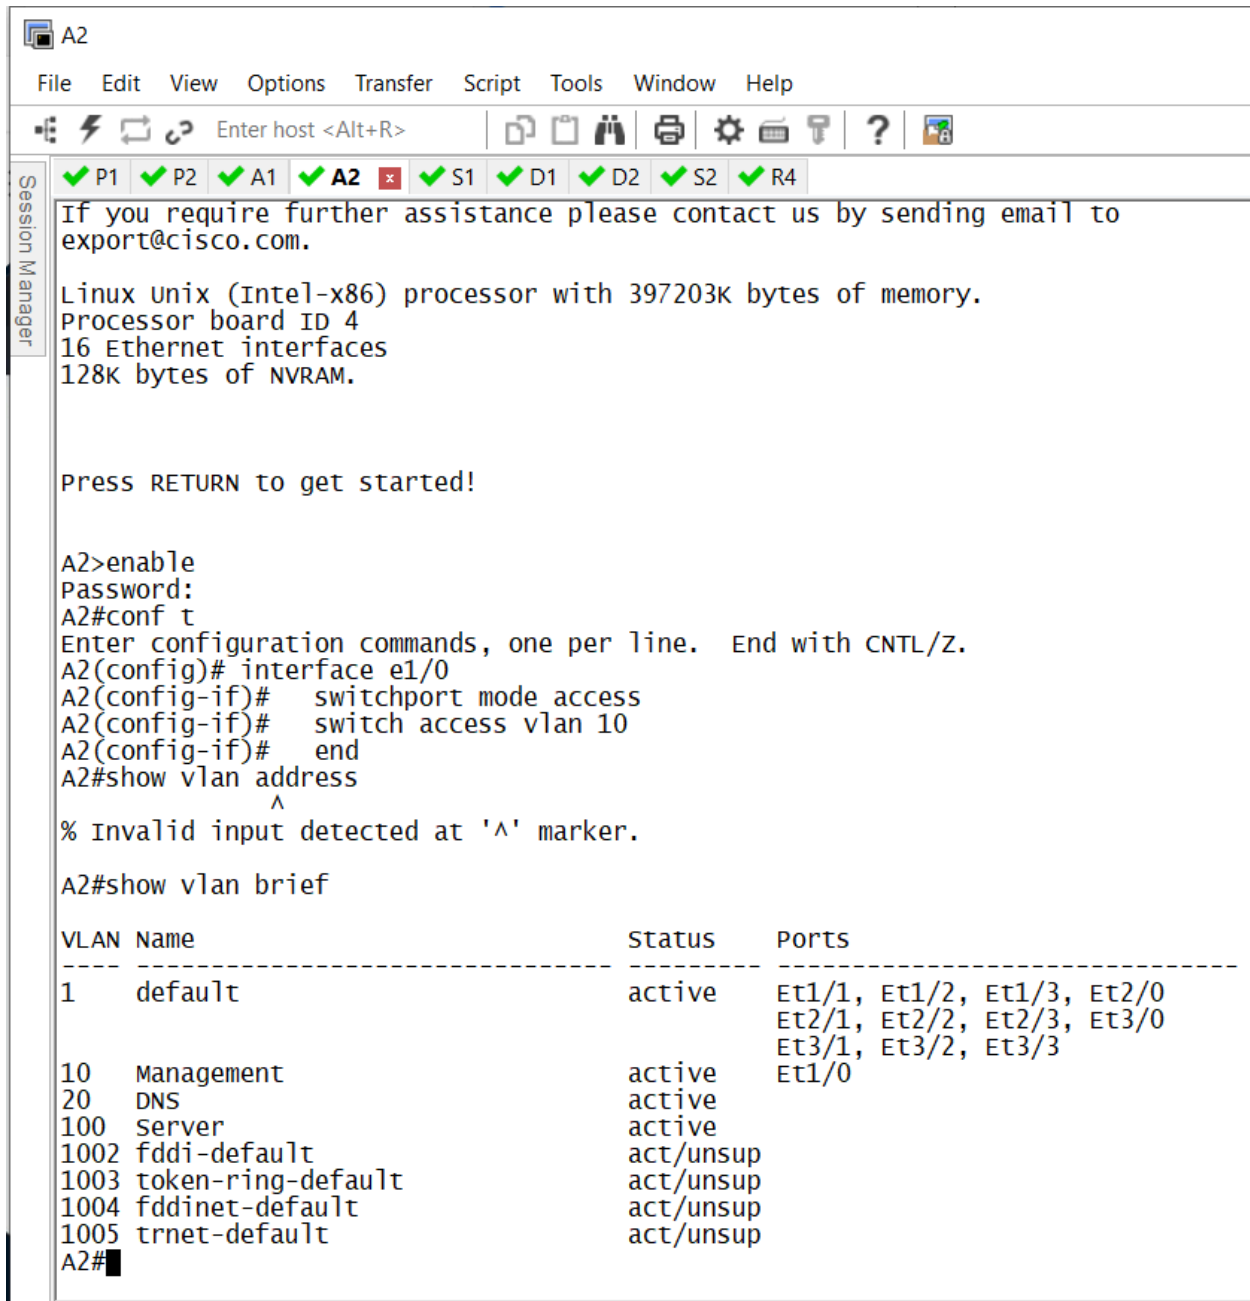

A2

File Edit View Options Transfer Script Tools Window Help

Enter host <Alt+R>

Session Manager

✓ P1 ✓ P2 ✓ A1 ✓ **A2** ✗ ✓ S1 ✓ D1 ✓ D2 ✓ S2 ✓ R4

If you require further assistance please contact us by sending email to export@cisco.com.

Linux unix (Intel-x86) processor with 397203k bytes of memory.
Processor board ID 4
16 Ethernet interfaces
128K bytes of NVRAM.

Press RETURN to get started!


A2>enable
Password:
A2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
A2(config)# interface e1/0
A2(config-if)# switchport mode access
A2(config-if)# switch access vlan 10
A2(config-if)# end
A2#show vlan address
^
% Invalid input detected at '^' marker.

A2#show vlan brief

VLAN	Name	Status	Ports
1	default	active	Et1/1, Et1/2, Et1/3, Et2/0 Et2/1, Et2/2, Et2/3, Et3/0 Et3/1, Et3/2, Et3/3
10	Management	active	Et1/0
20	DNS	active	
100	Server	active	
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

A2#

For P1:

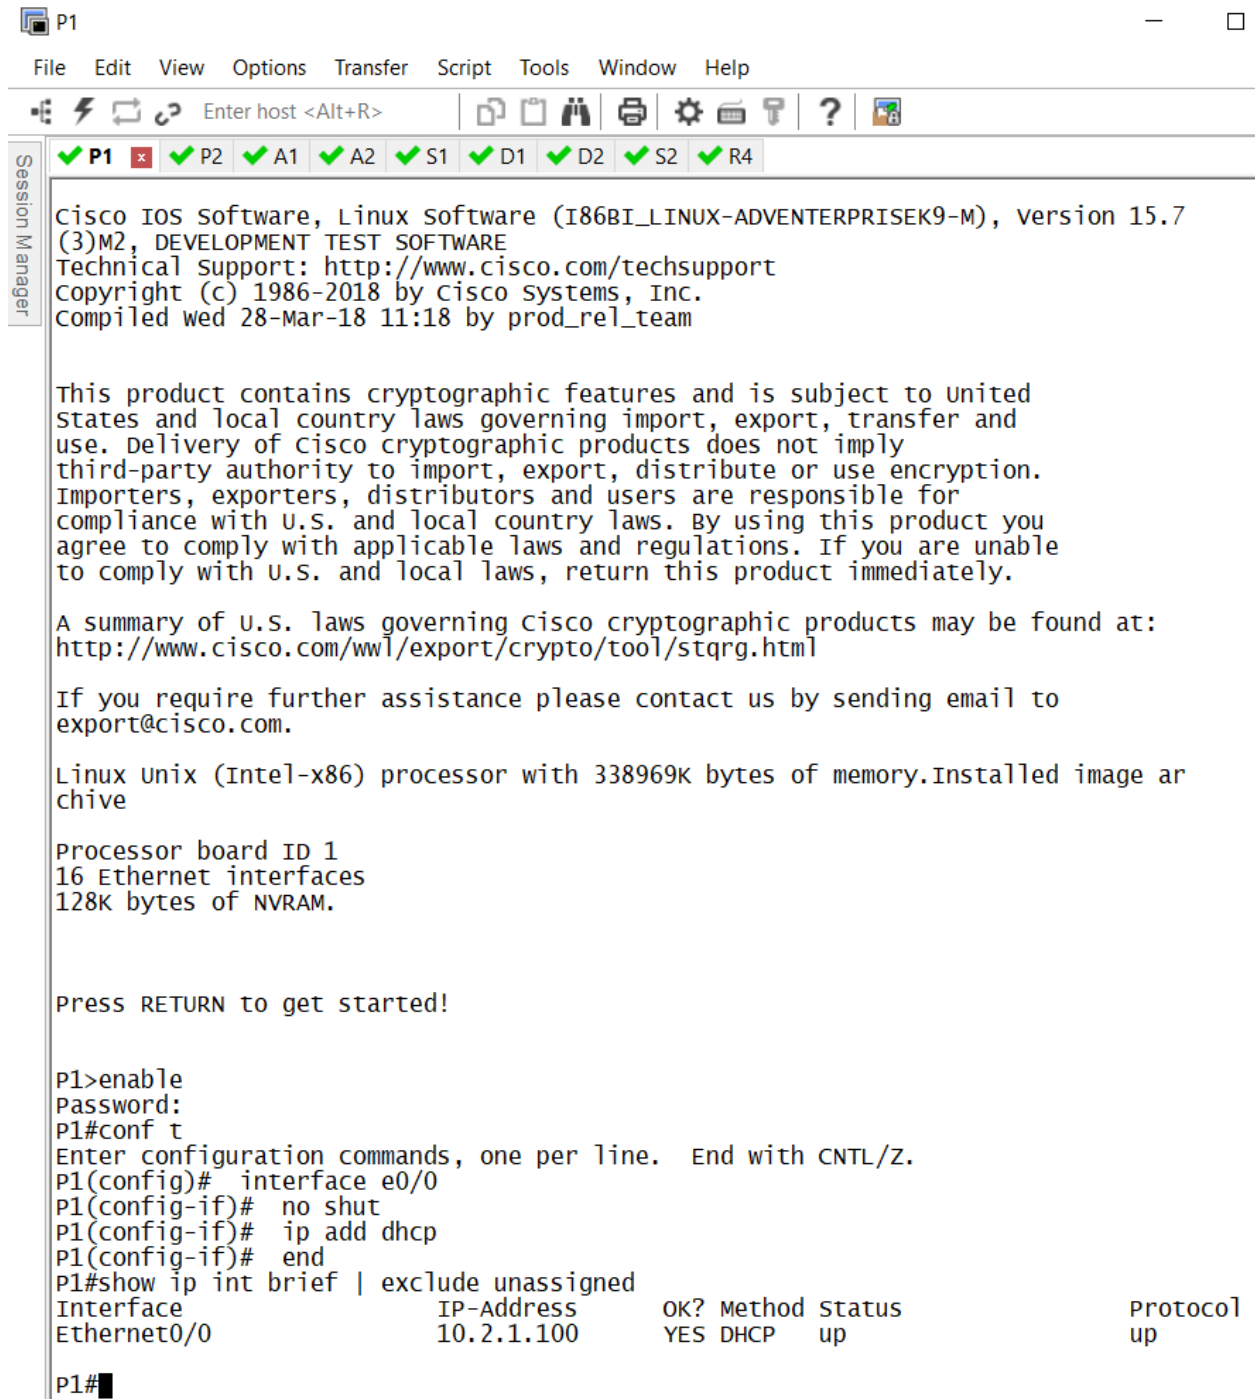

```
P1
File Edit View Options Transfer Script Tools Window Help
Enter host <Alt+R>
[Icons]

Session Manager
[P1] [P2] [A1] [A2] [S1] [D1] [D2] [S2] [R4]

Cisco IOS Software, Linux Software (I86BI_LINUX-ADVENTERPRISEK9-M), version 15.7
(3)M2, DEVELOPMENT TEST SOFTWARE
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2018 by Cisco Systems, Inc.
Compiled wed 28-Mar-18 11:18 by prod_rel_team

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/ww1/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.


Linux Unix (Intel-x86) processor with 338969K bytes of memory. Installed image ar
chive

Processor board ID 1
16 Ethernet interfaces
128K bytes of NVRAM.

Press RETURN to get started!

P1>enable
Password:
P1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
P1(config)# interface e0/0
P1(config-if)# no shut
P1(config-if)# ip add dhcp
P1(config-if)# end
P1#show ip int brief | exclude unassigned
Interface IP-Address OK? Method Status Protocol
Ethernet0/0 10.2.1.100 YES DHCP up
P1#
```

For P2:

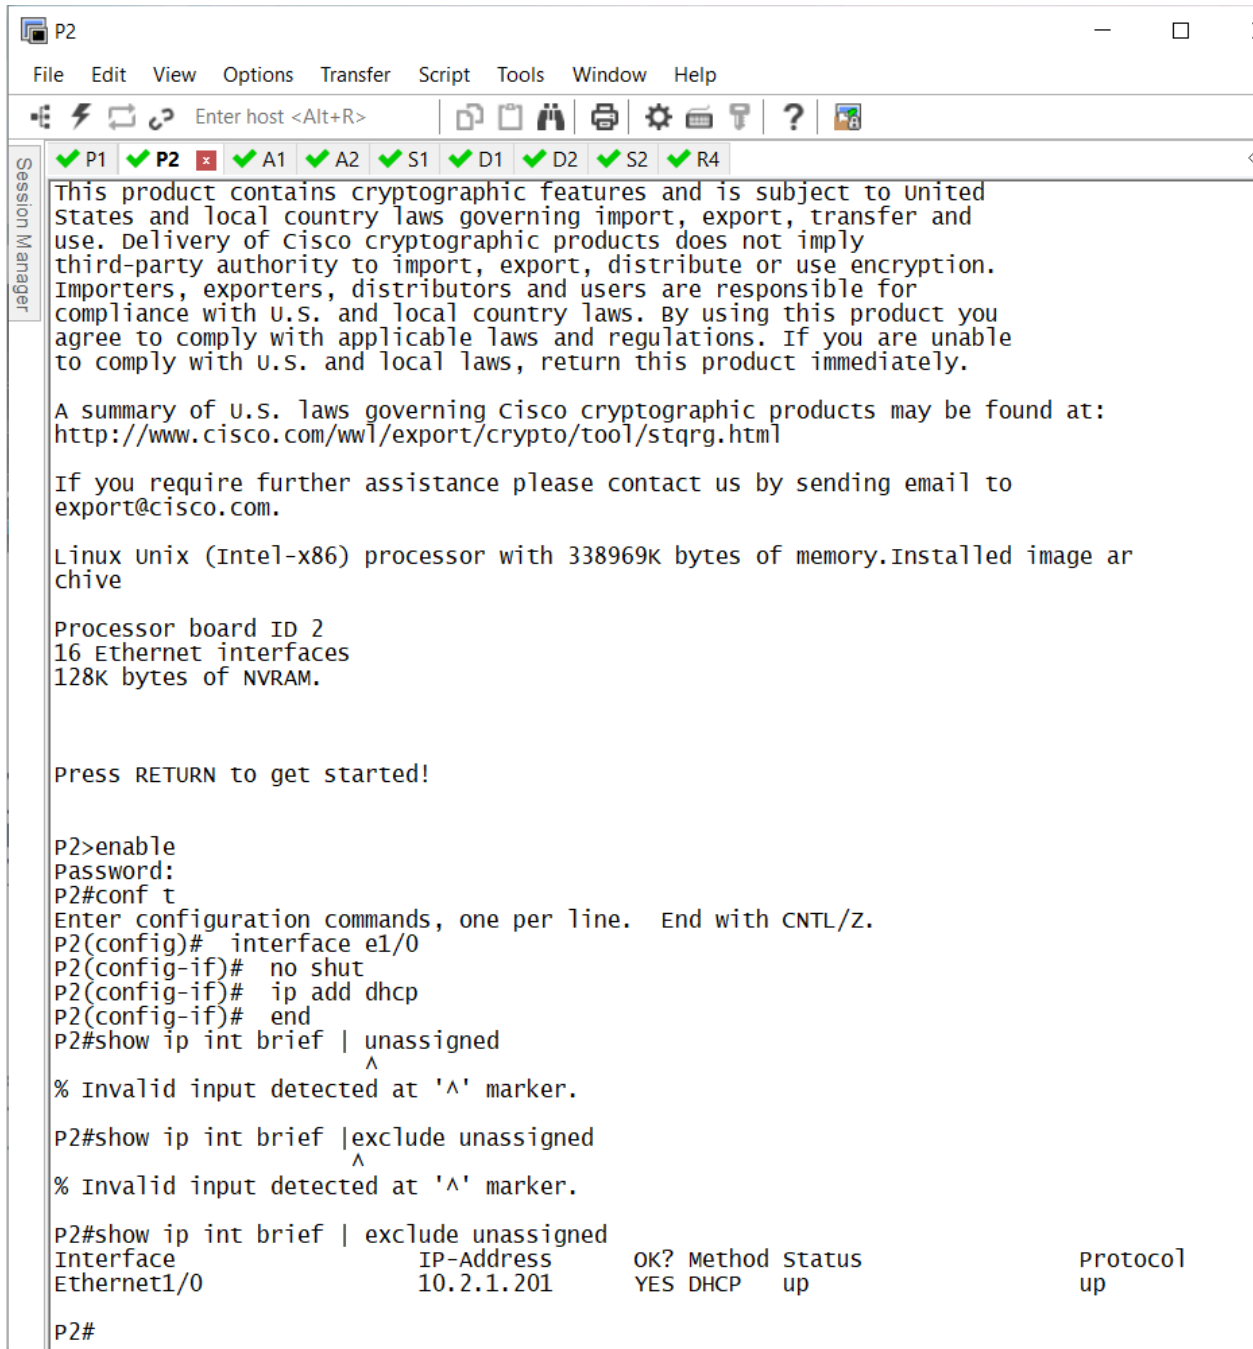

EXERCISE 2: Configure D1 as DHCP Server for VLAN 100

- DHCP Pool Name: SERVERPOOL
- Network: 192.168.1.128 255.255.255.224
- Default Gateway: 192.168.1.129
- DNS: 192.168.1.129
- Domain: SERVER.COM

```
D1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D1(config)# ip dhcp pool SERVERPOOL
D1(dhcp-config)# network 192.168.1.128 255.255.255.224
D1(dhcp-config)# default-router 192.168.1.129
D1(dhcp-config)# dns-server 192.168.1.129
D1(dhcp-config)# domain-name SERVER.COM
D1(dhcp-config)# exit
D1(config)# interface e1/0
D1(config-if)# switchport mode access
D1(config-if)# switchport access vlan 100
D1(config-if)# end
```


EXERCISE 3: Configure D2 as DHCP Server for VLAN 20

- DHCP Pool Name: DNSPOOL
- Network: 10.2.2.0 255.255.255.0
- Default Gateway: 10.2.2.2
- DNS: 10.2.2.2
- Domain: DNS.COM

```
D2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
D2(config)# ip dhcp pool DNSPOOL
D2(dhcp-config)# network 10.2.2.0 255.255.255.0
D2(dhcp-config)# default-router 10.2.2.2
D2(dhcp-config)# dns-server 10.2.2.2
D2(dhcp-config)# domain-name DNS.COM
D2(dhcp-config)# exit
D2(config)# interface e1/0
D2(config-if)# switchport mode access
D2(config-if)# switchport access vlan 20
D2(config-if)# end
```

S1 and S2 are DHCP Clients for their VLANs

For S1:

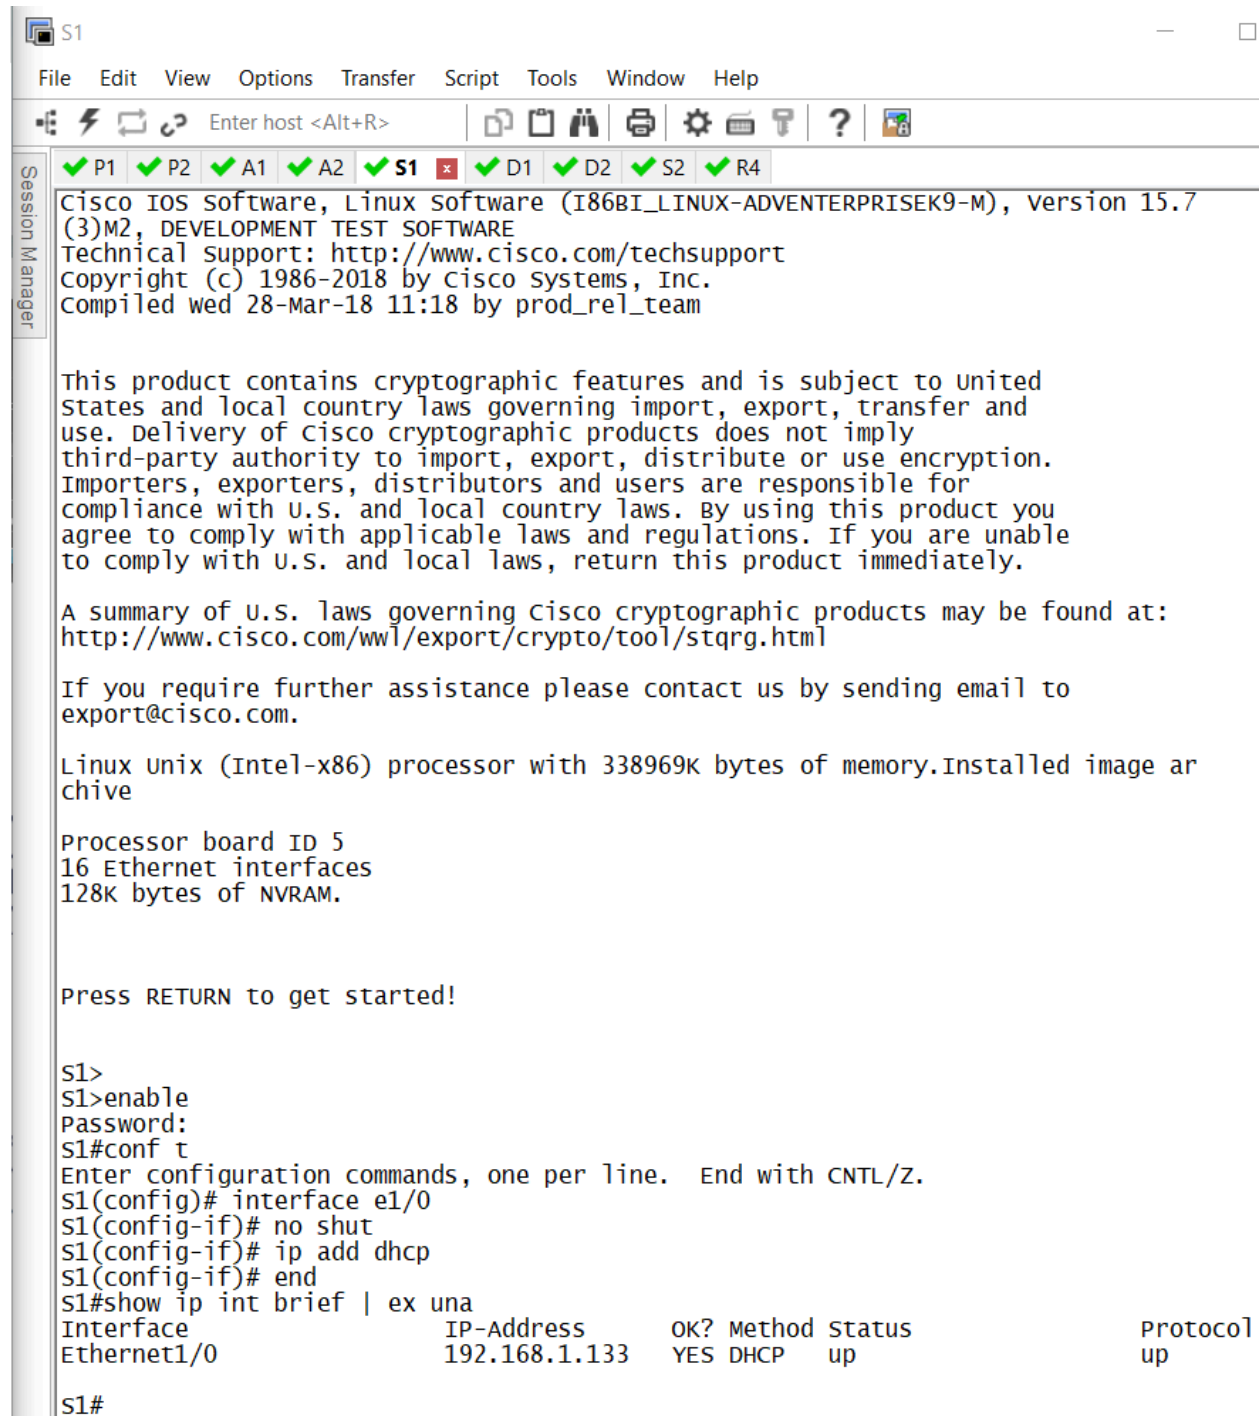

```
S1
File Edit View Options Transfer Script Tools Window Help
Enter host <Alt+R>
[P1] [P2] [A1] [A2] [S1] [D1] [D2] [S2] [R4]
Cisco IOS Software, Linux Software (I86BI_LINUX-ADVENTERPRISEK9-M), version 15.7(3)M2, DEVELOPMENT TEST SOFTWARE
Technical support: http://www.cisco.com/techsupport
Copyright (c) 1986-2018 by cisco systems, Inc.
Compiled wed 28-Mar-18 11:18 by prod_rel_team

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html


If you require further assistance please contact us by sending email to
export@cisco.com.

Linux Unix (Intel-x86) processor with 338969K bytes of memory.Installed image archive
Processor board ID 5
16 Ethernet interfaces
128K bytes of NVRAM.

Press RETURN to get started!

S1>
S1>enable
Password:
S1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
S1(config)# interface e1/0
S1(config-if)# no shut
S1(config-if)# ip add dhcp
S1(config-if)# end
S1#show ip int brief | ex una
Interface IP-Address OK? Method Status Protocol
Ethernet1/0 192.168.1.133 YES DHCP up
S1#
```


For S2:

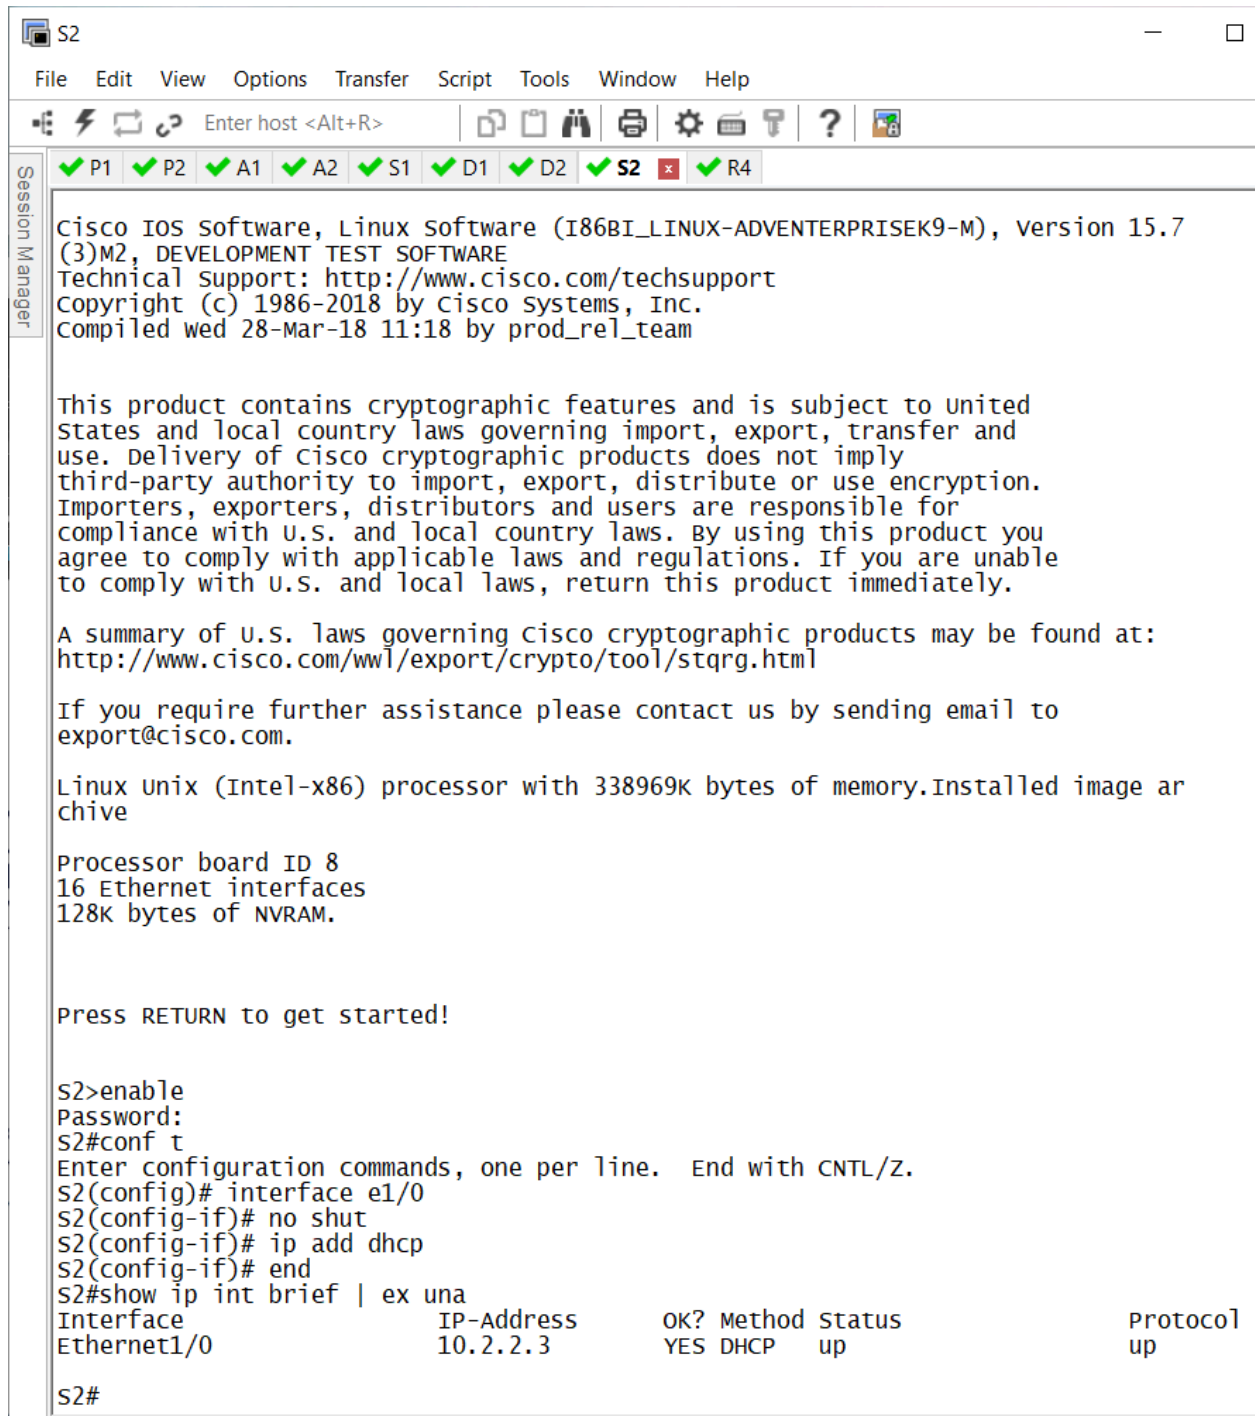

The screenshot shows a Cisco IOS terminal window titled "S2". The menu bar includes File, Edit, View, Options, Transfer, Script, Tools, Window, and Help. The toolbar contains icons for host entry, file operations, and help. A session manager bar at the top shows several sessions, with S2 selected and highlighted in red. The main terminal area displays the following text:

```
Cisco IOS Software, Linux Software (I86BI_LINUX-ADVENTERPRISEK9-M), version 15.7
(3)M2, DEVELOPMENT TEST SOFTWARE
Technical support: http://www.cisco.com/techsupport
Copyright (c) 1986-2018 by Cisco Systems, Inc.
Compiled wed 28-Mar-18 11:18 by prod_rel_team

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

Linux unix (Intel-x86) processor with 338969K bytes of memory. Installed image ar
chive

Processor board ID 8
16 Ethernet interfaces
128K bytes of NVRAM.

Press RETURN to get started!

S2>enable
Password:
S2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
S2(config)# interface e1/0
S2(config-if)# no shut
S2(config-if)# ip add dhcp
S2(config-if)# end
S2#show ip int brief | ex una


| Interface   | IP-Address | OK? | Method | Status | Protocol |
|-------------|------------|-----|--------|--------|----------|
| Ethernet1/0 | 10.2.2.3   | YES | DHCP   | up     | up       |


S2#
```