


Two-stage Dataset Construction

A. Class-level Isolation


All Classes




Base



Novel




B. File-level Isolation

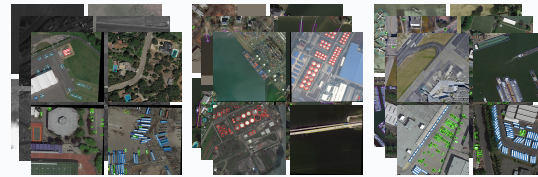


Raw Data Pool




Raw Base Set (Abundant) Raw Few-shot Set (K-shot)

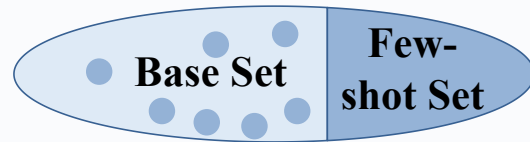


C. Cross-Scene Isolation

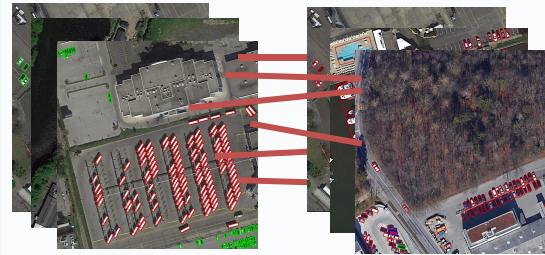

Hash filter

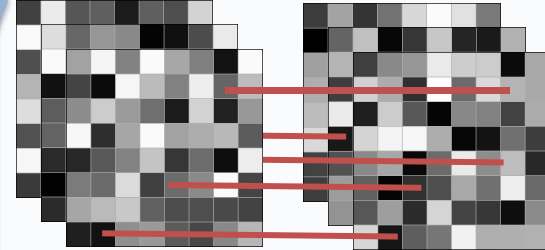

pHash (a) pHash (b)
remove a if $\exists b \in \text{Finetune}, d(h(a), h(b)) \leq \tau$

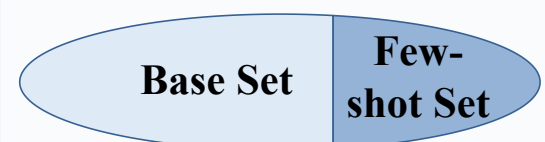

Typical Datasets

AeroOpt-Few



Base Class Novel Class
Optical Aerial Imagery

GeoInfra-Few




Base Class Novel Class
Infrared Vehicle Imagery

UAVIR-Few




Base Class Novel Class
UAV Vehicle Imagery

FGShip-Few

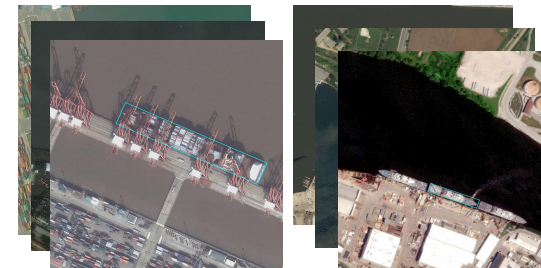

Base Class Novel Class
Fine-grained Ship Imagery

RotSAR-Few

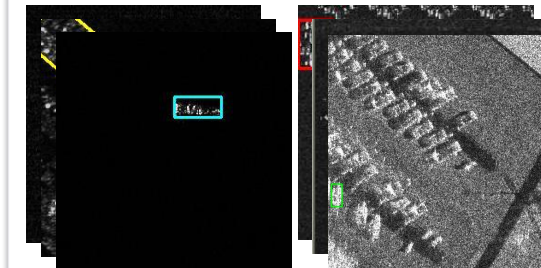

Base Class Novel Class
RSAR Imagery

WideSat-Few



Base Class Novel Class
Large-scale Satellite Imagery