

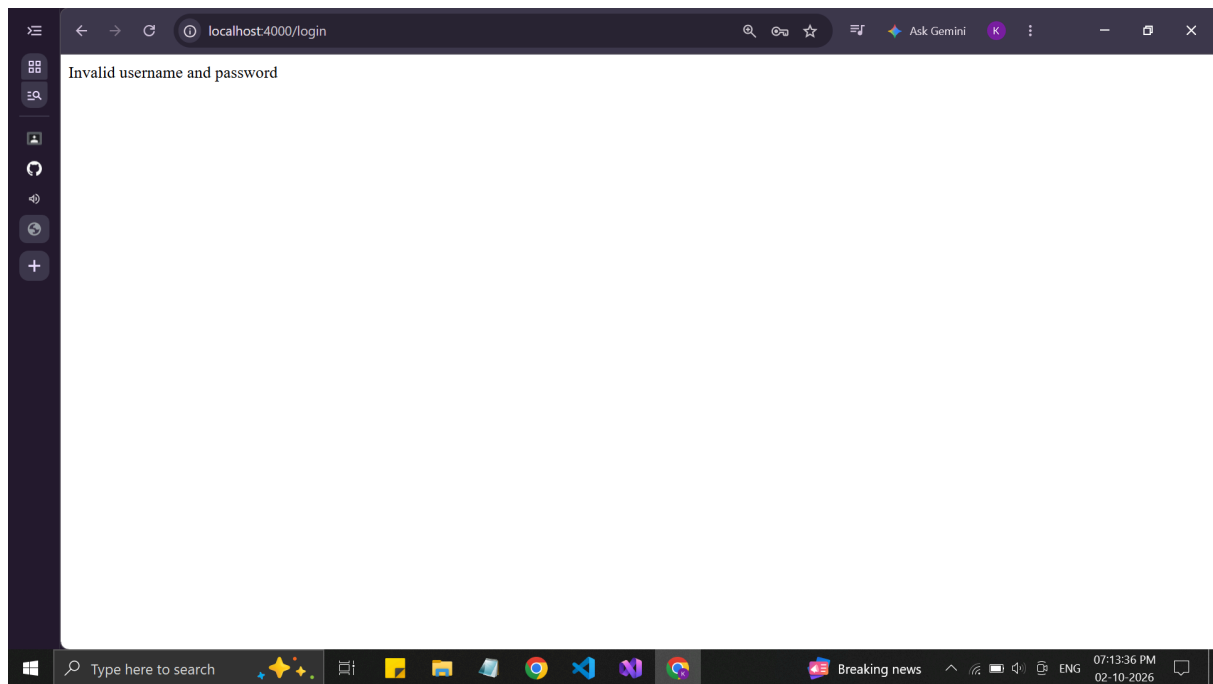
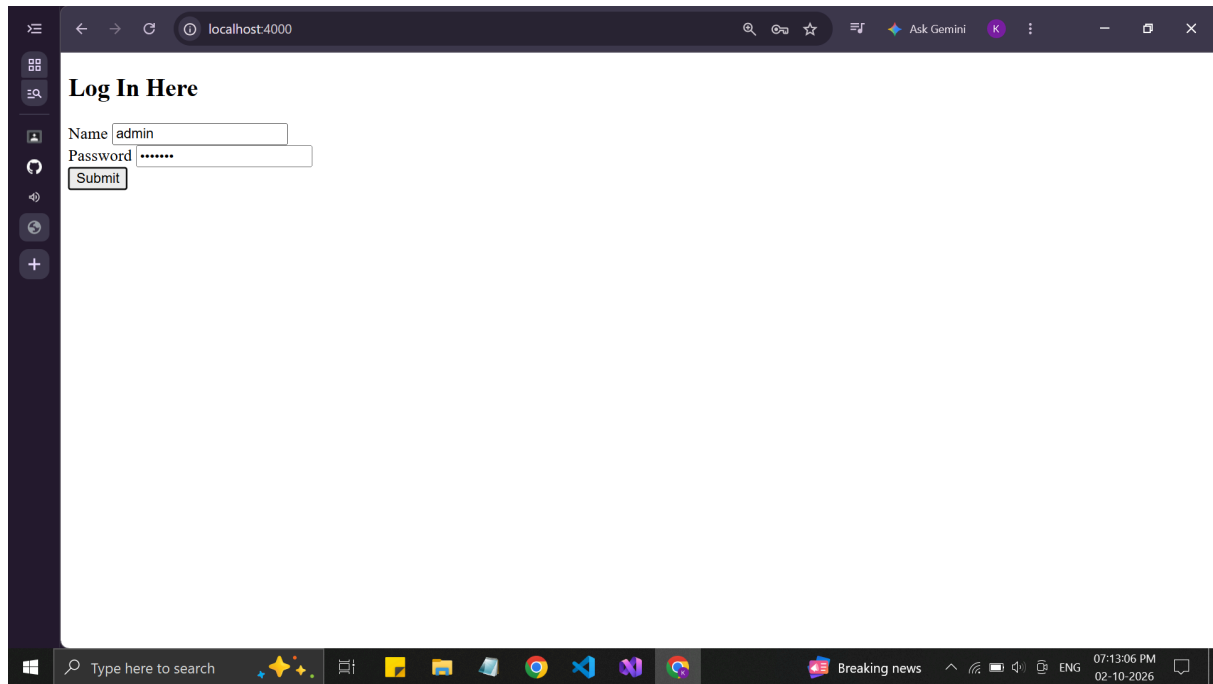


Que 2

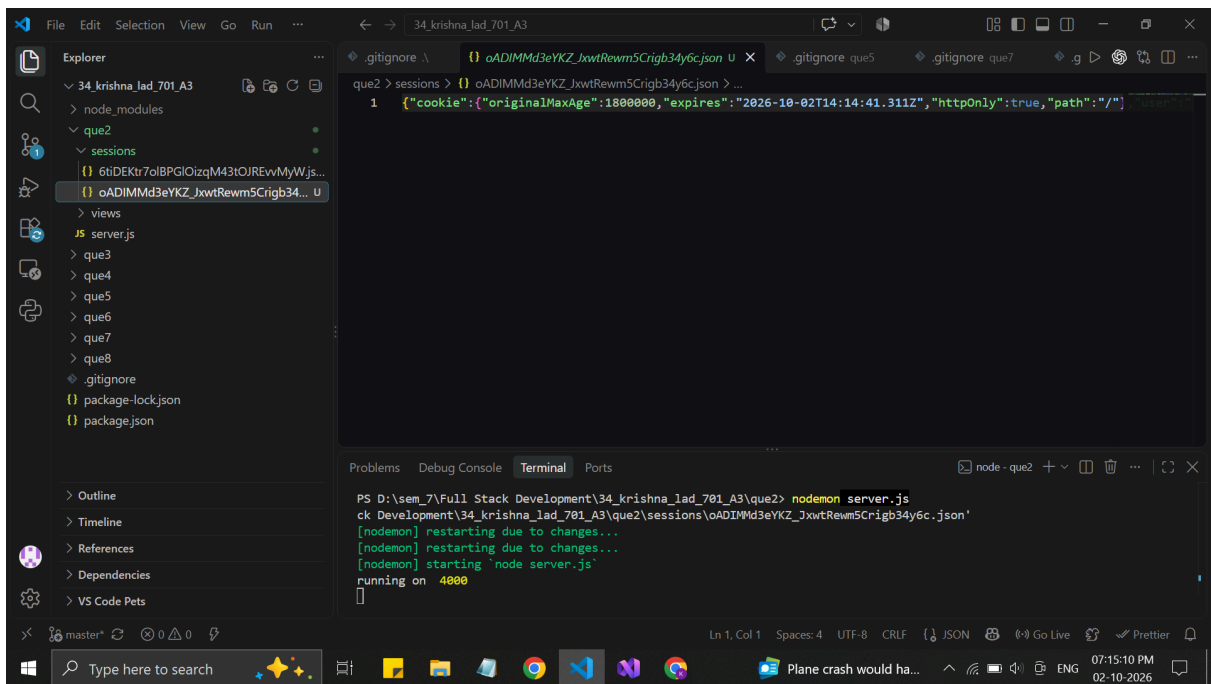


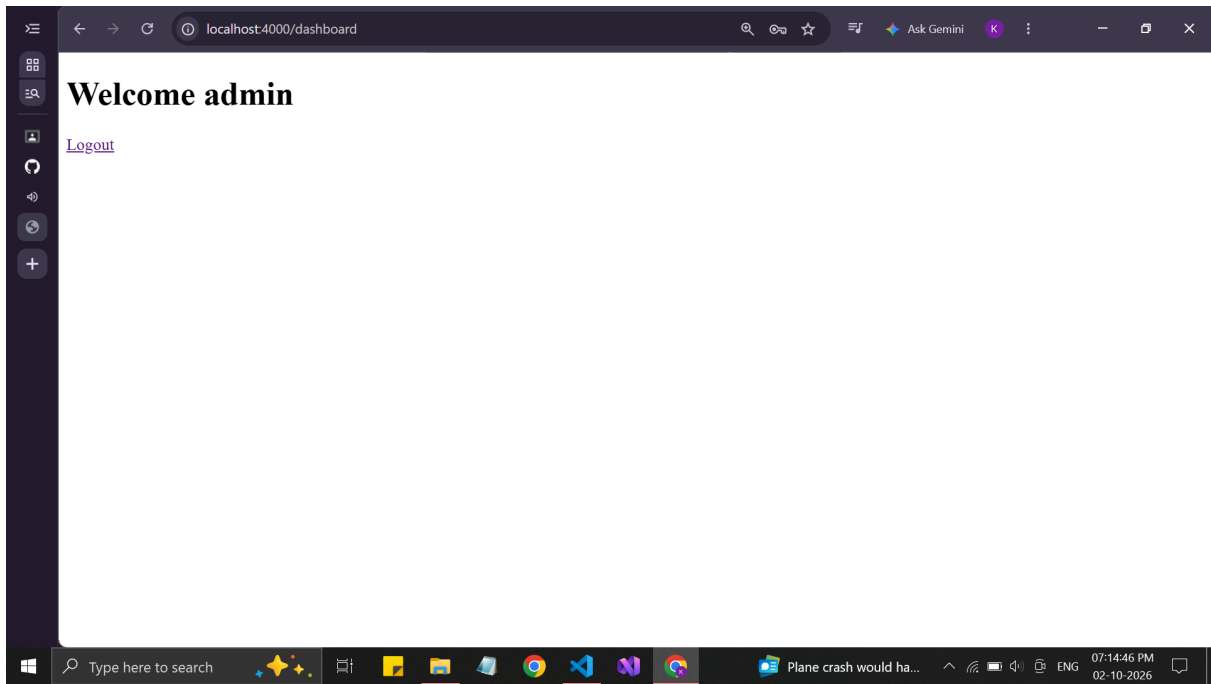

Que 3

Que 4

Connections to MongoDB

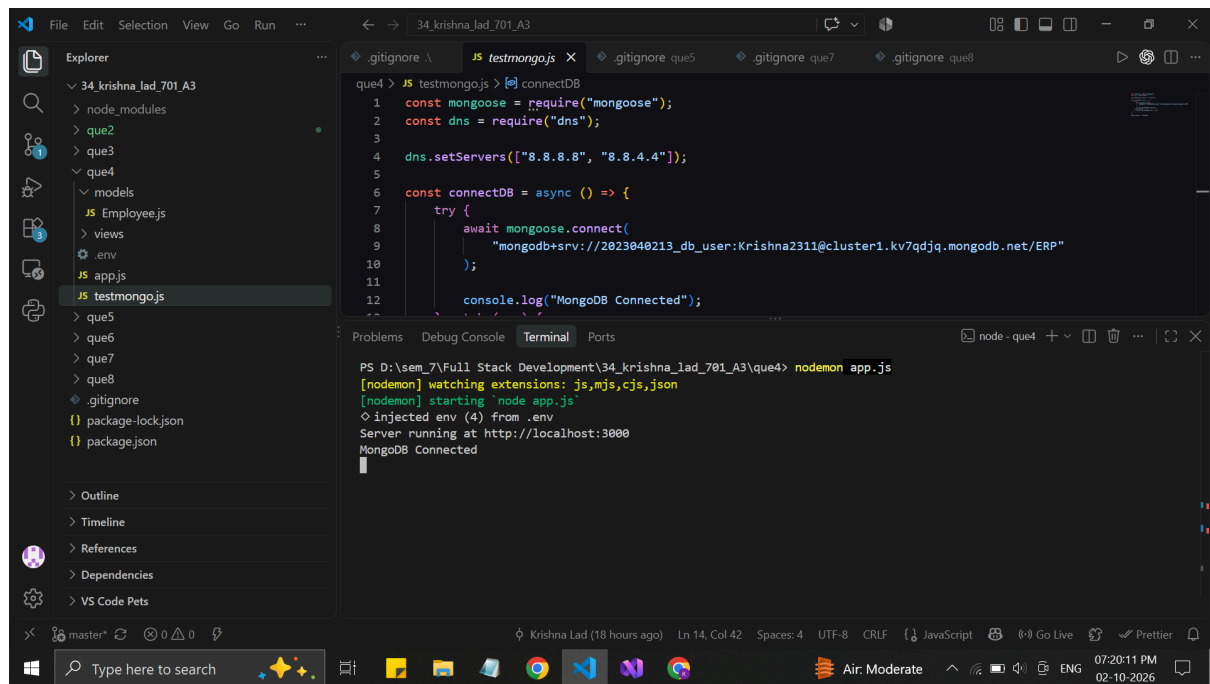


The screenshot shows a Visual Studio Code editor with a project named '34_krishna_lad_701_A3'. The Explorer sidebar on the left shows the file structure, including folders for 'node_modules', 'que2', 'que3', 'que4', 'models', and files like 'Employee.js', 'views', '.env', 'app.js', and 'testmongo.js'. The 'testmongo.js' file is selected and open in the editor. The code in the editor is as follows:

```
1 const mongoose = require("mongoose");
2 const dns = require("dns");
3
4 dns.setServers(["8.8.8.8", "8.8.4.4"]);
5
6 const connectDB = async () => {
7   try {
8     await mongoose.connect(
9       "mongodb+srv://2023040213_db_user:Krishna2311@cluster1.kv7qdjq.mongodb.net/ERP"
10    );
11  } catch (err) {
12    console.log("MongoDB Connected");
13  }
14 }
```


Below the editor, the Terminal panel is open, showing the output of running 'node testmongo.js' in the 'que4' directory. The output is:

```
PS D:\sem_7\Full Stack Development\34_krishna_lad_701_A3\que4> node testmongo.js
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting node app.js
◇ injected env (4) from .env
Server running at http://localhost:3000
MongoDB Connected
```


The status bar at the bottom indicates the file is 'master', the cursor is at 'Ln 14, Col 42', and the encoding is 'UTF-8'. The system tray shows the date and time as '07:20:11 PM 02-10-2026'.

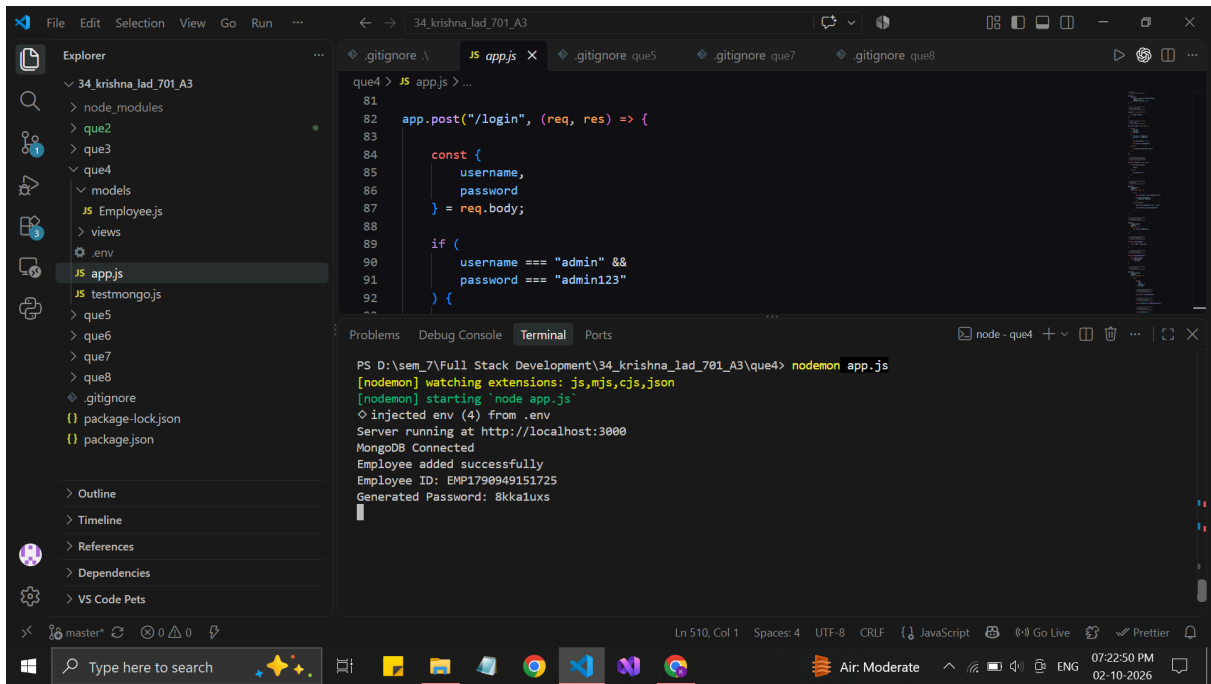


Que 5


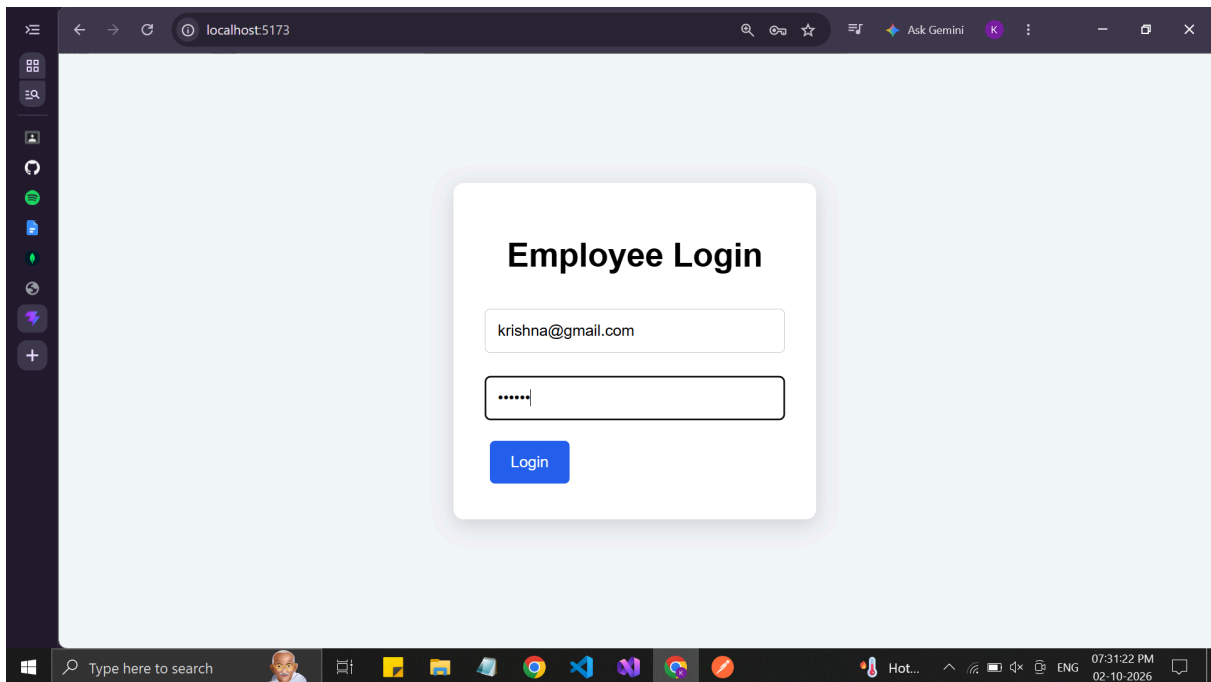




Que 6


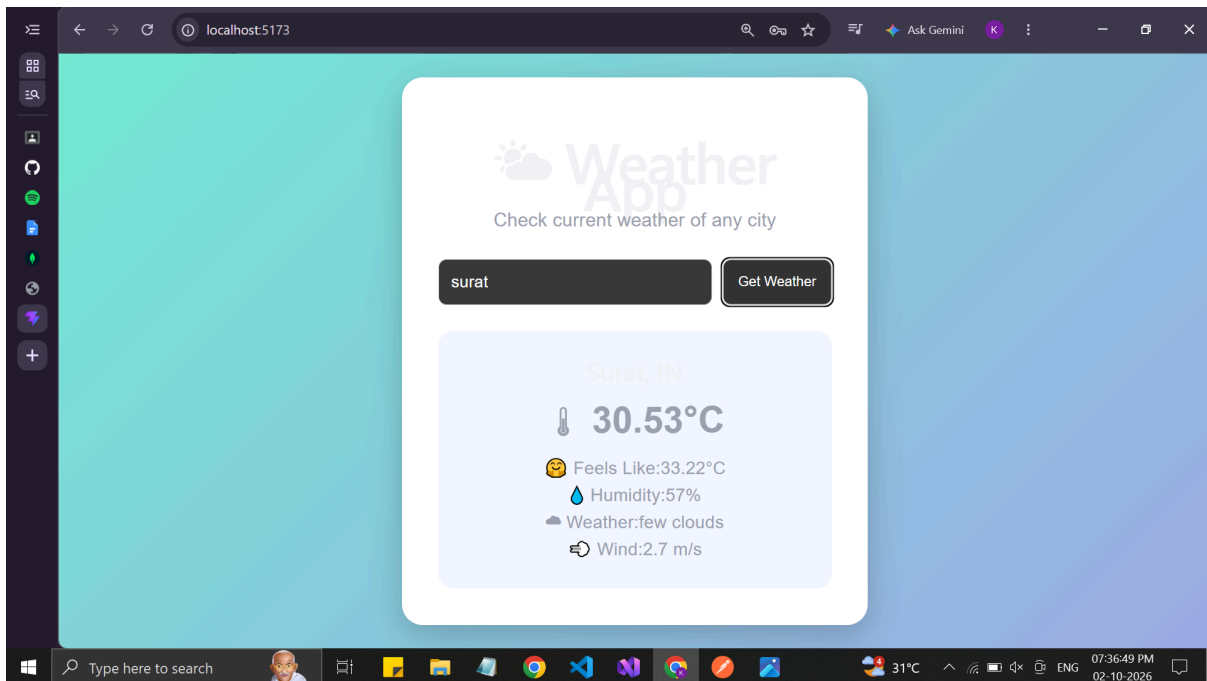


Que 7

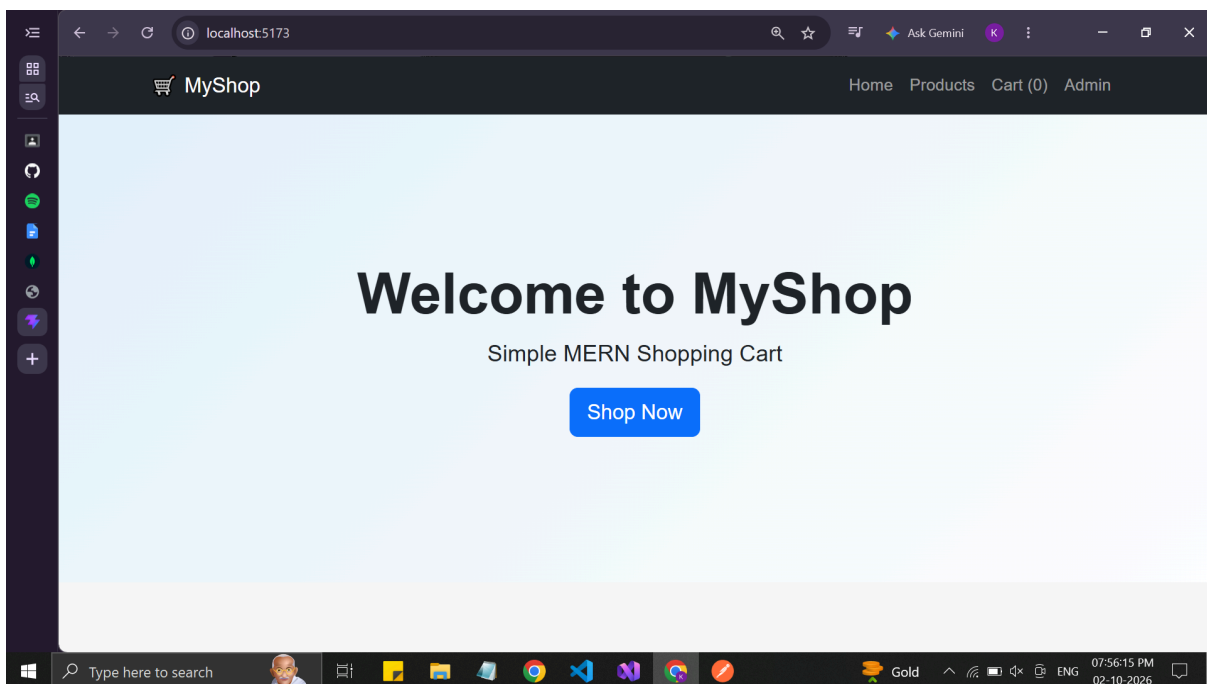

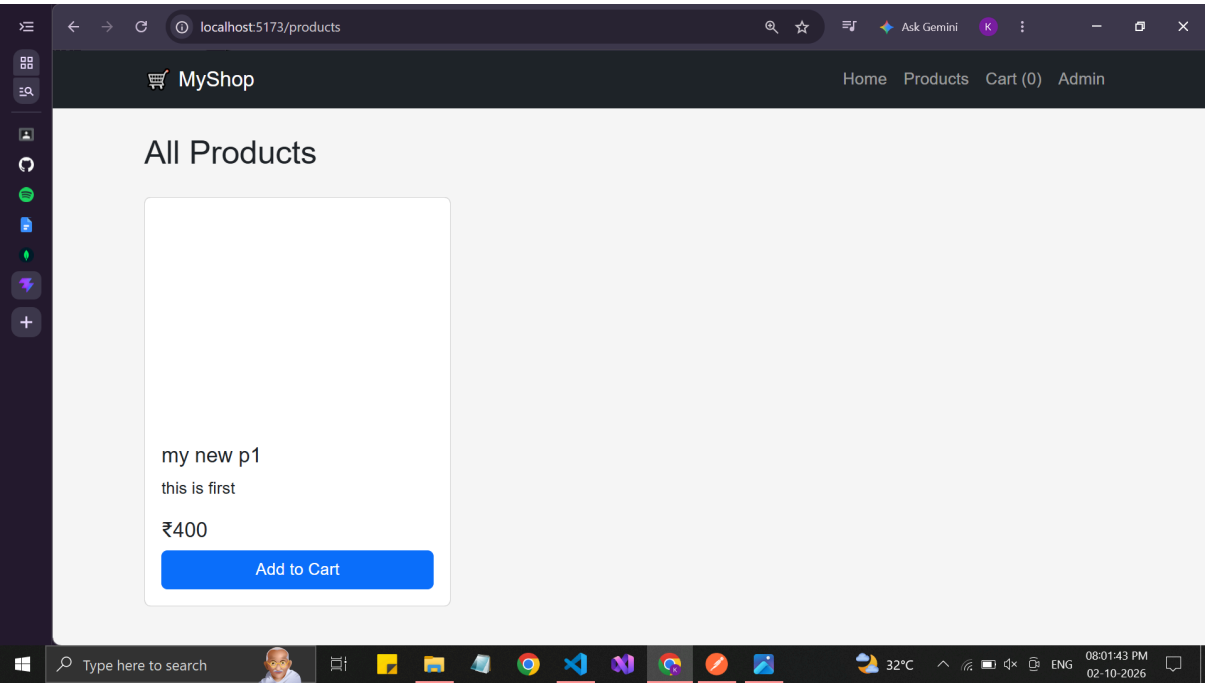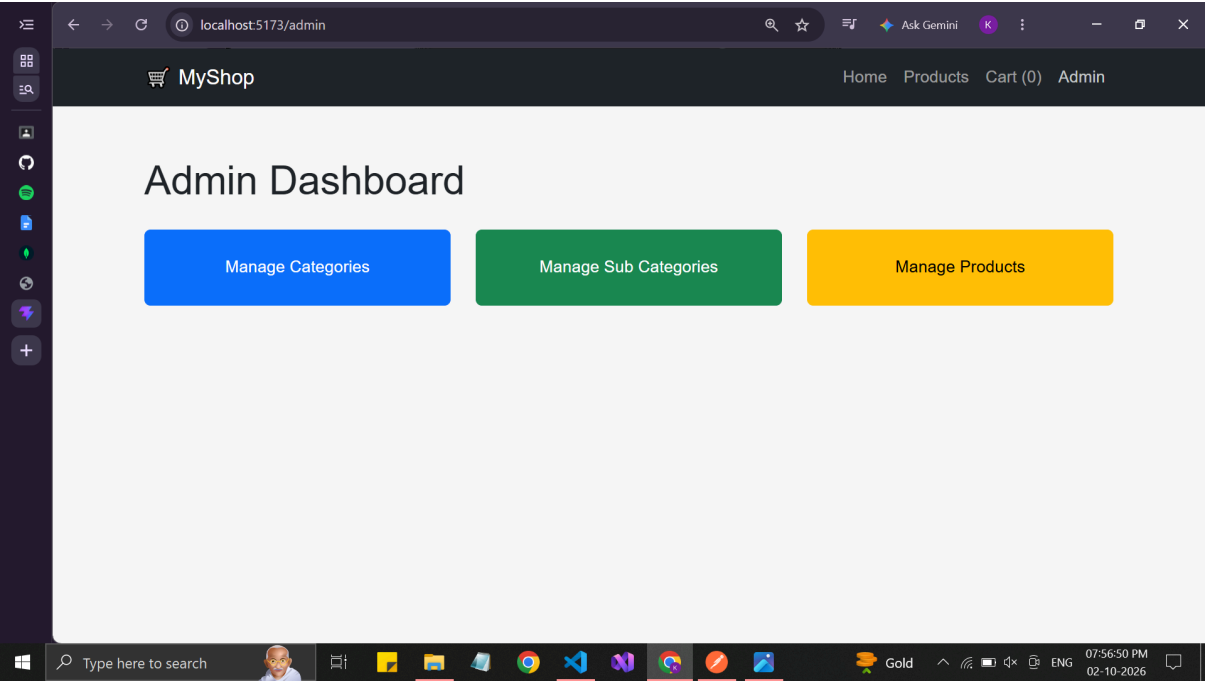

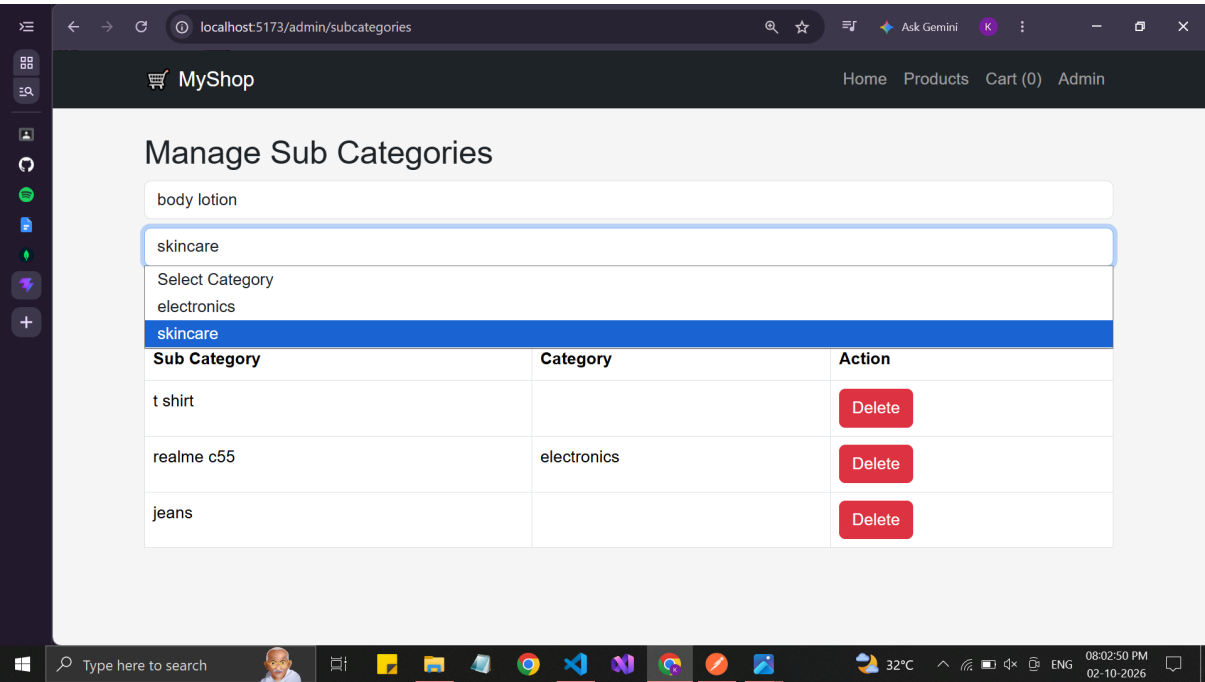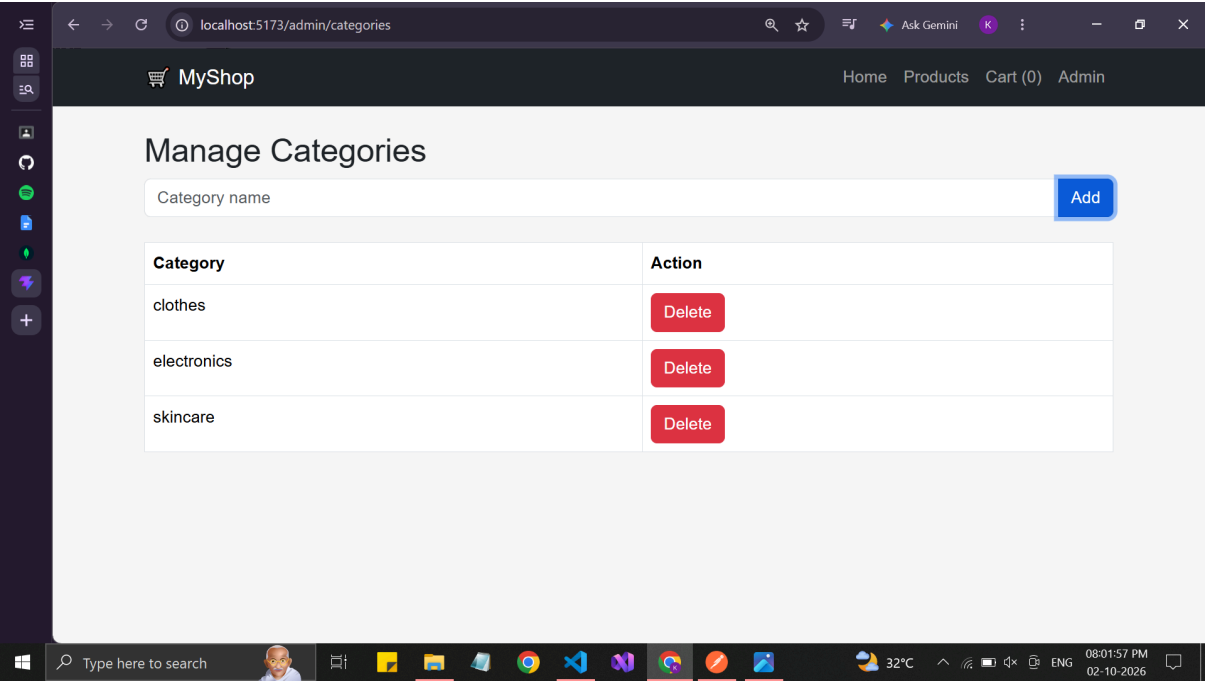

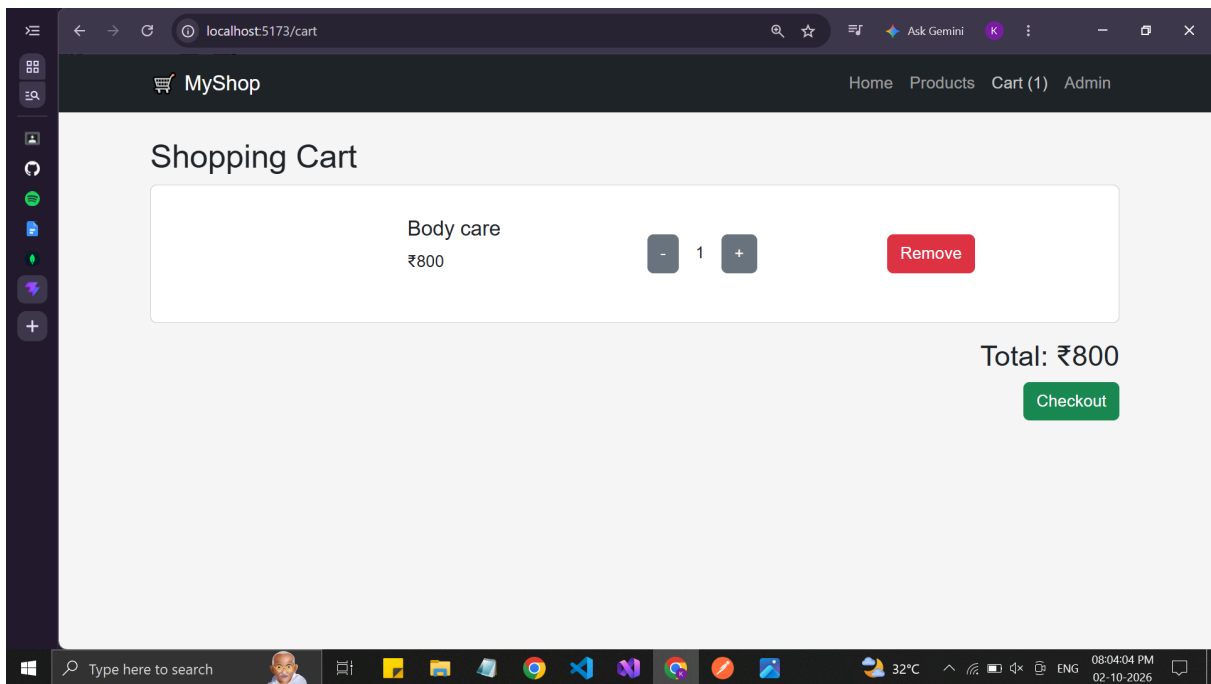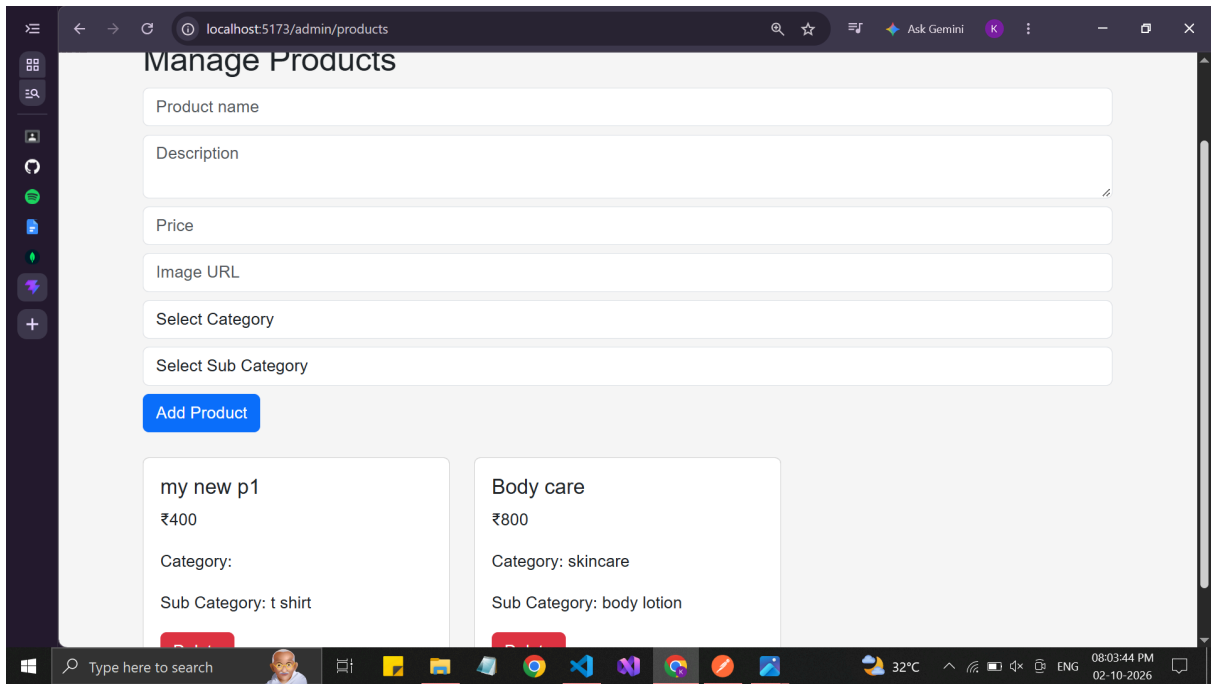

Que 8

