EXPLORER

SPENDWISE
- config
  - db.js
- controllers
- middleware
  - authMiddleware.js
- models
  - Transaction.js
  - User.js
- node_modules
- routes
  - authRoutes.js
  - transactionRoutes.js
- .env
- .gitignore
- package-lock.json
- package.json
- README.md
- server.js

OUTLINE
TIMELINE
NPM SCRIPTS

.env | db.js

config > db.js > ...

```javascript
const mongoose = require("mongoose");

const connectDB = async () => {
    try {
        const conn = await mongoose.connect(process.env.MONGO_URI);
        console.log(`MongoDB Connected: ${conn.connection.host}`);
    } catch (error) {
        console.error("MongoDB connection error:", error.message);
        process.exit(1);
    }
};

module.exports = connectDB;
```

PROBLEMS | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS

```
PS D:\code\soumi\spendwise> npm install

up to date, audited 128 packages in 1s

30 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
PS D:\code\soumi\spendwise>
```

Ln 13, Col 28 | Spaces: 4 | UTF-8 | CRLF | JavaScript | Signed out

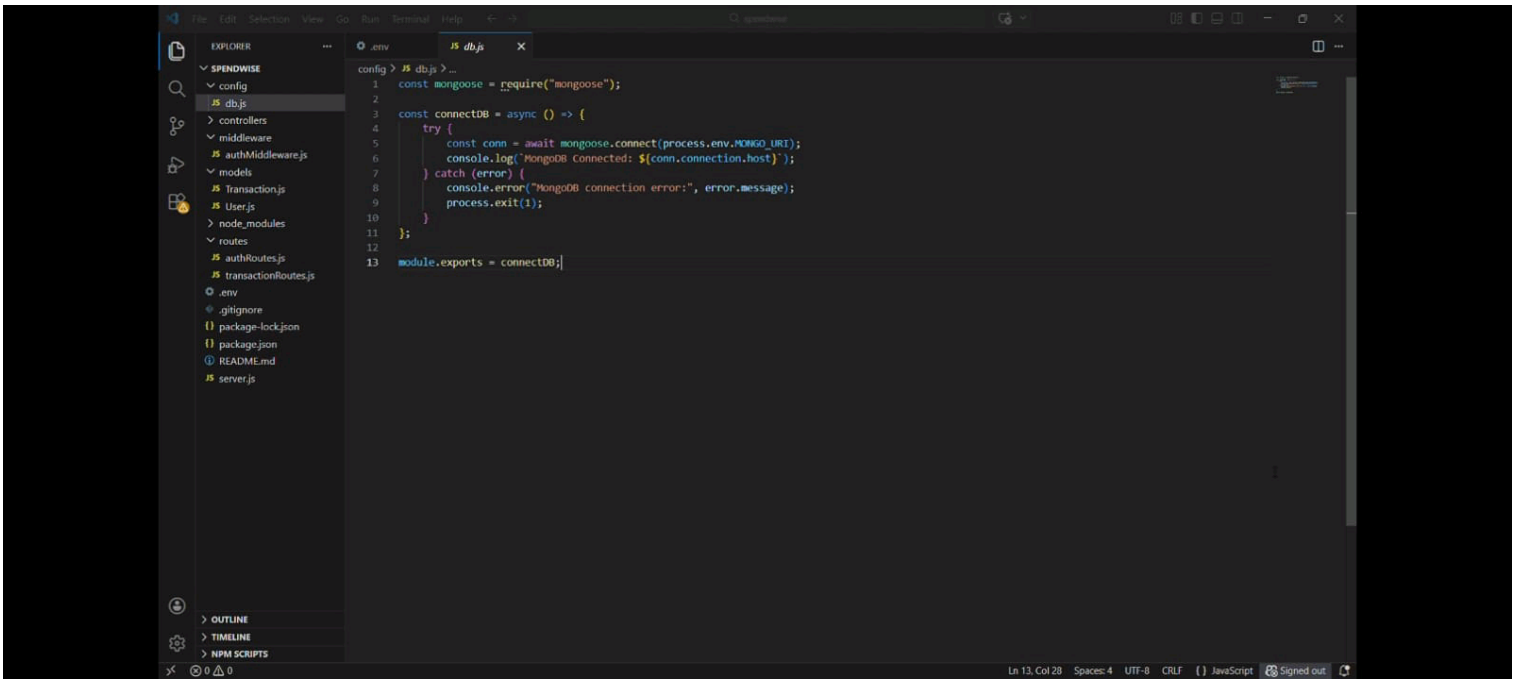
EXPLORER
SPENDWISE
config
db.js
controllers
middleware
authMiddleware.js
models
Transaction.js
User.js
node_modules
routes
authRoutes.js
transactionRoutes.js
.env
.gitignore
package-lock.json
package.json
README.md
server.js
OUTLINE
TIMELINE
NPM SCRIPTS
.env
db.js
config > db.js > ...
const mongoose = require("mongoose");
const connectDB = async () => {
try {
const conn = await mongoose.connect(process.env.MONGO_URI);
console.log(`MongoDB Connected: ${conn.connection.host}`);
} catch (error) {
console.error("MongoDB connection error:", error.message);
process.exit(1);
}
};
module.exports = connectDB;
Ln 13, Col 28
Spaces: 4
UTF-8
CRLF
JavaScript
Signed out

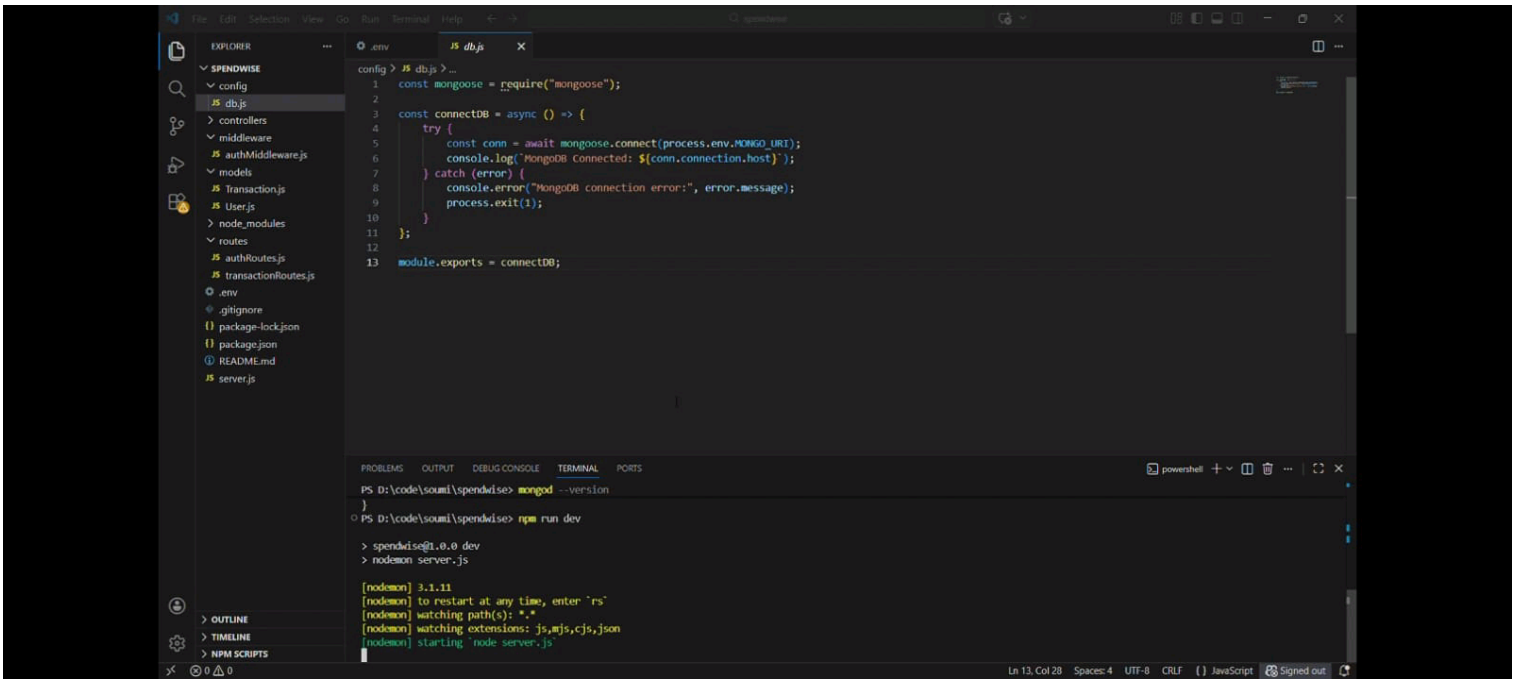
EXPLORER
SPENDWISE
config
db.js
controllers
middleware
authMiddleware.js
models
Transaction.js
User.js
node_modules
routes
authRoutes.js
transactionRoutes.js
.env
.gitignore
package-lock.json
package.json
README.md
server.js
OUTLINE
TIMELINE
NPM SCRIPTS
.env
db.js
config > db.js > ...
const mongoose = require("mongoose");
const connectDB = async () => {
try {
const conn = await mongoose.connect(process.env.MONGO_URI);
console.log(`MongoDB Connected: ${conn.connection.host}`);
} catch (error) {
console.error("MongoDB connection error:", error.message);
process.exit(1);
}
};
module.exports = connectDB;
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
PORTS
powershell
PS D:\code\soumi\spendwise> mongod --version
}
PS D:\code\soumi\spendwise> npm run dev
> spendwise@1.0.0 dev
> nodemon server.js
[nodemon] 3.1.11
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node server.js`
Ln 13, Col 28
Spaces: 4
UTF-8
CRLF
JavaScript
Signed out

EXPLORER

SPENDWISE
- config
  - db.js
- controllers
- middleware
  - authMiddleware.js
- models
  - Transaction.js
  - User.js
- node_modules
- routes
  - authRoutes.js
  - transactionRoutes.js
- .env
- .gitignore
- package-lock.json
- package.json
- README.md
- server.js

OUTLINE
TIMELINE
NPM SCRIPTS

.env | db.js

config > db.js > ...

```javascript
const mongoose = require("mongoose");

const connectDB = async () => {
    try {
        const conn = await mongoose.connect(process.env.MONGO_URI);
        console.log(`MongoDB Connected: ${conn.connection.host}`);
    } catch (error) {
        console.error("MongoDB connection error:", error.message);
        process.exit(1);
    }
};

module.exports = connectDB;
```

PROBLEMS | OUTPUT | DEBUG CONSOLE | TERMINAL | PORTS

```
PS D:\code\soumi\spendwise> npm run dev
> spendwise@1.0.0 dev
> nodemon server.js

[nodemon] 3.1.11
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting `node server.js`
[dotenv@17.3.1] injecting env (3) from .env -- tip: ⚡ secrets for agents: https://dotenvx.com/as2
Server running on port 5000
MongoDB Connected: 127.0.0.1
```

Ln 13, Col 28 | Spaces: 4 | UTF-8 | CRLF | JavaScript | Signed out