

# APPDEV1 - Introduction to Application Development

BENCILA, ADRIAN MARC C.

The Meditations of Marcus Aurelius

Year: 2025

[Meditations](#)   [Tao Te Ching](#)

## Book 1

"You have power over your mind - not outside events. Realize this, and you will find strength."

[Previous](#)

1

[Next](#)

**Reviews:** Content: 0

[+](#)

[-](#)

Style: 0

[+](#)

[-](#)

User Friendliness: 0

[+](#)

[-](#)

The Stoicism Movement

Written by: Adrian Bencila

Activity Guide #6

The Meditations of Marcus Aurelius

Year: 2025

[Meditations](#)   [Tao Te Ching](#)

## Chapter 1

"The Tao that can be told is not the eternal Tao."

## Chapter 2

"When people see some things as beautiful, other things become ugly."

# APPDEV1 - Introduction to Application Development

BENCILA, ADRIAN MARC C.

## Chapter 8

"The supreme good is like water. It benefits all things and does not compete."

## Chapter 16

"Empty yourself of everything. Let the mind rest at peace."

## Chapter 76

"The disciple of life is soft and yielding, the disciple of death is hard and brittle."

The Stoicism Movement

Written by: Adrian Bencila


Activity Guide #6

```
src > app > taoteaching > ts taoteaching.html > div.quote-container
1  <div class="quote-container">
2    <div class="quote-card" *ngFor="let quote of taoQuotes">
3      <h2>{{ quote.chapter }}</h2>
4      <p class="quote-text">"{{ quote.body }}"</p>
5    </div>
6  </div>
7
```

```
src > app > taoteaching > ts taoteaching.ts > Taoteching
1  import { Component } from '@angular/core';
2
3  @Component({
4    selector: 'app-taoteching',
5    standalone: false,
6    templateUrl: './taoteching.html',
7    styleUrls: ['./taoteching.css']
8  })
9  export class Taoteching {
10    taoQuotes = [
11      { chapter: 'Chapter 1', body: 'The Tao that can be told is not the eternal Tao.' },
12      { chapter: 'Chapter 2', body: 'When people see some things as beautiful, other things become ugly.' },
13      { chapter: 'Chapter 8', body: 'The supreme good is like water. It benefits all things and does not compete.' },
14      { chapter: 'Chapter 16', body: 'Empty yourself of everything. Let the mind rest at peace.' },
15      { chapter: 'Chapter 76', body: 'The disciple of life is soft and yielding, the disciple of death is hard and brittle.' }
16    ];
17  }
```

# APPDEV1 - Introduction to Application Development

BENCILA, ADRIAN MARC C.

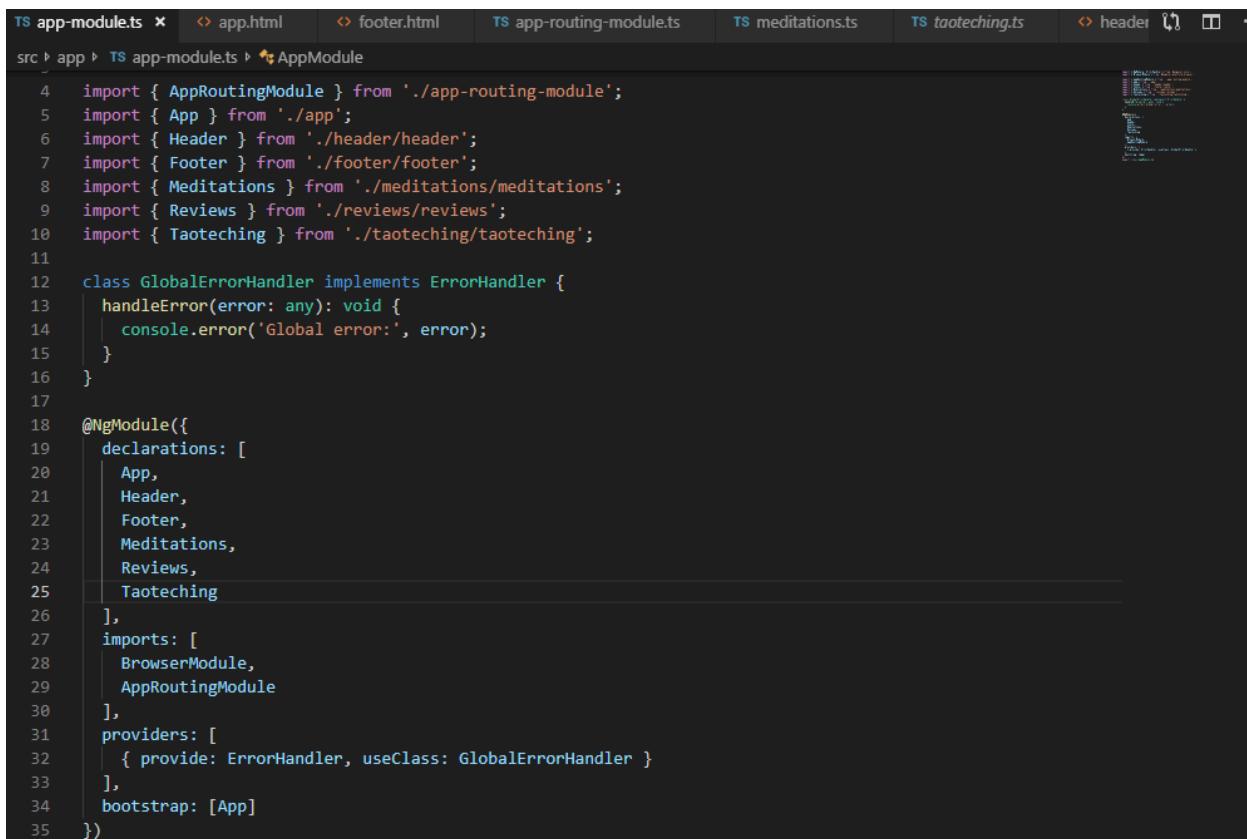

```
src/app/app.module.ts
  TS app-routing-module.ts
  TS footer.html
  TS header/header.ts
  TS meditations.ts
  TS taoteching.ts
  TS app.html
  TS footer.html
  TS app.module.ts
  TS AppModule


4 import { AppRoutingModule } from './app-routing-module';
5 import { App } from './app';
6 import { Header } from './header/header';
7 import { Footer } from './footer/footer';
8 import { Meditations } from './meditations/meditations';
9 import { Reviews } from './reviews/reviews';
10 import { Taoteching } from './taoteching/taoteching';

11 class GlobalErrorHandler implements ErrorHandler {
12   handleError(error: any): void {
13     console.error('Global error:', error);
14   }
15 }
16 }

17 @NgModule({
18   declarations: [
19     App,
20     Header,
21     Footer,
22     Meditations,
23     Reviews,
24     Taoteching
25   ],
26   imports: [
27     BrowserModule,
28     AppRoutingModule
29   ],
30   providers: [
31     { provide: ErrorHandler, useClass: GlobalErrorHandler }
32   ],
33   bootstrap: [App]
34 })
35 }
```


# APPDEV1 - Introduction to Application Development

BENCILA, ADRIAN MARC C.

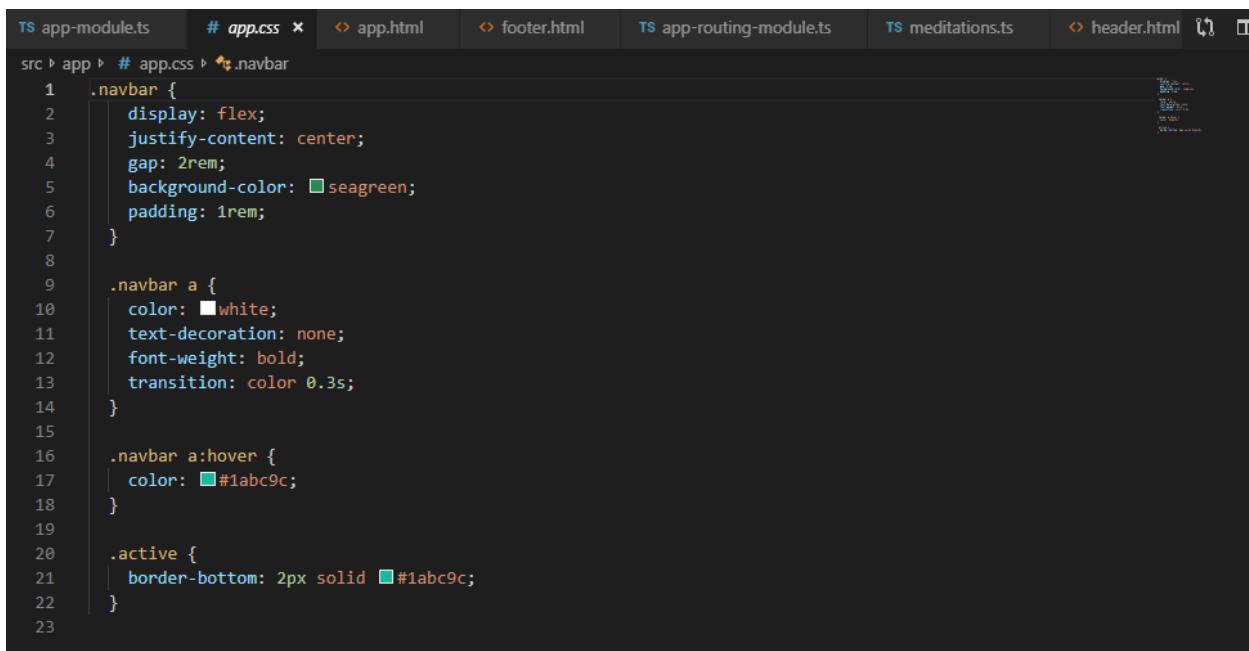

The screenshot shows a code editor with several tabs at the top: app-module.ts, # app.css, app.html, footer.html, app-routing-module.ts, meditations.ts, header.html, and a blank tab. The # app.css tab is active, displaying the following CSS code:

```
src > app > # app.css > *.navbar
1 .navbar {
2   display: flex;
3   justify-content: center;
4   gap: 2rem;
5   background-color: seagreen;
6   padding: 1rem;
7 }
8
9 .navbar a {
10  color: white;
11  text-decoration: none;
12  font-weight: bold;
13  transition: color 0.3s;
14 }
15
16 .navbar a:hover {
17  color: #1abc9c;
18 }
19
20 .active {
21  border-bottom: 2px solid #1abc9c;
22 }
```

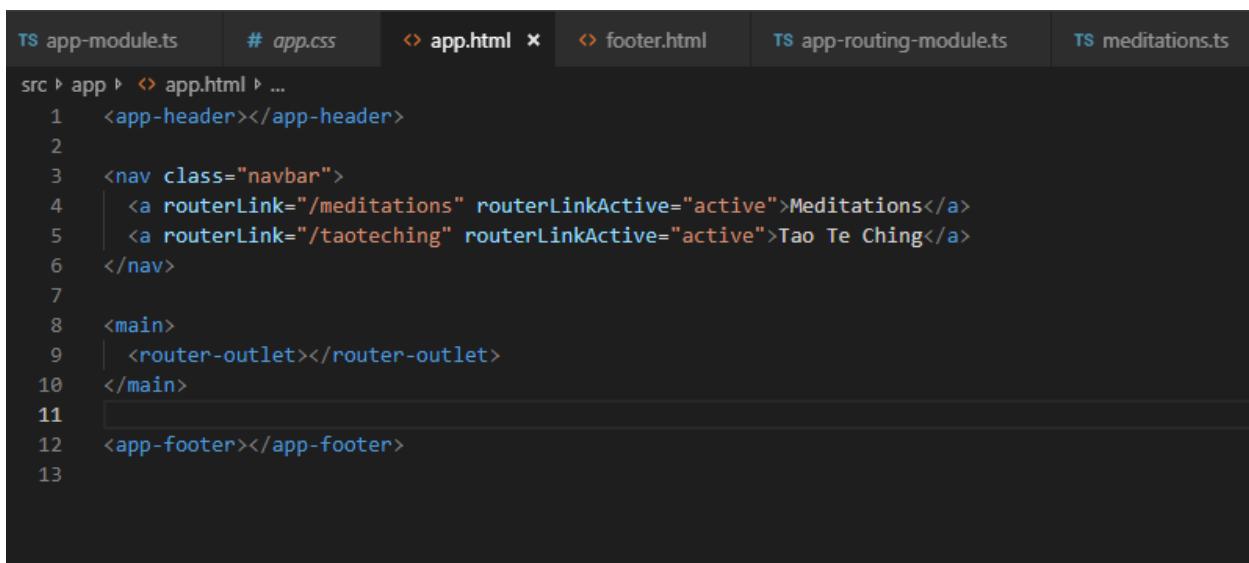

The screenshot shows a code editor with several tabs at the top: app-module.ts, # app.css, app.html, footer.html, app-routing-module.ts, meditations.ts, and a blank tab. The app.html tab is active, displaying the following HTML code:

```
src > app > app.html > ...
1 <app-header></app-header>
2
3 <nav class="navbar">
4   <a routerLink="/meditations" routerLinkActive="active">Meditations</a>
5   <a routerLink="/taoteching" routerLinkActive="active">Tao Te Ching</a>
6 </nav>
7
8 <main>
9   <router-outlet></router-outlet>
10 </main>
11
12 <app-footer></app-footer>
13
```