Activity for HUMCOM1: September 24, 2026

IMAGES

Activity 1:

```
<!DOCTYPE html>
<html>
<body>

<h2>HTML Image</h2>
<img src="woman.jpg" alt="woman" width="500" height="600">

</body>
</html>
```

HTML Images Syntax

The HTML <img> tag is used to embed an image in a web page.
Images are not technically inserted into a web page; images are linked to web pages.
The <img> tag creates a holding space for the referenced image.
The <img> tag is empty, it contains attributes only, and does not have a closing tag.
The <img> tag has two required attributes:

- src - Specifies the path to the image
- alt - Specifies an alternate text for the image

Syntax:

```
<img src="url" alt="alternatetext"
```

Activity 2:

With HTML image maps, you can create clickable areas on an image.

Image Maps

The HTML <map> tag defines an image map. An image map is an image with clickable areas.
The areas are defined with one or more <area> tags.
Try to click on the computer, phone, or the cup of coffee in the image below:

Activity .

```
<!DOCTYPE html>
<html>
<body>

<h2>Image Maps</h2>
<p>Click on the computer, the phone, or the cup of coffee to go to a new page and read more about the topic:</p>
```

```
<img src="workplace.jpg" alt="Workplace" usemap="#workmap" width="400" height="379">

<map name="workmap">
  <area shape="rect" coords="34,44,270,350" alt="Computer" href="computer.htm">
  <area shape="rect" coords="290,172,333,250" alt="Phone" href="phone.htm">
  <area shape="circle" coords="337,300,44" alt="Cup of coffee" href="coffee.htm">
</map>

</body>
</html>
```

Activity 3:

HTML Background Images

Add a background image on a <p> element:

```
<p style="background-image: url('img_girl.jpg');">
```

You can also specify the background image in the <style> element, in the <head> section:
Specify the background image in the <style> element:

```
<style>
p {
  background-image: url('img_girl.jpg');
}
</style>
```

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
  background-image: url('img_girl.jpg');
}
</style>
</head>
<body>
```

Activity 4:

```
<h2>Background Image</h2>

<p>You can specify background images<br>
for any visible HTML element.<br>
In this example, the background image<br>
is specified for a div element.<br>
By default, the background-image<br>
will repeat itself in the direction(s)<br>
where it is smaller than the element<br>
where it is specified. (Try resizing the<br>
browser window to see how the<br>
background image behaves.</p>
```

</body>
</html>

Background Image on a Page

If you want the entire page to have a background image, you must specify the background image on the <body> element:

```
<style>
body {
  background-image: url('img_girl.jpg');
}
</style>
```

Activity 5:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-image: url('img_girl.jpg');
}
</style>
</head>
<body>

<h2>Background Image</h2>

<p>By default, the background image will repeat itself if it is smaller than the element where it is specified, in this case the body element.</p>

</body>
</html>
```

Activity 6:

```
<!DOCTYPE html>
<html>
<body>

<h2>Background Image</h2>

<p>A background image for a p element:</p>

<p style="background-image: url('woman.jpg');">
You can specify background images<br>
for any visible HTML element.<br>
```

In this example, the background image
is specified for a p element.
By default, the background-image
will repeat itself in the direction(s)
where it is smaller than the element
where it is specified. (Try resizing the
browser window to see how the
background image behaves.
</p>

</body>
</html>

Activity 7:

Background Repeat

If the background image is smaller than the element, the image will repeat itself, horizontally and vertically, until it reaches the end of the element:

```
<style>
body {
  background-image: url('example_img_girl.jpg');
}
</style>
```

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-image: url('example_img_girl.jpg');
}
</style>
</head>
<body>

<h2>Background Repeat</h2>

<p>By default, the background image will repeat itself if it is smaller than the element where it is specified, in this case the body element.</p>

</body>
</html>
```

To avoid the background image from repeating itself, set the background-repeat property to no-repeat.

```
<style>
body {
```

```
  background-image: url('example_img_girl.jpg');
  background-repeat: no-repeat;
}
</style>
```

Activity 8:

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-image: url('example_img_girl.jpg');
  background-repeat: no-repeat;
}
</style>
</head>
<body>

<h2>Background No Repeat</h2>

<p>You can avoid the image from being repeated by setting the background-repeat property to "no-repeat".</p>

</body>
</html>
```

Activity 9:

Background Cover

If you want the background image to cover the entire element, you can set the background-size property to cover.
Also, to make sure the entire element is always covered, set the background-attachment property to fixed:
This way, the background image will cover the entire element, with no stretching (the image will keep its original proportions):

```
<style>
body {
  background-image: url('img_girl.jpg');
  background-repeat: no-repeat;
  background-attachment: fixed;
  background-size: cover;
}
</style>

<!DOCTYPE html>
<html>
```

```
<head>
<style>
body {
  background-image: url('img_girl.jpg');
  background-repeat: no-repeat;
  background-attachment: fixed;
  background-size: cover;
}
</style>
</head>
<body>
```

Activity 10:

```
<h2>Background Cover</h2>

<p>Set the background-size property to "cover" and the background image will cover the entire element, in this case the body element.</p>

</body>
</html>
```

Activity 11:

HTML Lists

HTML lists allow web developers to group a set of related items in lists.

```
<!DOCTYPE html>
<html>
<body>


<h2>An Unordered HTML List</h2>

<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

<h2>An Ordered HTML List</h2>

<ol>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ol>

</body>
</html>
```

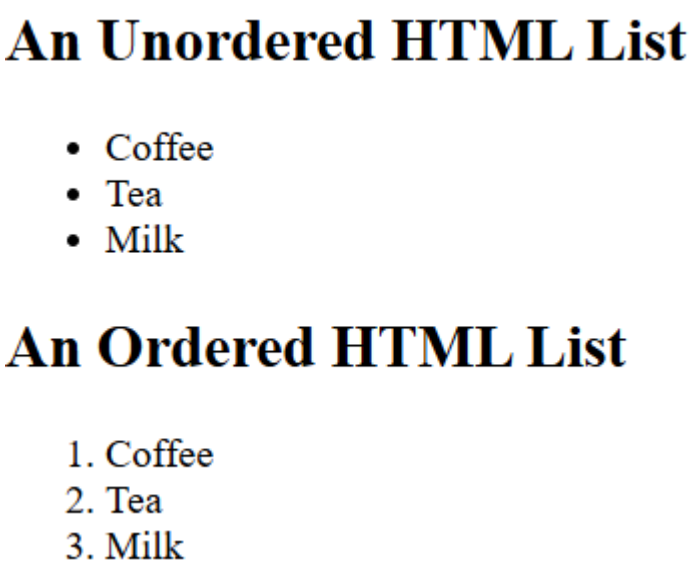

Unordered HTML List

An unordered list starts with the <ul> tag. Each list item starts with the <li> tag.
The list items will be marked with bullets (small black circles) by default:

Activity 12:

```
<!DOCTYPE html>
<html>
<body>

<h2>An unordered HTML list</h2>

<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

</body>
</html>
```

Activity 13:

Ordered HTML List

An ordered list starts with the <ol> tag. Each list item starts with the <li> tag.
The list items will be marked with numbers by default:

```
<!DOCTYPE html>
<html>
<body>

<h2>An ordered HTML list</h2>

<ol>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ol>

</body>
</html>
```

Activity 14:

HTML Description Lists

HTML also supports description lists.
A description list is a list of terms, with a description of each term.
The <dl> tag defines the description list, the <dt> tag defines the term (name), and the <dd> tag describes each term:

```
<!DOCTYPE html>
<html>
<body>

<h2>A Description List</h2>

<dl>
  <dt>Coffee</dt>
  <dd>- black hot drink</dd>
  <dt>Milk</dt>
  <dd>- white cold drink</dd>
</dl>

</body>
</html>
```

HTML List Tags

Tag	Description
	Defines an unordered list
	Defines an ordered list
	Defines a list item
<dl>	Defines a description list
<dt>	Defines a term in a description list
<dd>	Describes the term in a description list

HTML Forms

An HTML form is used to collect user input. The user input is most often sent to a server for processing.

The <form> Element

The HTML <form> element is used to create an HTML form for user input:

<form>
.
form elements
.
</form

The <form> element is a container for different types of input elements, such as: text fields, checkboxes, radio buttons, submit buttons, etc.

The <input> Element

The HTML <input> element is the most used form element.

An <input> element can be displayed in many ways, depending on the type attribute.

Here are some examples:

Type	Description
<input type="text">	Displays a single-line text input field
<input type="radio">	Displays a radio button (for selecting one of many choices)
<input type="checkbox">	Displays a checkbox (for selecting zero or more of many choice
<input type="submit">	Displays a submit button (for submitting the form)
<input type="button">	Displays a clickable button

All the different input types are covered in this chapter: HTML Input Types.

Activity 15:

Text Fields

The <input type="text"> defines a single-line input field for text input.

```
<!DOCTYPE html>
<html>
<body>


<h2>Text input fields</h2>

<form>
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname"
value="Dean">
</form>

<p>Note that the form itself is not visible.</p>

<p>Also note that the default width of text input fields
is 20 characters.</p>

</body>
</html>
```

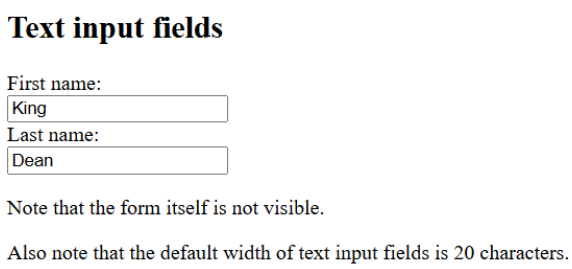


Note: The form itself is not visible. Also note that the default width of an input field is 20 characters.

Activity 16:

```
<!DOCTYPE html>
<html>
<body>

<h2>HTML Forms</h2>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname"
value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Dean"><br><br>
  <input type="submit" value="Submit">
</form>
```

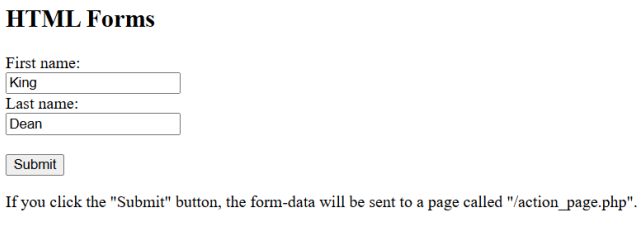

If you click the "Submit" button, the form-data will be sent to a page called "/action_page.php".

</body>
</html>

The <label> Element

Notice the use of the <label> element in the example above.

The <label> tag defines a label for many form elements.

The <label> element is useful for screen-reader users, because the screen-reader will read out loud the label when the user focuses on the input element.

The <label> element also helps users who have difficulty clicking on very small regions (such as radio buttons or checkboxes) - because when the user clicks the text within the <label> element, it toggles the radio button/checkbox.

The for attribute of the <label> tag should be equal to the id attribute of the <input> element to bind them together.

Radio Buttons

The <input type="radio"> defines a radio button.

Radio buttons let a user select ONE of a limited number of choices.

Activity 17:


```
<!DOCTYPE html>
<html>
<body>

<h2>Radio Buttons</h2>

<p>Choose your favorite Web language:</p>

<form>
  <input type="radio" id="html" name="fav_language" value="HTML">
  <label for="html">HTML</label><br>
  <input type="radio" id="css" name="fav_language" value="CSS">
  <label for="css">CSS</label><br>
  <input type="radio" id="javascript" name="fav_language" value="JavaScript">
  <label for="javascript">JavaScript</label>
</form>

</body>
```

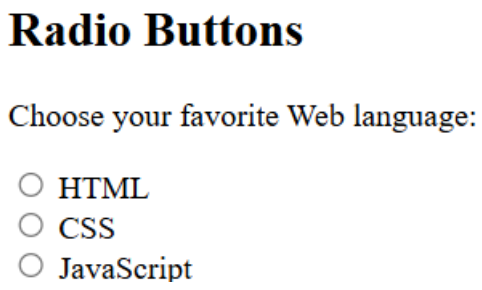


</html>

Checkboxes

The <input type="checkbox"> defines a **checkbox**.

Checkboxes let a user select ZERO or MORE options of a limited number of choices.

Activity 18:

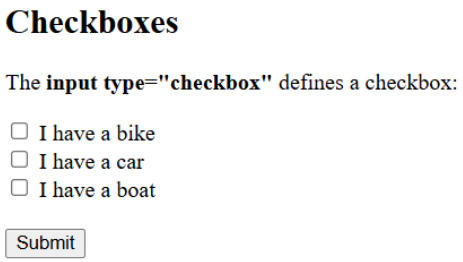


```
<!DOCTYPE html>
<html>
<body>

<h2>Checkboxes</h2>
<p>The <strong>input type="checkbox"</strong>
defines a checkbox:</p>

<form action="/action_page.php">
  <input type="checkbox" id="vehicle1" name="vehicle1" value="Bike">
  <label for="vehicle1"> I have a bike</label><br>
  <input type="checkbox" id="vehicle2" name="vehicle2" value="Car">
  <label for="vehicle2"> I have a car</label><br>
  <input type="checkbox" id="vehicle3" name="vehicle3" value="Boat">
  <label for="vehicle3"> I have a boat</label><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

The Submit Button

The <input type="submit"> defines a button for submitting the form data to a form-handler.

The form-handler is typically a file on the server with a script for processing input data.

The form-handler is specified in the form's action attribute.

Activity 19:

```
<!DOCTYPE html>
<html>
<body>


<h2>HTML Forms</h2>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
```

```
  <input type="text" id="fname" name="fname" value="King "><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Dean"><br><br>
  <input type="submit" value="Submit">
</form>

<p>If you click the "Submit" button, the form-data will be sent to a page called
"/action_page.php".</p>

</body>
</html>
```

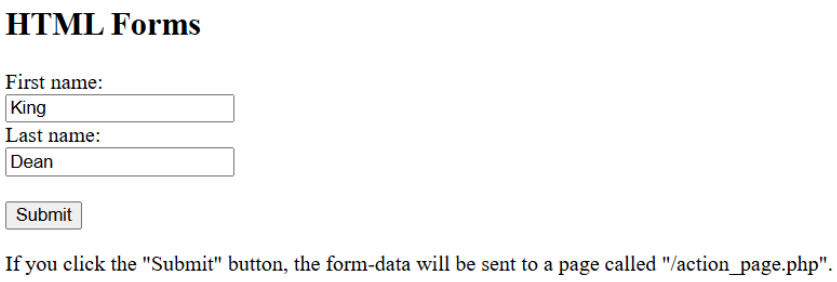

The Name Attribute for <input>

Notice that each input field must have a name attribute to be submitted.

If the name attribute is omitted, the value of the input field will not be sent at all.

Activity 20:

```
<!DOCTYPE html>
<html>
<body>


<h2>The name Attribute</h2>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" value="King"><br><br>
  <input type="submit" value="Submit">
</form>

<p>If you click the "Submit" button, the form-data will be sent to a page called
"/action_page.php".</p>

<p>Notice that the value of the "First name" field will not be submitted, because the input
element does not have a name attribute.</p>

</body>
</html>
```

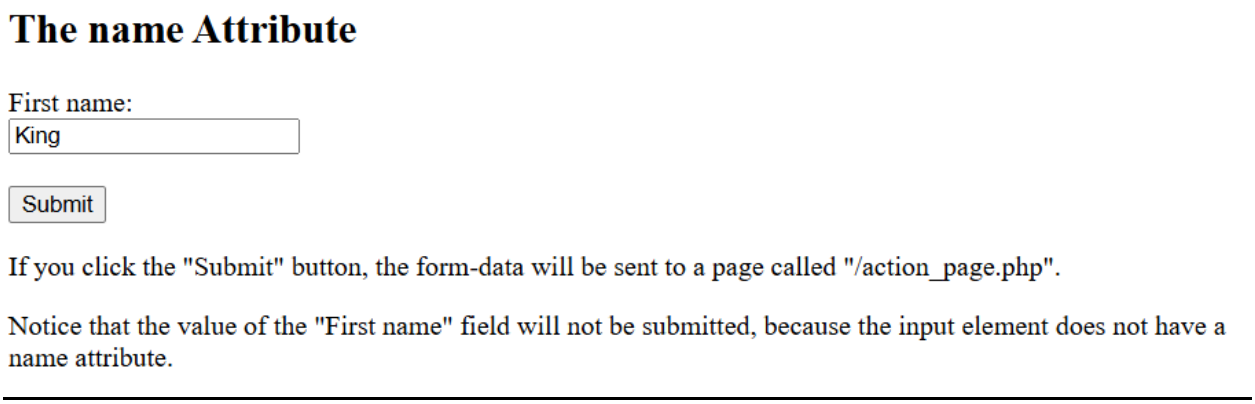

HTML Form Attributes

The Action Attribute

The action attribute defines the action to be performed when the form is submitted.

Usually, the form data is sent to a file on the server when the user clicks on the submit button.

In the example below, the form data is sent to a file called "action_page.php". This file contains a server-side script that handles the form data:

Activity 21:


```
<!DOCTYPE html>
<html>
<body>

<h2>HTML Forms</h2>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Dean"><br><br>
  <input type="submit" value="Submit">
</form>

<p>If you click the "Submit" button, the form-data will be sent to a page called "/action_page.php".</p>

</body>
</html>
```

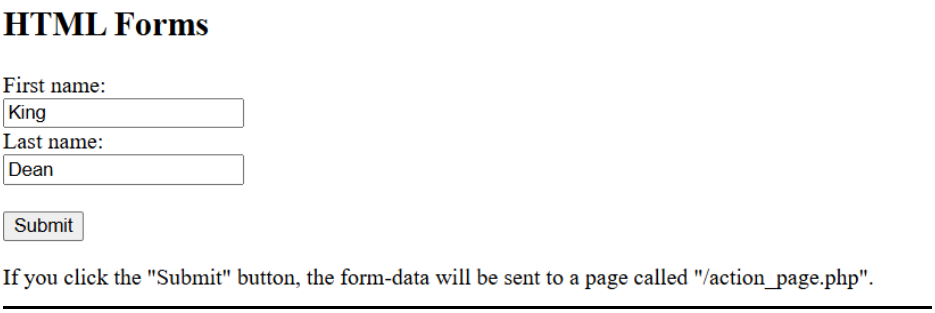

NOTE: If the action attribute is omitted, the action is set to the current page.

The Target Attribute

The target attribute specifies where to display the response that is received after submitting the form.

The target attribute can have one of the following values:

Value	Description
_blank	The response is displayed in a new window or tab
_self	The response is displayed in the current window
_parent	The response is displayed in the parent frame
_top	The response is displayed in the full body of the window
framename	The response is displayed in a named iframe

The default value is _self which means that the response will open in the current window.

Activity 21:


```
<!DOCTYPE html>
<html>
<body>

<h2>The form target attribute</h2>

<p>When submitting this form, the result will be opened in a new browser tab:</p>

<form action="/action_page.php" target="_blank">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text"
id="lname" name="lname"
value="Dean"><br><br>
  <input type="submit"
value="Submit">
</form>

</body>
</html>
```

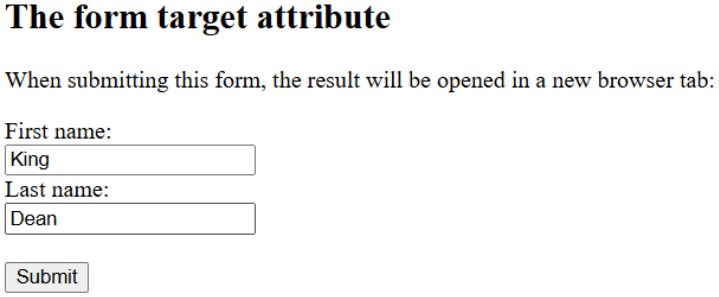

The Method Attribute

The method attribute specifies the HTTP method to be used when submitting the form data.

The form-data can be sent as URL variables (with method="get") or as HTTP post transaction (with method="post").

The default HTTP method when submitting form data is GET.

Activity 22:

```
<!DOCTYPE html>
<html>
<body>

<h2>The method Attribute</h2>


<p>This form will be submitted using the GET method:</p>

<form action="/action_page.php" target="_blank" method="get">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Dean"><br><br>
```

  <input type="submit" value="Submit">
</form>

After you submit, notice that the form values is visible in the address bar of the new browser tab.

</body>

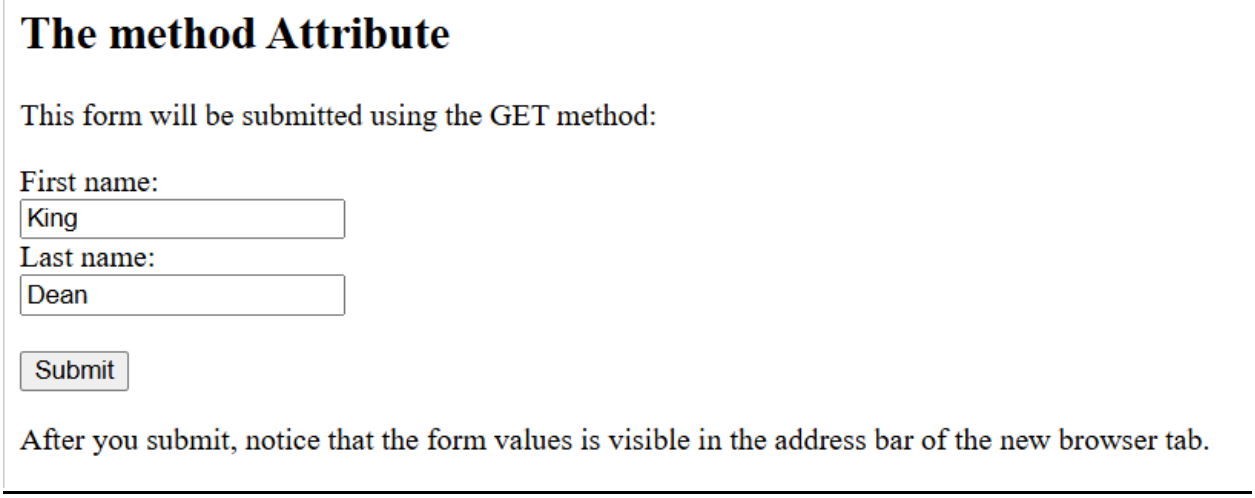

Activity 23:

<!DOCTYPE html>
<html>
<body>

<h2>The method Attribute</h2>

This form will be submitted using the POST method:

<form action="/action_page.php" target="_blank" method="post">
  <label for="fname">First name:</label>
  <input type="text" id="fname" name="fname" value="King">
  <label for="lname">Last name:</label>
  <input type="text" id="lname" name="lname" value="Dean">

  <input type="submit" value="Submit">
</form>

After you submit, notice that, unlike the GET method, the form values is NOT visible in the address bar of the new browser tab.

</body>
</html>

The method Attribute

This form will be submitted using the POST method:

First name:
King
Last name:
Dean

Submit

After you submit, notice that, unlike the GET method, the form values is NOT visible in the address bar of the new browser tab.

Notes on GET:

- Appends the form data to the URL, in name/value pairs
- NEVER use GET to send sensitive data! (the submitted form data is visible in the URL!)
- The length of a URL is limited (2048 characters)
- Useful for form submissions where a user wants to bookmark the result
- GET is good for non-secure data, like query strings in Google

Notes on POST:

- Appends the form data inside the body of the HTTP request (the submitted form data is not shown in the URL)
- POST has no size limitations, and can be used to send large amounts of data.
- Form submissions with POST cannot be bookmarked

Tip: Always use POST if the form data contains sensitive or personal information!

The Autocomplete Attribute

The autocomplete attribute specifies whether a form should have autocomplete on or off.

When autocomplete is on, the browser automatically complete values based on values that the user has entered before.

Activity 24:

```
<!DOCTYPE html>
<html>
<body>

<h1>The form autocomplete attribute</h1>
```

```
<p>Fill in and submit the form, then reload the page, start to fill in the form again - and see how autocomplete works.</p>

<p>Then, try to set autocomplete to "off".</p>

<form action="/action_page.php" autocomplete="on">
  <label for="fname">First name:</label>
  <input type="text" id="fname" name="fname"><br><br>
  <label for="email">Email:</label>
  <input type="text" id="email" name="email"><br><br>
  <input type="submit">
</form>

</body>
</html>
```

The Novalidate Attribute

The novalidate attribute is a boolean attribute.

When present, it specifies that the form-data (input) should not be validated when submitted.

Activity 25:


```
<!DOCTYPE html>
<html>
<body>

<h1>The form novalidate attribute</h1>

<p>The novalidate attribute indicates that the form input is not to be validated on submit:</p>

<form action="/action_page.php" novalidate>
  <label for="email">Enter your email:</label>
  <input type="email" id="email" name="email"><br><br>
  <input type="submit">
</form>

</body>
</html>
```

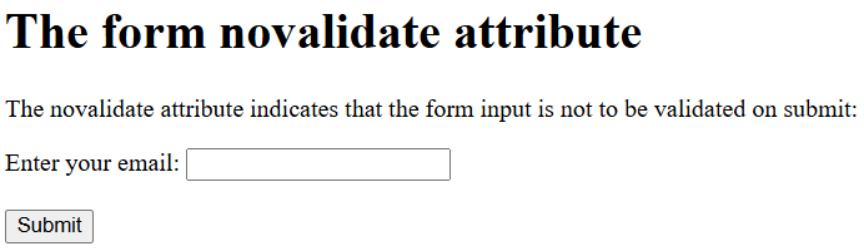

List of All <form> Attributes

Attribute	Description
accept-charset	Specifies the character encodings used for form submission
action	Specifies where to send the form-data when a form is submitted
autocomplete	Specifies whether a form should have autocomplete on or off
enctype	Specifies how the form-data should be encoded when submitting it to the server (only f
method	Specifies the HTTP method to use when sending form-data
name	Specifies the name of the form
novalidate	Specifies that the form should not be validated when submitted
rel	Specifies the relationship between a linked resource and the current document
target	Specifies where to display the response that is received after submitting the form

HTML Form Elements

The HTML <form> Elements

The HTML <form> element can contain one or more of the following form elements:

- <input>
- <label>
- <select>
- <textarea>
- <button>
- <fieldset>
- <legend>
- <datalist>
- <output>
- <option>
- <optgroup>

The <input> Element

One of the most used form elements is the <input> element.

The <input> element can be displayed in several ways, depending on the type attribute.


Activity 26:

```
<!DOCTYPE html>
<html>
<body>

<h2>The input Element</h2>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname"
name="fname"><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

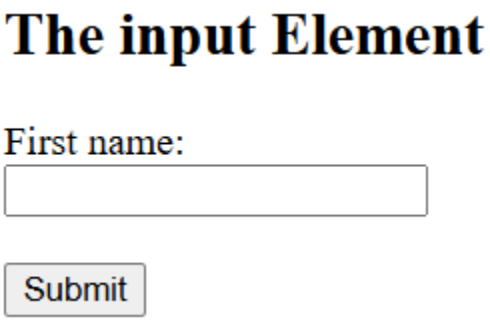

The <label> Element

The <label> element defines a label for several form elements.

The <label> element is useful for screen-reader users, because the screen-reader will read out loud the label when the user focus on the input element.

The <label> element also help users who have difficulty clicking on very small regions (such as radio buttons or checkboxes) - because when the user clicks the text within the <label> element, it toggles the radio button/checkbox.

The for attribute of the <label> tag should be equal to the id attribute of the <input> element to bind them together.

The <select> Element

The <select> element defines a drop-down list:

Activity 27:


```
<!DOCTYPE html>
<html>
<body>

<h2>The select Element</h2>

<p>The select element defines a drop-down list:</p>

<form action="/action_page.php">
  <label for="cars">Choose a car:</label>
  <select id="cars" name="cars">
    <option value="volvo">Volvo</option>
    <option value="saab">Saab</option>
    <option value="fiat">Fiat</option>
    <option value="audi">Audi</option>
  </select>
  <input type="submit">
</form>

</body>
</html>
```

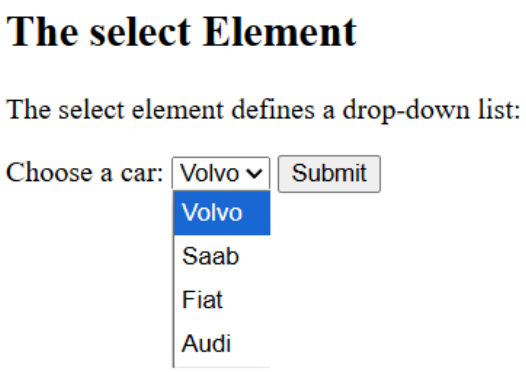

The <option> element defines an option that can be selected.

By default, the first item in the drop-down list is selected.

To define a pre-selected option, add the selected attribute to the option:

Activity 28:


```
<!DOCTYPE html>
<html>
<body>

<h2>Pre-selected Option</h2>
```

You can preselect an option with the selected attribute:

```
<form action="/action_page.php">
  <label for="cars">Choose a car:</label>
  <select id="cars" name="cars">
    <option value="volvo">Volvo</option>
    <option value="saab">Saab</option>
    <option value="fiat" selected>Fiat</option>
    <option value="audi">Audi</option>
  </select>
  <input type="submit">
</form>

</body>
</html>
```

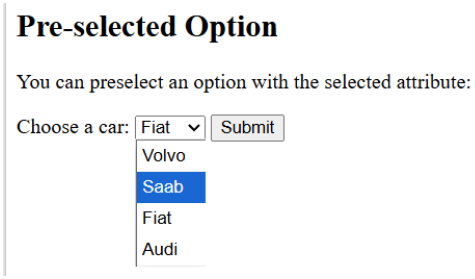

Visible Values:

Use the size attribute to specify the number of visible values:

Activity 29:


```
<!DOCTYPE html>
<html>
<body>

<h2>Visible Option Values</h2>

<p>Use the size attribute to specify the number of visible values.</p>

<form action="/action_page.php">
  <label for="cars">Choose a car:</label>
  <select id="cars" name="cars" size="3">
    <option value="volvo">Volvo</option>
    <option value="saab">Saab</option>
    <option value="fiat">Fiat</option>
    <option value="audi">Audi</option>
  </select><br><br>
  <input type="submit">
</form>

</body>
</html>
```

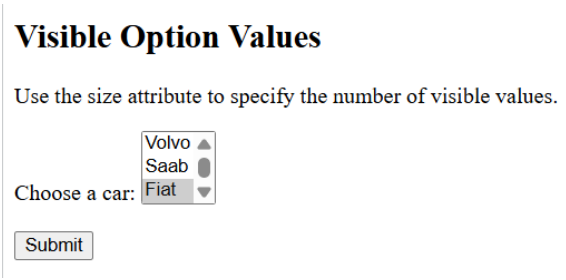

Allow Multiple Selections:

Use the multiple attribute to allow the user to select more than one value:

Activity 30:

```
<!DOCTYPE html>
<html>
<body>


<h2>Allow Multiple Selections</h2>

<p>Use the multiple attribute to allow the user to select more than one value.</p>

<form action="/action_page.php">
  <label for="cars">Choose a car:</label>
  <select id="cars" name="cars" size="4" multiple>
    <option value="volvo">Volvo</option>
    <option value="saab">Saab</option>
    <option value="fiat">Fiat</option>
    <option value="audi">Audi</option>
  </select><br><br>
  <input type="submit">
</form>

<p>Hold down the Ctrl (windows) / Command (Mac) button to select multiple options.</p>

</body>
</html>
```

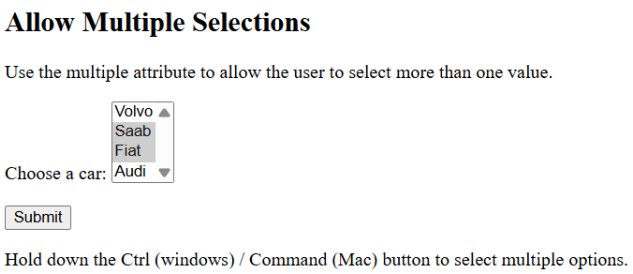

The <textarea> Element

The <textarea> element defines a multi-line input field (a text area):


Activity 31:

```
<!DOCTYPE html>
<html>
<body>

<h2>Textarea</h2>
<p>The textarea element defines a multi-line input field.</p>

<form action="/action_page.php">
  <textarea name="message" rows="10" cols="30">The cat was playing in the garden.</textarea>
  <br><br>
  <input type="submit">
</form>

</body>
```

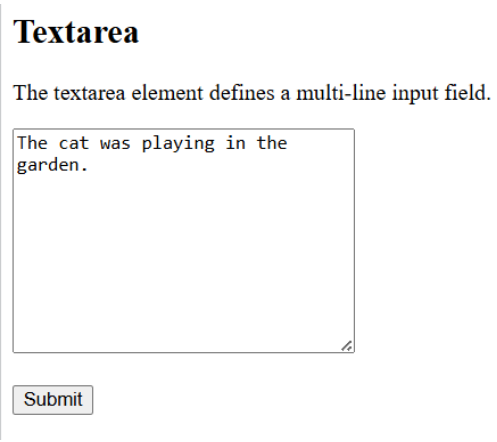

The rows attribute specifies the visible number of lines in a text area.

The cols attribute specifies the visible width of a text area.

Input Type Text

<input type="text"> defines a **single-line text input field**:

Activity 32:

```
<!DOCTYPE html>
<html>
<body>

<h2>Text field</h2>
<p>The <strong>input type="text"</strong> defines a one-line text input field:</p>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname"><br><br>
```

```
  <input type="submit" value="Submit">
</form>

<p>Note that the form itself is not visible.</p>
<p>Also note that the default width of a text field is 20 characters.</p>
javascript:void(0);
</body>
</html>
```

Text field

The **input type="text"** defines a one-line text input field:

First name:

Last name:

Submit

Note that the form itself is not visible.

Also note that the default width of a text field is 20 characters.

Input Type Password

<input type="password"> defines a **password field**:

Activity 33:

```
<!DOCTYPE html>
<html>
<body>

<h2>Password field</h2>

<p>The <strong>input type="password"</strong> defines a password field:</p>

<form action="/action_page.php">
  <label for="username">Username:</label><br>
  <input type="text" id="username" name="username"><br>
  <label for="pwd">Password:</label><br>
  <input type="password" id="pwd" name="pwd"><br><br>
  <input type="submit" value="Submit">
</form>

<p>The characters in a password field are masked (shown as asterisks or circles).</p>
```

```
</body>
</html>
```

Password field

The **input type="password"** defines a password field:

Username:

Password:

Submit

The characters in a password field are masked (shown as asterisks or circles).

Input Type Submit

<input type="submit"> defines a button for **submitting** form data to a **form-handler**.

The form-handler is typically a server page with a script for processing input data.

The form-handler is specified in the form's action attribute:

Activity 34:

```
<!DOCTYPE html>
<html>
<body>

<h2>Submit Button</h2>

<p>The <strong>input type="submit"</strong> defines a button for submitting form data to a form-handler:</p>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Dean"><br><br>
  <input type="submit" value="Submit">
</form>

<p>If you click "Submit", the form-data will be sent to a page called "/action_page.php".</p>

</body>
</html>
```

Submit Button

The **input type="submit"** defines a button for submitting form data to a form-handler:

First name:
King
Last name:
Dean

Submit

If you click "Submit", the form-data will be sent to a page called "/action_page.php".

Input Type Reset

<input type="reset"> defines a **reset button** that will reset all form values to their default values:

Activity 35:

```
<!DOCTYPE html>
<html>
<body>

<h2>Reset Button</h2>

<p>The <strong>input type="reset"</strong> defines a reset button that resets all form values to their default values:</p>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname" value="King"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname" value="Dean"><br><br>
  <input type="submit" value="Submit">
  <input type="reset" value="Reset">
</form>

<p>If you change the input values and then click the "Reset" button, the form-data will be reset to the default values.</p>

</body>
</html>
```

Reset Button

The **input type="reset"** defines a reset button that resets all form values to their default values:

First name:
King
Last name:
Dean

Submit Reset

If you change the input values and then click the "Reset" button, the form-data will be reset to the default values.

Input Type Radio

<input type="radio"> defines a **radio button**.

Radio buttons let a user select ONLY ONE of a limited number of choices:

Activity 36:

```
<!DOCTYPE html>
<html>
<body>

<h2>Radio Buttons</h2>

<p>The <strong>input type="radio"</strong> defines a radio button:</p>

<p>Choose your favorite Web language:</p>
<form action="/action_page.php">
  <input type="radio" id="html" name="fav_language" value="HTML">
  <label for="html">HTML</label><br>
  <input type="radio" id="css" name="fav_language" value="CSS">
  <label for="css">CSS</label><br>
  <input type="radio" id="javascript" name="fav_language" value="JavaScript">
  <label for="javascript">JavaScript</label><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

Radio Buttons

The **input type="radio"** defines a radio button:

Choose your favorite Web language:

- ○ HTML
- ○ CSS
- ○ JavaScript

Submit

Input Type Checkbox

<input type="checkbox"> defines a **checkbox**.

Checkboxes let a user select ZERO or MORE options of a limited number of choices.

Activity 37:

```
<!DOCTYPE html>
<html>
<body>

<h2>Checkboxes</h2>
<p>The <strong>input type="checkbox"</strong> defines a checkbox:</p>

<form action="/action_page.php">
  <input type="checkbox" id="vehicle1" name="vehicle1" value="Bike">
  <label for="vehicle1"> I have a bike</label><br>
  <input type="checkbox" id="vehicle2" name="vehicle2" value="Car">
  <label for="vehicle2"> I have a car</label><br>
  <input type="checkbox" id="vehicle3" name="vehicle3" value="Boat">
  <label for="vehicle3"> I have a boat</label><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

Checkboxes

The **input type="checkbox"** defines a checkbox:

- [ ] I have a bike
- [ ] I have a car
- [ ] I have a boat

Submit

Input Type Button

<input type="button"> defines a **button**:

Activity 38:




```
<!DOCTYPE html>
<html>
<body>

<h2>Input Button</h2>

<input type="button" onclick="alert('Hello World!')" value="Click Me!">

</body>
</html>
```

Input Type Color

The <input type="color"> is used for input fields that should contain a color.

Depending on browser support, a color picker can show up in the input field.

Activity 39:

```
<!DOCTYPE html>
<html>
<body>


<h2>Show a Color Picker</h2>
```

The input type="color" is used for input fields that should contain a color.

<form action="/action_page.php">
  <label for="favcolor">Select your favorite color:</label>
  <input type="color" id="favcolor" name="favcolor" value="#ff0000">
  <input type="submit" value="Submit">
</form>

Note: type="color" is not supported in Internet Explorer 11.

</body>
</html>

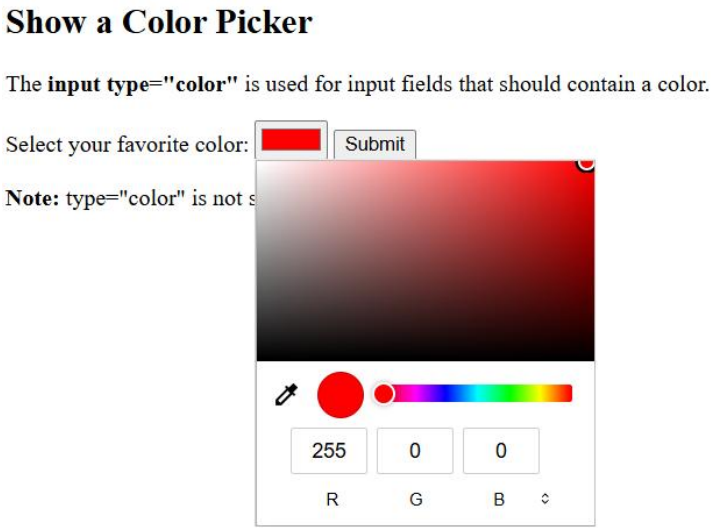

Input Type Date

The <input type="date"> is used for input fields that should contain a date.

Depending on browser support, a date picker can show up in the input field.

Activity 40:

<!DOCTYPE html>
<html>
<body>

<h2>Date Field</h2>


The input type="date" is used for input fields that should contain a date.

<form action="/action_page.php">
  <label for="birthday">Birthday:</label>
  <input type="date" id="birthday" name="birthday">

```
  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> type="date" is not supported in Internet Explorer 11.</p>

</body>
</html>
```

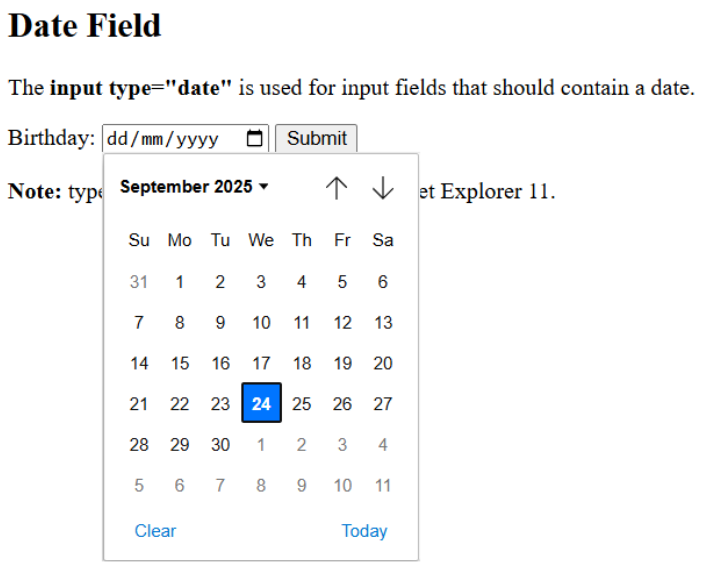

You can also use the min and max attributes to add restrictions to dates:

Activity 41:

```
<!DOCTYPE html>
<html>
<body>

<h2>Date Field Restrictions</h2>

<p>Use the min and max attributes to add restrictions to dates:</p>

<form action="/action_page.php">
  <label for="datemin">Enter a date after 2000-01-01:</label>
  <input type="date" id="datemin" name="datemin" min="2000-01-02"><br><br>

  <label for="datemax">Enter a date before 1980-01-01:</label>
  <input type="date" id="datemax" name="datemax" max="1979-12-31"><br><br>

  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> type="date" is not supported in Internet Explorer 11.</p>

</body>
```

</html>

Date Field Restrictions

Use the min and max attributes to add restrictions to dates:

Enter a date after 2000-01-01: dd/mm/yyyy

Enter a date before 1980-01-01: dd/mm/yyyy

Submit

Note: type="date" is not supported in Internet Explorer 11.

Input Type Datetime-local

The <input type="datetime-local"> specifies a date and time input field, with no time zone.

Depending on browser support, a date picker can show up in the input field.

Activity 42:

```
<!DOCTYPE html>
<html>
<body>

<h2>Local Date Field</h2>

<p>The <strong>input type="datetime-local"</strong> specifies a date and time input field, with no time zone.</p>

<form action="/action_page.php">
  <label for="birthdaytime">Birthday (date and time):</label>
  <input type="datetime-local" id="birthdaytime" name="birthdaytime">
  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> type="datetime-local" is not supported in Internet Explorer 11.</p>

</body>
</html>
```

Local Date Field

The **input type="datetime-local"** specifies a date and time input field, with no time zone.

Birthday (date and time): dd/mm/yyyy --:-- -- Submit

Note: type="datetime-local" is not supported in Internet Explorer 11.

Input Type Email

The <input type="email"> is used for input fields that should contain an e-mail address.

Depending on browser support, the e-mail address can be automatically validated when submitted.

Some smartphones recognize the email type, and add ".com" to the keyboard to match email input.

Activity 43:

```
<!DOCTYPE html>
<html>
<body>

<h2>Email Field</h2>

<p>The <strong>input type="email"</strong> is used for input fields that should contain an e-mail address:</p>

<form action="/action_page.php">
  <label for="email">Enter your email:</label>
  <input type="email" id="email" name="email">
  <input type="submit" value="Submit">
</form>

</body>
```

Email Field

The **input type="email"** is used for input fields that should contain an e-mail address:

Enter your email: Submit

Input Type Image

The <input type="image"> defines an image as a submit button.

The path to the image is specified in the src attribute.

Activity 44:

```
<!DOCTYPE html>
<html>
<body>

<h2>Display an Image as the Submit button</h2>

<form action="/action_page.php">
  <label for="fname">First name: </label>
  <input type="text" id="fname" name="fname"><br><br>
  <label for="lname">Last name: </label>
  <input type="text" id="lname" name="lname"><br><br>
  <input type="image" src="img_submit.gif" alt="Submit" width="48" height="48">
</form>

<p><b>Note:</b> The input type="image" sends the X and Y coordinates of the click that activated the image button.</p>

</body>
</html>
```

Display an Image as the Submit button

First name:

Last name:



Note: The input type="image" sends the X and Y coordinates of the click that activated the image button.

Input Type File

The <input type="file"> defines a file-select field and a "Browse" button for file uploads.

Activity 45:


```
<!DOCTYPE html>
<html>
<body>

<h1>File upload</h1>

<p>Show a file-select field which allows a file to be chosen for upload:</p>
<form action="/action_page.php">
  <label for="myfile">Select a file:</label>
  <input type="file" id="myfile" name="myfile"><br><br>
```

```
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

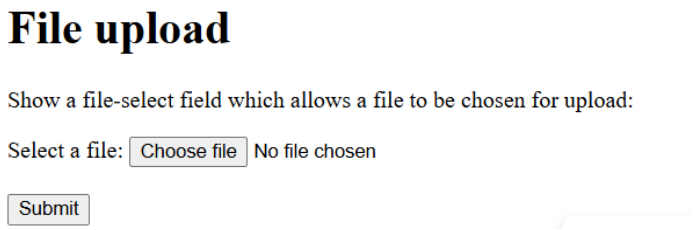

Input Type Hidden

The <input type="hidden"> defines a hidden input field (not visible to a user).

A hidden field lets web developers include data that cannot be seen or modified by users when a form is submitted.

A hidden field often stores what database record that needs to be updated when the form is submitted.

Note: While the value is not displayed to the user in the page's content, it is visible (and can be edited) using any browser's developer tools or "View Source" functionality. Do not use hidden inputs as a form of security!

Activity 46:

```
<!DOCTYPE html>
<html>
<body>

<h1>A Hidden Field (look in source code)</h1>

<form action="/action_page.php">
  <label for="fname">First name:</label>
  <input type="text" id="fname" name="fname"><br><br>
  <input type="hidden" id="custId" name="custId" value="3487">
  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> The hidden field is not shown to the user, but the data is sent when the form is submitted.</p>

</body>
```

</html>

A Hidden Field (look in source code)

First name: John

Submit

Note: The hidden field is not shown to the user, but the data is sent when the form is submitted.

Input Type Month

The <input type="month"> allows the user to select a month and year.

Depending on browser support, a date picker can show up in the input field.

Activity 47:

```
<!DOCTYPE html>
<html>
<body>


<h2>Month Field</h2>

<p>The <strong>input type="month"</strong> allows the user to select a month and year.</p>

<form action="/action_page.php">
  <label for="bdaymonth">Birthday (month and year):</label>
  <input type="month" id="bdaymonth" name="bdaymonth">
  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> type="month" is not supported in Firefox, Safari, or Internet Explorer 11.</p>

</body>
</html>
```

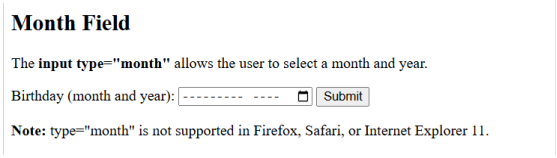



Input Type Number

The <input type="number"> defines a **numeric** input field.

You can also set restrictions on what numbers are accepted.

The following example displays a numeric input field, where you can enter a value from 1 to 5:

Activity 48:

```
<!DOCTYPE html>
<html>
<body>


<h2>Number Field</h2>

<p>The <strong>input type="number"</strong> defines a numeric input field.</p>

<p>You can use the min and max attributes to add numeric restrictions in the input field:</p>

<form action="/action_page.php">
  <label for="quantity">Quantity (between 1 and 5):</label>
  <input type="number" id="quantity" name="quantity" min="1" max="5">
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

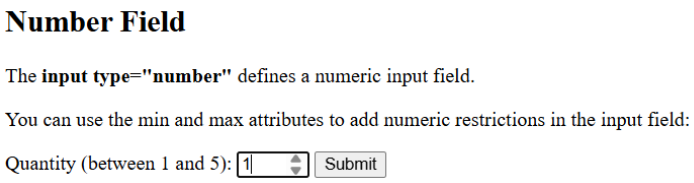

Input Restrictions

Attribute	Description
checked	Specifies that an input field should be pre-selected when the page loads (for type="checkbox" or type="radio")
disabled	Specifies that an input field should be disabled
max	Specifies the maximum value for an input field
maxlength	Specifies the maximum number of character for an input field
min	Specifies the minimum value for an input field
pattern	Specifies a regular expression to check the input value against
readonly	Specifies that an input field is read only (cannot be changed)
required	Specifies that an input field is required (must be filled out)
size	Specifies the width (in characters) of an input field
step	Specifies the legal number intervals for an input field
value	Specifies the default value for an input field

The following example displays a numeric input field, where you can enter a value from 0 to 100, in steps of 10. The default value is 30:

Activity 49:


```
<!DOCTYPE html>
<html>
<body>

<h2>Numeric Steps</h2>

<p>Depending on browser support: Fixed steps will apply in the input field.</p>

<form action="/action_page.php">
  <label for="quantity">Quantity:</label>
  <input type="number" id="quantity" name="quantity" min="0" max="100" step="10"
value="30">
  <input type="submit" value="Submit">
</form>

</body>
</html>
```



Input Type Range

The <input type="range"> defines a control for entering a number whose exact value is not important (like a slider control). Default range is 0 to 100. However, you can set restrictions on what numbers are accepted with the min, max, and step attributes:

Activity 50:


```
<!DOCTYPE html>
<html>
<body>

<h2>Range Field</h2>

<p>Depending on browser support: The input type "range" can be displayed as a slider control.</p>

<form action="/action_page.php" method="get">
  <label for="vol">Volume (between 0 and 50):</label>
  <input type="range" id="vol" name="vol" min="0" max="50">
  <input type="submit" value="Submit">
</form>

</body>
</html>
```



Input Type Search

The <input type="search"> is used for search fields (a search field behaves like a regular text field).


Activity 51:

```
<!DOCTYPE html>
<html>
<body>

<h2>Search Field</h2>
<p>The <strong>input type="search"</strong> is used for search fields (behaves like a regular text field):</p>

<form action="/action_page.php">
  <label for="gsearch">Search Google:</label>
  <input type="search" id="gsearch" name="gsearch">
  <input type="submit" value="Submit">
</form>

</body>
```



Input Type Tel

The <input type="tel"> is used for input fields that should contain a telephone number.

Activity 52:


```
<!DOCTYPE html>
<html>
<body>

<h2>Telephone Field</h2>

<p>The <strong>input type="tel"</strong> is used for input fields that should contain a telephone number:</p>

<form action="/action_page.php">
  <label for="phone">Enter a phone number:</label><br><br>
  <input type="tel" id="phone" name="phone" placeholder="123-45-678" pattern="[0-9]{3}-[0-9]{2}-[0-9]{3}" required><br><br>
  <small>Format: 123-45-678</small><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

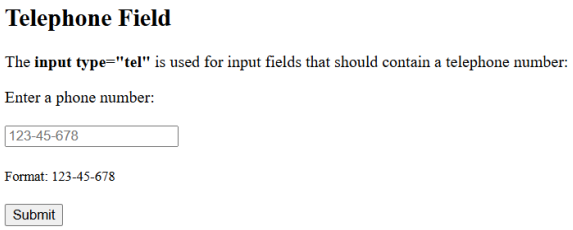

Input Type Time

The <input type="time"> allows the user to select a time (no time zone).

Depending on browser support, a time picker can show up in the input field.

Activity 53:

```
<!DOCTYPE html>
<html>
<body>

<h1>Show a Time Input Control</h1>


<p>The <strong>input type="time"</strong> allows the user to select a time (no time zone):</p>

<p>If the browser supports it, a time picker pops up when entering the input field.</p>
```

```
<form action="/action_page.php">
  <label for="appt">Select a time:</label>
  <input type="time" id="appt" name="appt">
  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> type="time" is not supported in Internet Explorer 11.</p>

</body>
</html>
```

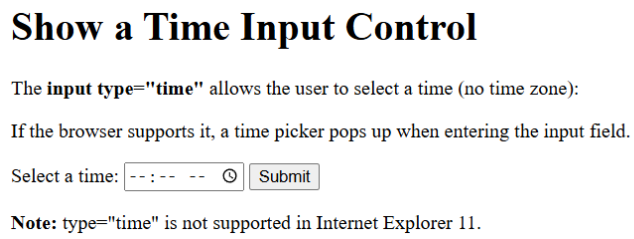

Input Type Url

The <input type="url"> is used for input fields that should contain a URL address.

Depending on browser support, the url field can be automatically validated when submitted.

Some smartphones recognize the url type, and adds ".com" to the keyboard to match url input.

Activity 55:


```
<!DOCTYPE html>
<html>
<body>

<h1>Display a URL Input Field</h1>

<p>The <strong>input type="url"</strong> is used for input fields that should contain a URL address:</p>

<form action="/action_page.php">
  <label for="homepage">Add your homepage:</label>
  <input type="url" id="homepage" name="homepage">
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

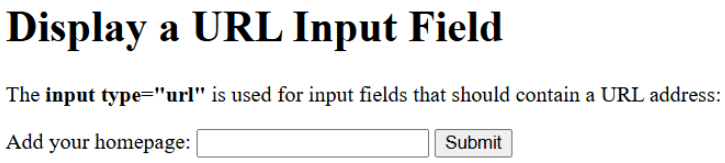

Input Type Week

The <input type="week"> allows the user to select a week and year.

Depending on browser support, a date picker can show up in the input field.

Activity 56:

```
<!DOCTYPE html>
<html>
<body>

<h1>Display a Week Input Control</h1>

<p>The <strong>input type="week"</strong> allows the user to select a week and year.</p>

<p>If the browser supports it, a date picker pops up when entering the input field.</p>

<form action="/action_page.php">
  <label for="week">Select a week:</label>
  <input type="week" id="week" name="week">
  <input type="submit" value="Submit">
</form>

<p><strong>Note:</strong> type="week" is not supported in Firefox, Safari or Internet Explorer 11.</p>

</body>
</html>
```

