

Bornes Wifi

1-Projet : remplacer les anciennes bornes wifi par des nouvelles bornes. (CARVIN , AUG USLD)

Central Aruba



Brancher une borne sur un port tagué sur le vlan 11 . Pour que quand la borne remonte elle remonte avec une bonne ip en 192.168 grâce au DHCP .

Mettre la borne dans le groupe AUG puis nommé la borne.



Ainsi j'ai créé l'étiquette, puis je suis parti les installer.


The screenshot shows the HPE Aruba Central web interface. The left sidebar contains a navigation menu with options like Overview, Devices, Clients, Guests, Applications, Security, Network Services, Alerts & Events, Audit Trail, Tools, Reports, Launch, App Catalog, Maintain, Firmware, and Organization. The main content area is titled 'Groups (24)' and displays a table of devices. The table has columns for Device Name, Type, Serial Number, and MAC Address. The devices listed are AP-AUG-R0-01 through AP-AUG-R1-05, all of type 'Access Point'. The Serial Number and MAC Address columns are redacted with blue boxes. The interface also shows a search bar, navigation menu, and status indicators.

Device Name	Type	Serial Number	MAC Address
AP-AUG-R0-01	Access Point		
AP-AUG-R0-02	Access Point		
AP-AUG-R0-03	Access Point		
AP-AUG-R0-04	Access Point		
AP-AUG-R1-01	Access Point		
AP-AUG-R1-02	Access Point		
AP-AUG-R1-03	Access Point		
AP-AUG-R1-04	Access Point		
AP-AUG-R1-05	Access Point		

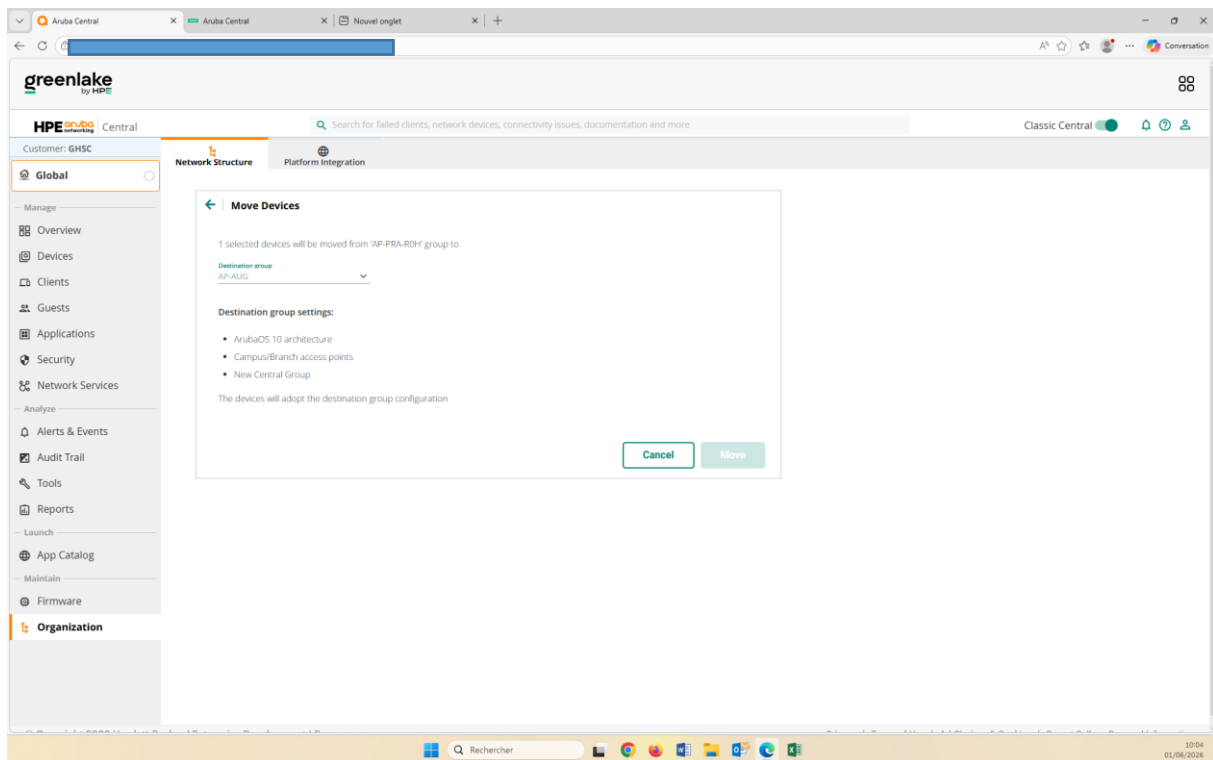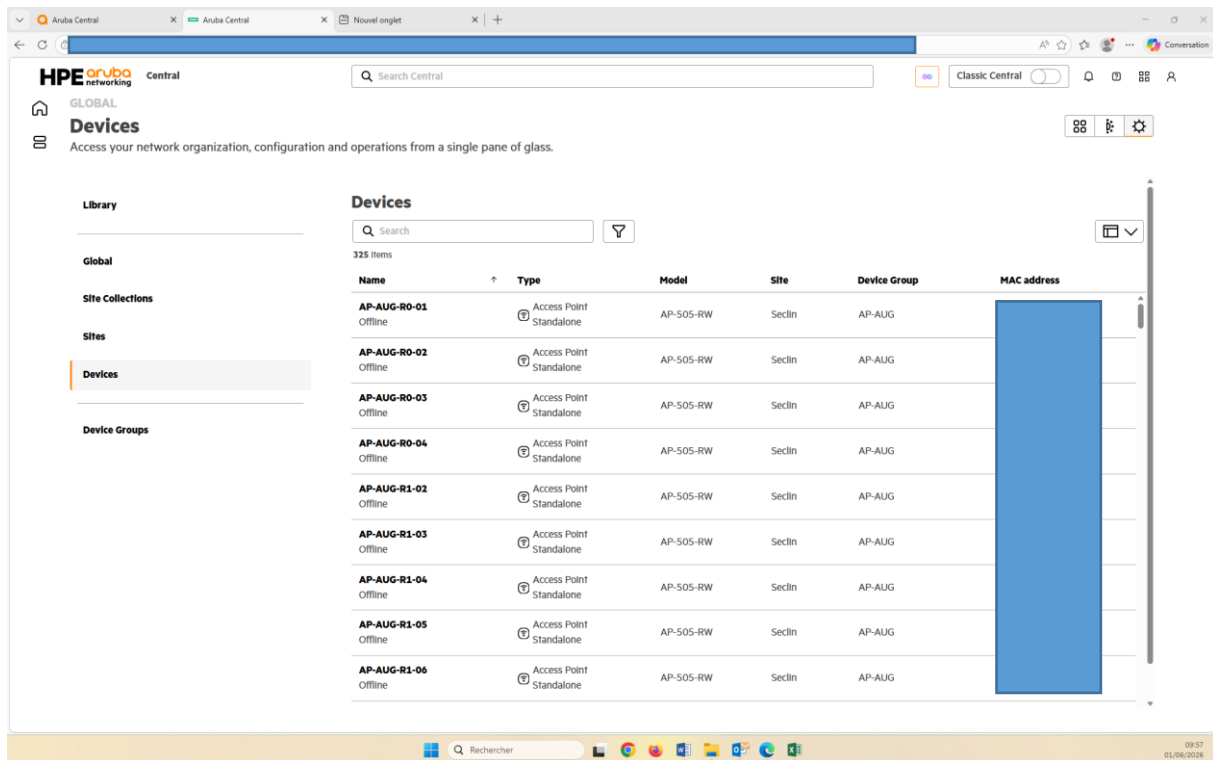

2- Créer les plans, ainsi voir la zone de couverture des bornes , placer les bornes puis les murs

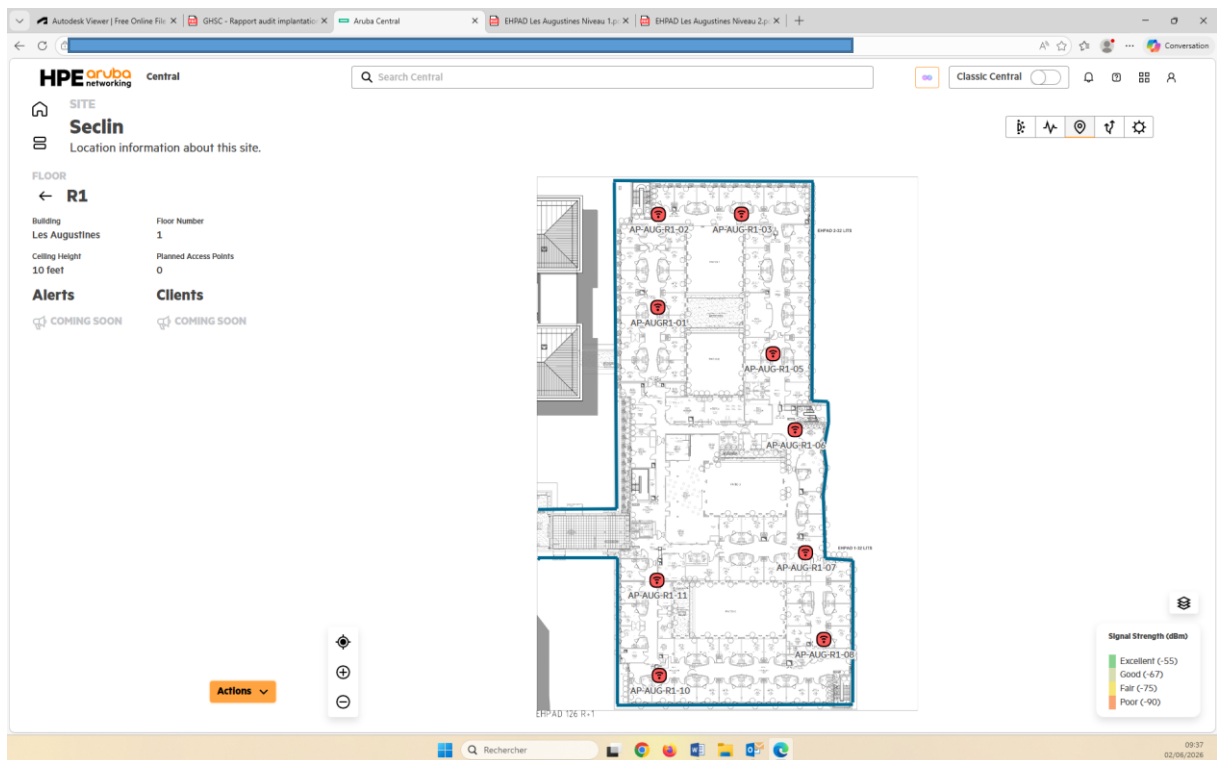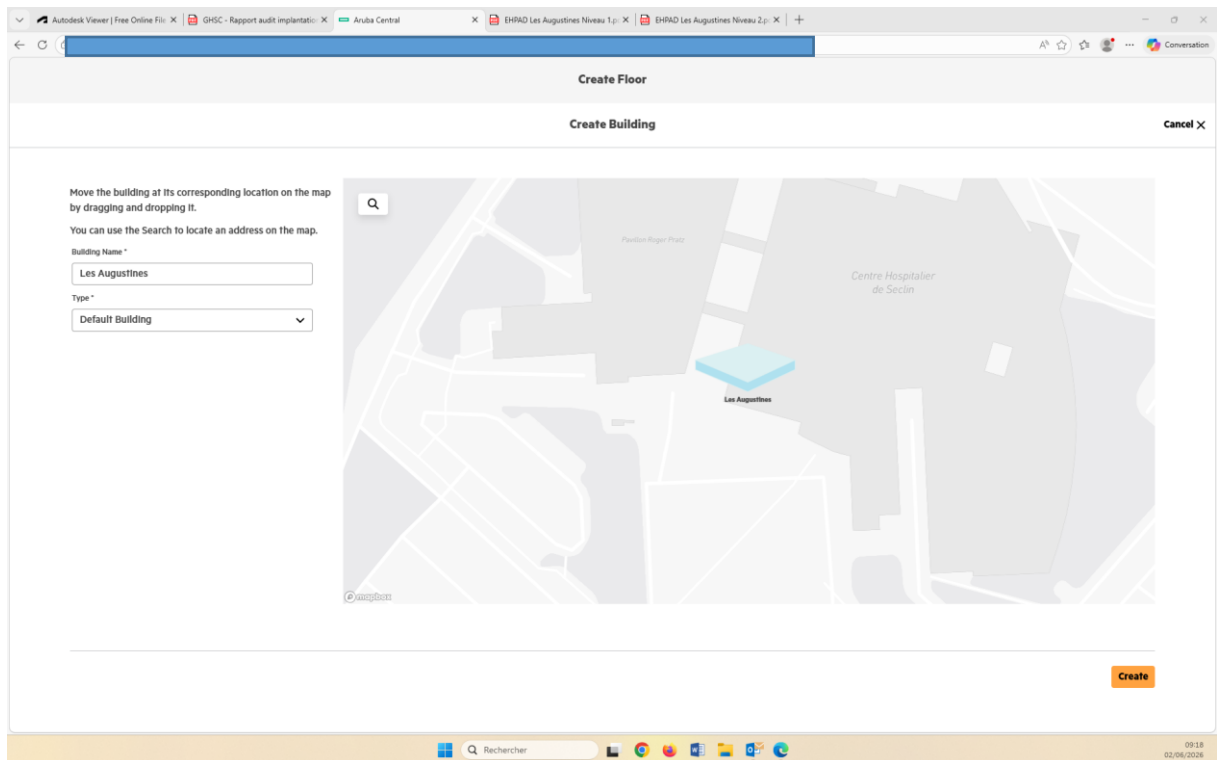

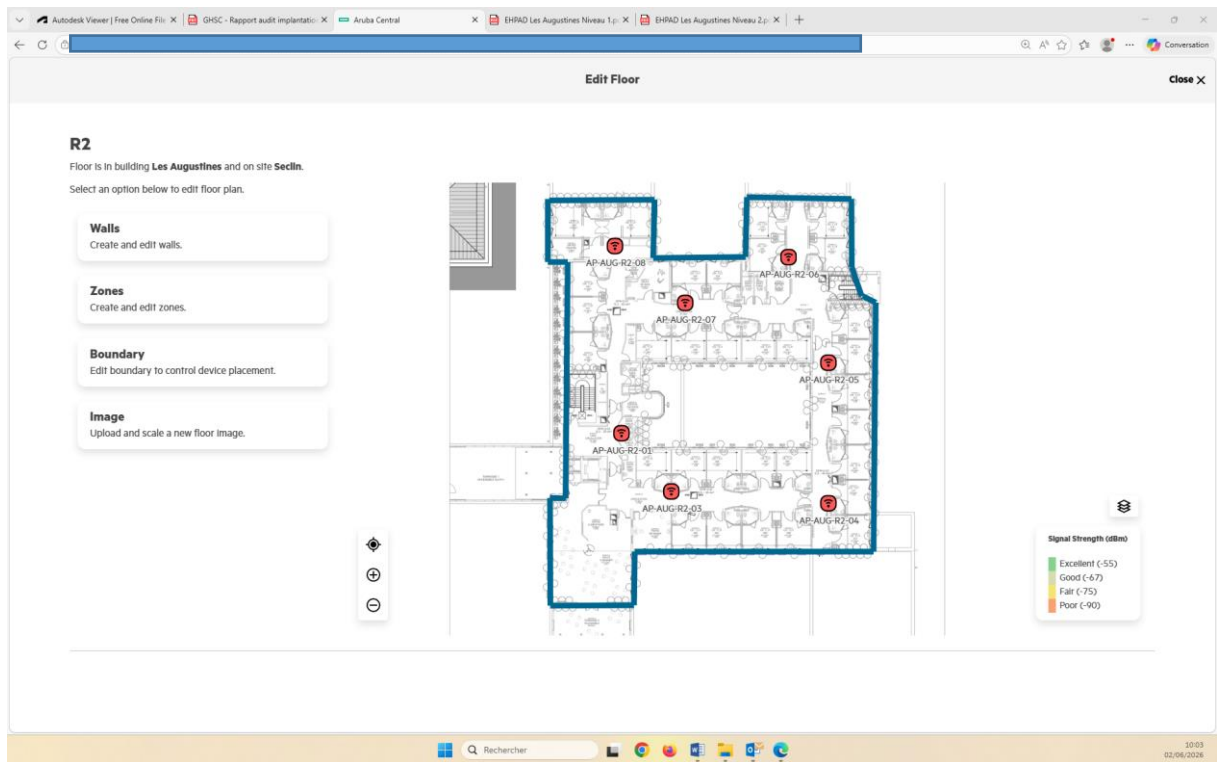

BR

Créé : il y a 7 jours par RINGOT Berangere (4371) Dernière mise à jour : À l'instant par CAN Meryem (7727)

A prévoir

Installer une borne wifi dans la salle de réunion RCB self MCO

Merci

BR

Créé : À l'instant par CAN Meryem (7727)

J'ai configuré la borne, il ne manque plus que de l'installer et vérifier qu'il y'a des prises dans la salle ou aux alentours

[Helpdesk](#)

MC

J'ai fais 5 bornes à Pratz

Tagué le vlan 12 pour que les bornes récup une ip en .12 . Je me connecte au switch du bâtiment je rajoute port trunk pvid vlan 12 au port

```
2>disp cu int g 4/0/23
#
interface GigabitEthernet4/0/23
port link-type trunk
port trunk permit vlan 1 8 12 128 242
port trunk pvid vlan 12
stp edged-port
stp port bpdu-protection enable
poe enable
#
return
2>disp cu int g 4/0/24
#
interface GigabitEthernet4/0/24
port link-type trunk
port trunk permit vlan 1 8 12 20 128 242
stp edged-port
stp port bpdu-protection enable
poe enable
#
return
2>sys
System View: return to User View with Ctrl+Z.
[ ]int g 4/0/24
[ ]-GigabitEthernet4/0/24]port trunk pvid vlan 12
[ ]-GigabitEthernet4/0/24]exit
[ ]disp cu int g 4/0/24
#
interface GigabitEthernet4/0/24
port link-type trunk
port trunk permit vlan 1 8 12 20 128 242
port trunk pvid vlan 12
stp edged-port
stp port bpdu-protection enable
poe enable
#
return
[ ]sa fo
Validating file. Please wait...
Saved the current configuration to mainboard device successfully.
[ ]
```

À CAN Meryem

 R.PRATZ NIV 3.pdf 551 KB	 R.PRATZ NIV 2.pdf 641 KB
---	---

Quand t'as le temps, si tu peux mettre ces plans dans aruba central et y positionner les bornes existante du batiment Pratz 2eme et 3eme stp .
Merci



axians

► Carte PRA-R2






A3 GHSC Batiment R.PRATZ Niv 2 éch 1/250ème

► Carte PRA-R3






A3 GHSC Batiment R.PRATZ Niveau 3 éch 1/250ème

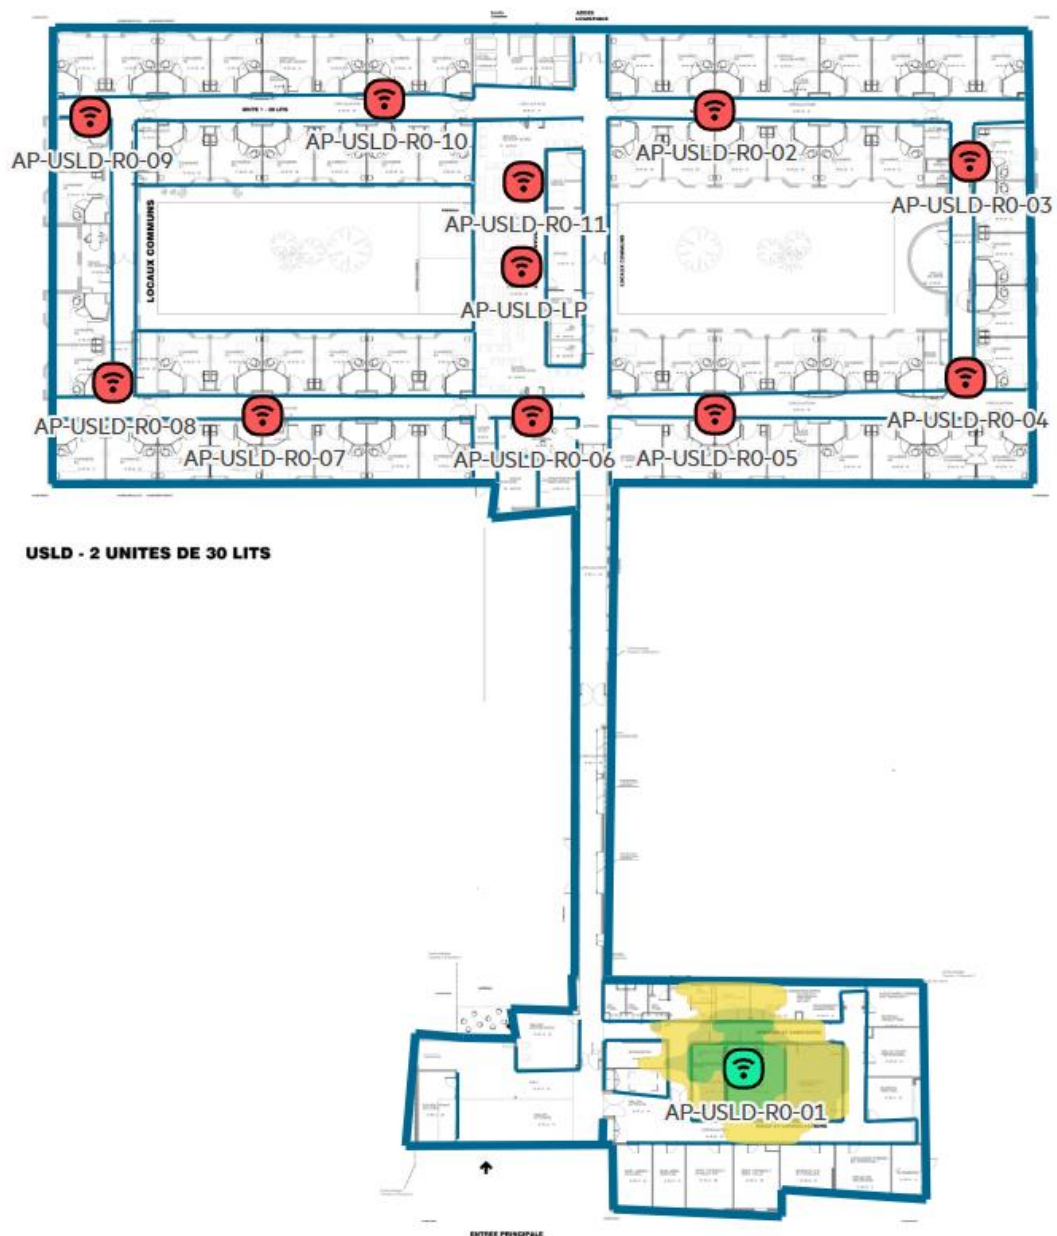


USLD - 2 UNITES DE 30 LITS

INCIPAL
PERSONNES AGEES

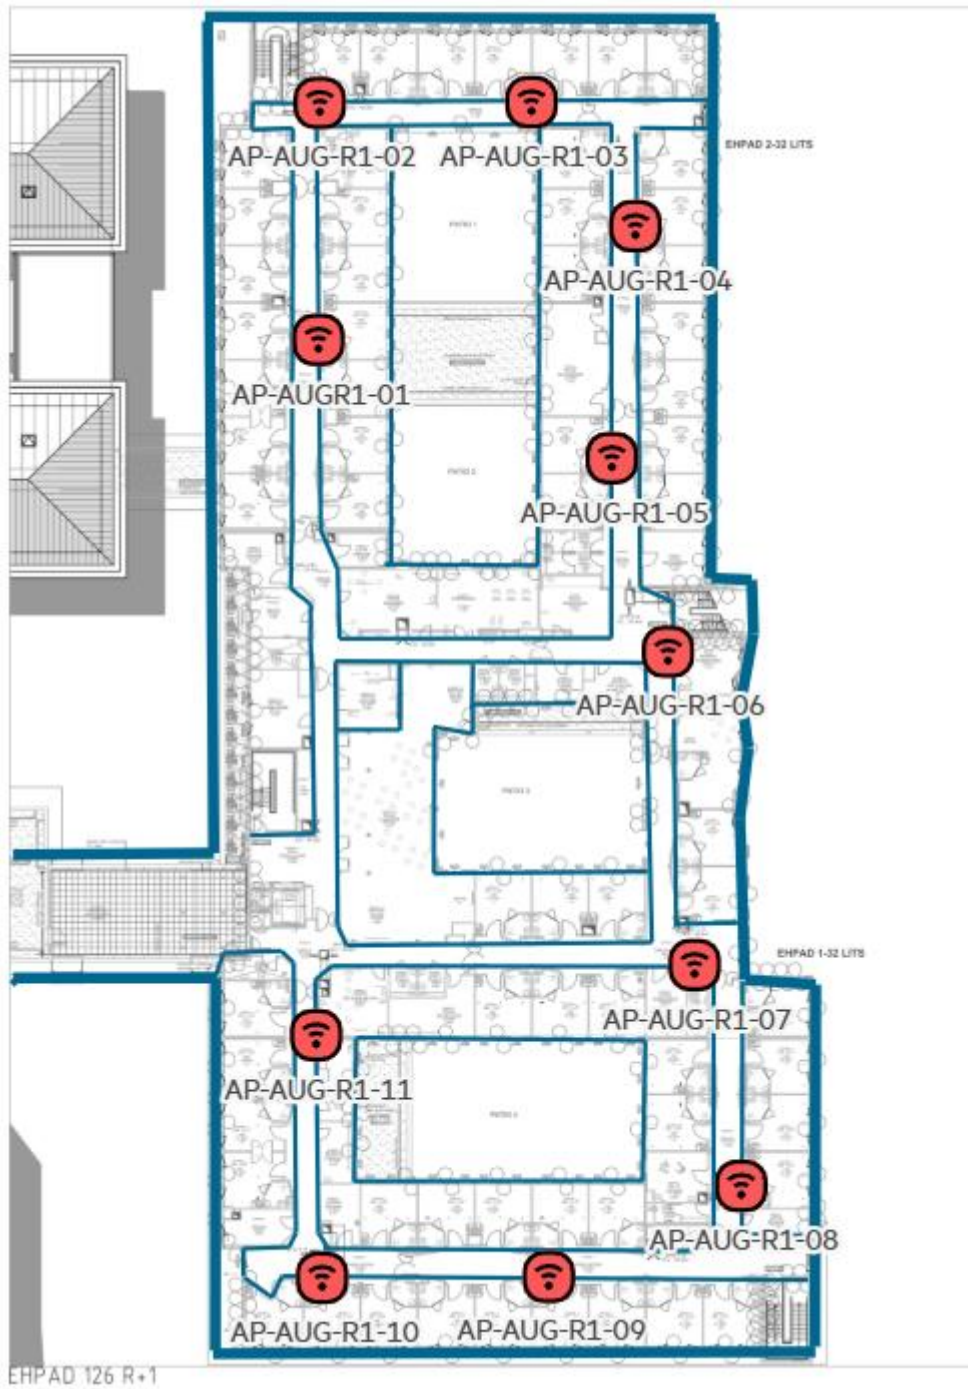

Floor is in building **Les Augustines** and on site **Seclin**.

- Walls**
Create and edit walls.
- Zones**
Create and edit zones.
- Boundary**
Edit boundary to control device placement.
- Image**
Upload and scale a new floor image.

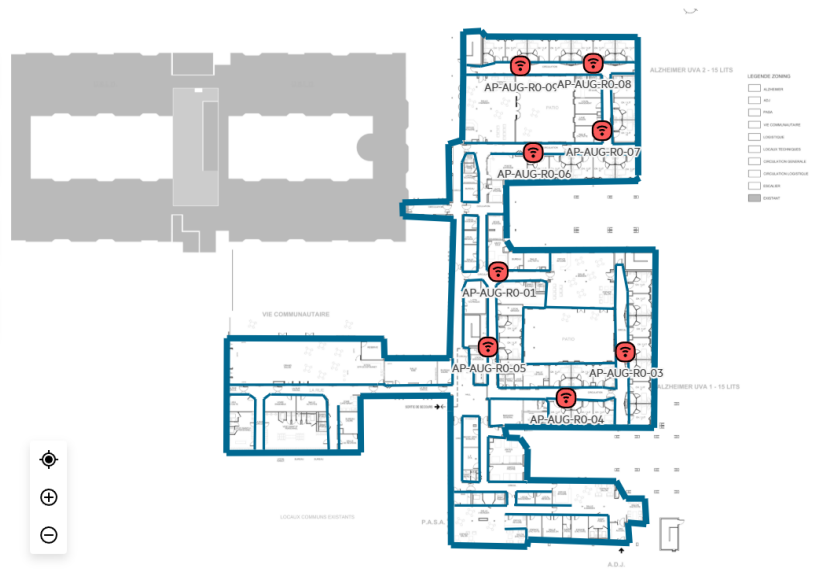

Active Directory

The screenshot shows the GLPI Tickets interface. On the left is a dark blue sidebar with the GLPI logo and a menu with categories like 'Assistance', 'Tickets', 'Gestion', 'Outils', 'Administration', and 'Configuration'. The main area displays a list of tickets. At the top, there are filters for 'Attribué à - Technicien' (set to 'est') and 'Moi-même'. Below this, there are filters for 'Caractéristiques - Statut' (set to 'est') and 'Nouveau'. A table of tickets is shown with columns: ID, TITRE, STATUT, PRIORITÉ, DERNIÈRE MODIFICATION, DATE D'OUVERTURE, DEMANDEUR, ATTRIBUÉ À - DEMANDEUR, ATTRIBUÉ À - GROUPE DE TECHNICIENS, TTR, TTD, and DESCRIPTION. One ticket is visible with ID 25 849, titled '[8000][AUTRE] <TECHNIQUE>', with status 'En cours (Attribué)' and priority 'Moyenne'. The description mentions a request for a Chrome shortcut and a link to a support page.


The screenshot shows the details of ticket 25849. The left sidebar is the same as in the previous screenshot. The main area is divided into two panes. The left pane shows the ticket details: 'Ticket # 25849 - [8000][AUTRE] <TECHNIQUE> BAZIN Bertrand (3464) (25849)'. It includes fields for 'Nom du demandeur', 'Service', and 'Téléphone'. Below this is a section 'Information sur la demande' with a message from Bertrand BAZIN asking for a Chrome shortcut and a link to a support page. The right pane shows the ticket's metadata: 'Date d'ouverture', 'Type', 'Catégorie', 'Statut', 'Source de la demande', 'Urgence', 'Impact', 'Priorité', and 'Lieu'. It also shows a list of 'Acteurs' (Demandeur, Observateur, Attribué à) and a 'Validation' status.



2-Après le remplacement des bornes nous devons nous assurer que les pc portables sont bien membres de la GPO et qu'il se connectent bien au wifi


Les augustines :
 LT-AUG1-CMV1
 LT-AUG1-CMV2
 LT-AUG1-CMV3
 LT-AUG1-PSY
 LT-AUG2-CMV1
 LT- AUG1-CMV2
 LT- AUG1-CMV3
 LT-AUG-UVA2
 LT-AUG-UVA1
 LT-AUG2-CMS1 ?

USLD :
 USLD-CMV3 ?
 LT-USLD-CMV1
 USLD-CMV1 ?
 USLDS_CMV1
 LT-USLD-CMV3
 USLDS_CMS2
 LT-USLD-CMV6
 LT-USLD-CMV4

Vérifier les noms des pc sur GLPI

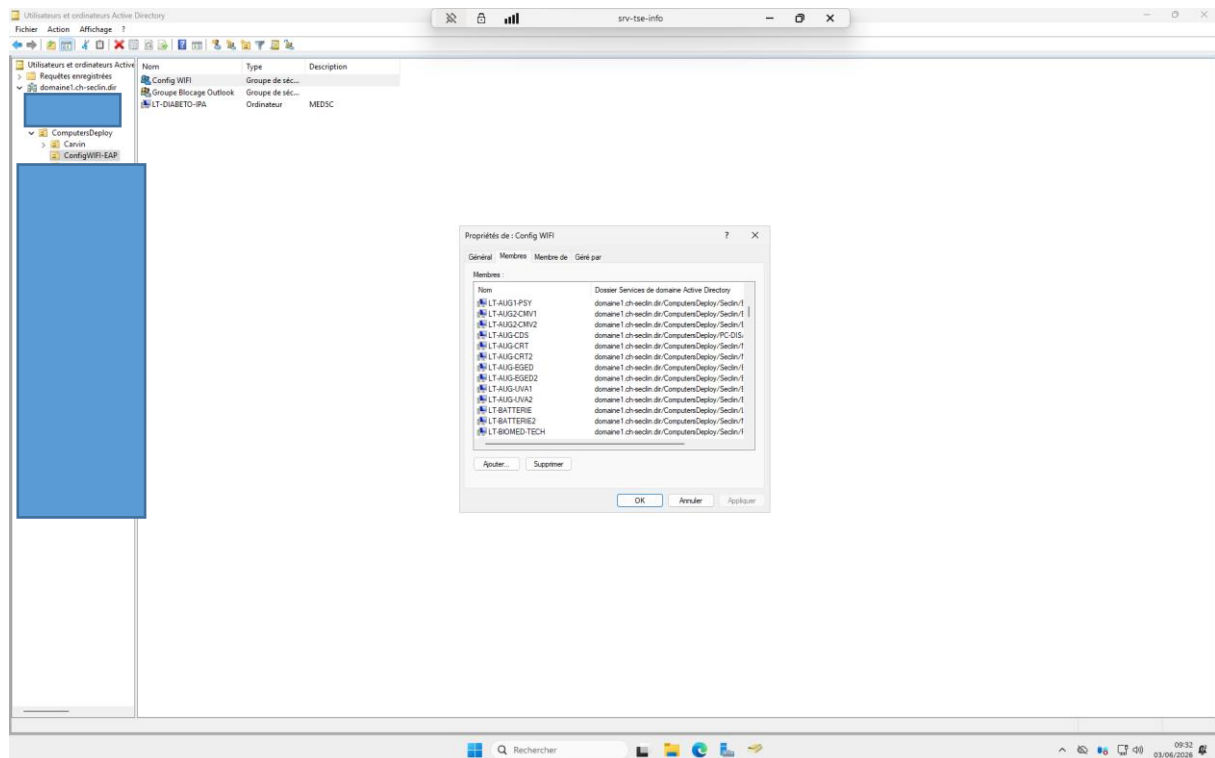


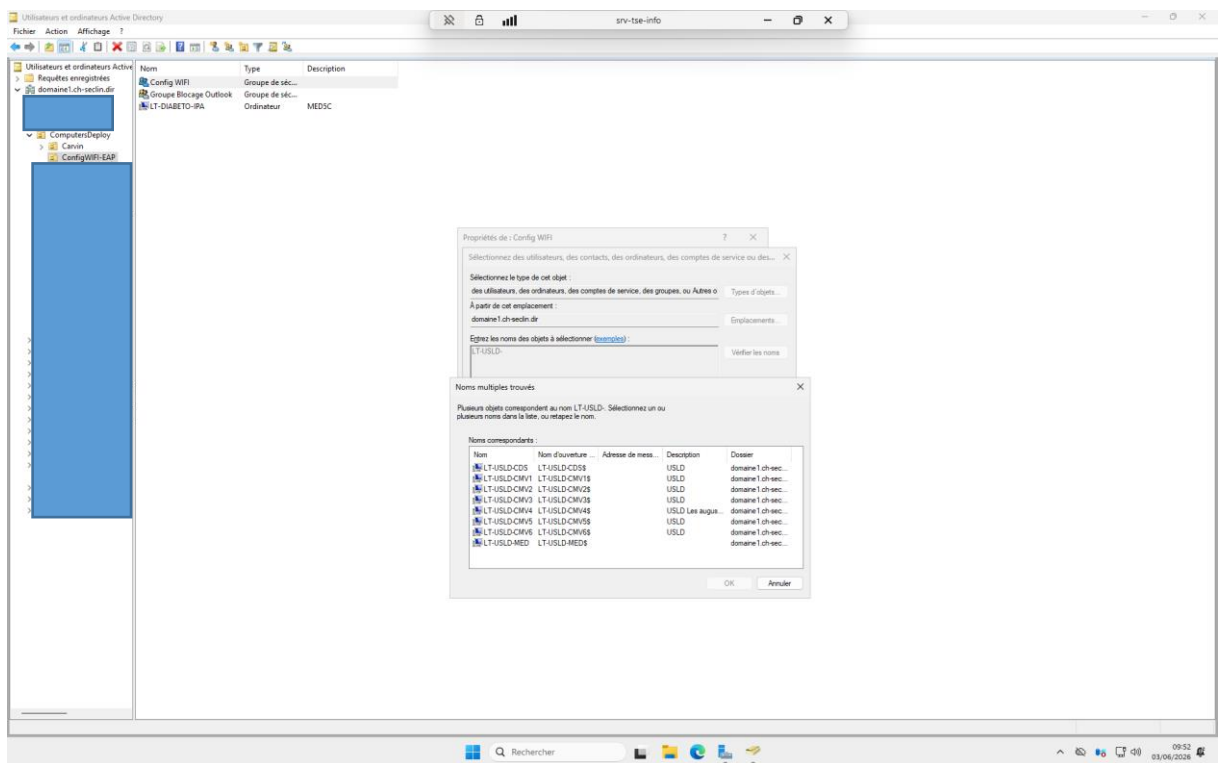
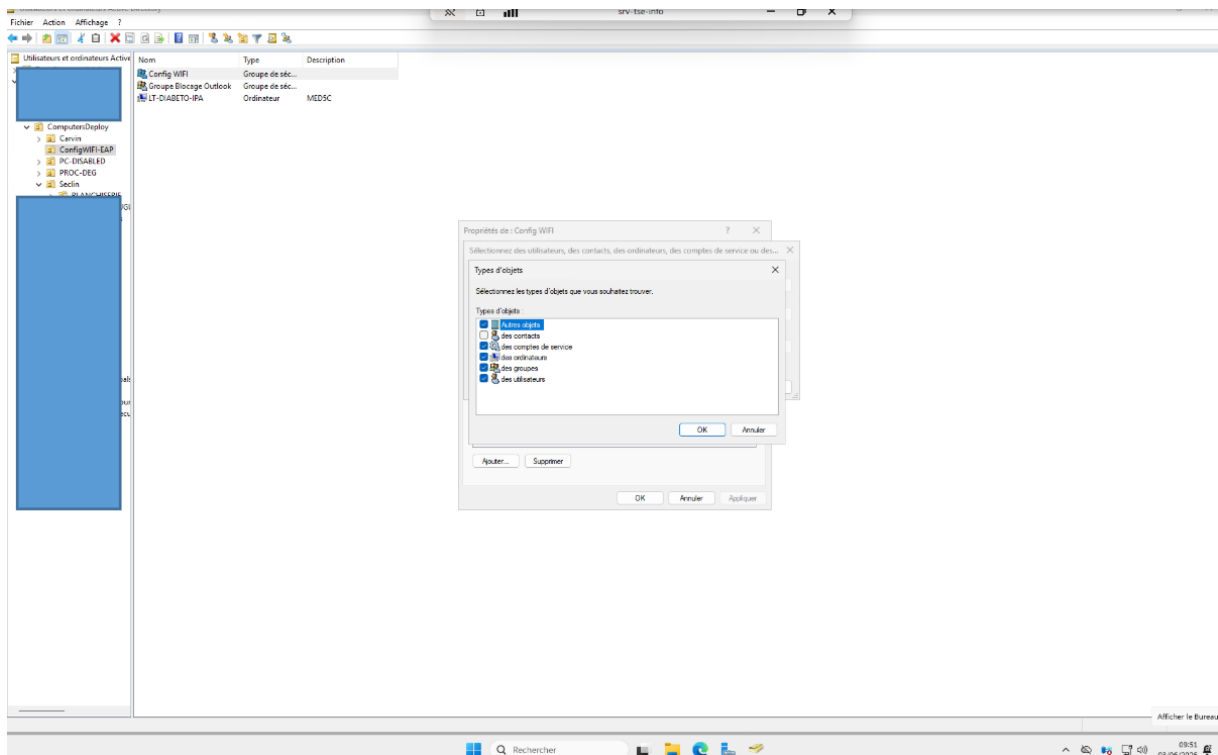



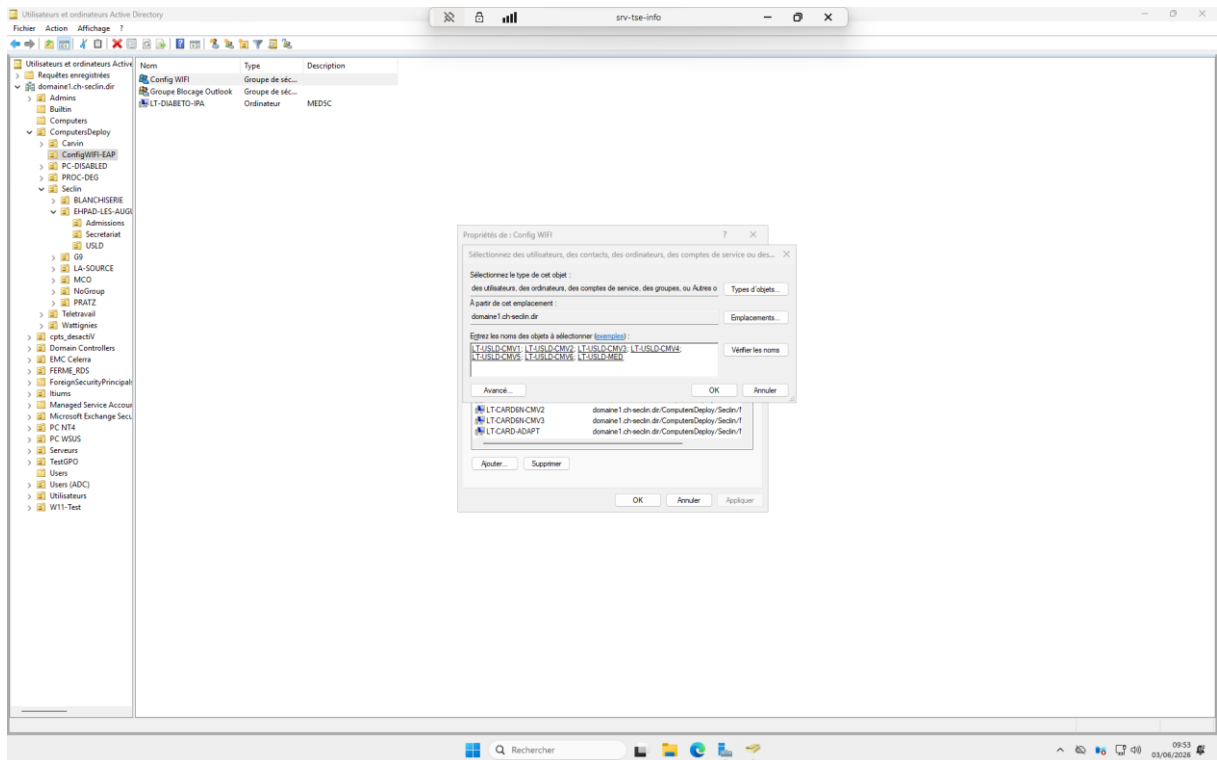





Raccourcis : GTA-MEDICAL



Dans ghsc.fr créer

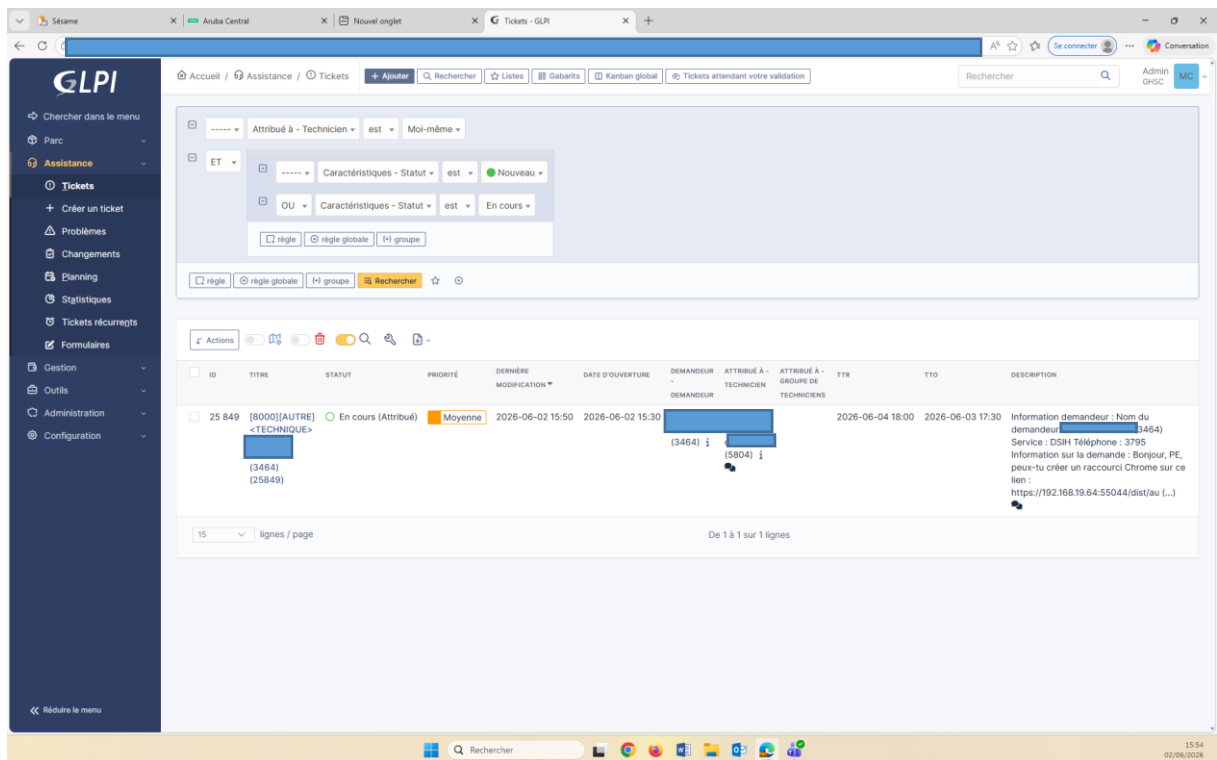


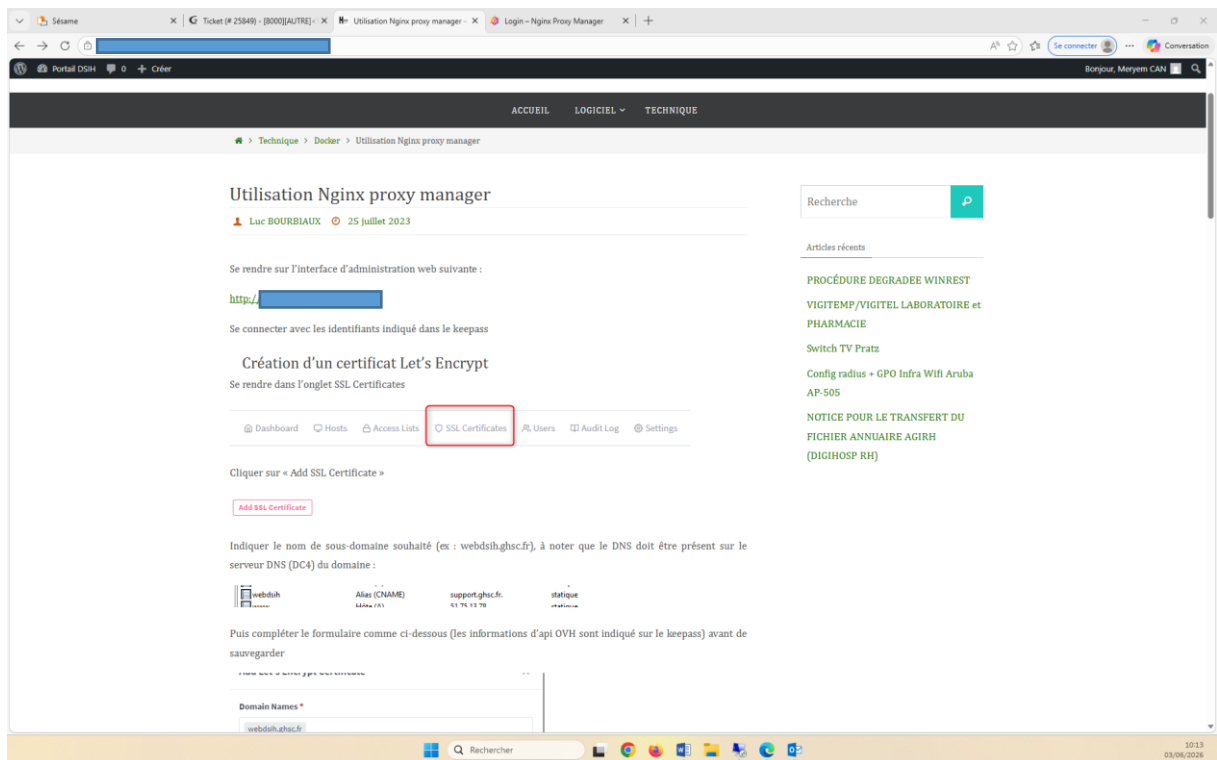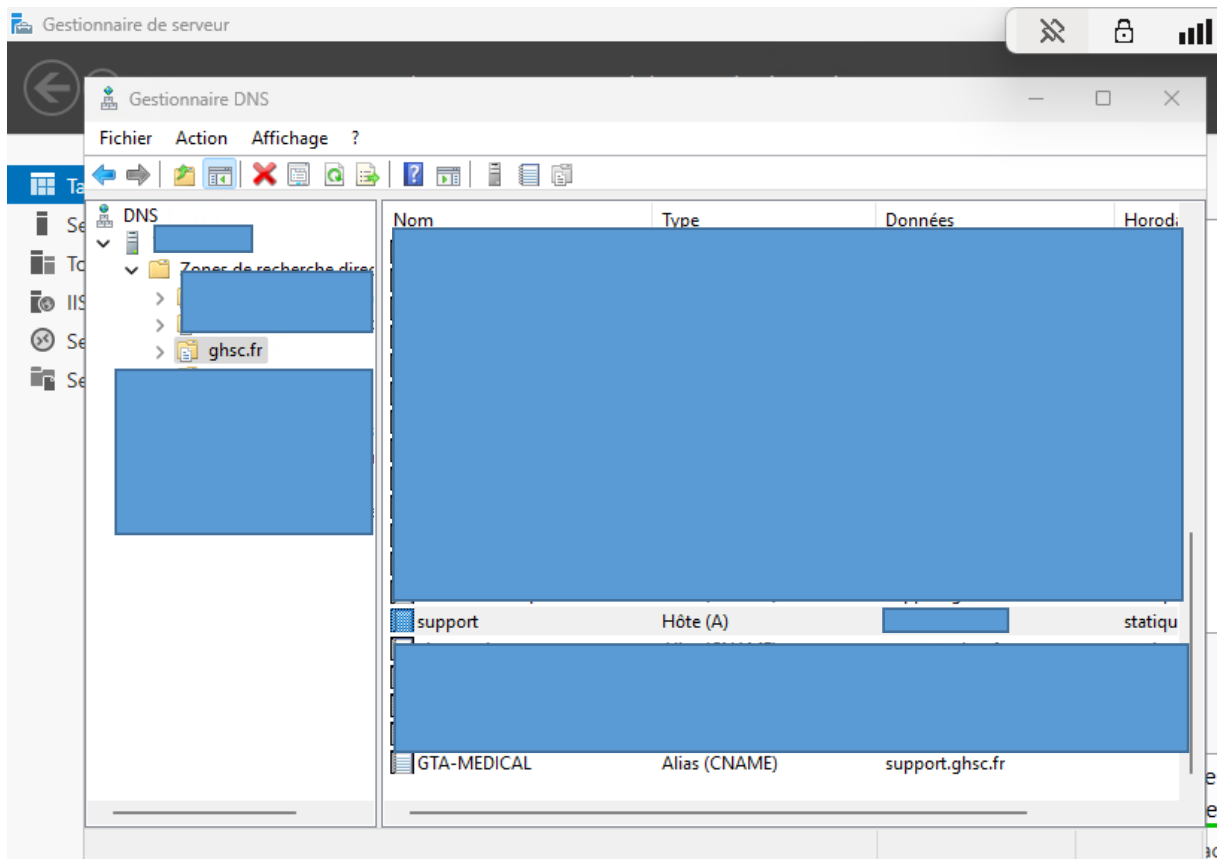

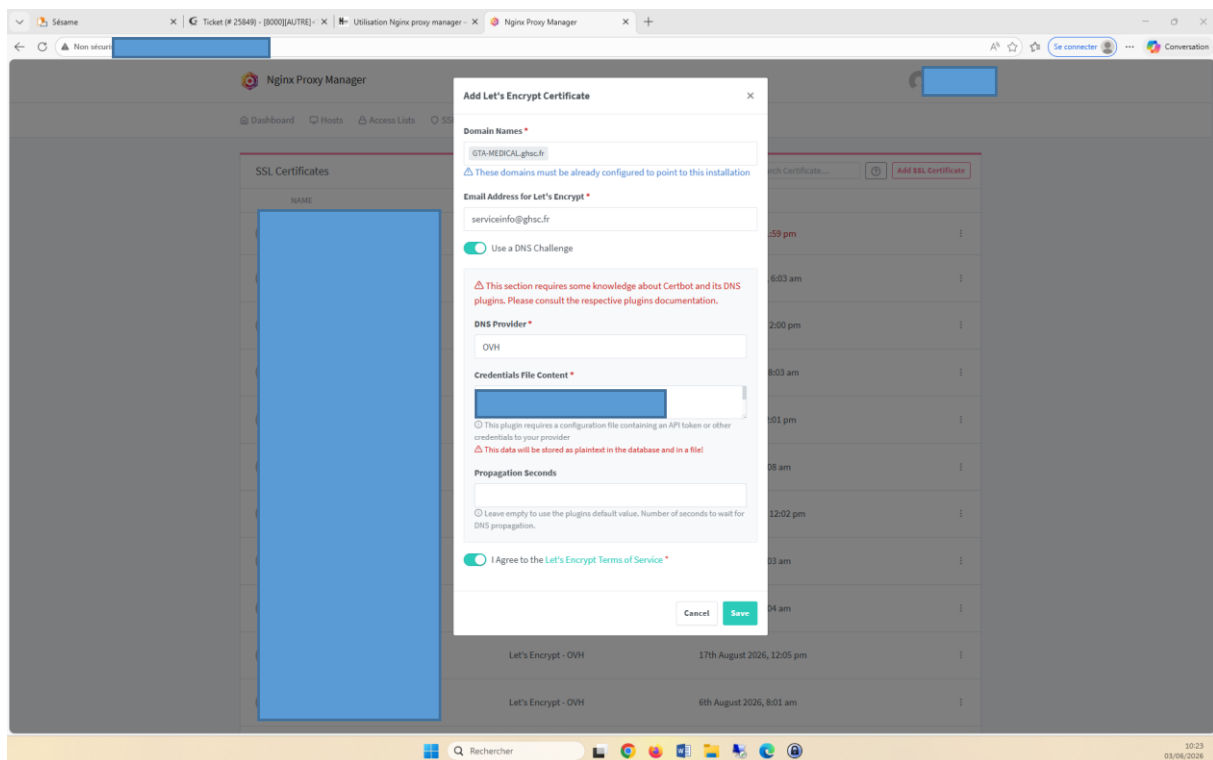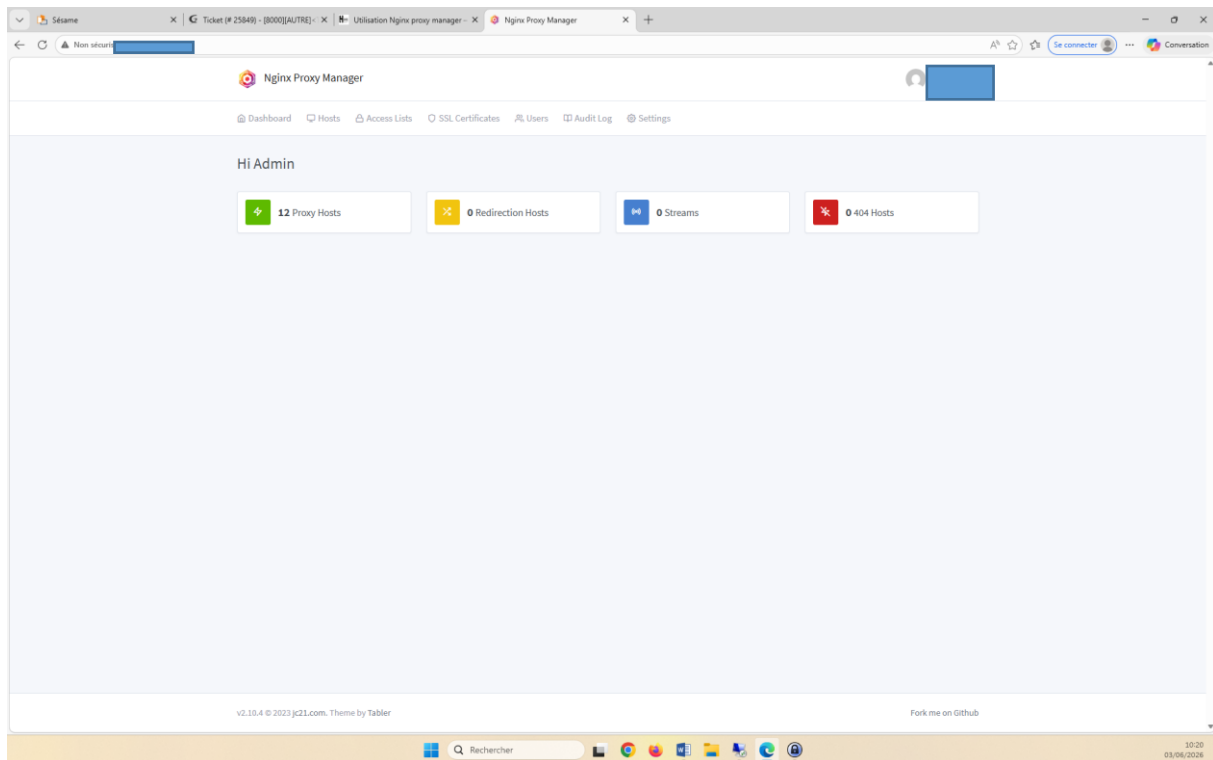

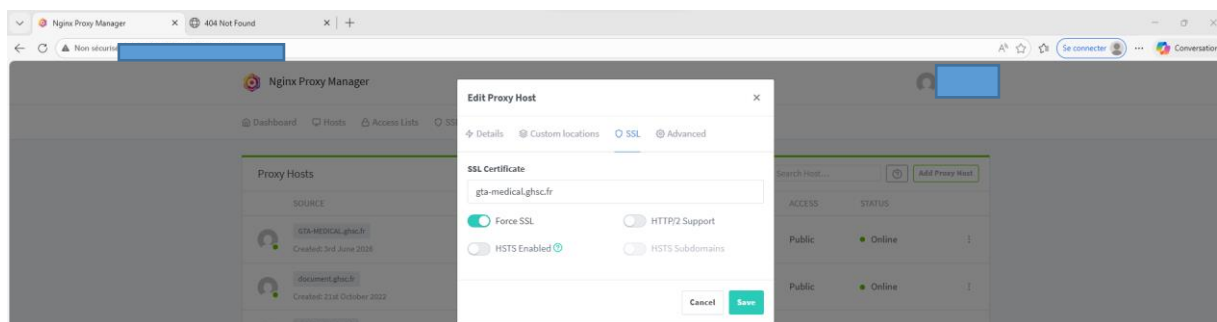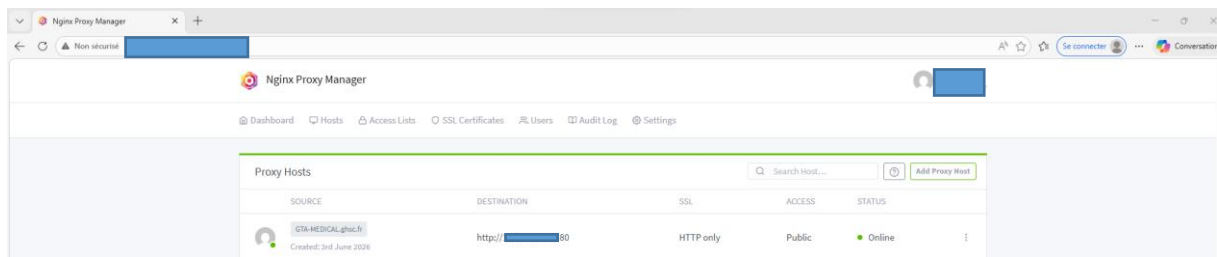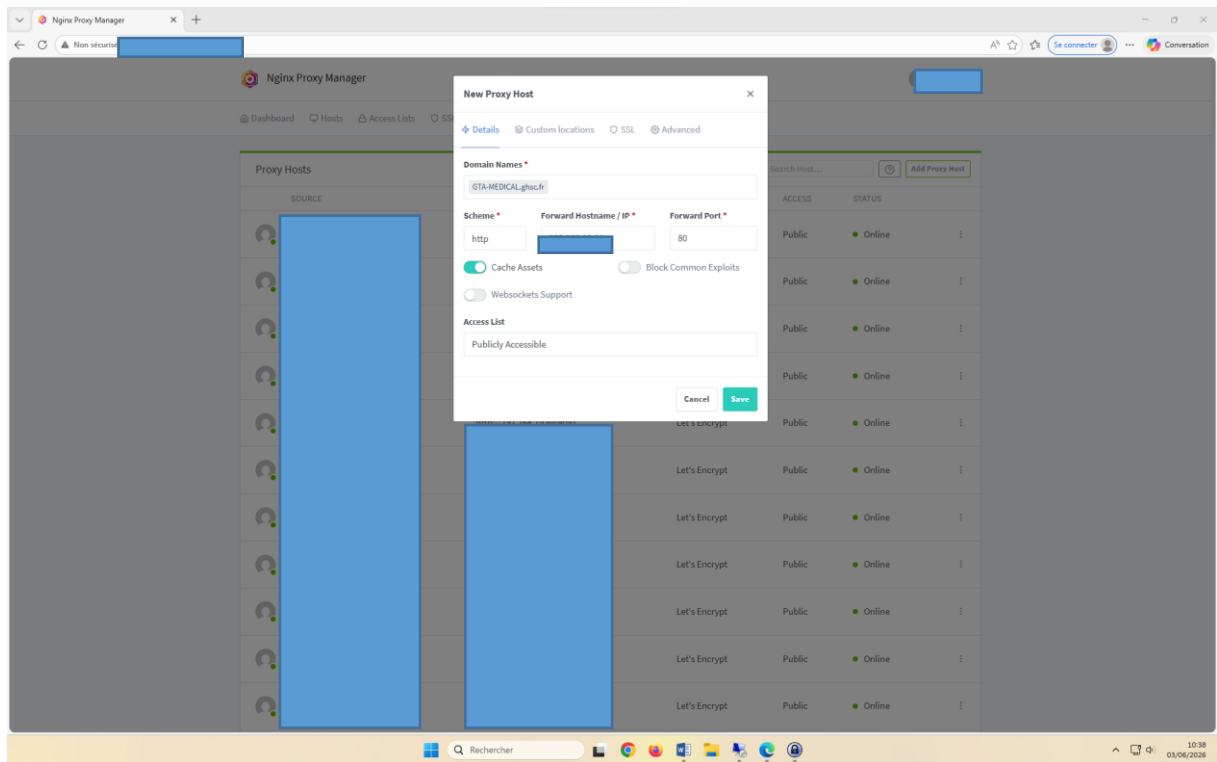

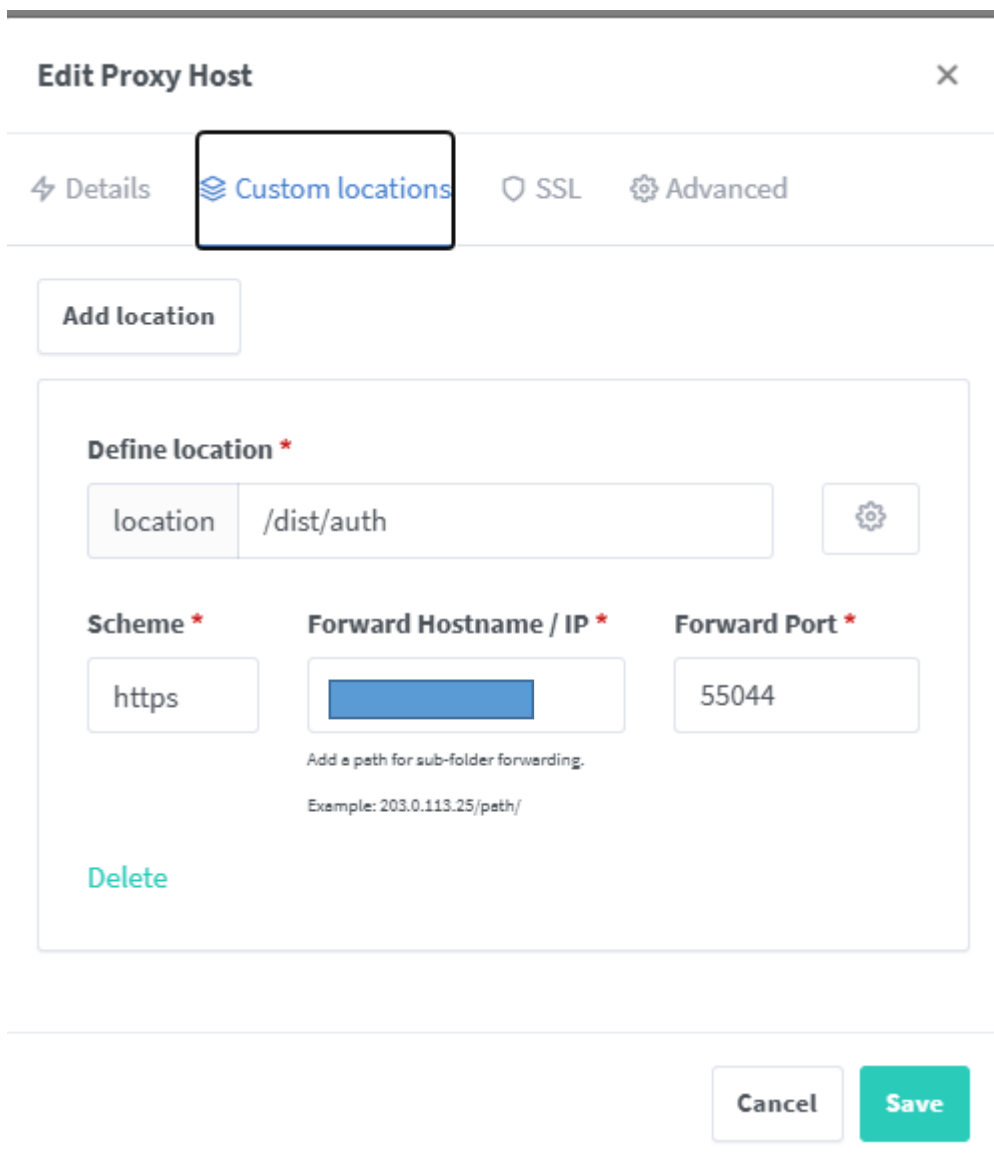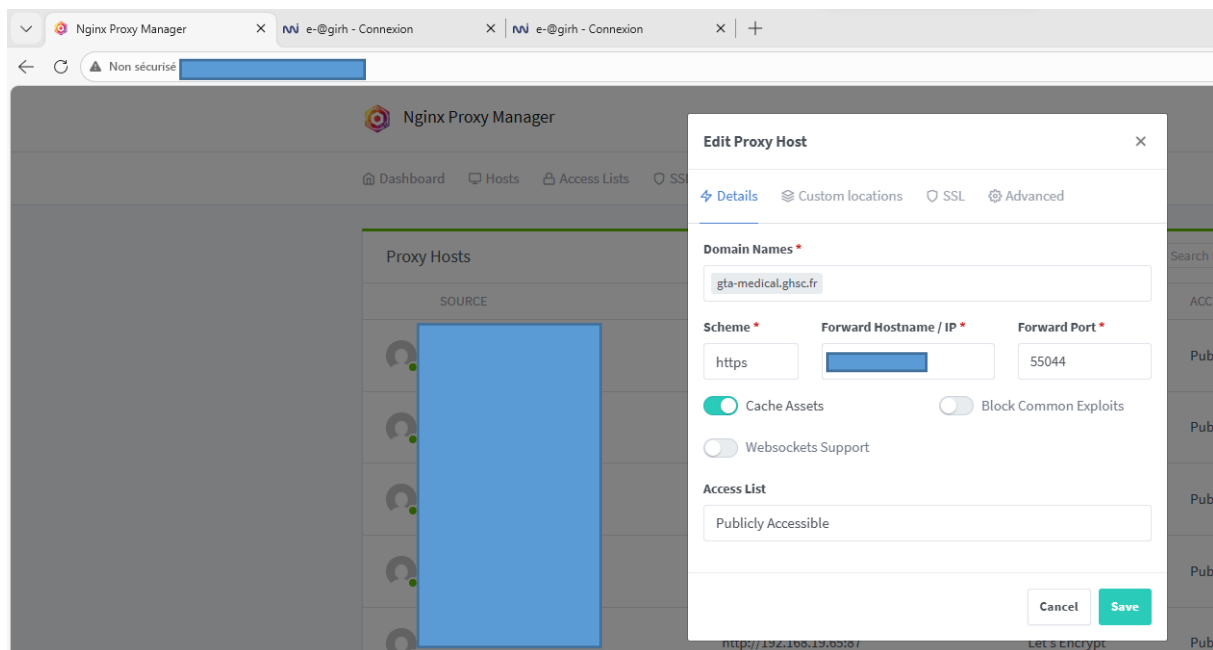

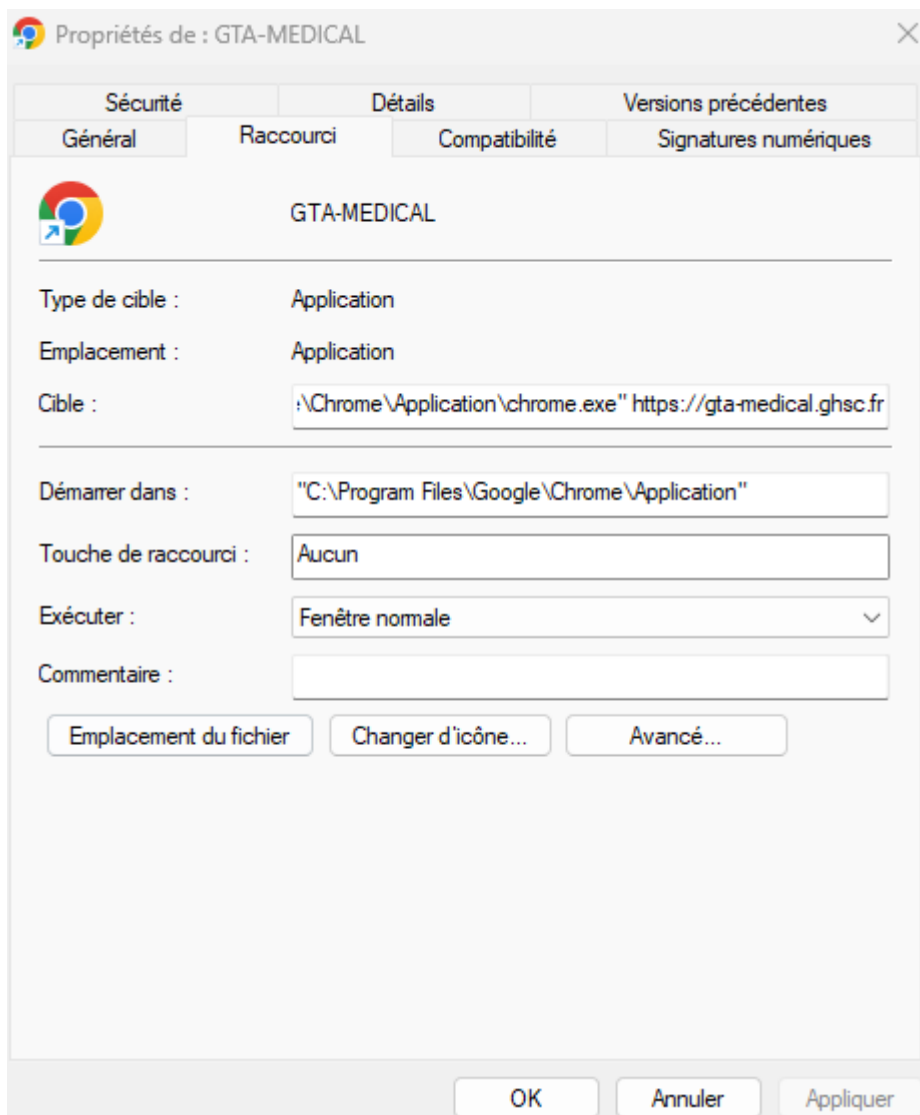

GLPI

Accueil / Assistance / Tickets

Ajouter Rechercher Listes Galeries Kanban global Tickets attendant votre validation

Rechercher Admin GHSC

Ticket 5

Statistiques

Validations

Base de connaissances

Éléments

Coûts

Projets

Tâches de projet

Problèmes

Changements

Contrats

Historique 22

Tous

Chercher dans le menu

Parc

Assistance

Créer un ticket

Problèmes

Changements

Planning

Statistiques

Tickets récurrents

Formulaires

Gestion

Outils

Administration

Configuration

Réduire le menu

[8000][AUTRE]<TECHNIQUE> BAZIN Bertrand (3464) (25849)

Créé : Hier par [redacted] (3464)

Il faudra voir avec BR pour la diffusion de ce raccourci qui ne concerne que le médical.

BAZIN Bertrand (3464)

Créé : Hier par [redacted] (3464)

nom : GTA-MEDICAL

Helpdesk

Créé : Hier par [redacted] (3464)

Ajouter le sous domaine GTA-MEDICAL.ghsc.fr aux DNS en CNAME vers support.ghsc.fr

Ajouter GTA-MEDICAL.ghsc.fr au reverse proxy vers https://[redacted]:44/dist/auth

Créer et ajouter un certificat SSL Let's Encrypt

Helpdesk

Créé : Hier par [redacted] (3464)

ensuite créer un raccourci pour ouvrir https://GTA-MEDICAL.ghsc.fr avec chrome

Helpdesk

Créé : Maintenant par CAN Maryem (7727)

Tout est bon . Il ne manque plus que le déploiement

Helpdesk

Réponse

Ticket

Date d'ouverture 2026-06-02 15:30:40

Type Demande

Catégorie Tache Exploitation

Statut En cours (Attribué)

Source de la demande Formcreator

Urgence Moyenne

Impact Moyen

Priorité Moyenne

Lieu -----

Validation Non soumis à validation

Acteurs 5

Demandeur [redacted] (3464) 26

Observateur [redacted] (4371) 112 [redacted] (34) 16

Attribué à [redacted] (3004) 158 [redacted] (7727) 1

14:17 03/06/2026

Propagation VLAN

Monitoring

http://[redacted]:43/screens/switch/switch_mon.htm?mode=swaps&status=any

Firefox envoie automatiquement certaines informations à Mozilla afin que nous puissions améliorer votre navigation. Choisir ce que j'envoie

aruba MOBILITY CONTROLLER | A3600-MASTER

Dashboard Monitoring Configuration Diagnostics Maintenance

Network > All Access Points

Global APs

Name	AP Group	Status	AP IP	Outer AP IP	AP Type	Switch IP	2.4GHz clients	2.4GHz channel	2.4GHz standard	5GHz clients	5GHz channel	5GHz standard	IPSEC	Actions
AP_ADM3C_B2	VRP2	down	[redacted]	N/A	105	[redacted]	2	11		0	52		Disabled	Clear
AP_AUGR1_B1	default	up	[redacted]	N/A	105	[redacted]	0	1		0	108		Disabled	Clear
AP_AUGR1_B10	VRP2	up	[redacted]	N/A	105	[redacted]	2	6		0	56		Disabled	Clear
AP_AUGR1_B11	default	up	[redacted]	N/A	105	[redacted]	1	11		0	140		Disabled	Clear
AP_AUGR1_B12	default	up	[redacted]	N/A	105	[redacted]	1	1		0	100		Disabled	Clear
AP_AUGR1_B13	default	up	[redacted]	N/A	105	[redacted]	3	11		1	116		Disabled	Clear
AP_AUGR1_B2	default	up	[redacted]	N/A	105	[redacted]	0	11		0	140		Disabled	Clear
AP_AUGR1_B3	default	up	[redacted]	N/A	105	[redacted]	0	1		0	100		Disabled	Clear
AP_AUGR1_B4	default	up	[redacted]	N/A	105	[redacted]	1	6		0	56		Disabled	Clear
AP_AUGR1_B5	default	up	[redacted]	N/A	105	[redacted]	0	11		0	108		Disabled	Clear

1 2 3 4 5 Next | 1-10 of 182 30

14:20 03/06/2026

HPE Intelligent Management Center

Home Resource User Service Alarm Report System

Query Devices

View Management

Resource Management

Terminal Access

Quick Start

IP Address Allocation

DHCP Configuration

Unauthorized Access

History Access Log

Real-Time Location

MAC Vendor Management

Access Configuration

Network Assets

Virtual Resources

Performance Management

Resource > Real-Time Location (Only wired network endpoints are supported)

Real-Time Location

Location Type * IP Address

IP Address * 129.59.100.113

OK Reset

Real-Time Location Result

Location Address	Device Label	Device IP	Interface	View Access Device Topology
129.59.100.113	SW-AUGR2-6200	129.59.100.113	2/1/8	

Total Items: 1.

Real-Time Location Process

- Start real-time location...
- Located device data: Device label "SW-AUGR2-6200"; device IP address "129.59.100.113"; interface description "2/1/8".
- Finished real-time location.

Copyright 2015,2022 Hewlett Packard Enterprise Development LP

14:21 03/06/2026

```
SW-AUGR2-6200# sh lldp neighbor-info

LLDP Neighbor Information
=====

Total Neighbor Entries      : 19
Total Neighbor Entries Deleted : 741
Total Neighbor Entries Dropped : 0
Total Neighbor Entries Aged-Out : 741

LOCAL-PORT  CHASSIS-ID  PORT-ID  PORT-DESC  TTL  SYS-NAME
-----
1/1/4       [REDACTED]  [REDACTED]  [REDACTED]  3601
1/1/8       [REDACTED]  [REDACTED]  [REDACTED]  3601
1/1/13      [REDACTED]  [REDACTED]  [REDACTED]  3601
1/1/17      [REDACTED]  [REDACTED]  [REDACTED]  3601
1/1/46      [REDACTED]  [REDACTED]  [REDACTED]  3601
1/1/52      [REDACTED]  1/1/2      SW-AUGR2-6200-1/1/52  120  SW-VIECM-8100-1
2/1/1       [REDACTED]  [REDACTED]  bond0       120  AP_AUGRH_B9
2/1/2       [REDACTED]  [REDACTED]  bond0       120  AP_AUGRH_B6
2/1/3       [REDACTED]  [REDACTED]  bond0       120  AP_AUGRH_B8
2/1/6       [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B2
2/1/7       [REDACTED]  [REDACTED]  bond0       120  AP_AUGRH_B7
2/1/8       [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B3
2/1/23      AUG1-ANIM    [REDACTED]  [REDACTED]  3601
2/1/41      [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B6
2/1/43      [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B13
2/1/44      [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B5
2/1/45      [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B1
2/1/46      [REDACTED]  [REDACTED]  bond0       120  AP_AUGR1_B4
2/1/52      [REDACTED]  1/1/2      SW-AUGR2-6200-2/1/52  120  SW-VIECM-8100-2

SW-AUGR2-6200#
```

```
SW-AUGR2-6200# sh run int 2/1/8
interface 2/1/8
  no shutdown
  no routing
  vlan access 1
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
  exit
SW-AUGR2-6200#
```

```

SW-AUGR2-6200# conf t
SW-AUGR2-6200(config)# int 2/1/8
SW-AUGR2-6200(config-if)# vlan trunk native 12
SW-AUGR2-6200(config-if)# vlan trunk allowed 1,8,12,128,242
SW-AUGR2-6200(config-if)# exit
SW-AUGR2-6200(config)# sh run int 2/1/8
interface 2/1/8
  no shutdown
  no routing
  vlan trunk native 12
  vlan trunk allowed 1,8,12,128,242
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
  exit
SW-AUGR2-6200(config)#

```

En parallèle lancer un cmd ping -t pour voir

```

Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.
Réponse de 129.5 : Impossible de joindre l'hôte de destination.

```

On attend qu'elle remonte dans le dhcp

Adresse IP du client	Nom	Expiration du bail	Type	ID unique	Description	Protection d'accès réseau	Expiration de la période d'essai	Profil du filtre	Stratégie	Actions
192.168.1.1	AP-AUGR1-B1.dom...	02/08/2026 14:23:05	DHCP		Accès complet	N/D	N/D	Aucun		Baux d'adresses
192.168.1.2	AP-AUGR1-B2.dom...	02/08/2026 14:17:05	DHCP		Accès complet	N/D	N/D	Aucun		Autres actions
192.168.1.3	AP-AUGR1-B3.dom...	01/08/2026 09:41:29	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.4	AP-NVH-RDH-099...	31/07/2026 15:27:05	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.5	AP-NVH-RDH-100...	31/07/2026 15:21:47	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.6	AP-NVH-RDH-101...	31/07/2026 15:16:51	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.7	AP-NVH-RDH-101...	31/07/2026 14:32:02	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.8	AP-NVH-RDH-101...	31/07/2026 13:55:03	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.9	AP-NVH-RDH-101...	31/07/2026 13:50:14	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.10	AP-NVH-RDH-049...	31/07/2026 13:29:51	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.11	AP-NVH-RDH-049...	31/07/2026 13:23:10	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.12	AP-NVH-RDH-049...	31/07/2026 13:12:29	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.13	AP-NVH-RDH-049...	31/07/2026 13:06:18	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.14	AP-NVH-RDH-051...	31/07/2026 11:40:55	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.15	AP-NVH-RDH-051...	31/07/2026 11:34:39	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.16	AP-NVH-RDH-051...	31/07/2026 11:27:03	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.17	AP-NVH-RDH-051...	31/07/2026 11:22:07	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.18	AP-NVH-RDH-105...	31/07/2026 11:17:11	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.19	AP-NVH-RDH-104...	31/07/2026 11:05:14	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.20	AP-NVH-RDH-015...	31/07/2026 10:09:40	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.21	AP-NVH-RDH-095...	31/07/2026 09:59:12	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.22	AP-NVH-RDH-029...	31/07/2026 09:49:13	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.23	AP-NVH-RDH-011...	31/07/2026 09:35:47	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.24	AP-NVH-RDH-064...	31/07/2026 09:26:17	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.25	AP-NVH-RDH-036...	31/07/2026 09:15:11	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.26	AP-NVH-RDH-036...	29/07/2026 14:01:52	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.27	AP-NVH-RDH-040...	29/07/2026 13:48:10	DHCP		Accès complet	N/D	N/D	Aucun		
192.168.1.28	AP-NVH-RDH-039...	29/07/2026 13:45:11	DHCP		Accès complet	N/D	N/D	Aucun		

On voit quelle est down sur aruba

Monitoring

creens/switch/switch_mon.html?mode=hwaps&status=any

Firefox envoie automatiquement certaines informations à Mozilla afin que nous puissions améliorer votre navigation. Choisir ce que j'envoie

aruba NETWORKS MOBILITY CONTROLLER | A3800-MASTER

lao_out_admin

Configuration | Diagnostics | Maintenance

Network > All Access Points

Global APs

Name	AP Group	Status	AP IP	Outer AP IP	AP Type	Switch IP	2.4Ghz clients	2.4Ghz channel	2.4Ghz standard	5Ghz clients	5Ghz channel	5Ghz standard	IPSEC	Actions
AP_ADM3E_B2	VRRP2	down					2	11		0	52		Disabled	Clear
AP_AUGR1_B1	default	up					0	1		0	108		Disabled	Clear
AP_AUGR1_B10	VRRP2	up					2	6		0	56		Disabled	Clear
AP_AUGR1_B11	default	up					1	11		0	140		Disabled	Clear
AP_AUGR1_B12	default	up					1	1		0	100		Disabled	Clear
AP_AUGR1_B13	default	up					2	11		1	116		Disabled	Clear
AP_AUGR1_B2	default	up					0	11		0	140		Disabled	Clear
AP_AUGR1_B3	default	down					0	1		0	100		Disabled	Clear
AP_AUGR1_B4	default	up					1	6		0	56		Disabled	Clear
AP_AUGR1_B5	default	up					0	11		0	108		Disabled	Clear

1 2 3 4 5 Next | 1-10 of 102 10

Refaire un ping -t 192.168.12.174

```
C:\Users\merye.can>ping 192.168.12.174

Envoi d'une requête 'Ping' 192.168.12.174 avec 32 octets de données :
Réponse de 192.168.12.174 : octets=32 temps<1ms TTL=63
Réponse de 192.168.12.174 : octets=32 temps<1ms TTL=63
Réponse de 192.168.12.174 : octets=32 temps<1ms TTL=63
Réponse de 192.168.12.174 : octets=32 temps<1ms TTL=63

Statistiques Ping pour 192.168.12.174
    Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
    Durée approximative des boucles en millisecondes :
        Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merye.can>
```

Conf :

[ARUBA]

port interco :

```
interface 1/3/14
  description SRCSS 5130
  no shutdown
  no routing
  vlan trunk native 1
  vlan trunk allowed 1,8,12,128,242
  exit
```

port access :


```
interface 2/1/45
  no shutdown
  no routing
  vlan trunk native 12
  vlan trunk allowed 1,8,12,128,242
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
  exit
```

Propager le vlan : sw-augr1-6200

```
SW-AUGR1-6200# conf t
SW-AUGR1-6200(config)# vlan 8
SW-AUGR1-6200(config-vlan-8)# name wifi
SW-AUGR1-6200(config-vlan-8)# description wifi
SW-AUGR1-6200(config-vlan-8)#
SW-AUGR1-6200(config-vlan-8)# vlan 12
SW-AUGR1-6200(config-vlan-12)# name AP-MGMT
SW-AUGR1-6200(config-vlan-12)# description AP-MGMT
SW-AUGR1-6200(config-vlan-12)#
SW-AUGR1-6200(config-vlan-12)# vlan 128
SW-AUGR1-6200(config-vlan-128)# name hotspot
SW-AUGR1-6200(config-vlan-128)# description hotspot
SW-AUGR1-6200(config-vlan-128)#
SW-AUGR1-6200(config-vlan-128)# vlan 242
SW-AUGR1-6200(config-vlan-242)# name careevent
SW-AUGR1-6200(config-vlan-242)# description careevent
SW-AUGR1-6200(config-vlan-242)#
SW-AUGR1-6200(config-vlan-242)# exit
```

Ping -a @ip

Je continue sur l'autre switch pour finir l'étage 1

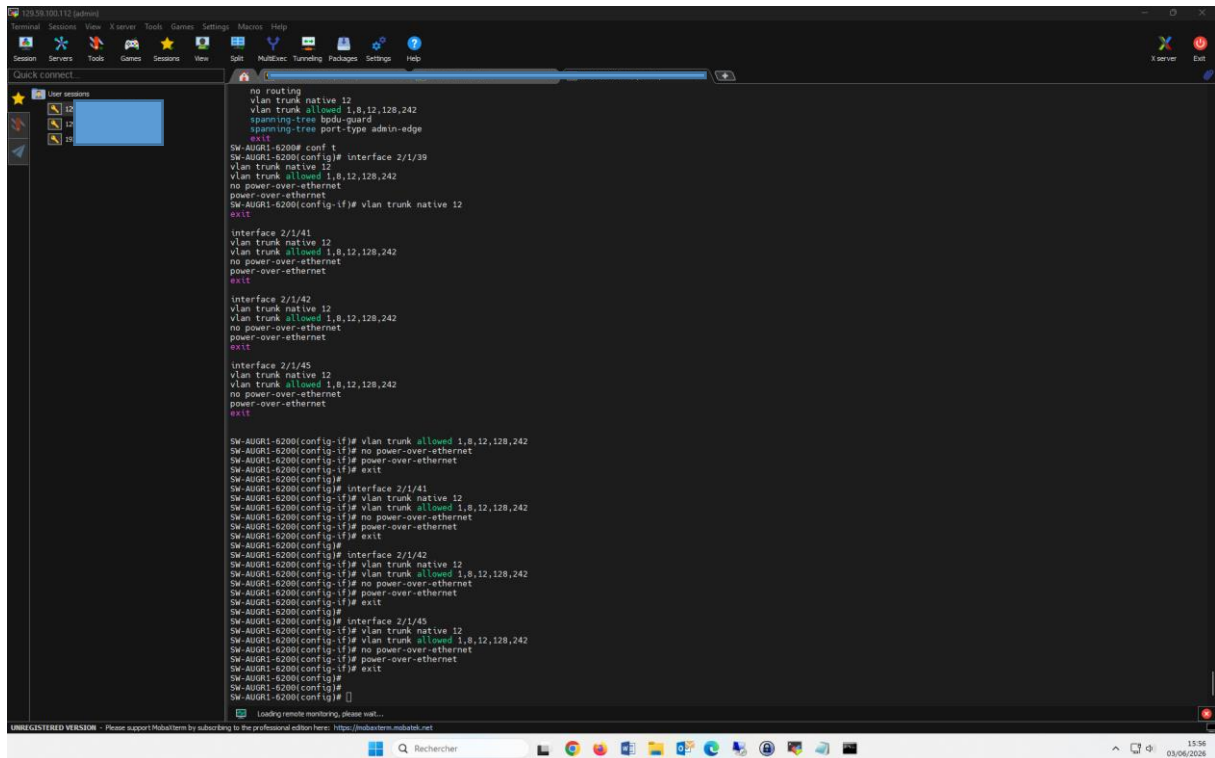

```
no routing
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
spanning-tree bdu-guard
spanning-tree port-type admin-edge
exit

SW-AUGR1-6200# conf t
SW-AUGR1-6200(config)# interface 2/1/39
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
SW-AUGR1-6200(config-if)# vlan trunk native 12
exit


interface 2/1/41
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 2/1/42
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 2/1/45
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

SW-AUGR1-6200(config-if)# vlan trunk allowed 1,8,12,128,242
SW-AUGR1-6200(config-if)# no power-over-ethernet
SW-AUGR1-6200(config-if)# power-over-ethernet
SW-AUGR1-6200(config-if)# exit
SW-AUGR1-6200(config)#
SW-AUGR1-6200(config)# interface 2/1/41
SW-AUGR1-6200(config-if)# vlan trunk native 12
SW-AUGR1-6200(config-if)# vlan trunk allowed 1,8,12,128,242
SW-AUGR1-6200(config-if)# no power-over-ethernet
SW-AUGR1-6200(config-if)# power-over-ethernet
SW-AUGR1-6200(config-if)# exit
SW-AUGR1-6200(config)#
SW-AUGR1-6200(config)# interface 2/1/42
SW-AUGR1-6200(config-if)# vlan trunk native 12
SW-AUGR1-6200(config-if)# vlan trunk allowed 1,8,12,128,242
SW-AUGR1-6200(config-if)# no power-over-ethernet
SW-AUGR1-6200(config-if)# power-over-ethernet
SW-AUGR1-6200(config-if)# exit
SW-AUGR1-6200(config)#
SW-AUGR1-6200(config)# interface 2/1/45
SW-AUGR1-6200(config-if)# vlan trunk native 12
SW-AUGR1-6200(config-if)# vlan trunk allowed 1,8,12,128,242
SW-AUGR1-6200(config-if)# no power-over-ethernet
SW-AUGR1-6200(config-if)# power-over-ethernet
SW-AUGR1-6200(config-if)# exit
SW-AUGR1-6200(config)#
SW-AUGR1-6200(config)#
```

R0 TJRS sur le augR1-6200

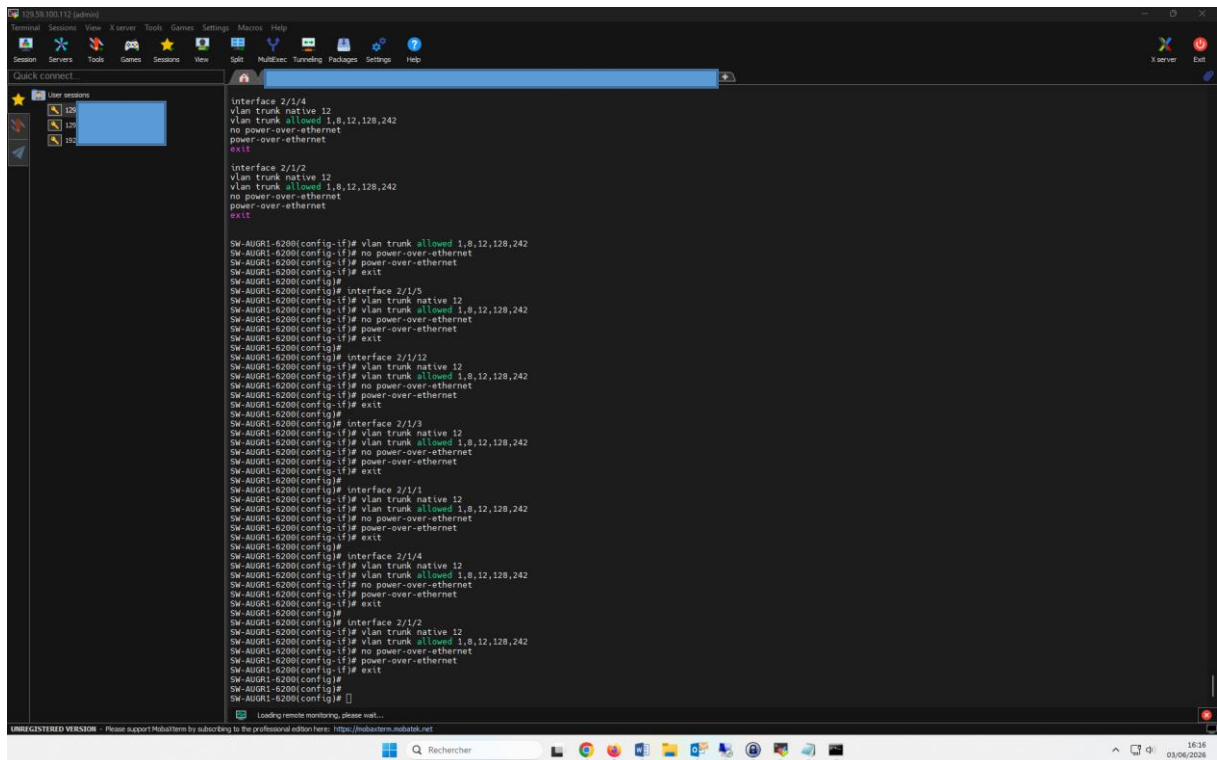

Monitoring									
Firefox envoie automatiquement certaines informations à Mozilla afin que nous puissions améliorer votre navigation. Choisir ce que j'envoie									
AP_AUGR1_B1	default	up	0	1	0	108	Disabled	Clear	
AP_AUGR1_B10	VSSP2	up	1	6	0	56	Disabled	Clear	
AP_AUGR1_B11	default	up	0	11	0	140	Disabled	Clear	
AP_AUGR1_B12	default	up	2	1	0	100	Disabled	Clear	
AP_AUGR1_B13	default	up	2	6	0	116	Disabled	Clear	
AP_AUGR1_B2	default	up	0	6	0	140	Disabled	Clear	
AP_AUGR1_B3	default	up	1	1	0	100	Disabled	Clear	
AP_AUGR1_B4	default	up	0	11	0	96	Disabled	Clear	
AP_AUGR1_B5	default	up	0	1	1	108	Disabled	Clear	
AP_AUGR1_B6	default	up	0	6	0	128	Disabled	Clear	
AP_AUGR1_B7	default	up	0	11	0	100	Disabled	Clear	
AP_AUGR1_B8	default	up	2	1	0	116	Disabled	Clear	
AP_AUGR1_B9	default	up	0	11	0	120	Disabled	Clear	
AP_AUGR2_B1	default	up	0	6	0	116	Disabled	Clear	
AP_AUGR2_B2	default	up	0	1	0	140	Disabled	Clear	
AP_AUGR2_B3	default	up	2	11	1	132	Disabled	Clear	
AP_AUGR2_B4	default	up	1	1	0	96	Disabled	Clear	
AP_AUGR2_B5	default	up	1	11	0	116	Disabled	Clear	
AP_AUGR2_B6	default	up	1	6	0	140	Disabled	Clear	
AP_AUGR2_B7	default	up	1	1	0	108	Disabled	Clear	
AP_AUGR2_B8	default	up	0	11	0	140	Disabled	Clear	
AP_AUGRH_B1	default	down	0	1	0	100	Disabled	Clear	
AP_AUGRH_B10	default	down	1	11	0	116	Disabled	Clear	
AP_AUGRH_B11	default	down	0	1	0	140	Disabled	Clear	
AP_AUGRH_B2	default	down	0	11	0	140	Disabled	Clear	
AP_AUGRH_B3	default	down	0	1	0	48	Disabled	Clear	
AP_AUGRH_B4	default	down	0	11	0	116	Disabled	Clear	
AP_AUGRH_B5	default	down	0	11	0	92	Disabled	Clear	
AP_AUGRH_B6	default	up	1	11	0	100	Disabled	Clear	

Vérifier en ping :

```
Invite de commandes

Durée approximative des boucles en millisecondes :
Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merve.can>ping 192.168.1.100

Envoi d'une requête 'Ping' 192.168.1.100 avec 32 octets de données :
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63

Statistiques Ping pour 192.168.1.100 :
    Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
Durée approximative des boucles en millisecondes :
    Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merve.can>ping 192.168.1.100

Envoi d'une requête 'Ping' 192.168.1.100 avec 32 octets de données :
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63

Statistiques Ping pour 192.168.1.100 :
    Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
Durée approximative des boucles en millisecondes :
    Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merve.can>
```

R2 : 8 bornes

The screenshot shows the HPE Intelligent Management Center (IMC) web interface. The left sidebar contains navigation menus for View Management, Resource Management, Terminal Access, Network Assets, Virtual Resources, and Performance Management. The main content area is titled 'Resource > Real-Time Location (Only wired network endpoints are supported)'. It features a 'Real-Time Location' section with a 'Location Type' dropdown set to 'IP Address' and an 'IP Address' input field containing '129.59.100.112'. Below this is a 'Real-Time Location Result' table with one entry:

Location Address	Device Label	Device IP	Interface	View Access Device Topology
129.59.100.112	SW-AUGR1-6200	129.59.100.112	2/1/47	

Below the table, it states 'Total Items: 1.' and a 'Real-Time Location Process' section with a log of events: 'Start real-time location...', 'Located device data: Device label "SW-AUGR1-6200"; device IP address "129.59.100.112"; interface description "2/1/47".', and 'Finished real-time location.'

SW-AUGR1-6200# sh lldp neighbor-info


LLDP Neighbor Information

=====

Total Neighbor Entries : 31
Total Neighbor Entries Deleted : 17
Total Neighbor Entries Dropped : 0
Total Neighbor Entries Aged-Out : 17

LOCAL-PORT	CHASSIS-ID	PORT-ID	PORT-DESC	TTL	SYS-NAME
1/1/13	AUG1-MED			3601	
1/1/23				3601	
1/1/29				3601	
1/1/31				3601	
1/1/43				3601	
1/1/45				3601	
1/1/52		1/1/1	SW-AUGR1-6200-1/1/52	120	SW-VIECM-8100-1
2/1/1			bond0	120	AP_AUGRH_B3
2/1/2			bond0	120	AP_AUGRH_B5
2/1/3			bond0	120	AP_AUGRH_B2
2/1/4			bond0	120	AP_AUGRH_B4
2/1/5			bond0	120	AP_AUGRH_B10
2/1/6			bond0	120	AP_AUGRH_B1
2/1/7			bond0	120	AP_AUGR2_B3
2/1/8			bond0	120	AP_AUGR2_B4
2/1/9			bond0	120	AP_AUGR1_B8
2/1/10			bond0	120	AP_AUGR1_B7
2/1/11			bond0	120	AP_AUGR2_B2
2/1/12			bond0	120	AP_AUGRH_B11
2/1/17			bond0	120	AP_USLDS_LP
2/1/23				3601	
2/1/39			bond0	120	AP_AUGR1_B12
2/1/41			bond0	120	AP_AUGR1_B9
2/1/42			bond0	120	AP_AUGR1_B10
2/1/43			bond0	120	AP_AUGR2_B8
2/1/44			bond0	120	AP_AUGR2_B7
2/1/45			bond0	120	AP_AUGR1_B11
2/1/46			bond0	120	AP_AUGR2_B5
2/1/47			bond0	120	AP_AUGR2_B1
2/1/48			bond0	120	AP_AUGR2_B6
2/1/52		1/1/1	SW-AUGR1-6200-2/1/52	120	SW-VIECM-8100-2

SW-AUGR1-6200#

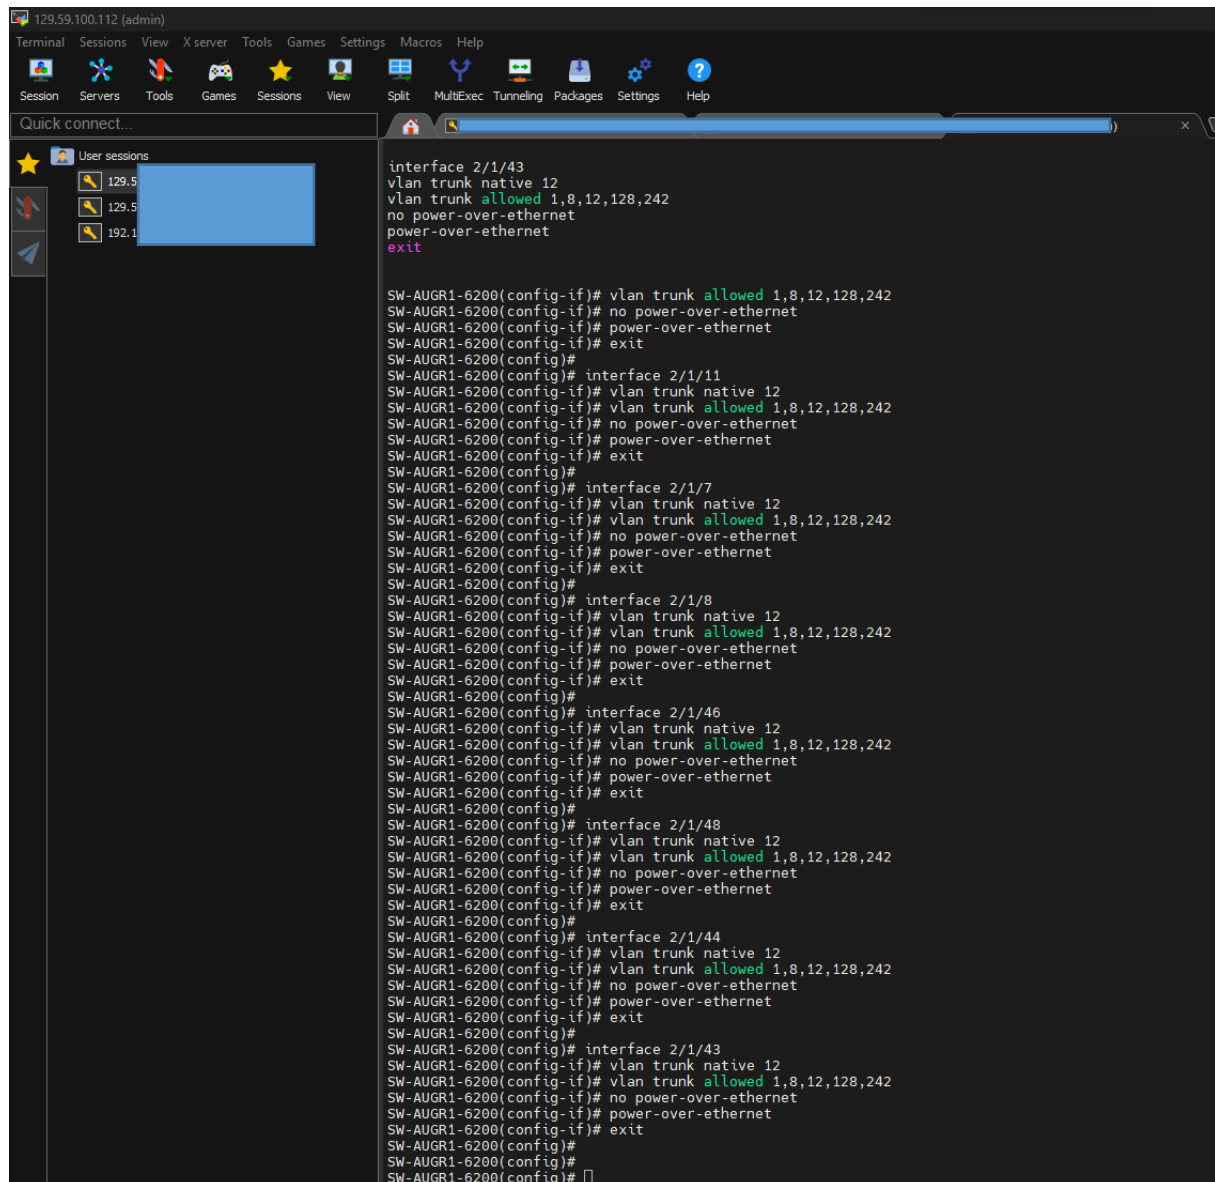

Ils sont DOWN

Aruba Mobility Controller | A3600-MASTER

Configuration | Diagnostics | Maintenance

Network > All Access Points

Global APs

Name	AP Group	Status	AP IP	Outer AP IP	AP Type	Switch IP	2.4Ghz clients	2.4Ghz channel	2.4Ghz standard	5Ghz clients	5Ghz channel	5Ghz standard	TPSEC	Actions
AP_ADM3E_B2	VRRP2	down					2	11		0	52		Disabled	Clear
AP_AUGR1_B1	default	up					0	1		0	108		Disabled	Clear
AP_AUGR1_B10	VRRP2	up					1	6		0	56		Disabled	Clear
AP_AUGR1_B11	default	up					1	11		0	140		Disabled	Clear
AP_AUGR1_B12	default	up					1	1		0	100		Disabled	Clear
AP_AUGR1_B13	default	up					2	6		0	116		Disabled	Clear
AP_AUGR1_B2	default	up					0	6		1	140		Disabled	Clear
AP_AUGR1_B3	default	up					1	1		0	100		Disabled	Clear
AP_AUGR1_B4	default	up					0	11		0	56		Disabled	Clear
AP_AUGR1_B5	default	up					1	1		0	108		Disabled	Clear
AP_AUGR1_B6	default	up					1	6		0	128		Disabled	Clear
AP_AUGR1_B7	default	up					2	11		0	100		Disabled	Clear
AP_AUGR1_B8	default	up					2	1		0	116		Disabled	Clear
AP_AUGR1_B9	default	up					0	11		0	120		Disabled	Clear
AP_AUGR2_B1	default	down					0	6		0	116		Disabled	Clear
AP_AUGR2_B2	default	down					0	1		0	140		Disabled	Clear
AP_AUGR2_B3	default	down					1	11		1	132		Disabled	Clear
AP_AUGR2_B4	default	down					1	1		0	56		Disabled	Clear
AP_AUGR2_B5	default	down					1	11		0	116		Disabled	Clear
AP_AUGR2_B6	default	down					1	6		0	140		Disabled	Clear
AP_AUGR2_B7	default	down					1	1		0	108		Disabled	Clear
AP_AUGR2_B8	default	down					0	11		0	140		Disabled	Clear

Ils sont UP

Aruba Mobility Controller | A3600-MASTER

Configuration | Diagnostics | Maintenance

Network > All Access Points

Global APs

Name	AP Group	Status	AP IP	Outer AP IP	AP Type	Switch IP	2.4Ghz clients	2.4Ghz channel	2.4Ghz standard	5Ghz clients	5Ghz channel	5Ghz standard	TPSEC	Actions
AP_ADM3E_B2	VRRP2	down					2	11		0	52		Disabled	Clear
AP_AUGR1_B1	default	up					0	1		0	108		Disabled	Clear
AP_AUGR1_B10	VRRP2	up					1	6		0	56		Disabled	Clear
AP_AUGR1_B11	default	up					1	11		0	140		Disabled	Clear
AP_AUGR1_B12	default	up					1	1		0	100		Disabled	Clear
AP_AUGR1_B13	default	up					2	11		1	116		Disabled	Clear
AP_AUGR1_B2	default	up					0	6		0	140		Disabled	Clear
AP_AUGR1_B3	default	up					1	1		0	100		Disabled	Clear
AP_AUGR1_B4	default	up					0	11		0	56		Disabled	Clear
AP_AUGR1_B5	default	up					1	1		0	108		Disabled	Clear
AP_AUGR1_B6	default	up					0	6		0	128		Disabled	Clear
AP_AUGR1_B7	default	up					1	11		0	100		Disabled	Clear
AP_AUGR1_B8	default	up					2	1		0	116		Disabled	Clear
AP_AUGR1_B9	default	up					0	11		0	120		Disabled	Clear
AP_AUGR2_B1	default	up					0	6		0	116		Disabled	Clear
AP_AUGR2_B2	default	up					0	1		1	48		Disabled	Clear
AP_AUGR2_B3	default	up					0	11		0	132		Disabled	Clear
AP_AUGR2_B4	default	up					1	1		0	56		Disabled	Clear
AP_AUGR2_B5	default	up					1	6		0	116		Disabled	Clear
AP_AUGR2_B6	default	up					0	6		0	140		Disabled	Clear
AP_AUGR2_B7	default	up					0	1		0	108		Disabled	Clear
AP_AUGR2_B8	default	up					0	11		0	140		Disabled	Clear
AP_AUGRH_B1	default	up					1	1		0	100		Disabled	Clear
AP_AUGRH_B10	default	up					0	11		0	116		Disabled	Clear
AP_AUGRH_B11	default	up					0	1		0	140		Disabled	Clear
AP_AUGRH_B2	default	up					0	11		0	140		Disabled	Clear
AP_AUGRH_B3	default	up					0	1		0	116		Disabled	Clear
AP_AUGRH_B4	default	up					0	6		0	140		Disabled	Clear
AP_AUGRH_B5	default	up					0	11		0	52		Disabled	Clear
AP_AUGRH_B6	default	up					1	11		0	100		Disabled	Clear
AP_AUGRH_B7	default	up					0	1		0	140		Disabled	Clear
AP_AUGRH_B8	default	up					0	11		0	52		Disabled	Clear
AP_AUGRH_B9	default	up					0	6		0	116		Disabled	Clear

Ils sont bien dans le baux d'adresse

DHCP

Fichier Action Affichage ?

Adresse IP du client	Nom	Expiration du bail	Type	ID unique	Description	Protection d'accès réseau	Expiration de la période d'essai	Profil du filtre	Stratégie	Actions
192.168.1.102	AP_AUGR2_B7.dom...	02/08/2026 16:44:35	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		Baux d'adresses
192.168.1.102	AP_AUGR2_B8.dom...	02/08/2026 16:44:34	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		Autres actions
192.168.1.102	AP_AUGR2_B8.dom...	02/08/2026 16:44:27	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		
192.168.1.102	AP_AUGR2_B1.dom...	02/08/2026 16:40:06	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		
192.168.1.102	AP_AUGR2_B2.dom...	02/08/2026 16:40:06	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		
192.168.1.102	AP_AUGR2_B3.dom...	02/08/2026 16:40:06	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		
192.168.1.102	AP_AUGR2_B4.dom...	02/08/2026 16:40:06	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		
192.168.1.102	AP_AUGR2_B5.dom...	02/08/2026 16:40:06	DHCP	9c1c12cab...	Accès complet	N/D	N/D	Aucun		

CMD : ping test tout est remonté tout fonctionne

```
Invite de commandes
Durée approximative des boucles en millisecondes :
  Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merye.can>ping 192.168.1.100

Envoi d'une requête 'Ping' 192.168.1.100 avec 32 octets de données :
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps=3 ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63

Statistiques Ping pour 192.168.1.100:
  Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
  Durée approximative des boucles en millisecondes :
    Minimum = 0ms, Maximum = 3ms, Moyenne = 0ms

C:\Users\merye.can>ping 192.168.12.201

Envoi d'une requête 'Ping' 192.168.12.201 avec 32 octets de données :
Réponse de 192.168.12.201 : octets=32 temps<1ms TTL=63
Réponse de 192.168.12.201 : octets=32 temps<1ms TTL=63
Réponse de 192.168.12.201 : octets=32 temps<1ms TTL=63
Réponse de 192.168.12.201 : octets=32 temps<1ms TTL=63

Statistiques Ping pour 192.168.12.201:
  Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
  Durée approximative des boucles en millisecondes :
    Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merye.can>
```

VLAN USLD :

AP_USLDS_B1	default	up	129.59
AP_USLDS_B10	default	up	129.59
AP_USLDS_B11	default	up	129.59
AP_USLDS_B2	default	up	129.59
AP_USLDS_B3	default	up	129.59
AP_USLDS_B4	default	up	129.59
AP_USLDS_B5	default	up	129.59
AP_USLDS_B6	default	up	129.59
AP_USLDS_B7	default	up	129.59
AP_USLDS_B8	default	up	129.59
AP_USLDS_B9	default	up	129.59
AP_USLDS_LP	VRRP2	up	129.59


Allez sur l'imc et vérifiez sur quel switch

The screenshot displays the HPE Intelligent Management Center (IMC) web interface. The left sidebar shows the navigation menu with categories like View Management, Resource Management, Terminal Access, Network Assets, Virtual Resources, and Performance Management. The main content area is titled 'Resource > Real-Time Location (Only wired network endpoints are supported)'. It includes a 'Real-Time Location' section with a 'Location Type' dropdown set to 'IP Address' and an 'IP Address' input field containing '129.59'. Below this is the 'Real-Time Location Result' section, which contains a table with the following data:


Location Address	Device Label	Device IP	Interface	View Access Device Topology
129.59	SW-USLDS-6200	129.59.1	1/1/1	

Below the table, it states 'Total Items: 1.' At the bottom, the 'Real-Time Location Process' section shows a log of events: 'Start real-time location...', 'Located device data Device label "SW-USLDS-6200"; device IP address "129.59.100.114"; interface description "1/1/1".', and 'Finished real-time location.'

Se connecter en ssh au switch

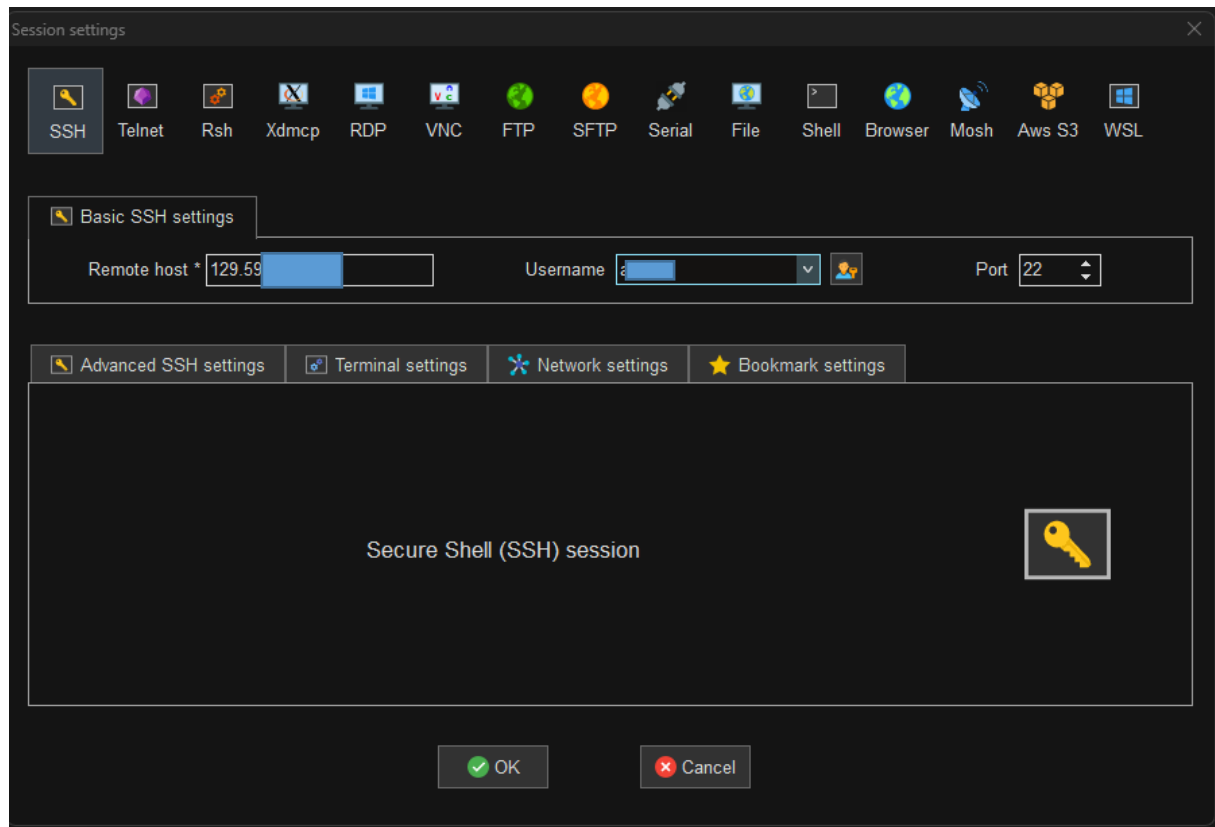

Propager le vlan, c'est bien en port trunk mais il manque les vlan

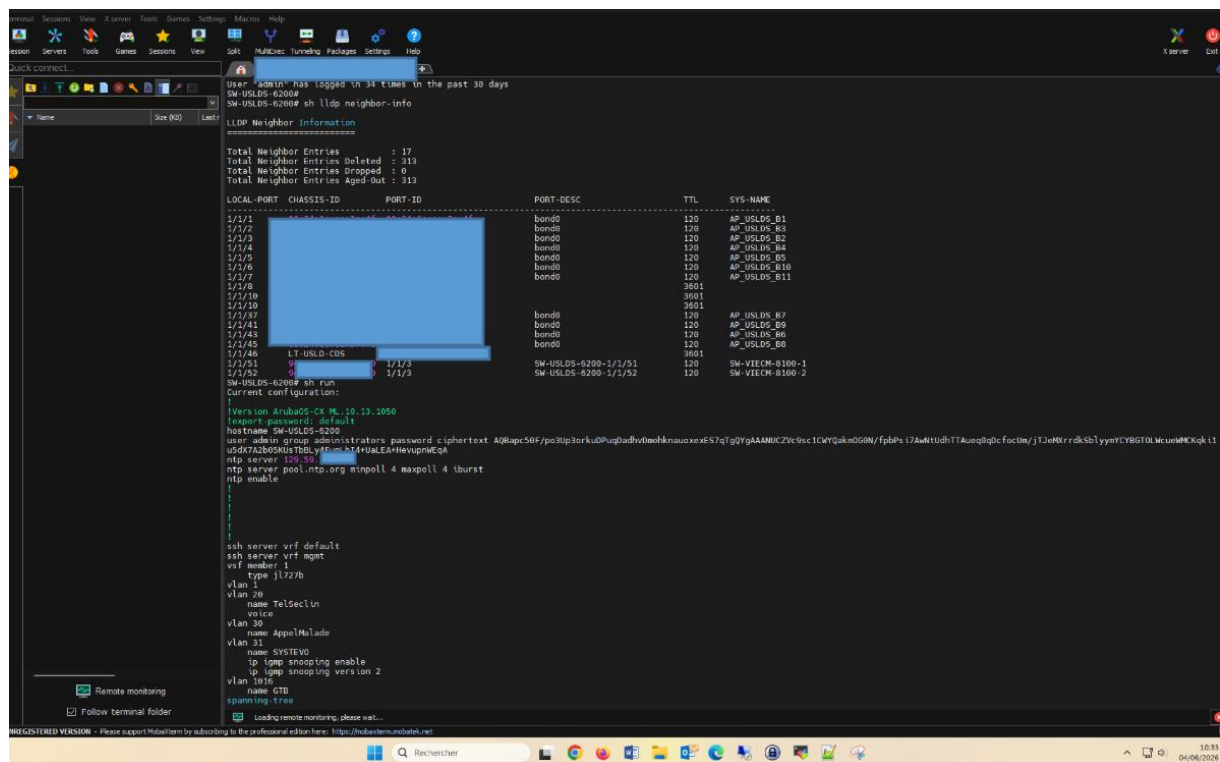

Vérifier les interfaces sur l'autre switch

```
Last login: 2026-06-04 04:19:53 from 129.59
User "admin" has logged in 24 times in the past 30 days
SW-VIECM-8100-1#
SW-VIECM-8100-1# sh lldp
% Command incomplete.
SW-VIECM-8100-1# sh lldp neighbor-info

LLDP Neighbor Information
=====

Total Neighbor Entries      : 8
Total Neighbor Entries Deleted : 1
Total Neighbor Entries Dropped : 0
Total Neighbor Entries Aged-Out : 1

LOCAL-PORT  CHASSIS-ID  PORT-ID  PORT-DESC  TTL  SYS-NAME
-----
1/1/1       [REDACTED]  1/1/52   SW-VIECM-8100-1-1/1/1  120  SW-AUGR1-6200
1/1/2       [REDACTED]  1/1/52   SW-VIECM-8100-1-1/1/2  120  SW-AUGR2-6200
1/1/3       [REDACTED]  1/1/51   SW-VIECM-8100-1-1/1/3  120  SW-USLDS-6200
1/1/4       [REDACTED]  1/1/51   SW-VIECM-8100-1-1/1/4  120  SW-VIECM-6200
1/1/23      [REDACTED]  1/3/21   VIE_CM      120  SW-PLASI-CORE-6400
1/1/24      [REDACTED]  1/1/24   SW-VIECM-8100-1-1/1/24  120  SW-VIECM-8100-2
1/1/27      [REDACTED]  1/1/27   SW-VIECM-8100-1-1/1/27  120  SW-VIECM-8100-2
1/1/28      [REDACTED]  1/1/28   SW-VIECM-8100-1-1/1/28  120  SW-VIECM-8100-2
SW-VIECM-8100-1#
```

Les vlan sont pas là :

```
!
ssh server vrf default
ssh server vrf mgmt
vsf member 1
type jl727b
vlan 1
vlan 20
name TelSeclin
voice
vlan 30
name AppelMalade
vlan 31
name SYSTEVO
ip igmp snooping enable
ip igmp snooping version 2
vlan 1016
name GTB
```

Conf t :

```

SW-USLDS-6200# conf t
SW-USLDS-6200(config)# vlan 8
SW-USLDS-6200(config-vlan-8)# name wifi
SW-USLDS-6200(config-vlan-8)# description wifi
SW-USLDS-6200(config-vlan-8)#
SW-USLDS-6200(config-vlan-8)# vlan 12
SW-USLDS-6200(config-vlan-12)# name AP-MGMT
SW-USLDS-6200(config-vlan-12)# description AP-MGMT
SW-USLDS-6200(config-vlan-12)#
SW-USLDS-6200(config-vlan-12)# vlan 128
SW-USLDS-6200(config-vlan-128)# name hotspot
SW-USLDS-6200(config-vlan-128)# description hotspot
SW-USLDS-6200(config-vlan-128)#
SW-USLDS-6200(config-vlan-128)# vlan 242
SW-USLDS-6200(config-vlan-242)# name careevent
SW-USLDS-6200(config-vlan-242)# description careevent
SW-USLDS-6200(config-vlan-242)#
SW-USLDS-6200(config-vlan-242)# exit
SW-USLDS-6200(config)#

```

Sh run

```

!
ssh server vrf default
ssh server vrf mgmt
vsf member 1
    type jl727b
vlan 1
vlan 8
    name wifi
    description wifi
vlan 12
    name AP-MGMT
    description AP-MGMT
vlan 20
    name TelSeclin
    voice
vlan 30
    name AppelMalade
vlan 31
    name SYSTEVO
    ip igmp snooping enable
    ip igmp snooping version 2
vlan 128
    name hotspot
    description hotspot
vlan 242
    name careevent
    description careevent
vlan 1016
    name GTB

```



```
C:\Users\merve.can>ping 192.168.1.100

Envoi d'une requête 'Ping' 192.168.1.100 avec 32 octets de données :
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63
Réponse de 192.168.1.100 : octets=32 temps<1ms TTL=63

Statistiques Ping pour 192.168.1.100
    Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
Durée approximative des boucles en millisecondes :
    Minimum = 0ms, Maximum = 0ms, Moyenne = 0ms

C:\Users\merve.can>
```

```
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/7
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/3
SW-USLDS-6200(config-if)# vlan trunk native 12
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/2
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/4
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/5
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/43
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit

interface 1/1/37
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit


interface 1/1/45
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
no power-over-ethernet
power-over-ethernet
exit


interface 1/1/41
vlan trunk native 12
vlan trunk allowed 1,8,12,128,242
```

DHCP									
Fichier Action Affichage 1									
Adresse IP du client	Nom	Expiration du bail	Type	ID unique	Description	Protection d'accès réseau	Expiration de la période d'essai	Profil du filtre	Stratégie
	AP_USLDS_B2.dom...	03/08/2026 11:08:45	DHCP			Accès complet	N/D	Aucun	
	AP_USLDS_B4.dom...	03/08/2026 11:08:45	DHCP			Accès complet	N/D	Aucun	
	AP_USLDS_B5.dom...	03/08/2026 11:08:44	DHCP			Accès complet	N/D	Aucun	
	AP_USLDS_B3.dom...	03/08/2026 11:08:44	DHCP			Accès complet	N/D	Aucun	
	AP_USLDS_B6.dom...	03/08/2026 11:08:44	DHCP			Accès complet	N/D	Aucun	
	AP_USLDS_B1.dom...	03/08/2026 10:58:49	DHCP			Accès complet	N/D	Aucun	

Elles reviennent toutes

AP_USLDS_B1	default	up	192.168	
AP_USLDS_B10	default	up	192.168	
AP_USLDS_B11	default	up	192.168	
AP_USLDS_B12	default	down	129.59	
AP_USLDS_B2	default	up	192.168	
AP_USLDS_B3	default	up	192.168	
AP_USLDS_B4	default	up	192.168	
AP_USLDS_B5	default	up	192.168	
AP_USLDS_B6	default	up	192.168	
AP_USLDS_B7	default	up	192.168	
AP_USLDS_B8	default	up	192.168	
AP_USLDS_B9	default	up	192.168	

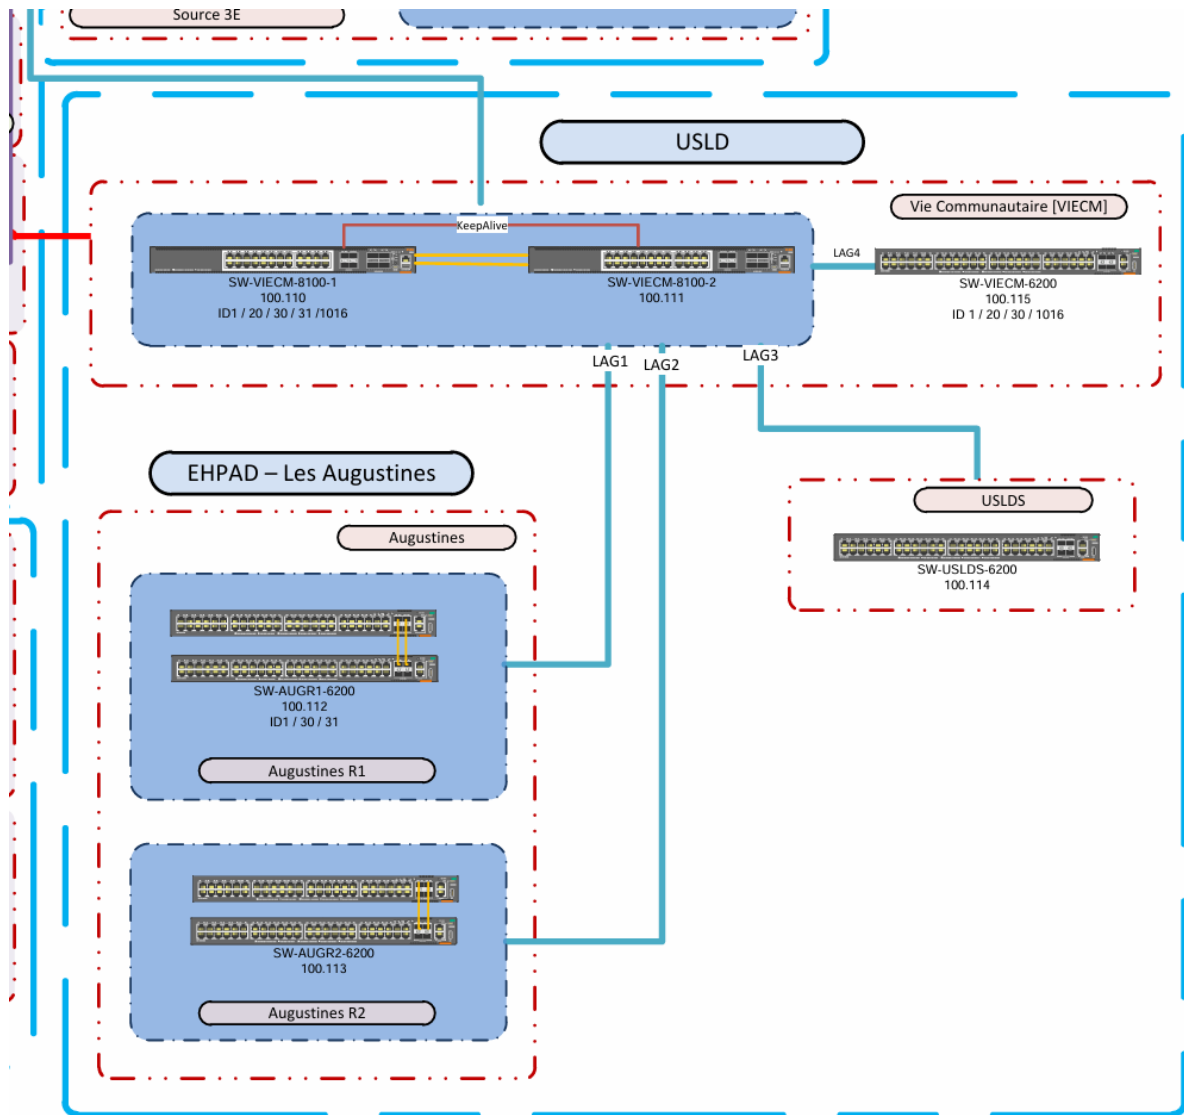

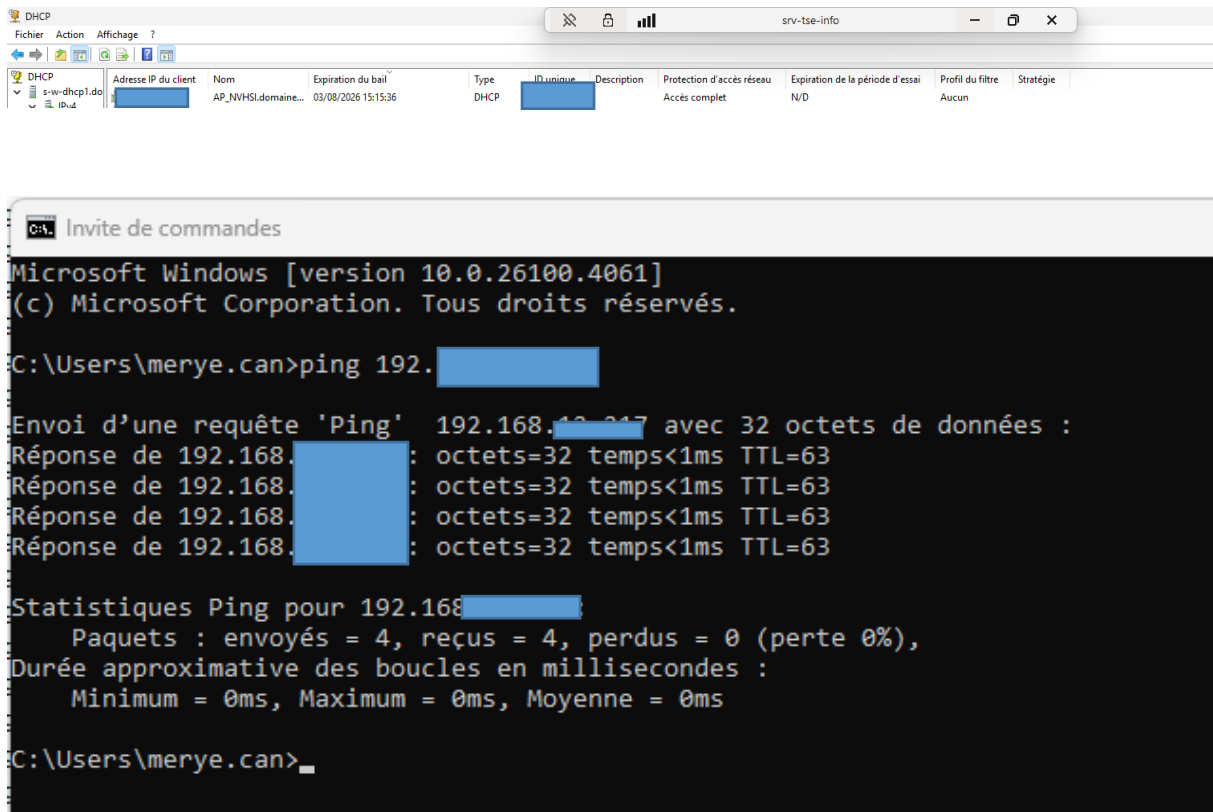


Etiqueter la nvllle borne et allez la changer physiquement

Puis faire des test réseau

C'est ok

AP-IMAGERIE-REU

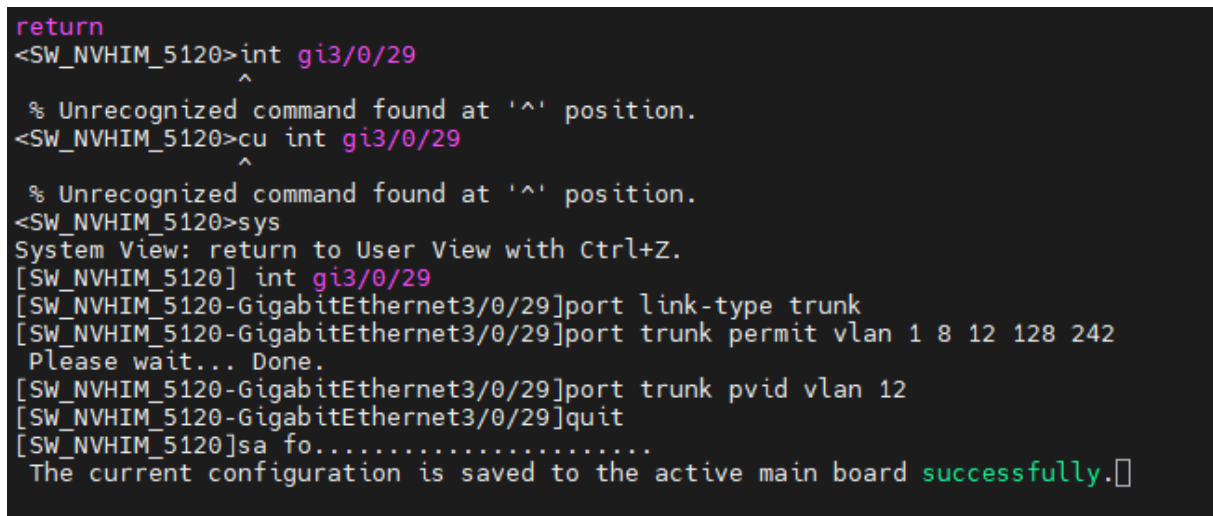

Vendredi :

 Répondre  Répondre à tous  Transférer



ven. 05/06/2026 10:33

CAN Meryem

RE: [DSI] Infos Déploiement Wifi

À

Cc

Voici le nombre de bornes que nous allons installer par étage la semaine prochaine

Augustines :

R0 : 11 bornes

R1 : 13 bornes

R2 : 8 bornes

USLD :

11 bornes + AP-USLD-LP

PRATZ :

ROB : AP-PRA-ROB-STOCK

45 bornes au total

Cordialement,
CAN Meryem

Je suis parti aux urgences dépanner la télévision qui affiche le temps d'attente ainsi qu'un pc qui a eu un problème de réseau .

AP-NVH-IMA

1 item

Name	Inherits From	Assigned Device Function	Assigned Scope
 sys-system-info-profile	Self	Campus Access Point	AP-NVH-R1-12

Name *

sys-system-info-profile

Hostname

AP-NVH-IMA

OU EST ELLE placé ? JE LAI MIS DANS LE GRP NVH R0H avec la même que AP-IMA-REU MAIS PAS SUR car elles sont sur le mm switch

```

<SW_NVHIM_5120>disp cu int gi1/0/16
#
interface GigabitEthernet1/0/16
 poe enable
#
return
<SW_NVHIM_5120>disp cu int gi3/0/29
#
interface GigabitEthernet3/0/29
 port link-type trunk
 port trunk permit vlan 1 8 12 128 242
 port trunk pvid vlan 12
 poe enable
#
return
<SW_NVHIM_5120>SYS
System View: return to User View with Ctrl+Z.
[SW_NVHIM_5120]int gi1/0/16
[SW_NVHIM_5120-GigabitEthernet1/0/16] port link-type trunk
[SW_NVHIM_5120-GigabitEthernet1/0/16] port trunk permit vlan 1 8 12 128 242
Please wait... Done.
[SW_NVHIM_5120-GigabitEthernet1/0/16] port trunk pvid vlan 12
[SW_NVHIM_5120-GigabitEthernet1/0/16]
[SW_NVHIM_5120-GigabitEthernet1/0/16]

```

srv-tse-info									
Adresse IP du client	Nom	Expiration du bail	Type	ID unique	Description	Protection d'accès réseau	Expiration de la période d'essai	Profil du filtre	Stratég
192.168...	AP-NVH-R1-12.do...	04/08/2026 13:17:18	DHCP	...		Accès complet	N/D	Aucun	

Dominique noter LE UF dans l'Excel grâce au n° de série sur GLPI à permet de faire les fiches de sortie

The screenshot shows the GLPI web interface. The left sidebar contains a menu with categories like 'Parc', 'Ordinateurs', 'Moniteurs', 'Logiciels', 'Matériels réseau', 'Périphériques', 'Imprimantes', 'Cartouches', 'Consommables', 'Téléphones', 'Baies', 'Châssis', 'PDU', and 'Équipements passifs'. The main content area displays a search results page for 'Ordinateurs'. The search criteria are set to 'contient S4L29298'. Below the search bar, there is a table of results. The table has columns for 'NOM', 'NUMÉRO DE SÉRIE', 'STATUT', 'NUMÉRO D'INVENTAIRE', 'PLUGINS - UF - FICHE', 'LIEU', 'FABRICANT', 'TYPE', 'MODÈLE', 'SYSTÈME D'EXPLOITATION - NOM', 'RÉSEAU - IP', 'DATE DE DERNIER INVENTAIRE', 'UTILISATEUR', 'INFORMATIONS FINANCIÈRES ET ADMINISTRATIVES - NUMÉRO DE COMMANDE', 'INFORMATIONS FINANCIÈRES ET ADMINISTRATIVES - FOURNISSEUR', and 'COM - MÉA'. The table shows one result for 'MCO-PHARMAS (1522)' with a status of 'Recyclage DEEE' and a serial number of 'S4L29298'. The user 'Admin GHSC' is logged in.

NOM	NUMÉRO DE SÉRIE	STATUT	NUMÉRO D'INVENTAIRE	PLUGINS - UF - FICHE	LIEU	FABRICANT	TYPE	MODÈLE	SYSTÈME D'EXPLOITATION - NOM	RÉSEAU - IP	DATE DE DERNIER INVENTAIRE	UTILISATEUR	INFORMATIONS FINANCIÈRES ET ADMINISTRATIVES - NUMÉRO DE COMMANDE	INFORMATIONS FINANCIÈRES ET ADMINISTRATIVES - FOURNISSEUR	COM - MÉA
MCO-PHARMAS (1522)	S4L29298	Recyclage DEEE	0002278	8210	2015-00763	LENOVO	Desktop	ThinkCentre M73	Microsoft Windows 10 Professionnel	129.59.254.195 fe80::7fb3:d2b3-674f:62bd 129.59.254.195	2026-01-23 09:49	DEGORQUE Charlotte (7388)	IF236625	COMPUTACENTER	8 Gi

DATE	MARQUE	MODELE	Type de Materiel	N° de SERIE	N° inventaire	Fiche Madrid	fiche de sortie	ANNEE	Fournisseur	UF
23/01/2026	LENOVO	L570	LAPTOP	MP1EMC30	NON		2019-00339	2019	ECONOCOM	0
30/01/2026	LENOVO	L570	LAPTOP	MP19TYVL	0001859	pas trouvé		2017	ECONOCOM	6960
10/02/2026	IYAMA	B1906S	ECRAN	11015M1700214	0003026		2011-00710		COMPUTACENTER	0
10/02/2026	IYAMA	B1906S	ECRAN	11016A9803411	0000855	pas trouvé				0
10/02/2026	LENOVO	M71E	PC FIXE	S4GWMP6	0001830		2012-00884		COMPUTACENTER	8210
10/02/2026	LENOVO	M72E	PC FIXE	S4VMGY3	0001522	2013-00698			COMPUTACENTER	8210
10/02/2026	LENOVO	M73	PC FIXE	S4L29298	0002278	2015-00763			COMPUTACENTER	8210
10/02/2026	LENOVO	M72E	PC FIXE	S4MNB74	0001673	2012-01141		2012	COMPUTACENTER	0
17/02/2026	LENOVO	M73	PC FIXE	S4F39669	0001739	2014-00906		2014	COMPUTACENTER	6330
17/02/2026	LENOVO	M73	PC FIXE	S4C90859	0001758			2014	COMPUTACENTER	0
03/04/2026	LENOVO	L570	LAPTOP	MP1EMC3S	0002050	2019-00339			ECONOCOM	0
03/04/2026	LENOVO	M700	PC FIXE	S4V47267	0001350	2016-00594			COMPUTACENTER	0
03/04/2026	LENOVO	M700	PC FIXE	S4V47287	0001290	2016-00594			COMPUTACENTER	7761
03/04/2026	LENOVO	M700	PC FIXE	S4V47269	0002405	2016-00594			COMPUTACENTER	7511
03/04/2026	LENOVO	M700	PC FIXE	S4V47259	0002381	2016-00594			COMPUTACENTER	8310
03/04/2026	LENOVO	M700	PC FIXE	S4V47296		2016-00594			COMPUTACENTER	0
03/04/2026	LENOVO	M700	PC FIXE	S4V47266	0001851	2016-00594			COMPUTACENTER	9540
03/04/2026	LENOVO	M700	PC FIXE	S4V47498	0002384	2016-00594			COMPUTACENTER	0
03/04/2026	LENOVO	M700	PC FIXE	S4V47533		2016-00594			COMPUTACENTER	0
03/04/2026	LENOVO	M700	PC FIXE	S4V47543		2016-00594			COMPUTACENTER	0
03/04/2026	LENOVO	M700	PC FIXE	S4V47268		2016-00594			COMPUTACENTER	0
03/04/2026	LENOVO	M710S	PC FIXE	PC0RQ7GQ	0001387	2018-00262			ECONOCOM	3241
03/04/2026	LENOVO	M710S	PC FIXE	PC0RQ7FA	0001442	2018-00262			ECONOCOM	0
03/04/2026	LENOVO	M710S	PC FIXE	PC0RQD35G	0001765	2018-00261			ECONOCOM	0
03/04/2026	LENOVO	M710S	PC FIXE	PC0RQ7FP	0002720	2018-00262				0
03/04/2026	LENOVO	L560	LAPTOP	MP127LY2	0002762	2016-00599				0

J'ai fait 2026 /2023

Ping -a 129.59.25.20 un pc a seclin a la meme @ ip qu'une sonde d'une société

```

interface GigabitEthernet1/0/18
 poe enable
#
return
<SW_PLARH_5120>sys
System View: return to User View with Ctrl+Z.
[SW_PLARH_5120]q
[SW_PLARH_5120]quit
<SW_PLARH_5120>disp vlan
Total 9 VLAN exist(s).
The following VLANs exist:
 1(default), 7-8, 12, 20, 128, 242, 245, 1016,
<SW_PLARH_5120>sys
System View: return to User View with Ctrl+Z.
[SW_PLARH_5120]quit
<SW_PLARH_5120>disp cu int gi1/0/8
#
interface GigabitEthernet1/0/8
 port link-type trunk
 port trunk permit vlan 1 8 12 128 242
 port trunk pvid vlan 12
 poe enable
#
return
<SW_PLARH_5120>sys
System View: return to User View with Ctrl+Z.
[SW_PLARH_5120]int gi1/0/18
[SW_PLARH_5120-GigabitEthernet1/0/18]port link-type trunk
[SW_PLARH_5120-GigabitEthernet1/0/18]port trunk permit vlan 1 8 12 128 242
Please wait... Done.
[SW_PLARH_5120-GigabitEthernet1/0/18]port trunk pvid vlan 12
[SW_PLARH_5120-GigabitEthernet1/0/18]quit
[SW_PLARH_5120]sa fo
Validating file. Please wait.....
Saved the current configuration to mainboard device successfully.
Slot 1:
Save next configuration file successfully.
Configuration is saved to device successfully.
[SW_PLARH_5120]

```

Changer l'ip le remettre en DHCP

```
Invite de commandes
Microsoft Windows [version 10.0.26100.4061]
(c) Microsoft Corporation. Tous droits réservés.

C:\Users\merye.can>ping -a 129.5[redacted]

Envoi d'une requête 'ping' sur PSC-DRH [redacted] avec 32 octets de données :
Réponse de 129.[redacted] : octets=32 temps=1 ms TTL=128
Réponse de 129.[redacted] : octets=32 temps=1 ms TTL=128
Réponse de 129.[redacted] : octets=32 temps<1ms TTL=128
Réponse de 129.[redacted] : octets=32 temps=1 ms TTL=128

Statistiques Ping pour 129.59.31.24:
    Paquets : envoyés = 4, reçus = 4, perdus = 0 (perte 0%),
    Durée approximative des boucles en millisecondes :
        Minimum = 0ms, Maximum = 1ms, Moyenne = 0ms

C:\Users\merye.can>

C:\Users\merye.can>nslookup PSC-DRH
Serveur : SRVDC5.[redacted]
Address: 129.59.[redacted]

Nom : PSC-DRH.d[redacted]
Address: 129.5[redacted]

C:\Users\merye.can>
```

Arp -a

```
129.5[redacted] dynamique
129.5[redacted] dynamique
129.5[redacted] dynamique
```

@ mac : 20-53-8d-3c-46-58

Resource > Real-Time Location(Only wired network endpoints are supported) [Add to My Favorites](#) [Help](#)

Real-Time Location

Location Type * IP Address

IP Address * 129.5[redacted] OK Reset

Real-Time Location Result

Location Address	Device Label	Device IP	Interface	View Access Device Topology
129.59.[redacted]	SW_SRCSS_5130	129.5[redacted]	GigabitEthernet1/0/29	

Total Items: 1.

Real-Time Location Process

- Start real-time location...
- Located device data: Device label "SW_SRCSS_5130"; device IP address "129.59.31.24"; interface description "GigabitEthernet1/0/29".
- Finished real-time location.

Quelques bornes

*Untitled - Notepad					
File Edit Format View Help					
AP_IMAG_REU	VRRP2	up	129.5		6
AP_IMAGERIE	VRRP2	up	129.5		R0H
AP_LABO_B01	VRRP2	up	129.5		68
AP_MCO_ADM	VRRP2	up	129.5		117
AP_NVH7E_B1	default	up	129.5		92
AP_NVHSI	VRRP2	up	129.5		2
AP_TECRB	VRRP2	up	129.5		22
AP_TRAUMA	VRRP2	up	129.5		

AP-PRA-R0B-STOCK

AP-NVH-R0H-108 → AP-NVH-R7-01

Se connecter sur l'interface web du switch

Regarder les statistiques des ports si elles sont à 0 c'est ok

The screenshot displays the Aruba IMC web interface. The top navigation bar includes 'Monitoring', 'HPE Intelligent Management Center', and a search bar. The left sidebar contains a menu with 'Interfaces' selected. The main content area shows two switch configurations: '1 CONDUCTOR: 6200F 48G CL4 4SFP+370W Swch' and '2 STANDBY: 6200F 48G CL4 4SFP+370W Swch'. Below these, there are port status indicators (green for up, red for down) and a table of interfaces.

Name	Description	Admin State	Flow Control	Routing Status	VSF	Type	Link State	Reason
1/1/18		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...
1/1/19		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...
1/1/20		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...
1/1/21		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...
1/1/22		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...
1/1/23		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...
1/1/24		Up	Disabled	Disabled	Disabled	1GbT	Down	Waiting fo...

Including 104 of 104

Interface: 1/1/18

MAC	5c:a4:7d:8b:a9:f0
Rx Statistics	
Packets	0
Bytes	0
Drops	0
Errors	0
CRC Errors	0
Q Tx Pkts	
0	0
1	0
2	0

Tx Statistics	
Packets	0
Bytes	0
Drops	0
Errors	0
Q Tx Bytes	
0	0
1	0
2	0

```
SW-NVH6E-6200# sh int 1/1/18
```

```
Interface 1/1/18 is down
Admin state is up
State information: Waiting for link
Link state: down for 6 months (since Tue Nov 25 14:57:01 UTC 2025)
Link transitions: 0
Description:
Persona:
Hardware: Ethernet, MAC Address: 
MTU 1500
Type 1GbT
Full-duplex
qos trust none
Speed 0 Mb/s
Auto-negotiation is on
Energy-Efficient Ethernet is disabled
Flow-control: off
Error-control: off
MDI mode: none
VLAN Mode: native-untagged
Native VLAN: 1
Allowed VLAN List: 1,20
Rate collection interval: 300 seconds
```

Rate	RX	TX	Total (RX+TX)
Mbits / sec	0.00	0.00	0.00
KPkts / sec	0.00	0.00	0.00
Unicast	0.00	0.00	0.00
Multicast	0.00	0.00	0.00
Broadcast	0.00	0.00	0.00
Utilization %	0.00	0.00	0.00

Statistic	RX	TX	Total
Packets	0	0	0
Unicast	0	0	0
Multicast	0	0	0
Broadcast	0	0	0
Bytes	0	0	0
Jumbos	0	0	0
Dropped	0	0	0
Pause Frames	0	0	0
Errors	0	0	0
CRC/FCS	0	n/a	0
Collision	n/a	0	0
Runts	0	n/a	0
Giants	0	n/a	0

```
SW-NVH6E-6200#
```

1/0/2 débrancher et rebrancher sur le nv switch 1/0/18

```
SW-NVH6E-6200# conf t
SW-NVH6E-6200(config)# interface 1/1/18
SW-NVH6E-6200(config-if)# vlan trunk native 12
SW-NVH6E-6200(config-if)# vlan trunk allowed 1,8,12,128,242
SW-NVH6E-6200(config-if)# no power-over-ethernet
SW-NVH6E-6200(config-if)# power-over-ethernet
SW-NVH6E-6200(config-if)# exit
SW-NVH6E-6200(config)#
```

```
AP_LABO_B01    129.59.254.68
AP_MCO_ADM     129.59.254.117
AP_TECRB       129.59.30.122
```

Problème : boucle interne sur le switch (STP) quelqu'un a branché a un mini switch sur le switch

```
2/1/6
2/1/7
2/1/8
2/1/9
2/1/10
2/1/11
2/1/12
2/1/17
2/1/23
2/1/39
2/1/41
2/1/42
2/1/43
2/1/44
2/1/45
2/1/46
2/1/47
2/1/48
2/1/52
SW-AUGR1-6200# sh run int 2/1/6
interface 2/1/6
  no shutdown
  no routing
  vlan trunk native 12
  vlan trunk allowed 1,8,12,128,242
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
  exit
SW-AUGR1-6200#
```

bond0	120	AP-AUG-R0-01
bond0	120	AP-AUG-R2-03
bond0	120	AP-AUG-R2-04
bond0	120	AP-AUG-R1-08
bond0	120	AP-AUG-R1-07
bond0	120	AP_AUGR2_B2
bond0	120	AP_AUGRH_B11
bond0	120	AP_USLDS_LP
	3601	
bond0	120	AP_AUGR1_B12
bond0	120	AP-AUG-R1-09
bond0	120	AP-AUG-R1-10
bond0	120	AP-AUG-R2-08
bond0	120	AP-AUG-R2-07
bond0	120	AP-AUG-R1-11
bond0	120	AP-AUG-R2-05
bond0	120	AP-AUG-R2-01
bond0	120	AP-AUG-R2-06
SW-AUGR1-6200-2/1/52	120	SW-VIECM-8100-2

Vérifier si sur les 5120 le stp est activé faire un tableau :

The screenshot shows the HPE Intelligent Management Center (IMC) interface. The main content area displays a table of network devices. The table has columns for Status, Device Label, Model, IP Address, Device Category, and Operation. The table is filtered to show 15 devices, with the first 14 having a status of 'Normal' and the last one being 'Unknown'. A large blue rectangle obscures the middle part of the table, likely containing IP addresses and device categories.

Status	Device Label	Model	IP Address	Device Category	Operation
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Normal	SW_NVH1E_5				...
Unknown	SW_PSC1VP				...

31.15	<pre> <SW_NVH1E_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :b8af-672d-7880 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_NVH1E_5120> </pre>
31.10	<pre> <SW_NVH2E_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :d07e-28f3-cc40 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_NVH2E_5120> </pre>
31.7	<pre> <SW_NVH4E_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :4431-927d-b24f Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_NVH4E_5120> </pre>
31.8	<pre> <SW_NVH6E_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :d07e-2860-2c44 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 </pre>

31.4	<pre> <SW_NVHAP_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :d07e-28f3-ccb8 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_NVHAP_5120> </pre>	
31.12	<pre> <SW_NVHIM_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 Bridge-Prio. :32768 MAC address :4431-9272-9b2d Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 TC Snooping :disabled <SW_NVHIM_5120> </pre>	
31.6	<pre> <SW_NVHRB_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :d07e-2860-325c Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_NVHRB_5120> </pre>	
31.13	<pre> <SW_NVHRH_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :d07e-28b9-4d6c Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_NVHRH_5120> </pre>	

31.14	<pre> <SW_PLARH_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :5c8a-38a9-599d Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_PLARH_5120> </pre>	
31.20	<pre> <SW_PLASI_5120_2>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :b8af-670c-87f6 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_PLASI_5120_2> </pre>	
31.16	<pre> <SW_PLASI_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 Bridge-Prio. :32768 MAC address :4431-926e-7791 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 TC Snooping :disabled <SW_PLASI_5120> </pre>	
31.9	<pre> <SW_PRA3E_5120>disp stp Protocol Status :disabled Protocol Std. :IEEE 802.1s Version :3 CIST Bridge-Prio. :32768 MAC address :b8af-670c-91f6 Max age(s) :20 Forward delay(s) :15 Hello time(s) :2 Max hops :20 <SW_PRA3E_5120> </pre>	
31.11	enable	
192.168.60.3		


```

-SW_NW2E_5120>disp logbuffer reverse
Logging buffer configuration and contents:enabled
Allowed max buffer size : 1024
Actual buffer size : 512
Channel number : 4 , Channel name : logbuffer
Dropped messages : 0
Overwritten messages : 252255
Current messages : 512

%Jun 9 14:17:36:404 2026 SW_NW2E_5120 SHELL/6/SHELL_CMD: -Task=vt0-IPAddr=129.59.27.48-User=sw_admin; Command is quit
%Jun 9 14:17:22:619 2026 SW_NW2E_5120 LLDP/6/LLDP_CREATE_NEIGHBOUR: New neighbor created on Port GigabitEthernet3/0/5 (IfIndex 26214404), Chassis ID is 0080-9f94-8fdc, Port ID is 0080-9f94-8f
dc.
%Jun 9 14:17:21:682 2026 SW_NW2E_5120 LLDP/6/LLDP_DELETE_NEIGHBOUR: Neighbor deleted on Port GigabitEthernet3/0/5 (IfIndex 26214404), Chassis ID is 0080-9f94-8fdc, Port ID is 0080-9f94-8f
dc.
%Jun 9 14:17:08:790 2026 SW_NW2E_5120 SHELL/6/SHELL_CMD: -Task=vt0-IPAddr=129.59.27.48-User=sw_admin; Command is disp stp brief
%Jun 9 14:17:05:840 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/24 detected a topology change.
%Jun 9 14:17:05:839 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/24 has been set to forwarding state.
%Jun 9 14:17:05:837 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/22 detected a topology change.
%Jun 9 14:17:05:835 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/22 has been set to forwarding state.
%Jun 9 14:17:05:834 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/18 detected a topology change.
%Jun 9 14:17:05:832 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/18 has been set to forwarding state.
%Jun 9 14:17:05:830 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/17 detected a topology change.
%Jun 9 14:17:05:829 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/17 has been set to forwarding state.
%Jun 9 14:17:05:827 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/15 detected a topology change.
%Jun 9 14:17:05:825 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/15 has been set to forwarding state.
%Jun 9 14:17:05:823 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/14 detected a topology change.
%Jun 9 14:17:05:822 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/14 has been set to forwarding state.
%Jun 9 14:17:05:820 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/12 detected a topology change.
%Jun 9 14:17:05:819 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/12 has been set to forwarding state.
%Jun 9 14:17:05:817 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/11 detected a topology change.
%Jun 9 14:17:05:815 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/11 has been set to forwarding state.
%Jun 9 14:17:05:814 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/7 detected a topology change.
%Jun 9 14:17:05:812 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/7 has been set to forwarding state.
%Jun 9 14:17:05:810 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/5 detected a topology change.
%Jun 9 14:17:05:809 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/5 has been set to forwarding state.
%Jun 9 14:17:05:807 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/3 detected a topology change.
%Jun 9 14:17:05:805 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/3 has been set to forwarding state.
%Jun 9 14:17:05:803 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/2 detected a topology change.
%Jun 9 14:17:05:802 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/2 has been set to forwarding state.
%Jun 9 14:17:05:800 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=2; Instance 0's GigabitEthernet2/0/1 detected a topology change.
%Jun 9 14:17:05:599 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=2; Instance 0's GigabitEthernet2/0/1 has been set to forwarding state.
%Jun 9 14:17:05:598 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=1; Instance 0's GigabitEthernet1/0/3 detected a topology change.
%Jun 9 14:17:04:928 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=1; Instance 0's GigabitEthernet1/0/3 has been set to forwarding state.
%Jun 9 14:17:04:926 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: -Slot=1; Instance 0's GigabitEthernet1/0/1 detected a topology change.
%Jun 9 14:17:04:924 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: -Slot=1; Instance 0's GigabitEthernet1/0/1 has been set to forwarding state.
%Jun 9 14:17:04:922 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: Instance 0's GigabitEthernet3/0/24 detected a topology change.
%Jun 9 14:17:04:921 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: Instance 0's GigabitEthernet3/0/24 has been set to forwarding state.
%Jun 9 14:17:04:919 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: Instance 0's GigabitEthernet3/0/22 detected a topology change.
%Jun 9 14:17:04:917 2026 SW_NW2E_5120 MSTP/6/MSTP_FORWARDING: Instance 0's GigabitEthernet3/0/22 has been set to forwarding state.
%Jun 9 14:17:04:916 2026 SW_NW2E_5120 MSTP/6/MSTP_DETECTED_TC: Instance 0's GigabitEthernet3/0/20 detected a topology change.

```

Labo 1 : stp

Activer le STP sur

```

return
[HP]stp enable
%Apr 26 13:13:02:036 2000 HP MSTP/6/MSTP_ENABLE: STP is now enabled on the device.
[HP]
#Apr 26 13:13:02:474 2000 HP MSTP/1/PFWD:
Trap 1.3.6.1.4.1.25506.8.35.14.0.1: Instance 0's Port 0.9437191 has been set to forwarding state!
%Apr 26 13:13:02:711 2000 HP MSTP/6/MSTP_FORWARDING: Instance 0's port GigabitEthernet1/0/8 has been set to forwarding state.
%Apr 26 13:13:02:861 2000 HP MSTP/6/MSTP_DETECTED_TC: Instance 0's port GigabitEthernet1/0/8 detected a topology change.
%Apr 26 13:13:03:617 2000 HP MSTP/6/MSTP_NOTIFIED_TC: Instance 0's port GigabitEthernet1/0/8 was notified of a topology change.
[HP]disp stp b
[HP]disp stp brief
MSTID      Port                      Role    STP State    Protection
0          GigabitEthernet1/0/8      ROOT    FORWARDING  NONE
0          GigabitEthernet1/0/18     DESI    DISCARDING   NONE
[HP]

```

Activer le stp sur la moitié des ports sur le switch HP 5120 activer (1 à 12)

```

[HP]int g 1/0/1
[HP-GigabitEthernet1/0/1]stp
[HP-GigabitEthernet1/0/1]stp ed
[HP-GigabitEthernet1/0/1]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/1 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/1]

```

```

0 GigabitEthernet1/0/18 DES1 FORMINGING None
[HP]int g 1/0/2
[HP-GigabitEthernet1/0/2]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/2 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/2]q

% Ambiguous command found at '^' position.
[HP-GigabitEthernet1/0/2]quit
[HP]int g 1/0/3
[HP-GigabitEthernet1/0/3]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/3 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/3]quit
[HP]int g 1/0/4
[HP-GigabitEthernet1/0/4]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/4 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/4]quit
[HP]int g 1/0/5
[HP-GigabitEthernet1/0/5]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/5 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/5]quit
[HP]int g 1/0/6
[HP-GigabitEthernet1/0/6]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/6 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/6]quit
[HP]int g 1/0/7
[HP-GigabitEthernet1/0/7]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/7 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/7]quit
[HP]int g 1/0/8
[HP-GigabitEthernet1/0/8]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/8 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/8]
%Apr 26 13:15:35:619 2000 HP MSTP/6/MSTP_DETECTED_TC: Instance 0's port GigabitEthernet1/0/8 detected a topology change.
[HP-GigabitEthernet1/0/8]quit
[HP]int g 1/0/9
[HP-GigabitEthernet1/0/9]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/9 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/9]quit
[HP]int g 1/0/10
[HP-GigabitEthernet1/0/10]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/10 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/10]quit
[HP]int g 1/0/11
[HP-GigabitEthernet1/0/11]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/11 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/11]quit
[HP]int g 1/0/12
[HP-GigabitEthernet1/0/12]stp edged-port enable
Warning: Edge port should only be connected to terminal. It will cause temporary loops if port GigabitEthernet1/0/12 is connected to bridges. Please use it carefully!
[HP-GigabitEthernet1/0/12]quit
[HP]

```

LAISSER L'AUTRE MOITIE SANS LE STP

SWITCH ARUBA :

Activer bpdu guard sur la moitié et pas l'autre moitié activer : (25 à 48)

[illegible]

Aruba ip :192.168.1.200

```
6200(config)# int vlan1
6200(config-if-vlan)# ip address 192.168.1.200
% Command incomplete.
6200(config-if-vlan)# ip address 192.168.1.200 255.255.255.0
6200(config-if-vlan)# no sh
6200(config-if-vlan)# exit
6200(config)#
```

HP ip : 192.168.1.100

```
[HP]int vlan1
[HP-Vlan-interface1]
%Apr 26 13:45:37:789 2000 HP IFNET/3/LINK_UPDOWN: Vlan-interface1 lin
%Apr 26 13:45:37:909 2000 HP IFNET/5/LINEPROTO_UPDOWN: Line protocol
[HP-Vlan-interface1]ip address 192.168.1.100
[HP-Vlan-interface1]no sh
^
% Unrecognized command found at '^' position.
[HP-Vlan-interface1]un
[HP-Vlan-interface1]undo sh
Interface Vlan-interface1 is not shut down
[HP-Vlan-interface1]
```

LABO STP : Boucle réseau

je dois faire un labo j'ai un switch aruba 6200 avec la moitié des ports active de 25 à 48 en bpdu guard
ip switch en 192.168.1.200

un autre switch hp 5120 port 1 à 12 activer stp ip switch en 192.168.1.100

le aruba est relié par un câble réseau au hp (câble rouge), un câble jaune qui est sur le hp est relié à
mini switch et un câble blanc est relié au pc portable sur lequel je fais les ping -t et dessus ya
wireshark , puis il y a un câble noir qui est branché sur le mini switch et le port console et branché à
ma tour pc qui est sur le switch hp pour l'instant le but est de comprendre le mécanisme et de trouver
une solution au problème de boucle réseau mon prof m'a alors dit de faire plusieurs étapes afin que
je comprenne je dois donc tester des choses en enlevant les câbles échanger ect faire des disp stp
brief ect tout d'abord il demande

1- quelle diff entre stp Edge et sans stp Edge et aussi entre bpdu et sans bpdu

2ème étape : bande passante utilisée pendant storm

3 e : temps de convergence avec edge ou sans edge

4 e : quelles sont les étapes de convergences stp

5° : comment détecter une boucle depuis un switch distant

Sans BPDU Guard, le protocole STP met le port en état DISCARDING afin de bloquer la boucle tout en maintenant le port actif. Avec BPDU Guard activé, la réception de BPDU sur un port edge est considérée comme une violation et entraîne la désactivation immédiate du port (error-disabled) pour protéger le réseau.

```

0 GigabitEthernet1/0/8 DESI FORWARDING NONE
[HP]disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI FORWARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
[HP]disp stp brief
#Apr 26 14:17:00:604 2000 HP MSTP/4/PDTEC:
<HP>
#Apr 26 14:04:08:084 2000 HP SHELL/4/LOGIN:
Trap 1.3.6.1.4.1.25506.2.2.1.1.3.0.1: Login from Console
#Apr 26 14:04:08:025 2000 HP SHELL/5/SHELL_LOGIN: Console logged in from aux0.
<HP>disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI FORWARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
<HP>
#Apr 26 14:04:27:861 2000 HP MSTP/1/PDTEC:
Trap 1.3.6.1.4.1.25506.8.35.14.0.2: Instance 0's Port 0.9437193 has been set to discarding state!
#Apr 26 14:04:27:983 2000 HP MSTP/6/MSTP_DETCTED_TC: Instance 0's port GigabitEthernet1/0/10 detected a topology change.
#Apr 26 14:04:28:134 2000 HP MSTP/6/MSTP_DISCARDING: Instance 0's port GigabitEthernet1/0/10 has been set to discarding state.
#Apr 26 14:04:32:079 2000 HP LLDP/6/LLDP_CREATE_NEIGHBOR: New neighbor created on Port GigabitEthernet1/0/10 (Ifindex 9437193), Chassis ID is b8aa-675a-2664, Port ID is GigabitEthernet1/0/10.
<HP>disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI DISCARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
<HP>disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI DISCARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
<HP>disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI DISCARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
<HP>disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI DISCARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
<HP>disp stp brief
MSTID Port Role STP State Protection
0 GigabitEthernet1/0/8 ROOT FORWARDING NONE
0 GigabitEthernet1/0/10 DESI DISCARDING NONE
0 GigabitEthernet1/0/18 DESI FORWARDING NONE
<HP>]

```

Aruba bpdu-guard :

```

1/1/14 Disabled Down 20000 128 P2P 0 0 0 0
1/1/15 Disabled Down 20000 128 P2P 0 0 0 0
1/1/16 Disabled Down 20000 128 P2P 0 0 0 0
1/1/17 Disabled Down 20000 128 P2P 0 0 0 0
1/1/18 Disabled Down 20000 128 P2P 0 0 0 0
1/1/19 Disabled Down 20000 128 P2P 0 0 0 0
1/1/20 Disabled Down 20000 128 P2P 0 0 0 0
1/1/21 Disabled Down 20000 128 P2P 0 0 0 0
1/1/22 Disabled Down 20000 128 P2P 0 0 0 0
1/1/23 Disabled Down 20000 128 P2P 0 0 0 0
1/1/24 Disabled Down 20000 128 P2P 0 0 0 0
1/1/25 Disabled Down 20000 128 P2P 0 0 0 0
1/1/26 Disabled Down 20000 128 P2P 0 0 0 0
1/1/27 Designated Forwarding 20000 128 P2P 47 0 0 0
1/1/28 Disabled Down 20000 128 P2P 0 0 0 0
1/1/29 Disabled Down 20000 128 P2P 0 0 0 0
1/1/30 Disabled Down 20000 128 P2P 0 0 0 0
1/1/31 Disabled Down 20000 128 P2P 0 0 0 0
6200# sh spanning-tree
Spanning tree status : Enabled Protocol: MSTP

MST0
Root ID Priority : 32768
MAC-Address: 
This bridge is the root
Hello time(in seconds):2 Max Age(in seconds):20
Forward Delay(in seconds):15

Bridge ID Priority : 32768
MAC-Address: 
Hello time(in seconds):2 Max Age(in seconds):20
Forward Delay(in seconds):15

Port Role State Cost Priority Type BPDU-Tx BPDU-Rx TCN-Tx TCN-Rx
-----
1/1/1 Disabled Down 20000 128 P2P 72 0 0 0
1/1/2 Disabled Down 20000 128 P2P 0 0 0 0
1/1/3 Disabled Down 20000 128 P2P 0 0 0 0
1/1/4 Disabled Down 20000 128 P2P 0 0 0 0
1/1/5 Designated Forwarding 20000 128 P2P 3059 18285 9 49
1/1/6 Disabled Down 20000 128 P2P 0 0 0 0
1/1/7 Disabled Down 20000 128 P2P 0 0 0 0
1/1/8 Disabled Down 20000 128 P2P 0 0 0 0
1/1/9 Disabled Down 20000 128 P2P 55 144221 0 0
1/1/10 Disabled Down 20000 128 P2P 0 0 0 0
1/1/11 Disabled Down 20000 128 P2P 0 0 0 0
1/1/12 Disabled Down 20000 128 P2P 0 0 0 0
1/1/13 Disabled Down 20000 128 P2P 0 0 0 0
1/1/14 Disabled Down 20000 128 P2P 0 0 0 0
1/1/15 Disabled Down 20000 128 P2P 0 0 0 0
1/1/16 Disabled Down 20000 128 P2P 0 0 0 0
1/1/17 Disabled Down 20000 128 P2P 0 0 0 0
1/1/18 Disabled Down 20000 128 P2P 0 0 0 0
1/1/19 Disabled Down 20000 128 P2P 0 0 0 0
1/1/20 Disabled Down 20000 128 P2P 0 0 0 0
1/1/21 Disabled Down 20000 128 P2P 0 0 0 0
1/1/22 Disabled Down 20000 128 P2P 0 0 0 0
1/1/23 Disabled Down 20000 128 P2P 0 0 0 0
1/1/24 Disabled Down 20000 128 P2P 0 0 0 0
1/1/25 Disabled Down 20000 128 P2P 0 0 0 0
1/1/26 Disabled Down 20000 128 P2P 0 0 0 0
1/1/27 Disabled Bpdu-Error 20000 128 P2P 54 0 0 0
1/1/28 Disabled Down 20000 128 P2P 0 0 0 0
1/1/29 Disabled Down 20000 128 P2P 0 0 0 0
1/1/30 Disabled Down 20000 128 P2P 0 0 0 0
-- MORE --, next page: Space, next line: Enter, quit: q

```

Sans bdpu guard :

```
6. COM1 (Communications Port(C...
1/1/7 Disabled Down 20000 128 P2P 0 0 0 0
1/1/8 Disabled Down 20000 128 P2P 0 0 0 0
1/1/9 Disabled Down 20000 128 P2P 55 144221 0 0
1/1/10 Disabled Down 20000 128 P2P 0 0 0 0
1/1/11 Designated Forwarding 20000 128 P2P 5 8173 0 0
1/1/12 Disabled Down 20000 128 P2P 0 0 0 0
1/1/13 Disabled Down 20000 128 P2P 0 0 0 0
1/1/14 Disabled Down 20000 128 P2P 0 0 0 0
1/1/15 Disabled Down 20000 128 P2P 0 0 0 0
1/1/16 Disabled Down 20000 128 P2P 0 0 0 0
1/1/17 Disabled Down 20000 128 P2P 0 0 0 0
1/1/18 Disabled Down 20000 128 P2P 0 0 0 0
1/1/19 Disabled Down 20000 128 P2P 0 0 0 0
1/1/20 Disabled Down 20000 128 P2P 0 0 0 0
1/1/21 Disabled Down 20000 128 P2P 0 0 0 0
1/1/22 Disabled Down 20000 128 P2P 0 0 0 0
1/1/23 Disabled Down 20000 128 P2P 0 0 0 0
1/1/24 Disabled Down 20000 128 P2P 0 0 0 0
1/1/25 Disabled Down 20000 128 P2P 0 0 0 0
1/1/26 Disabled Down 20000 128 P2P 0 0 0 0
1/1/27 Disabled Bpdu-Error 20000 128 P2P 54 0 0 0
1/1/28 Disabled Down 20000 128 P2P 0 0 0 0
1/1/29 Disabled Down 20000 128 P2P 0 0 0 0
1/1/30 Disabled Down 20000 128 P2P 0 0 0 0
6200# sh spanning-tree
Spanning tree status : Enabled Protocol: MSTP

MST0
Root ID Priority : 32768
MAC-Address:
This bridge is the root
Hello time(in seconds):2 Max Age(in seconds):20
Forward Delay(in seconds):15

Bridge ID Priority : 32768
MAC-Address:
Hello time(in seconds):2 Max Age(in seconds):20
Forward Delay(in seconds):15

Port Role State Cost Priority Type BPDU-Tx BPDU-Rx TCN-Tx TCN-Rx
1/1/1 Disabled Down 20000 128 P2P 72 0 0 0
1/1/2 Disabled Down 20000 128 P2P 0 0 0 0
1/1/3 Disabled Down 20000 128 P2P 0 0 0 0
1/1/4 Disabled Down 20000 128 P2P 0 0 0 0
1/1/5 Designated Forwarding 20000 128 P2P 3105 18285 10 49
1/1/6 Disabled Down 20000 128 P2P 0 0 0 0
1/1/7 Disabled Down 20000 128 P2P 0 0 0 0
1/1/8 Disabled Down 20000 128 P2P 0 0 0 0
1/1/9 Disabled Down 20000 128 P2P 55 144221 0 0
1/1/10 Disabled Down 20000 128 P2P 0 0 0 0
1/1/11 Backup Blocking 20000 128 P2P 11 9987 0 0
1/1/12 Disabled Down 20000 128 P2P 0 0 0 0
1/1/13 Disabled Down 20000 128 P2P 0 0 0 0
1/1/14 Disabled Down 20000 128 P2P 0 0 0 0
1/1/15 Disabled Down 20000 128 P2P 0 0 0 0
1/1/16 Disabled Down 20000 128 P2P 0 0 0 0
1/1/17 Disabled Down 20000 128 P2P 0 0 0 0
1/1/18 Disabled Down 20000 128 P2P 0 0 0 0
1/1/19 Disabled Down 20000 128 P2P 0 0 0 0
1/1/20 Disabled Down 20000 128 P2P 0 0 0 0
1/1/21 Disabled Down 20000 128 P2P 0 0 0 0
1/1/22 Disabled Down 20000 128 P2P 0 0 0 0
1/1/23 Disabled Down 20000 128 P2P 0 0 0 0
1/1/24 Disabled Down 20000 128 P2P 0 0 0 0
1/1/25 Disabled Down 20000 128 P2P 0 0 0 0
```

Sans stp : 40 secondes d'attente

```

MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  DISCARDING  NONE
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  LEARNING  NONE
[HP]
#Apr 26 14:18:29:612 2000 HP MSTP/1/PFWD:
Trap 1.3.6.1.4.1.25506.8.35.14.0.1: Instance 0's Port 0.9437203 has been set to forwarding state!
%Apr 26 14:18:29:812 2000 HP MSTP/6/MSTP_FORWARDING: Instance 0's port GigabitEthernet1/0/20 has been set to forwarding state.
%Apr 26 14:18:29:973 2000 HP MSTP/6/MSTP_DETECTED_TC: Instance 0's port GigabitEthernet1/0/20 detected a topology change.
[HP]disp stp brief
MSTID    Port                Role  STP State  Protection
0        GigabitEthernet1/0/8  ROOT  FORWARDING  NONE
0        GigabitEthernet1/0/18  DESI  FORWARDING  NONE
0        GigabitEthernet1/0/20  DESI  FORWARDING  NONE
[HP]

```

Avec STP le switch surveille le réseau et empêche les boucles. Si boucle apparaît il bloque auto un port (discarding) pour garder le réseau stable. Les paquets passent quand même par un autre chemin.

Sans STP le switch ne bloque rien. Si boucle avec les câbles les paquets tournent en rond ce qui provoque une tempête de broadcast qui sature tout le réseau.

Avec BPDU Guard le switch protège les ports utilisateurs. Si branches un autre switch ou un équipement qui envoie des BPDU sur un port censé être pour PC le port est immédiatement coupé pour éviter une boucle.

Sans BPDU Guard le switch laisse passer ces BPDU. STP peut gérer la situation mais si c'est mal câblé une boucle peut apparaître plus facilement.

- 1-Fonctionnement LACP actif / actif passif ?
- 2- Bande passante
- 3- en cas de Topologie Change , sur quel lien apparait la trap Topologie Change

STP root

- 1-vers qui ont root

Simulation d'un switch qui a eu la priorité root alors qu'on ne veut pas

Un switch cœur de réseau en 192.168.1.100 interconnecter a un autre switch root en 1.200 mettre du stp partout sur les switch et voir ce qu'il se passe en simulant un serveur (avec le pc portable qui ping les 2 switch) puis essayer de voir comment forcer le cœur de réseau a rester root et enlever l'autre mais aussi voir les impacts ?

Activer SSH

```
<HP>sys
System View: return to User View with Ctrl+Z.
[HP]system-view
^
% Unrecognized command found at '^' position.
[HP]public-key local create rsa
Warning: The local key pair already exist.
Confirm to replace them? [Y/N]:N
[HP]stelnet server enable
^
% Unrecognized command found at '^' position.
[HP]ssh s
[HP]ssh server e
[HP]ssh server enable
Info: Enable SSH server.
[HP]local-u
[HP]local-user a
[HP]local-user admin
New local user added.
[HP-luser-admin]password
[HP-luser-admin]password-control
[HP-luser-admin]password
[HP-luser-admin]password-s
[HP-luser-admin]password admin
^
% Too many parameters found at '^' position.
[HP-luser-admin]password simple admin
[HP-luser-admin]servi
[HP-luser-admin]service-type ssh
[HP-luser-admin]aut
[HP-luser-admin]authorization-attribute level 3
[HP-luser-admin]quit
[HP]
```

```

[HP]user-interface vty 0 4
[HP-ui-vty0-4]authentication-mode scheme
[HP-ui-vty0-4]protocol inbound ssh
[HP-ui-vty0-4]quit
[HP]

```

Activer le STP Aruba et HP

```

6200(config)# spanning-tree
6200(config)# sh spanning-tree
Spanning tree status      : Enabled Protocol: MSTP

MST0
  Root ID    Priority : 32768
             MAC-Address: 
             This bridge is the root
             Hello time(in seconds):2 Max Age(in seconds):20
             Forward Delay(in seconds):15

  Bridge ID  Priority : 32768
             MAC-Address: 
             Hello time(in seconds):2 Max Age(in seconds):20
             Forward Delay(in seconds):15

Port    Role    State    Cost    Priority  Type    BPDU-Tx  BPDU-Rx  TCN-Tx  TCN-Rx
-----
1/1/1   Disabled Down      20000    128     P2P      0         0         0         0
1/1/2   Disabled Down      20000    128     P2P      0         0         0         0
1/1/3   Disabled Down      20000    128     P2P      0         0         0         0
1/1/4   Disabled Down      20000    128     P2P      0         0         0         0
1/1/5   Disabled Down      20000    128     P2P      0         0         0         0
1/1/6   Disabled Down      20000    128     P2P      0         0         0         0
1/1/7   Disabled Down      20000    128     P2P      0         0         0         0
-- MORE --, next page: Space, next line: Enter, quit: q

```

Voir qui est le root entre les 2 switch

Aruba est root

On met a 0 la priorité des 2 c Aruba qui est route car il a la plus grande @mac donc il gagne

Une fois qu'on met sa priorité a 1 alors Hp devient root car il a la priorité la + basse

Aruba root :

```
Root ID Priority : 0
MAC-Address: 
This bridge is the root
Hello time(in seconds):2 Max Age(in seconds):20
Forward Delay(in seconds):15

Bridge ID Priority : 0
MAC-Address: 
Hello time(in seconds):2 Max Age(in seconds):20
Forward Delay(in seconds):15
```

Port	Role	State	Cost	Priority	Type	BPDU-Tx	BPDU-Rx	TCN-Tx	TCN-Rx
1/1/1	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/2	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/3	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/4	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/5	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/6	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/7	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/8	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/9	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/10	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/11	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/12	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/13	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/14	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/15	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/16	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/17	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/18	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/19	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/20	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/21	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/22	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/23	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/24	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/25	Disabled	Bpdu-Error	20000	128	P2P	4961	0	2	0
1/1/26	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/27	Disabled	Bpdu-Error	20000	128	P2P	0	0	0	0
1/1/28	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/29	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/30	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/31	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/32	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/33	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/34	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/35	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/36	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/37	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/38	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/39	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/40	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/41	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/42	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/43	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/44	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/45	Disabled	Bpdu-Error	20000	128	P2P	1	0	0	0
1/1/46	Designated	Forwarding	20000	128	P2P	205	176	3	2
1/1/47	Disabled	Bpdu-Error	20000	128	P2P	1	0	0	0
1/1/48	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/49	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/50	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/51	Disabled	Down	20000	128	P2P	0	0	0	0
1/1/52	Disabled	Down	20000	128	P2P	0	0	0	0

to the professional edition here: <https://mobaxterm.mobatek.net>

ARUBA prio 1 :

```

6200(config)# spanning-tree priority 1
6200(config)# sh spanning-tree
Spanning tree status      : Enabled Protocol: MSTP

MST0
  Root ID    Priority : 0
             MAC-Address: 
             Hello time(in seconds):2 Max Age(in seconds):20
             Forward Delay(in seconds):15

  Bridge ID  Priority : 4096
             MAC-Address: 
             Hello time(in seconds):2 Max Age(in seconds):20
             Forward Delay(in seconds):15

Port      Role      State      Cost      Priority  Type      BPDU-Tx  BPDU-Rx  TCN-Tx  TCN-Rx
-----
1/1/1     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/2     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/3     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/4     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/5     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/6     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/7     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/8     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/9     Disabled  Down      20000     128      P2P      0        0        0        0
1/1/10    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/11    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/12    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/13    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/14    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/15    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/16    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/17    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/18    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/19    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/20    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/21    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/22    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/23    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/24    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/25    Disabled  Bpdu-Error 20000     128      P2P      4961     0        2        0
1/1/26    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/27    Disabled  Bpdu-Error 20000     128      P2P      0        0        0        0
1/1/28    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/29    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/30    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/31    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/32    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/33    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/34    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/35    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/36    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/37    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/38    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/39    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/40    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/41    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/42    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/43    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/44    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/45    Disabled  Bpdu-Error 20000     128      P2P      1        0        0        0
1/1/46    Root      Forwarding 20000     128      P2P Bound  315     179     5        2
1/1/47    Disabled  Bpdu-Error 20000     128      P2P      1        0        0        0
1/1/48    Disabled  Down      20000     128      P2P      0        0        0        0
1/1/49    Disabled  Down      20000     128      P2P      0        0        0        0

```

show spanning-tree inconsistent-ports

```

6200(config)# show spanning-tree inconsistent-ports
Instance ID  Blocked Port  Reason
-----
0            1/1/37          BPDU Guard
0            1/1/43          BPDU Guard
6200(config)# show spanning-tree inconsistent-ports
Instance ID  Blocked Port  Reason
-----
0            1/1/37          BPDU Guard
0            1/1/41          BPDU Guard
0            1/1/43          BPDU Guard
6200(config)# 

```

SUR ARUBA

```

6200# conf t
6200(config)# int vlan1
6200(config-if-vlan)# ip address 192.168.1.1 255.255.255.0
6200(config-if-vlan)# no sh
6200(config-if-vlan)# exit
6200(config)# w m
Copying configuration: [Success]
6200(config)# int lag 10
6200(config-lag-if)# lacp mode active
6200(config-lag-if)# no sh
6200(config-lag-if)# exit
6200(config)# int 1/1/23
6200(config-if)# lag 10
6200(config-if)# exit
6200(config)# int 1/1/24
6200(config-if)# lag 10
6200(config-if)# exit
6200(config)# sh lacp aggregates

Aggregate name      : lag10
Interfaces          : 1/1/23 1/1/24
Heartbeat rate      : Slow
Hash                : l3-src-dst
Aggregate mode      : Active
6200(config)# sh lacp interfaces

State abbreviations :
A - Active           P - Passive       F - Aggregable I - Individual
S - Short-timeout    L - Long-timeout  N - InSync     O - OutofSync
C - Collecting       D - Distributing
X - State m/c expired E - Default neighbor state

Actor details of all interfaces:
-----
Intf      Aggr  Port  Port  State  System-ID      System Aggr  Forwarding
Name      Id    Pri   State  ID             Pri    Key   State
-----
1/1/23    lag10  24    1     ALFNCD  [redacted]      65534  10    up
1/1/24    lag10  25    1     ALFNCD  [redacted]      65534  10    up

Partner details of all interfaces:
-----
Intf      Aggr  Port  Port  State  System-ID      System Aggr
Name      Id    Id    Pri   State  ID             Pri    Key
-----
1/1/23    lag10  23    32768 ALFNCD  [redacted]      2768   1
1/1/24    lag10  24    32768 ALFNCD  [redacted]      2768   1
6200(config)# 

```

JAUNE 24 et rouge 23

```

6200(config)# sh lacp interfaces


State abbreviations :
A - Active      P - Passive      F - Aggregable I - Individual
S - Short-timeout L - Long-timeout N - InSync      O - OutofSync
C - Collecting  D - Distributing
X - State m/c expired      E - Default neighbor state

Actor details of all interfaces:
-----
Intf      Aggr      Port  Port  State  System-ID      System Aggr  Forwarding
      Name      Id    Pri    State  System-ID      Pri    Key    State
-----
1/1/23    lag10      24    1     ALFNCD      [REDACTED]    65534  10    up
1/1/24    lag10      25    1     ALFNCD      [REDACTED]    65534  10    up

Partner details of all interfaces:
-----
Intf      Aggr      Port  Port  State  System-ID      System Aggr
      Name      Id    Pri    State  System-ID      Pri    Key
-----
1/1/23    lag10      23    32768 ALFNCD      [REDACTED]    32768  1
1/1/24    lag10      24    32768 ALFNCD      [REDACTED]    32768  1
6200(config)#

```

On perd un de ping quand j'enlève un câble rouge

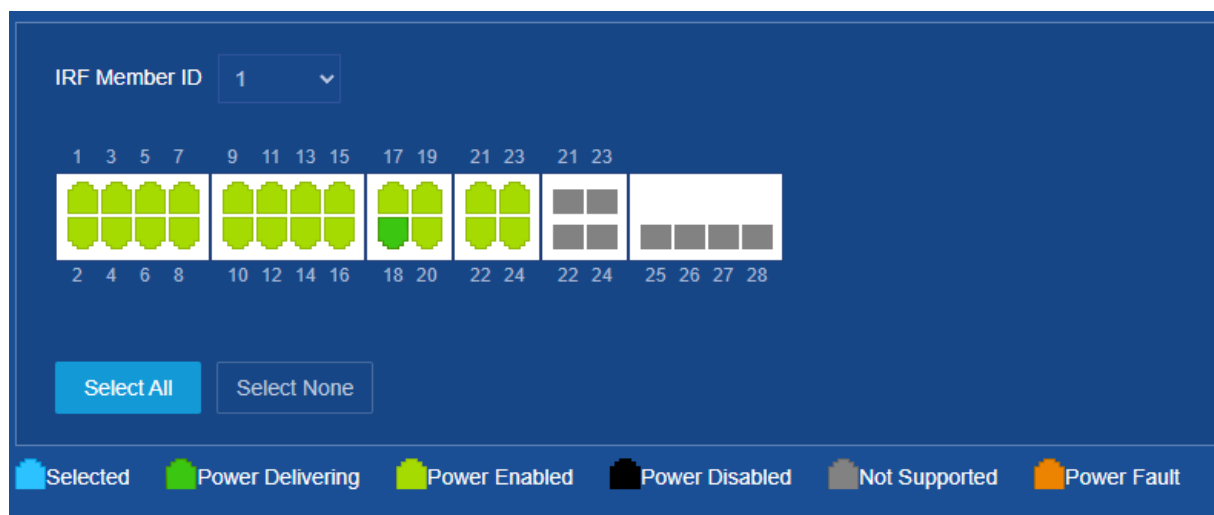

```
GE1/0/13      DOWN auto  A    A    200
GE1/0/14      DOWN auto  A    A    200
GE1/0/15      DOWN auto  A    A    200
GE1/0/16      DOWN auto  A    A    200
GE1/0/17      DOWN auto  A    A    246
GE1/0/18      UP   1G(a)  F(a)  T    192
GE1/0/19      DOWN auto  A    A    246
GE1/0/20      DOWN auto  A    A    246
GE1/0/21      DOWN auto  A    A    246
GE1/0/22      DOWN auto  A    A    246
GE1/0/23      DOWN auto  A    A    246
GE1/0/24      UP   1G(a)  F(a)  T    192
XGE1/0/25     DOWN auto  A    A    1
XGE1/0/26     DOWN auto  A    A    1
XGE1/0/27     DOWN auto  A    A    1
XGE1/0/28     DOWN auto  A    A    1

<SW_PSANTE_5140-2>disp int g1/0/21
GigabitEthernet1/0/21
Current state: DOWN
Line protocol state: DOWN
IP packet frame type: Ethernet II, hardware address: 
Description: GigabitEthernet1/0/21 Interface
Bandwidth: 1000000 kbps
Loopback is not set
Media type is twisted pair
Port hardware type is 1000_BASE_T
Unknown-speed mode, unknown-duplex mode
Link speed type is autonegotiation, link duplex type is autonegotiation
Flow-control is not enabled
Maximum frame length: 10240
Allow jumbo frames to pass
Broadcast max-ratio: 100%
Multicast max-ratio: 100%
Unicast max-ratio: 100%
PVID: 246
MDI type: Automdix
Port link-type: Access
Tagged VLANs: None
Untagged VLANs: 246
Port priority: 0
Last link flapping: Never
Last clearing of counters: Never
Current system time:2026-06-12 10:19:32 Brussels+01:00:00
Last time when physical state changed to up:-
Last time when physical state changed to down:2013-01-01 01:00:28 Brussels+01:00:00
Peak input rate: 0 bytes/sec, at 2013-01-01 01:01:23
Peak output rate: 0 bytes/sec, at 2013-01-01 01:01:23
Last 300 seconds input: 0 packets/sec 0 bytes/sec -%
Last 300 seconds output: 0 packets/sec 0 bytes/sec -%
Input (total): 0 packets, 0 bytes
0 unicasts, 0 broadcasts, 0 multicasts, 0 pauses
Input (normal): 0 packets, - bytes
0 unicasts, 0 broadcasts, 0 multicasts, 0 pauses
Input: 0 input errors, 0 runs, 0 giants, 0 throttles
0 CRC, 0 frame, - overruns, 0 aborts
- ignored, - parity errors
Output (total): 0 packets, 0 bytes
0 unicasts, 0 broadcasts, 0 multicasts, 0 pauses
Output (normal): 0 packets, - bytes
0 unicasts, 0 broadcasts, 0 multicasts, 0 pauses
Output: 0 output errors, - underruns, - buffer failures
0 aborts, 0 deferred, 0 collisions, 0 late collisions
0 lost carrier, - no carrier

<SW_PSANTE_5140-2>
```

Ya déjà le port 245

```
name SYSTEVO
description SYSTEVO
#
vlan 35
name wifi
description WiFi
#
vlan 48
name TVIP carvin
description TVIP carvin
#
vlan 129
name hotspot
description hot spot
#
vlan 192
name carvin
description carvin
#
vlan 200
name seclin
description seclin
#
vlan 245
name videosurv
description VideoIP
#
vlan 246
name carv antennes
description CarvAntenne
#
stp region-configuration
region-name STP-Carvin
instance 2 vlan 1 to 4094
active region-configuration
#
stp global enable
```

Vérifier qu'il peut transiter sur les autres ports (interconnexion)
3/0/5

```

GigabitEthernet3/0/5
Current state: UP
Line protocol state: UP
IP packet frame type: Ethernet II, hardware address: 
Description: interco SW_PSANTE-2
Bandwidth: 1000000 kbps
Loopback is not set
Media type is twisted pair
Port hardware type is 1000_BASE_T
1000Mbps-speed mode, full-duplex mode
Link speed type is autonegotiation, link duplex type is autonegotiation
Flow-control is not enabled
Maximum frame length: 10240
Allow jumbo frames to pass
Broadcast max-ratio: 100%
Multicast max-ratio: 100%
Unicast max-ratio: 100%
PVID: 192
MDI type: Automdix
Port link-type: Trunk
VLAN Passing: 1(default vlan), 21, 30-31, 35, 48, 129, 192, 200, 245-246
VLAN permitted: 1(default vlan), 21, 30-31, 35, 48, 54, 129, 191-192, 200
                245-246
Trunk port encapsulation: IEEE 802.1q
Port priority: 0
Last link flapping: 68 weeks 0 days 23 hours 37 minutes
Last clearing of counters: Never
Current system time:2026-06-12 10:33:48 Brussels+01:00:00
Last time when physical state changed to up:2025-02-20 10:04:53 Brussels+01:00:00
Last time when physical state changed to down:2024-06-05 08:58:20 Brussels+01:00:00
Peak input rate: 5628622 bytes/sec, at 2025-05-19 16:16:11
Peak output rate: 10696371 bytes/sec, at 2025-04-08 17:40:56
Last 300 seconds input: 34 packets/sec 16180 bytes/sec 0%
Last 300 seconds output: 731 packets/sec 267576 bytes/sec 0%
Input (total): 294214053 packets, 88142012378 bytes
                280378197 unicasts, 1761135 broadcasts, 12074721 multicasts, 0 pauses
Input (normal): 294214053 packets, - bytes
                280378197 unicasts, 1761135 broadcasts, 12074721 multicasts, 0 pauses
Input: 0 input errors, 0 runs, 0 giants, 0 throttles
        0 CRC, 0 frame, - overruns, 0 aborts
        - ignored, - parity errors
Output (total): 17229652320 packets, 5275994808644 bytes
                545961581 unicasts, 6437251609 broadcasts, 10246439130 multicasts, 0 pauses
Output (normal): 17229652320 packets, - bytes
                545961581 unicasts, 6437251609 broadcasts, 10246439130 multicasts, 0 pauses
Output: 0 output errors, - underruns, - buffer failures
        0 aborts, 0 deferred, 0 collisions, 0 late collisions
        0 lost carrier, - no carrier

<SW_PSANTE_5140>

```

1/0/24

```

#
interface GigabitEthernet1/0/24
 port link-type trunk
 port trunk permit vlan 1 21 30 to 31 35 48 54 129 191 to 192 200 245 to 246
 port trunk pvid vlan 192
 combo enable auto
 poe enable
#

```

```

interface GigabitEthernet1/0/2
port access vlan 245
stp edged-port
stp port bpdu-protection enable
poE enable
#
return
[SW_PSANTE_5140-2-GigabitEthernet1/0/2]sa fo
Validating file. Please wait...
Saved the current configuration to mainboard device successfully.
[SW_PSANTE_5140-2-GigabitEthernet1/0/2]quit
[SW_PSANTE_5140-2]]

```

Ticket clos :

Autre (25836)

3/15 > >>

Ticket

2

Statistiques

Validations

Base de connaissances

Éléments

Coûts

Projets

Tâches de projet

Problèmes

Changements

Contrats

Historique

17

Tous

CP

Créé : 10 jours par (6299)

Dernière mise à jour : Maintenant par CAN Meryem (7727)

Données du formulaire

Demandeur

1) Nom : PLET Cyrille (6299)

2) Demande pour un autre agent : Non

3) Service : Services > Service Technique

4) Téléphone : 361768040

5) Nom du PC : DS1-TEC1

Description

6) Description :

Nous avons besoin d'une intervention de votre part concernant la configuration réseau pour ajouter une caméra sur le réseau du pôle santé carvin merci de prendre contact pour en discuter afin de vous donner les infos complémentaire

Créé : 9 jours par (4374)

AJ

vlan 245 a tagger sur switch RDC du PSC

Helpdesk

Créé : À l'instant par CAN Meryem (7727)

MC

Bonjour,

Vous pouvez brancher la camera sur le port g1/0/2 du switch SW_PSANTE_5140-2 .

Le port a été configuré sur le vlan 245.

Cordialement,

CAN Meryem

Helpdesk

Ticket

Date d'ouverture

2026-06-02 11:54:18

Date de résolution

2026-06-12 11:44:21

Date de fermeture

2026-06-12 11:44:21

Type

Incident

Catégorie

Réseau

Statut

Clos

Rouvrir

Source de la demande

Formcreator

Urgence

Moyenne

Impact

Moyen

Priorité

Moyenne

Lieu

Validation

Non soumis à validation

Acteurs 4

Demandeur

(299) 1

Observateur

Information

Élément modifié : Autre (25836)

Stack 2 switch accès ARUBA 6200

Interconnecter entre eux VSF un switch connecter au VSX cœur de réseau et le 2eme switch relier au 1 cœur de réseau les 2 cœurs sont reliés entre eux avec un lag et les liens qui sont connectés aux switch via un lag aussi

```
i2 COM1 (Communications Port) X
Autojoin Eligibility Status: Eligible
MAC Address : 
Secondary : 
Topology : Standalone
Status : No Split
Split Detection Method : None

Mbr Mac Address      type      Status
ID -----
1 [redacted] JL727B   Conductor
6200# conf t
6200(config)# vsf start-auto-stacking
This will configure links and secondary on conductor
Do you want to continue (y/n)? y
6200(config)# sh vsf

Force Autojoin      : Disabled
Autojoin Eligibility Status: Not Eligible
MAC Address : [redacted]
Secondary : 0
Topology : 
Status : 
Split Detection Method : None

Mbr Mac Address      type      Status
ID -----
1 [redacted] JL727B   Conductor
2 [redacted] JL727B   Not Present
6200(config)# sh vsf

Force Autojoin      : Disabled
Autojoin Eligibility Status: Not Eligible
MAC Address : [redacted]
Secondary : 2
Topology : Ring
Status : Active Fragment
Split Detection Method : None

Mbr Mac Address      type      Status
ID -----
1 [redacted] JL727B   Conductor
2 [redacted] JL727B   Standby Booting
6200(config)# sh vsf

Force Autojoin      : Disabled
Autojoin Eligibility Status: Not Eligible
MAC Address : [redacted]
Secondary : 2
Topology : Ring
Status : No Split
Split Detection Method : None

Mbr Mac Address      type      Status
ID -----
1 [redacted] JL727B   Conductor
2 [redacted] JL727B   Standby
6200(config)#
```

VSF créer :

```
6200# sh vsf member 1

    MAC Address      : 
    Type             : JL727B
    Model            : 6200F 48G Class 4 PoE 4SFP+ 370W Switch
    Status           : Conductor
    ROM Version      : ML.01.14.0002
    Serial Number    : 
    Uptime           : 5 hours under a minute
    CPU Utilization  : 3%
    Memory Utilization : 20%
    VSF Link 1       : Up, connected to peer member 2, link 2
    VSF Link 2       : Up, connected to peer member 2, link 1

6200# sh vsf member 2

    MAC Address      : 
    Type             : JL727B
    Model            : 6200F 48G Class 4 PoE 4SFP+ 370W Switch
    Status           : Standby
    ROM Version      : ML.01.14.0002
    Serial Number    : 
    Uptime           : 9 minutes
    CPU Utilization  : 9%
    Memory Utilization : 10%
    VSF Link 1       : Up, connected to peer member 1, link 2
    VSF Link 2       : Up, connected to peer member 1, link 1

6200#
```

Changer le nom

```
6200(config)# hostname SW-NVH1E-6200
SW-NVH1E-6200(config)#
```

VLAN 1 :

```
SW-NVH1E-6200(config)# int vlan 1
SW-NVH1E-6200(config-if-vlan)# ip address 129 
SW-NVH1E-6200(config-if-vlan)# no sh
SW-NVH1E-6200(config-if-vlan)# exit
SW-NVH1E-6200(config)# sh run
Current configuration:
```

SNTP : sert a synchroniser les log/imc.alert ect


```

SW-NVH1E-6200(config)# interface 1/1/1-1/1/48
SW-NVH1E-6200(config-if-<1/1/1-1/1/48>)# spanning-tree port-type admin-edge
SW-NVH1E-6200(config-if-<1/1/1-1/1/48>)# spanning-tree bpduguard
SW-NVH1E-6200(config-if-<1/1/1-1/1/48>)# exit
SW-NVH1E-6200(config)# sh run
Current configuration:

!Version ArubaOS-CX ML.10.13.1040
!export-password: default
hostname SW-NVH1E-6200
ntp server 129.1.1.1
ntp server pool.ntp.org minpoll 4 maxpoll 4 iburst
ntp enable

!
ssh server vrf default
ssh server vrf mgmt
vsf secondary-member 2
vsf member 1
  type j1727b
  link 1 1/1/50
  link 2 1/1/49
vsf member 2
  type j1727b
  link 1 2/1/49
  link 2 2/1/50
!
vlan 1
spanning-tree
interface mgmt
  no shutdown
  ip dhcp
interface 1/1/1
  no shutdown
  no routing
  vlan access 1
  spanning-tree bpduguard
  spanning-tree port-type admin-edge
interface 1/1/2
  no shutdown
  no routing
  vlan access 1
  spanning-tree bpduguard
  spanning-tree port-type admin-edge
interface 1/1/3
  no shutdown
  no routing
  vlan access 1
  spanning-tree bpduguard
  spanning-tree port-type admin-edge
interface 1/1/4
  no shutdown
  no routing
  vlan access 1
  spanning-tree bpduguard
  spanning-tree port-type admin-edge
interface 1/1/5
!
SW-NVH1E-6200(config)# interface 2/1/1-2/1/48
SW-NVH1E-6200(config-if-<2/1/1-2/1/48>)# spanning-tree port-type admin-edge
SW-NVH1E-6200(config-if-<2/1/1-2/1/48>)# spanning-tree bpduguard

```

```
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/42
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/43
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/44
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/45
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/46
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/47
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/48
    no shutdown
    no routing
    vlan access 1
    spanning-tree bpdu-guard
    spanning-tree port-type admin-edge
interface 2/1/49
    no shutdown
interface 2/1/50
    no shutdown
interface 2/1/51
    no shutdown
    no routing
    vlan access 1
interface 2/1/52
    no shutdown
    no routing
    vlan access 1
interface 2/1/53
    no shutdown
    no routing
    vlan access 1
```

ACTIVER SSH :

```
hostname SW-NVH1E-6200
user sw_admin group administrators password ciphertext
ZBmc5L4NGt0r/Lnt0w0f
ntp server 129.
ntp server pool.ntp.org minpoll 4 maxpoll 4 iburst
ntp enable
```

Propager les vlan :

Créer les LAG :

```
https-server vrf default
https-server vrf mgmt
SW-NVH1E-6200# sh https

HTTPS Server Configuration
-----
VRF                               : mgmt, default
REST Access Mode                  : read-write
Max sessions per user             : 6
Session idle timeout              : 20
Session absolute timeout          : 480
SW-NVH1E-6200# D
```

Brassage

Vérifier ports

Hello ,
Peux-tu vérifier ce qu'il y a sur ces ports, et si ce n'est pas un serveur ou switch, le déplacer ailleurs que sur les CR stp ?

2026-06-15 22:05:50.224 Event[483][LOG_INFO][UMM]- Link status for interface 1/7/30 is up at 100 Mbps	SW-NVHSI-CORE-6400
2026-06-15 22:05:48.108 Event[484][LOG_INFO][UMM]- Link status for interface 1/7/30 is down	SW-NVHSI-CORE-6400
2026-06-15 22:05:47.298 Event[483][LOG_INFO][UMM]- Link status for interface 1/7/30 is up at 100 Mbps	SW-NVHSI-CORE-6400
2026-06-15 22:05:42.572 Event[484][LOG_INFO][UMM]- Link status for interface 1/7/30 is down	SW-NVHSI-CORE-6400
2026-06-15 22:04:58.674 Event[483][LOG_INFO][UMM]- Link status for interface 1/7/24 is up at 1 Gbps	SW-PLASI-CORE-6400
2026-06-15 22:04:55.759 Event[484][LOG_INFO][UMM]- Link status for interface 1/7/24 is down	SW-PLASI-CORE-6400
2026-06-15 22:04:36.943 Event[483][LOG_INFO][UMM]- Link status for interface 1/7/24 is up at 1 Gbps	SW-PLASI-CORE-6400
2026-06-15 22:04:32.039 Event[484][LOG_INFO][UMM]- Link status for interface 1/7/24 is down	SW-PLASI-CORE-6400

Cœur nvh

```
SW-NVHSI-CORE-6400# sh ru int 1/7/30
interface 1/7/30
  description imp canon imagerie
  no shutdown
  speed 100-full
  no routing
  vlan access 7
  spanning-tree bpduguard
  spanning-tree port-type admin-edge
  exit
SW-NVHSI-CORE-6400# sh mac-address-table int 1/7/30
MAC age-time           : 300 seconds
Number of MAC addresses : 1

MAC Address           VLAN    Type           Interface
-----
40:f8:df:a5:75:1e     7       dynamic       1/7/30
SW-NVHSI-CORE-6400# sh lldp neighbor-info

SW-NVHSI-CORE-6400# sh vlan port 1/7/30

VLAN  Name           Mode           Mapping
-----
7     radio        access        port
SW-NVHSI-CORE-6400#
```

Cœur plasi

```
SW-PLASI-CORE-6400# sh ru int 1/7/24
interface 1/7/24
  description Borne Dosimetrie
  no shutdown
  no routing
  vlan access 7
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
  exit
SW-PLASI-CORE-6400#
```

```
SW-PLASI-CORE-6400# show mac-address-table interface 1/7/24
MAC age-time      : 300 seconds
Number of MAC addresses : 1

MAC Address      VLAN    Type      Interface
-----
00:04:5f:7d:d1:97  7      dynamic   1/7/24
```

IMP canon imagerie ET Borne Dosimétrie

Peux-tu vérifier ce qu'il y a sur ces ports, et si ce n'est pas un serveur ou switch, le déplacer ailleurs que sur les CR stp ?

2026-06-15 22:05:50.234	SW-NVHSI-CORE-6400
Event(402) LSC_0801(090) [Link status for interface 1/7/20 is up at 200 Mbps]	
2026-06-15 22:05:48.388	SW-NVHSI-CORE-6400
Event(404) LSC_0801(090) [Link status for interface 1/7/20 is down]	
2026-06-15 22:05:47.258	SW-NVHSI-CORE-6400
Event(402) LSC_0801(090) [Link status for interface 1/7/20 is up at 300 Mbps]	
2026-06-15 22:05:43.572	SW-NVHSI-CORE-6400
Event(404) LSC_0801(090) [Link status for interface 1/7/20 is down]	
2026-06-15 22:04:58.474	SW-PLAS-CORE-6400
Event(402) LSC_0801(090) [Link status for interface 1/7/24 is up at 1 Gbps]	
2026-06-15 22:04:55.755	SW-PLAS-CORE-6400
Event(404) LSC_0801(090) [Link status for interface 1/7/24 is down]	
2026-06-15 22:04:36.543	SW-PLAS-CORE-6400
Event(402) LSC_0801(090) [Link status for interface 1/7/24 is up at 1 Gbps]	
2026-06-15 22:04:33.439	SW-PLAS-CORE-6400
Event(404) LSC_0801(090) [Link status for interface 1/7/24 is down]	



Créé : À l'instant par CAN Meryem (7727)

SW-NVHSI-CORE-6400 1/7/30 : imprimante dosimétrie

SW-PLASI-CORE-6400 1/7/24 : borne dosimétrie

Les équipements ont bien été retirés des ports concernés.

Cordialement, CAN Meryem

[Helpdesk](#)

Ticket

Date d'ouverture: 2026-06-16 08:15:35

Date de résolution: 2026-06-16 10:42:31

Date de fermeture: 2026-06-16 10:42:31

Type: Demande

Catégorie: Via mail GHSC

Statut: ☒ Clos ☐ Rouvrir

Source de la demande: E-Mail

Urgence: Moyenne

Impact: Moyen

Priorité: Moyenne

Lieu: -----

Validation: Non soumis à validation

Acteurs 3

Demandeur: [Avatar] (374) 2

Observateur: [Avatar] **Information**

CAN Meryem

Élément modifié : Petite mission du jour (26229)

Basculer le serveur witness sur le nv switch 6200

```

Interface 1/1/1 is down
Admin state is up
State information: Waiting for link
Link state: down for 23 hours (since Mon Jun 15 14:03:01 CEST 2026)
Link transitions: 0
Description:
Persona:
Hardware: Ethernet, MAC Address: 
MTU 1500
Type 1GbT
Full-duplex
qos trust none
Speed 0 Mb/s
Auto-negotiation is on
Energy-Efficient Ethernet is disabled
Flow-control: off
Error-control: off
MII mode: none
VLAN Mode: access
Access VLAN: 1
Rate collection interval: 300 seconds

Rate                RX                TX                Total (RX+TX)
-----
Mbits / sec         0.00                0.00                0.00
KPkts / sec         0.00                0.00                0.00
Unicast              0.00                0.00                0.00
Multicast            0.00                0.00                0.00
Broadcast            0.00                0.00                0.00
Utilization %        0.00                0.00                0.00

Statistic           RX                TX                Total
-----
Packets              0                  0                  0
Unicast              0                  0                  0
Multicast            0                  0                  0
Broadcast            0                  0                  0
Bytes                0                  0                  0
Jumbo                0                  0                  0
Dropped              0                  0                  0
Pause Frames         0                  0                  0
Errors               0                  0                  0
CRC/FCS              0                  n/a                0
Collision            n/a                0                  0
Runt                 0                  n/a                0
Giants               0                  n/a                0

```

```
SW-NVH1E-6200# sh int 1/1/2
```

```

Interface 1/1/2 is down
Admin state is up
State information: Waiting for link
Link state: down for 23 hours (since Mon Jun 15 14:03:01 CEST 2026)
Link transitions: 0
Description:
Persona:
Hardware: Ethernet, MAC Address: 
MTU 1500
Type 1GbT
Full-duplex
qos trust none
Speed 0 Mb/s
Auto-negotiation is on
Energy-Efficient Ethernet is disabled
Flow-control: off

```

```

interface GigabitEthernet2/0/19
description port1-wit
port link-type trunk
port trunk permit vlan 1 3 244
poe enable
#

```

sur l'ancien 5120

```

SW-NVH1E-6200(config-if)# do sh run int 1/1/1
interface 1/1/1
description port1-wit
no shutdown
no routing
vlan trunk native 1
vlan trunk allowed 1,3,244
spanning-tree bpdu-guard
spanning-tree port-type admin-edge
exit
SW-NVH1E-6200(config-if)# 

```

```

interface GigabitEthernet4/0/12
description port idrac-wit
port access vlan 3
#

```

Ancien 5120

```

exit
SW-NVH1E-6200(config-if)# do sh run int 1/1/2
interface 1/1/2
  description idrac-wit
  no shutdown
  no routing
  vlan access 3
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
exit
SW-NVH1E-6200(config-if)# 

```

```

interface GigabitEthernet4/0/14
  description port2-wit
  port link-type trunk
  port trunk permit vlan 1 3 244
#

```

Ancien 5120

```

exit
SW-NVH1E-6200(config-if)# exit
SW-NVH1E-6200(config)# int 1/1/3
SW-NVH1E-6200(config-if)# description port2-wit
SW-NVH1E-6200(config-if)# vlan trunk native 1
SW-NVH1E-6200(config-if)# vlan trunk allowed 1,3,244
SW-NVH1E-6200(config-if)# exit
SW-NVH1E-6200(config)# 

```

Trouver le port du pc grâce a l'ip

```

<SW_NVH1E_5120>display arp | include 129.59
Type: S-Static      D-Dynamic
IP Address          MAC Address        VLAN ID  Interface        Aging Type
129.59.             [redacted]          1        GE4/0/23         20      D
<SW_NVH1E_5120>sh int g 4/0/23
^
SW-NVH1E-6200(config)# int 1/1/4
SW-NVH1E-6200(config-if)# description pc centreon
SW-NVH1E-6200(config-if)# do sh run int 1/1/4
interface 1/1/4
  description pc centreon
  no shutdown
  no routing
  vlan access 1
  spanning-tree bpdu-guard
  spanning-tree port-type admin-edge
exit
SW-NVH1E-6200(config-if)# 

```

Création de VM

Répondre Répondre à tous Transférer



mer. 17/06/2020 13:16

Mise en place d'un serveur dédié CW – clonage et adaptation

CAN Meriem

Dans le cadre de l'évolution de notre environnement, je te confie la mise en place d'un nouveau serveur dédié basé sur le serveur de test actuel.

Travaux à réaliser

- Clonage de la machine**
 - Cloner le serveur de test existant **S-L-CW-TEST**
 - Déployer le clone dans un **VLAN isolé** (VM isolation)
- Configuration système**
 - Modifier le **nom de la machine** → **S-L-CW-DESINT**
 - Changer l'**adresse IP** (adapter selon le plan d'adressage)
- Vérification des ressources**
 - S'assurer de la présence des ressources suivantes :
 - +4 CPU
 - +40 Go de RAM
 - Extension du filesystem /appdd (+1,5 To)

Administrateur Système



S-L-CW-TEST - Clone Existing Virtual Machine

- 1 Select a name and folder
- 2 Select a compute resource
- 3 Select storage
- 4 Select clone options
- 5 Ready to complete

Select a name and folder

Specify a unique name and target location

A virtual machine, template, or vApp with the same name exists in the selected location. Enter a new name.

Virtual machine name: S-L-CW-DESINT

Select a location for the virtual machine.

Navigation tree showing vcenter-vxrail.domaine1.ch-seclin.dir > VxRail-Datacenter > CROSSWAY. A large blue rectangular area is present below the CROSSWAY folder.

CANCEL NEXT

S-L-CW-TEST - Clone Existing Virtual Machine

- 1 Select a name and folder
- 2 Select a compute resource
- 3 Select storage
- 4 Select clone options
- 5 Ready to complete

Select a compute resource

Select the destination compute resource for this operation

Navigation tree showing VxRail-Datacenter > VxRail-V. A large blue rectangular area is present over the list of resources.

Compatibility
✓ Compatibility checks succeeded.

CANCEL BACK NEXT

S-L-CW-TEST - Clone Existing Virtual Machine

- 1 Select a name and folder
- 2 Select a compute resource
- 3 Select storage**
- 4 Select clone options
- 5 Ready to complete

Select storage



Select the storage for the configuration and disk files

BATCH CONFIGURE **CONFIGURE PER DISK**

☐ Encrypt this virtual machine ⓘ

Select virtual disk format

As defined in the VM storage policy ▾

VM Storage Policy

Keep existing VM storage policies ▾

☐ Disable Storage DRS for this virtual machine

	Name	Storage Compatibility	Capacity	Provisioned	Free
	datastore1				
☐	datastore1	--	415.5 GB	19.51 GB	395.99 GB
☐	datastore1	--	413.5 GB	17.67 GB	395.83 GB
☐	datastore1	--	413.5 GB	17.67 GB	395.83 GB
☒	VxRail-76a9a9-da45a	--	83.84 TB	140.87 TB	20.01 TB

Manage Columns Items per page 10 ▾ 9 items

Compatibility

ⓘ vSAN storage consumption would be 4.13 TB disk space and 0 B reserved Flash space.

CANCEL

BACK

NEXT

S-L-CW-TEST - Clone Existing Virtual Machine

- 1 Select a name and folder
- 2 Select a compute resource
- 3 Select storage
- 4 Select clone options**
- 5 Customize hardware
- 6 Ready to complete

Select clone options



Select further clone options

☐ Customize the operating system

☒ Customize this virtual machine's hardware

☐ Power on virtual machine after creation

CANCEL

BACK

NEXT

S-L-CW-TEST - Clone Existing Virtual Machine

- 1 Select a name and folder
- 2 Select a compute resource
- 3 Select storage
- 4 Select clone options
- 5 Customize hardware
- 6 Ready to complete

Customize hardware

Configure the virtual machine hardware

Virtual Hardware VM Options Advanced Parameters

ADD NEW DEVICE

CPU *20

Memory *104GB

Hard disks5 total | 2.07 TB

Hard disk 130GB

Maximum Size20.03 TB

TypeAs defined in the VM storage policy

SharingNo sharing

Disk ModeDependent

Virtual Device NodeSCSI controller 0SCSI(0:0) Hard disk 1

Hard disk 225GB

Hard disk 310GB

Hard disk 42GB

CANCELBACKNEXT

S-L-CW-TEST - Clone Existing Virtual Machine

- 1 Select a name and folder
- 2 Select a compute resource
- 3 Select storage
- 4 Select clone options
- 5 Customize hardware
- 6 Ready to complete

Customize hardware

SharingNo sharing

Disk ModeDependent

Virtual Device NodeSCSI controller 0SCSI(0:4) Hard disk 5

SCSI controller 0VMware Paravirtual

Network adapter 1 *VM-ISOLATIONConnected

StatusConnect At Power On

Adapter TypeVMXNET 3

SharesNormal50

Reservation0Mbit/s

LimitUnlimitedMbit/s

MAC Address00:50:56:91:48:12Automatic

CD/DVD drive 1Client DeviceConnect At Power On

Video cardSpecify custom settings

SATA controller 0AHCI

CANCELBACKNEXT

```
[root@CW-TEST ~]# hostnamectl
  Static hostname: CW-TEST
        Icon name: computer-vm
        Chassis: vm
        Machine ID: [REDACTED]
        Boot ID: [REDACTED]
  Virtualization:
  Operating System: Red Hat Enterprise Linux 8.9 (Ootpa)
        CPE OS Name: cpe:/o:redhat:enterprise_linux:8::baseos
        Kernel: Linux 4.18.0-513.9.1.el8_9.x86_64
        Architecture: x86-64
[root@CW-TEST ~]# sudo hostnamectl set-hostname S-L-CW-DESINT
[root@CW-TEST ~]# hostnamectl
  Static hostname: S-L-CW-DESINT
        Icon name: computer-vm
        Chassis: vm
        Machine ID: [REDACTED]
        Boot ID: [REDACTED]
  Virtualization: vmware
  Operating System: Red Hat Enterprise Linux 8.9 (Ootpa)
        CPE OS Name: cpe:/o:redhat:enterprise_linux:8::baseos
        Kernel: Linux 4.18.0-513.9.1.el8_9.x86_64
        Architecture: x86-64
[root@CW-TEST ~]#
```

```
[root@CW-TEST ~]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback [REDACTED]
    inet 127.0.0.1 scope host lo
        valid_lft forever preferred_lft forever
2: ens192: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc mq state DOWN group default qlen 1000
    link/ether [REDACTED]
    altname enp11s0
    inet 192.168.1.100 brd 192.168.1.255 scope global noprefixroute ens192
        valid_lft forever preferred_lft forever
[root@CW-TEST ~]# sudo vi /etc/sysconfig/network-scripts/ifcfg-ens192
```

```

PROXY_METHOD=none
BROWSER_ONLY=no
BOOTPROTO=none
DEFROUTE=yes
IPV4_FAILURE_FATAL=no
IPV6INIT=yes
IPV6_AUTOCONF=yes
IPV6_DEFROUTE=yes
IPV6_FAILURE_FATAL=no
IPV6_ADDR_GEN_MODE=eui64
NAME=ens192
UUID=[REDACTED]
DEVICE=ens192
ONBOOT=yes
IPADDR=192.168.[REDACTED]
PREFIX=20
GATEWAY=192.168.[REDACTED]
DNS1=129.54.1.10
DNS2=129.54.1.10
DOMAIN=DOMAIN1.[REDACTED]

```

FICHER HOST

```
[root@CW-TEST ~]# sudo systemctl restart NetworkManager
[root@CW-TEST ~]#
```

```
Red Hat Enterprise Linux 8.9 (Ootpa)
Kernel 4.18.0-513.9.1.el8_9.x86_64 on an x86_64

Activate the web console with: systemctl enable --now cockpit.socket

S-L-CW-DESINT login [REDACTED]
Password:
Last login: Wed Jun 17 16:08:10 on tty1
[root@S-L-CW-DESINT ~]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback [REDACTED]
    inet 127.0.0.1 scope host lo
        valid_lft forever preferred_lft forever
2: ens192: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
    link/ether [REDACTED]
    altname enp11s0
    inet 192.168.[REDACTED]5 scope global noprefixroute ens192
        valid_lft forever preferred_lft forever
[root@S-L-CW-DESINT ~]#
```

Mettre sdf dans appdd

```

[root@S-L-CW-DESINT ~]# df -hT /appdb
Sys. de fichiers      Type Taille Utilisé Dispo Uti% Monté sur
/dev/mapper/BDD-appdb ext4  2,0T    1,8T 152G 93% /appdb
[root@S-L-CW-DESINT ~]# lsblk
NAME                MAJ:MIN RM  SIZE RO TYPE MOUNTPOINT
sda                  8:0      0   30G  0 disk
├─sda1                8:1      0   600M  0 part /boot/efi
├─sda2                8:2      0    1G  0 part /boot
├─sda3                8:3      0   28,4G  0 part
│   └─rhel-root       253:0      0   25,4G  0 lvm /
│       └─rhel-swap    253:1      0    3G  0 lvm [SWAP]
sdb                  8:16     0   25G  0 disk
├─DATA-fslog         253:3      0    2G  0 lvm /fslog
├─DATA-maint         253:4      0   9,8G  0 lvm /maint
└─DATA-soft          253:5      0  24,4G  0 lvm /soft
sdc                  8:32     0   10G  0 disk
└─DATA-soft          253:5      0  24,4G  0 lvm /soft
sdd                  8:48     0    2G  0 disk
└─DATA-soft          253:5      0  24,4G  0 lvm /soft
sde                  8:64     0    2T  0 disk
└─BDD-appdb          253:2      0    2T  0 lvm /appdb
sdf                  8:80     0   1,5T  0 disk
sr0                  11:0     1 1024M  0 rom
[root@S-L-CW-DESINT ~]# pvs
PV          VG   Fmt Attr PSize  PFree
/dev/sda3   rhel lvm2 a--   28,41g    0
/dev/sdb     DATA lvm2 a--   <25,00g    0
/dev/sdc     DATA lvm2 a--   <10,00g    0
/dev/sdd     DATA lvm2 a--   <2,00g 876,00m
/dev/sde     BDD   lvm2 a--   <2,00t 4,87g
[root@S-L-CW-DESINT ~]# vgs
VG   #PV #LV #SN Attr   VSize  VFree
BDD   1   1   0 wz--n-   <2,00t 4,87g
DATA   3   3   0 wz--n-  <36,99g 876,00m
rhel   1   2   0 wz--n-   28,41g    0
[root@S-L-CW-DESINT ~]# lvs
LV      VG   Attr      LSize  Pool Origin Data%  Meta%  Move Log Cpy%Sync Convert
appdb   BDD   -wi-ao---- <2,00t
fslog   DATA -wi-ao---- 1,95g
maint   DATA -wi-ao---- <9,77g
soft    DATA -wi-ao---- 24,41g
root    rhel  -wi-ao---- 25,41g
swap    rhel  -wi-ao---- 3,00g

```

- Le LV **/appdb** est BDD/appdb de taille **2 To**.
- Le nouveau disque est **/dev/sdf** de taille **1,5 To**.
- Le VG **BDD** contient actuellement seulement **/dev/sde**.
- Il reste environ **4 Go libres** dans le VG BDD, donc pour ajouter +1,5 To il faut d'abord intégrer **/dev/sdf** au VG.

```
[root@S-L-CW-DESINT ~]# lsblk /dev/sdf
NAME MAJ:MIN RM SIZE RO TYPE MOUNTPOINT
sdf    8:80   0 1,5T  0 disk
[root@S-L-CW-DESINT ~]# pvcreate /dev/sdf
Physical volume "/dev/sdf" successfully created.
[root@S-L-CW-DESINT ~]# pv
```

PV	VG	Fmt	Attr	PSize	PFree
/dev/sda3	rhel	lvm2	a--	28,41g	0
/dev/sdb	DATA	lvm2	a--	<25,00g	0
/dev/sdc	DATA	lvm2	a--	<10,00g	0
/dev/sdd	DATA	lvm2	a--	<2,00g	876,00m
/dev/sde	BDD	lvm2	a--	<2,00t	4,87g
/dev/sdf		lvm2	---	1,50t	1,50t

```
/dev/sdf    lvm2    1,50t    1,50t
[root@S-L-CW-DESINT ~]# vgextend BDD /dev/sdf
Volume group "BDD" successfully extended
[root@S-L-CW-DESINT ~]# vg
```

VG	#PV	#LV	#SN	Attr	USize	UFree
BDD	2	1	0	wz--n-	<3,50t	1,50t
DATA	3	3	0	wz--n-	<36,99g	876,00m
rhel	1	2	0	wz--n-	28,41g	0

```
[root@S-L-CW-DESINT ~]#
```

```
[root@S-L-CW-DESINT ~]# lvextend -L +1.5T /dev/BDD/appdb
Size of logical volume BDD/appdb changed from <2,00 TiB (523040 extents) to <3,50 TiB (916256 extents).
Logical volume BDD/appdb successfully resized.
[root@S-L-CW-DESINT ~]# lv
```

LV	VG	Attr	LSize	Pool	Origin	Data%	Meta%	Move	Log	Cpy%	Sync	Convert
appdb	BDD	-wi-ao----	<3,50t									
fslog	DATA	-wi-ao----	1,95g									
maint	DATA	-wi-ao----	<9,77g									
soft	DATA	-wi-ao----	24,41g									
root	rhel	-wi-ao----	25,41g									
swap	rhel	-wi-ao----	3,00g									

```
[root@S-L-CW-DESINT ~]#
```

```
[root@S-L-CW-DESINT ~]# df -hT /appdb
```

Sys. de fichiers	Type	Taille	Utilisé	Dispo	Uti%	Monté sur
/dev/mapper/BDD-appdb	ext4	2,0T	1,8T	152G	93%	/appdb

```

[dev/mapper/BDD-appdb ext4 253:2 0 3,5T 1,8T 1,6T 53% /appdb
[root@S-L-CW-DESINT ~]# resize2fs /dev/BDD/appdb
resize2fs 1.45.6 (20-Mar-2020)
Le système de fichiers de /dev/BDD/appdb est monté sur /appdb ; le changement de taille doit être effectué en ligne
old_desc_blocks = 256, new_desc_blocks = 448
Le système de fichiers sur /dev/BDD/appdb a maintenant une taille de 938246144 blocs (4k).

[root@S-L-CW-DESINT ~]# df -hT /appdb
Sys. de fichiers      Type Taille Utilisé Dispo Util% Monté sur
/dev/mapper/BDD-appdb ext4  3,5T   1,8T  1,6T   53% /appdb
[root@S-L-CW-DESINT ~]#

```

```

[root@S-L-CW-DESINT ~]# lsblk
NAME                MAJ:MIN RM   SIZE RO TYPE MOUNTPOINT
sda                  8:0    0   30G  0 disk
├─ sda1              8:1    0   600M  0 part /boot
├─ sda2              8:2    0    1G  0 part /boot/efi
├─ sda3              8:3    0   28,4G  0 part /
├─ sda3.1            253:0    0   25,4G  0 lvm /
├─ sda3.1.1          253:1    0    3G  0 lvm /
sdb                  8:16   0    25G  0 disk
├─ sdb1              253:3    0    2G  0 lvm /
├─ sdb1.1            253:4    0    9,8G  0 lvm /
├─ sdb1.1.1          253:5    0   24,4G  0 lvm /
sdc                  8:32   0    10G  0 disk
├─ sdc1              253:5    0   24,4G  0 lvm /
sdd                  8:48   0    2G  0 disk
├─ sdd1              253:5    0   24,4G  0 lvm /
sde                  8:64   0    2T  0 disk
├─ sde1              253:2    0   3,5T  0 lvm /appdb
sdf                  8:80   0   1,5T  0 disk
├─ sde1-BDD-appdb    253:2    0   3,5T  0 lvm /appdb
sr0                  11:0    1 1024M  0 rom

```

Edit Settings
S-L-CW-DESINT

Virtual Hardware
VM Options
Advanced Parameters

ADD NEW DEVICE

CPU
20

Memory
104
GB

Hard disks
6 total | 3.57 TB

SCSI controller 0
VMware Paravirtual

Network adapter 1 *
Serveur
Connected

Status
☒ Connect At Power On

Adapter Type
VMXNET 3

Shares
Normal
50

Reservation
0
Mbit/s

Limit
Unlimited
Mbit/s

MAC Address
00:50:56:91:c9:e6
Automatic

CD/DVD drive 1
Client Device
Connect At Power On

Video card
Specify custom settings

SATA controller 0
AHCI

CANCEL
OK

Scan subnet

Subnet

192.168.16 SRV)

Select Scan type

Discovery scans: Ping scan

Debug

☐

Loading...

Cancel

Scan subnet

192.168.18.15 mettre la vm dans le reseau puis allez sur phpipam refaire un scan et mettre que l'ip 192.168.18.15 correspond au S-L-CW-DESINT



Support

CR

Créé : il y a 3 jours par RICHARD Christelle (5382)



Bonjour

Nous n'avons pas la possibilité de créer la réunion via teams dans l'agenda outlook du Dr Verclytte

Pouvez vous revenir vers nous SVP

Merci

 Helpdesk

Données du formulaire

Demandeur

- 1) Nom : PLET Cyrille (6299)
- 2) Demande pour un autre agent : Non
- 3) Service : Services > Service Technique
- 4) Téléphone : 361767850
- 5) Nom du PC : DST-TEC1

Description

6) Description :

Bonjour,

pour faire suite au ticket 0025836, je me suis rendu sur le site de Pole Santé Carvin au rez de chaussez ans le local info où se trouve la baie informatique mais je n'ai pas de switch SW_PSANTE_5140-2. j'ai un switch SW_psante-2 200.21, est-ce le même?

Et pourriez-vous m'expliquer comment trouver le port g1/0/2.

Le cable de la caméra que nous voulons connecté est dans cette baie informatique

Merci

ACL

Aide moi a faire ca ;

Tous les eqsupembts sur le vlan 300 peuvent acceder que au net , pas au serv , pas au pc au autre vlan , comuniquer juste avce le firewall

Asl sur les cœurs de reseau ou sur les switch = verrouiller le reseau , le sécuriser

Autoriser quel réseau , que internet

Commnhique qur avce cette ip par le firewall etout le trfaci internet est roité sur ce reseau 192.168.188.249

Le vlan 300 doit communiquer que avce cette ip192.168

L'ip est dans le Vlan 188

Donc en theorie est ce que le vlan 300 peut juste communiquer acvce le vlan 188

Comment je pourrais tester sur un switch avant de le faire en prod

Je veux que tous les equipements sur le vlan 300 ne peuvent acceder que a internet il peuvent communiquer que a internet rien dautre , pas de com avec les pc , les erveurs , les autre vlan ect juste pouvoir communiquer avce le parefeu

Je voidrais alors verrouiller le reseau , le securiser grace a des ASL levlan 300 est sur le cœur de reseau donc je voudrais créer un lab simulant le cœur de reseauavant de pratiquer en prod .

Jte donne les infos reel : communiquer qu'avec cette ip par le par feu et tout le trafic interent est routé sur ce reseau 192.168.188.249 qui est dans le vlan 188 sur le cœur

Je voudrais donc que tous les equiepemtns sur le vlan 300 nont quacces que au net rien d'autre sur le reseau .

Pour faire le lab c sur un aruba 6200

Les ACL


Ajouter des sondes Zabbix :



Afin de superviser les serveurs : Se connecter en rdp au serv avec le nom du serv ou l'ip et avec un compte admin. Connaitre l'os du serv afin de télécharger la bonne version de zabbix coller l'exécutable sur le serveur puis le lancer , configurer mettre l'ip du serveur zabbix . Ensuite allez sur zabbix creer un nouvelle hote mettre le nom du serv ainsi que son ip .


The screenshot shows the Zabbix website's download page. The header includes the ZABBIX logo and navigation links: PRODUIT, SOLUTIONS, PRICING, SERVICES, PARTENAIRES, SOCIÉTÉ, and a GET ZABBIX button. The main heading is "Téléchargez et installez les agents Zabbix précompilés". Below this, there's a section for "Show legacy downloads" with a table of options.

OS DISTRIBUTION	VERSION DU SYSTÈME D'EXPLOITATION	MATÉRIEL	VERSION DE ZABBIX	CHIFFREMENT	FORMAT
Windows	11, 10	amd64	7.4	OpenSSL	MSI
Linux	Server 2016 +	i386	7.0 LTS	No encryption	Archive
macOS	Server 2003 +		6.0 LTS		
AIX	XP (64bit) +				
FreeBSD					
OpenBSD					
Solaris					

Below the table, the "Zabbix Release" is set to 7.0.27. The main section displays "Zabbix agent v7.0.27" with a "Read manual" link. It lists packaging details: Packaging: MSI, Encryption: OpenSSL, Linkage: Dynamic, Checksum: sha256: 60d85c96197a634c7b4a9f5809e18f4a4c5501a7f61644126183f4f96bc3815, sha1: 30e45821085718f996bc4f9c20cc651565a0497, md5: 6f4c4065faad13c741a0896054298f0e. A "DOWNLOAD" button is present with the URL: https://cdn.zabbix.com/zabbix/binaries/stable/7.0/7.0.27/zabbix_agent-7.0.27-windows-amd64-openssl.msi. The footer shows the Windows taskbar with the search bar and system clock (10:40, 29/06/2026).

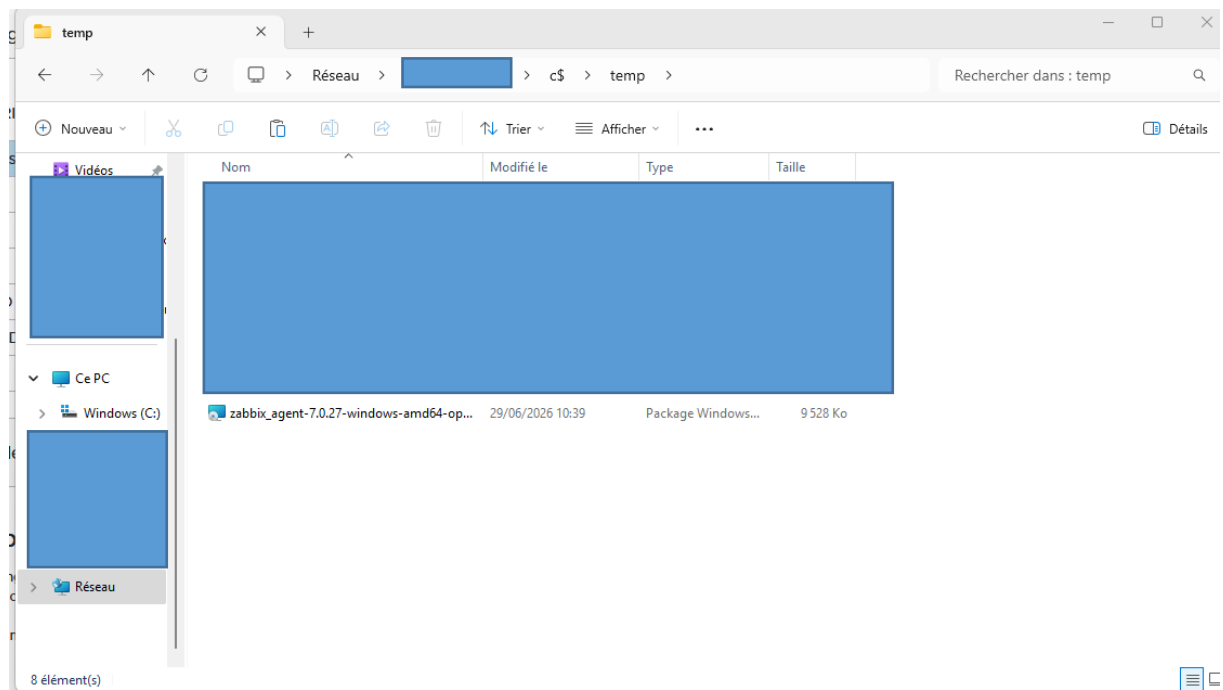

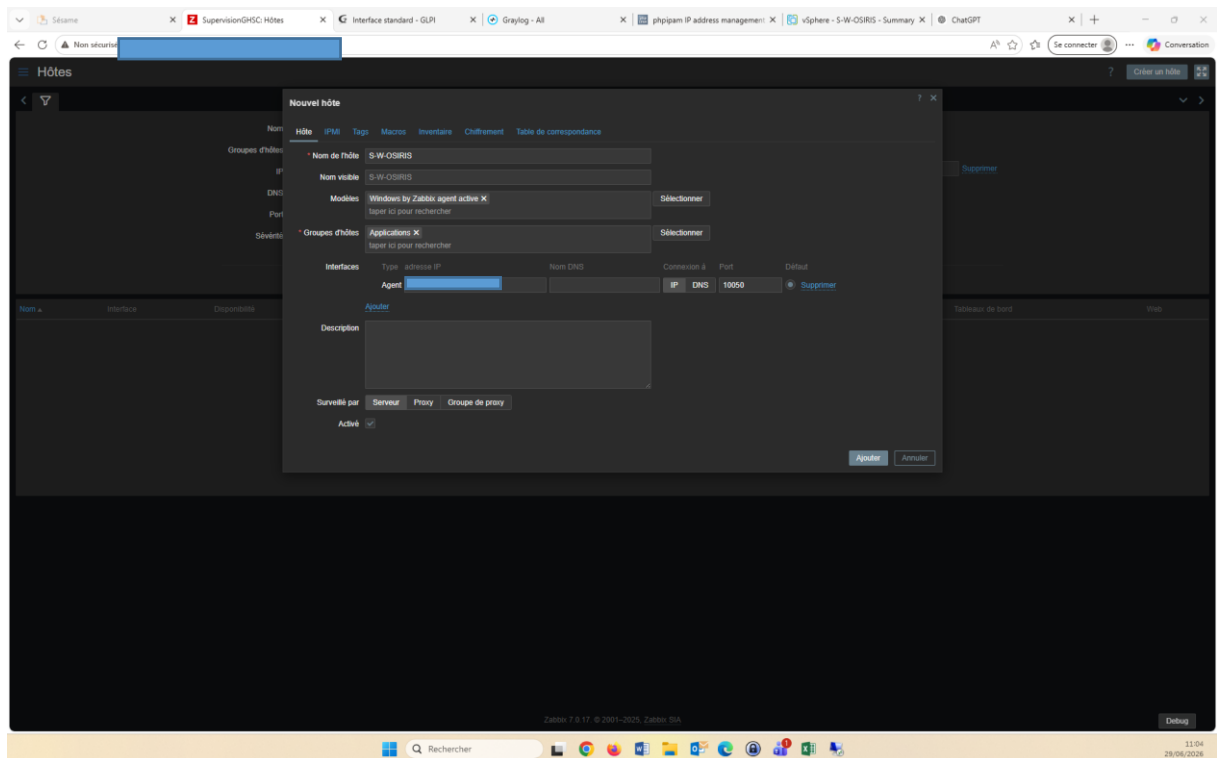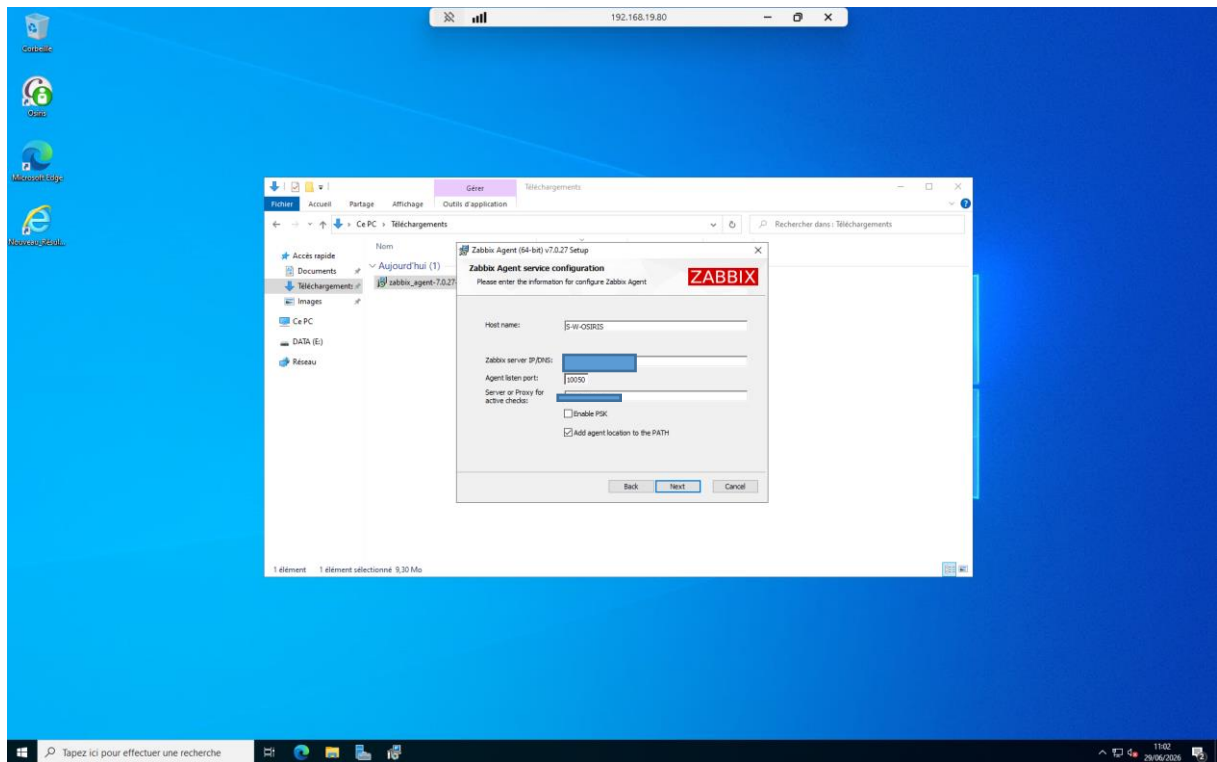

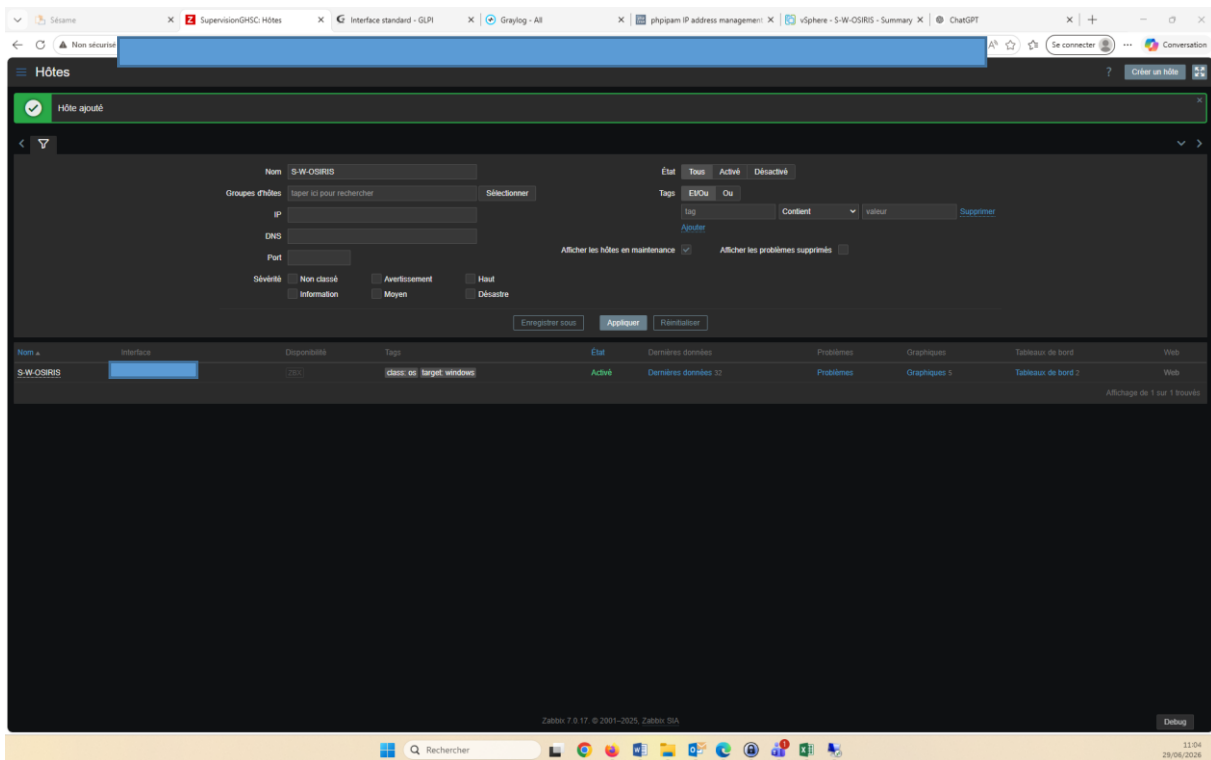

LINUX : se connecter en ssh sur serv **cleanroom**

Debian 11 : cleanroom, modifier le fichier conf en mettant l'ip du serv de zabbix

```

root@cleanroom-gw:/home/systancia# apt-get install zabbix-agent
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
198 packages can be upgraded. Run 'apt list --upgradable' to see them.
root@cleanroom-gw:/home/systancia# apt install zabbix-agent
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  zabbix-agent
0 upgraded, 1 newly installed, 0 to remove and 198 not upgraded.
Need to get 785 kB of archives.
After this operation, 1,323 kB of additional disk space will be used.
Get:1 http://repo.zabbix.com/zabbix/7.0/debian bullseye/main amd64 zabbix-agent amd64 1:7.0.27-1+deb11i1 [785 kB]
Fetched 785 kB in 1s (660 kB/s)
Selecting previously unselected package zabbix-agent.
(Reading database ... 63922 files and directories currently installed.)
Preparing to unpack .../zabbix-agent_1:7.0.27-1+deb11i1_amd64.deb ...
Unpacking zabbix-agent (1:7.0.27-1+deb11i1) ...
Setting up zabbix-agent (1:7.0.27-1+deb11i1) ...
Created symlink /etc/systemd/system/multi-user.target.wants/zabbix-agent.service -> /lib/systemd/system/zabbix-agent.service.
Processing triggers for man-db (2.9.4-2) ...
root@cleanroom-gw:/home/systancia# systemctl restart zabbix-agent
root@cleanroom-gw:/home/systancia# systemctl enable zabbix-agent
Synchronizing state of zabbix-agent.service with SysV service script with /lib/systemd/systemd-sysv-install.
Executing: /lib/systemd/systemd-sysv-install enable zabbix-agent
root@cleanroom-gw:/home/systancia#

```

```

/etc/zabbix/zabbix_agentd.conf
# ListenIP=0.0.0.0

## Option: StartAgents
# Number of pre-forked instances of zabbix_agentd that process passive checks.
# If set to 0, disables passive checks and the agent will not listen on any TCP port.
#
# Mandatory: no
# Range: 0-100
# Default:
# StartAgents=10

#### Active checks related

## Option: ServerActive
# Zabbix server/proxy address or cluster configuration to get active checks from.
# Server/proxy address is IP address or DNS name and optional port separated by colon.
# Cluster configuration is one or more server or proxy group member addresses separated by semicolon.
# Multiple Zabbix servers/clusters and Zabbix proxies can be specified, separated by comma.
# Unless using proxy groups, more than one Zabbix proxy should not be specified from each Zabbix server/cluster.
# If Zabbix proxy is specified then Zabbix server/cluster for that proxy should not be specified.
# Multiple comma-delimited addresses can be provided to use several independent Zabbix servers in parallel. Spaces are allowed.
# If port is not specified, default port is used.
# IPv6 addresses must be enclosed in square brackets if port for that host is specified.
# If port is not specified, square brackets for IPv6 addresses are optional.
# If this parameter is not specified, active checks are disabled.
# Example for Zabbix proxy:
#   ServerActive=127.0.0.1:10051
# Example for Zabbix proxy group:
#   ServerActive=proxy1.example.com;proxy2.example.com;proxy3.example.com;proxy4.example.com;proxy5.example.com
# Example for multiple servers:
#   ServerActive=127.0.0.1:10051;zabbix.domain[:1]:30051,::1,[12fe::1]
# Example for high availability:
#   ServerActive=zabbix.cluster.node1;zabbix.cluster.node2:20051;zabbix.cluster.node3
# Example for high availability with two clusters and one server:
#   ServerActive=zabbix.cluster.node1;zabbix.cluster.node2:20051;zabbix.cluster2.node1;zabbix.cluster2.node2;zabbix.domain

# Mandatory: no
# Default:
# ServerActive=

ServerActive=

## Option: Hostname
# List of comma delimited unique, case sensitive hostnames.
# Required for active checks and must match hostnames as configured on the server.
# Value is acquired from HostnameItem if undefined.
#
# Mandatory: no
# Default:
# Hostname=

Hostname=S-L-Cleanroom-Gateway[]

## Option: HostnameItem
# Item used for generating Hostname if it is undefined. Ignored if Hostname is defined.
# Does not support UserParameters or aliases.
#
# Mandatory: no
# Default:
# HostnameItem=system.hostname

Help      Write Out  Where Is   Cut        Execute    Location  Undo       Set Mark  To Bracket  Previous  Back
Exit      Read File  Replace   Paste     Justify   Go To Line Redo       Copy      Where Was  Next     Forward

root@cleanroom-gw:/home/systancia# nano /etc/zabbix/zabbix_agentd.conf
root@cleanroom-gw:/home/systancia# systemctl restart zabbix-agent
root@cleanroom-gw:/home/systancia# systemctl status zabbix-agent
● zabbix-agent.service - Zabbix Agent
   Loaded: loaded (/lib/systemd/system/zabbix-agent.service; enabled; vendor preset: enabled)
   Active: active (running) since Tue 2026-06-30 10:26:30 CEST; 6s ago
     Process: 1261198 ExecStart=/usr/sbin/zabbix_agentd -c $CONFFILE (code=exited, status=0/SUCCESS)
    Main PID: 1261198 (zabbix_agentd)
       Tasks: 13 (1 limit: 4657)
      Memory: 5.5M
         CPU: 20ms
    CGroup: /system.slice/zabbix-agent.service
            └─1261198 /usr/sbin/zabbix_agentd -c /etc/zabbix/zabbix_agentd.conf
            └─1261199 /usr/sbin/zabbix_agentd: collector [idle 1 sec]
            └─1261200 /usr/sbin/zabbix_agentd: listener #1 [waiting for connection]
            └─1261201 /usr/sbin/zabbix_agentd: listener #2 [waiting for connection]
            └─1261202 /usr/sbin/zabbix_agentd: listener #3 [waiting for connection]
            └─1261203 /usr/sbin/zabbix_agentd: listener #4 [waiting for connection]
            └─1261204 /usr/sbin/zabbix_agentd: listener #5 [waiting for connection]
            └─1261205 /usr/sbin/zabbix_agentd: listener #6 [waiting for connection]
            └─1261206 /usr/sbin/zabbix_agentd: listener #7 [waiting for connection]
            └─1261207 /usr/sbin/zabbix_agentd: listener #8 [waiting for connection]
            └─1261208 /usr/sbin/zabbix_agentd: listener #9 [waiting for connection]
            └─1261209 /usr/sbin/zabbix_agentd: listener #10 [waiting for connection]
            └─1261210 /usr/sbin/zabbix_agentd: active checks #1 [idle 1 sec]

Jun 30 10:26:30 cleanroom-gw systemd[1]: Starting Zabbix Agent...
Jun 30 10:26:30 cleanroom-gw systemd[1]: Started Zabbix Agent.

```

Nouvel hôte

Hôte

IPMI

Tags

Macros

Inventaire

Chiffrement

Table de correspondance

Nom de l'hôte

S-L-Cleanroom-Gateway

Nom visible

S-L-Cleanroom-Gateway

Modèles

Linux by Zabbix agent

Sélectionner

Groupe d'hôtes

Applications

Sélectionner

Interfaces

Type

adresse IP

Nom DNS

Connexion à

Port

Défaut

Agent

IP

DNS

100

Supprimer

Ajouter

Description

Surveillé par

Serveur

Proxy

Groupe de proxy

Activé

Ajouter

Annuler

Nom	Interface	Disponibilité	Tags	État	Dernière connexion	Problèmes	Graphiques	Tableaux de bord	Web
S-L-Cleanroom-Gateway			OS: Linux; Langue: Russe	Actif	Dernière connexion: 12	Problèmes	Graphiques 1	Tableaux de bord 2	Web

Affichage de 1 sur 1 records

Mettre à jour les certificats

Copier le nouveau certificat, se connecter au serveur collé le certificat, puis allez dans le gestionnaire de serv allez dans outils puis gestionnaire serveur internet : IIS , importer le nv certificat. Puis allez sur les sites web en https , puis sur liaison modifier et sélectionner le nouveau certificat.

Certificat wildcard *.ghsc.fr

Fournisseur ssl247 : <https://myssl.ssl247.com/fr> (proc à faire)

Serveurs à mettre à jour :

www.ghsc.fr > presta extérieur

Parapheur demat RH > srv-demat-iis (maj le certificat dans iis puis lier les sites HTTPS)


Revers proxy > s-l-rproxy (/etc/caddy/ssl/ puis redémarrer CADDY)



Exchange > plasi-ex16 et nvhsi-ex16 (maj le certificat dans iis puis lier les sites HTTPS)



Portail patient imagerie > s-w-ris-diffusion (E:\EDL\XnReverseProxy\nginx\Certificates placer les fichiers puis redémarrer le service XnReverseproxy)



Portail patient Labo > S-W-TDPATIENT (maj le certificat dans iis puis lier les sites HTTPS) et S-L-KEY-KLOAK (/etc/keycloak/certs puis redémarrer KEYCLOAK)

Ne pas oublier les autre word et ajouter photos ainsi que les siite web et mettre els competnces

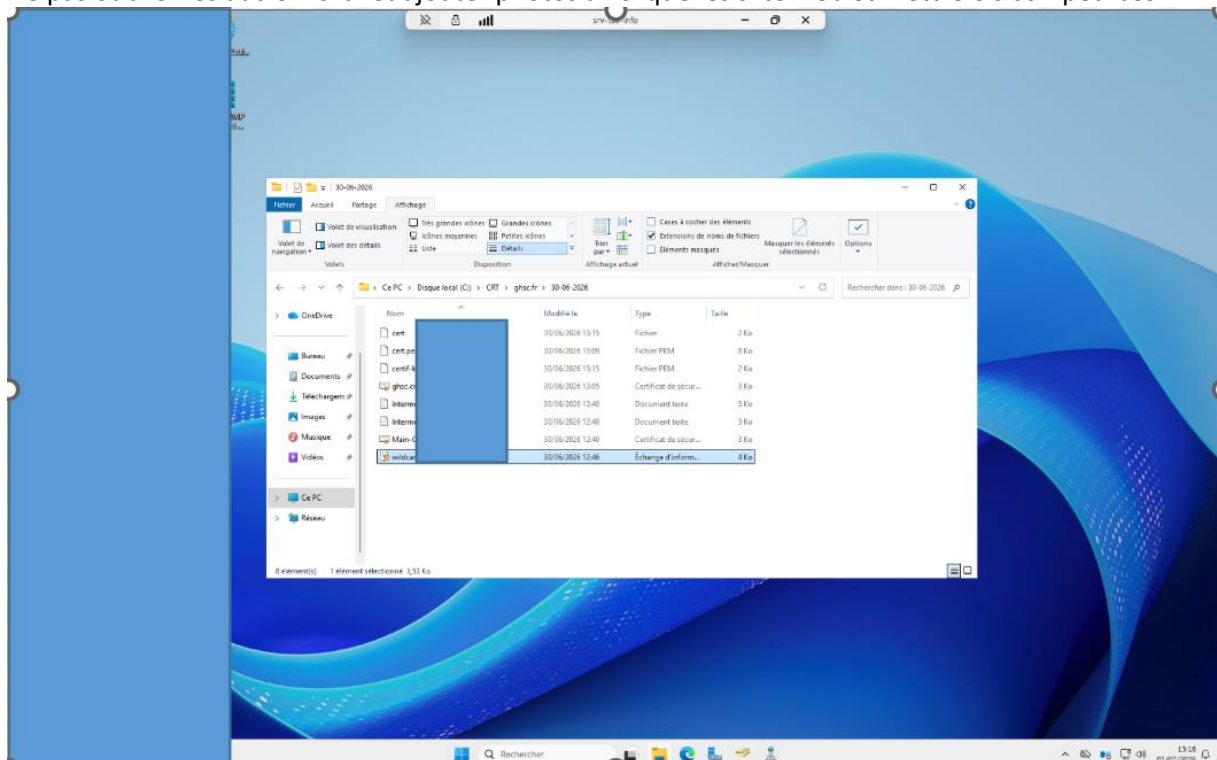

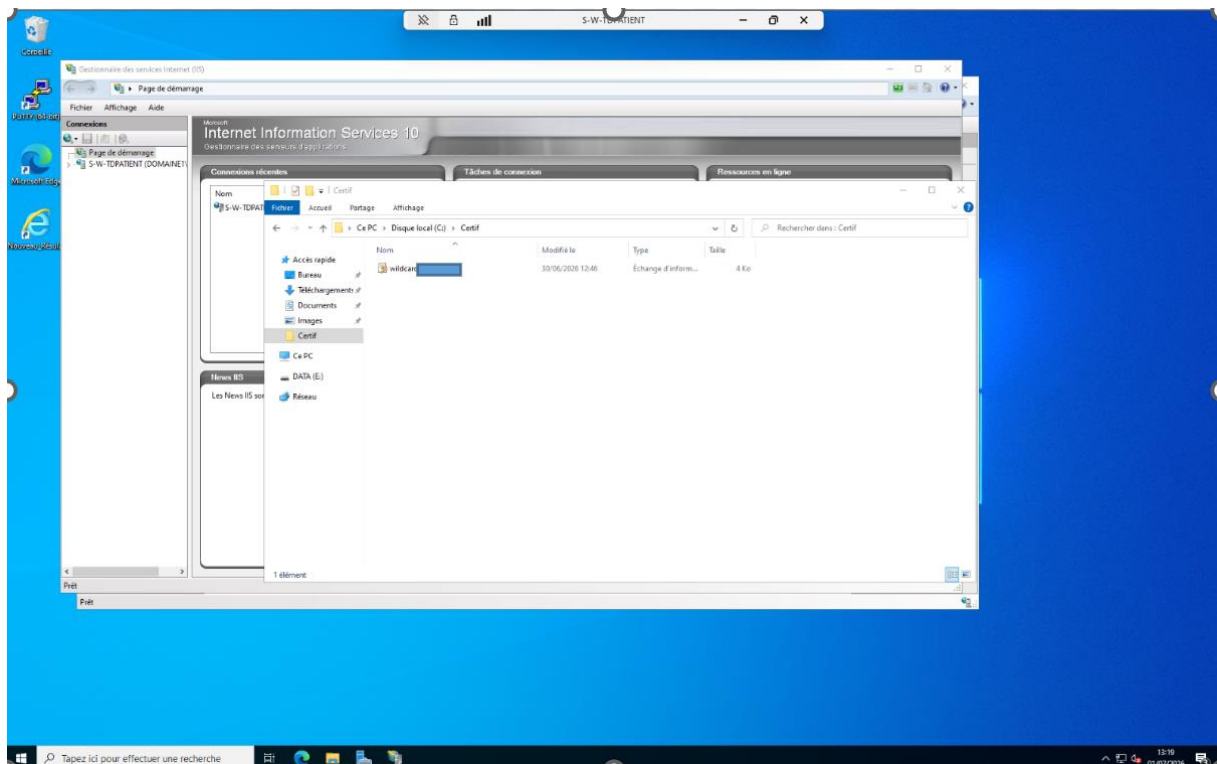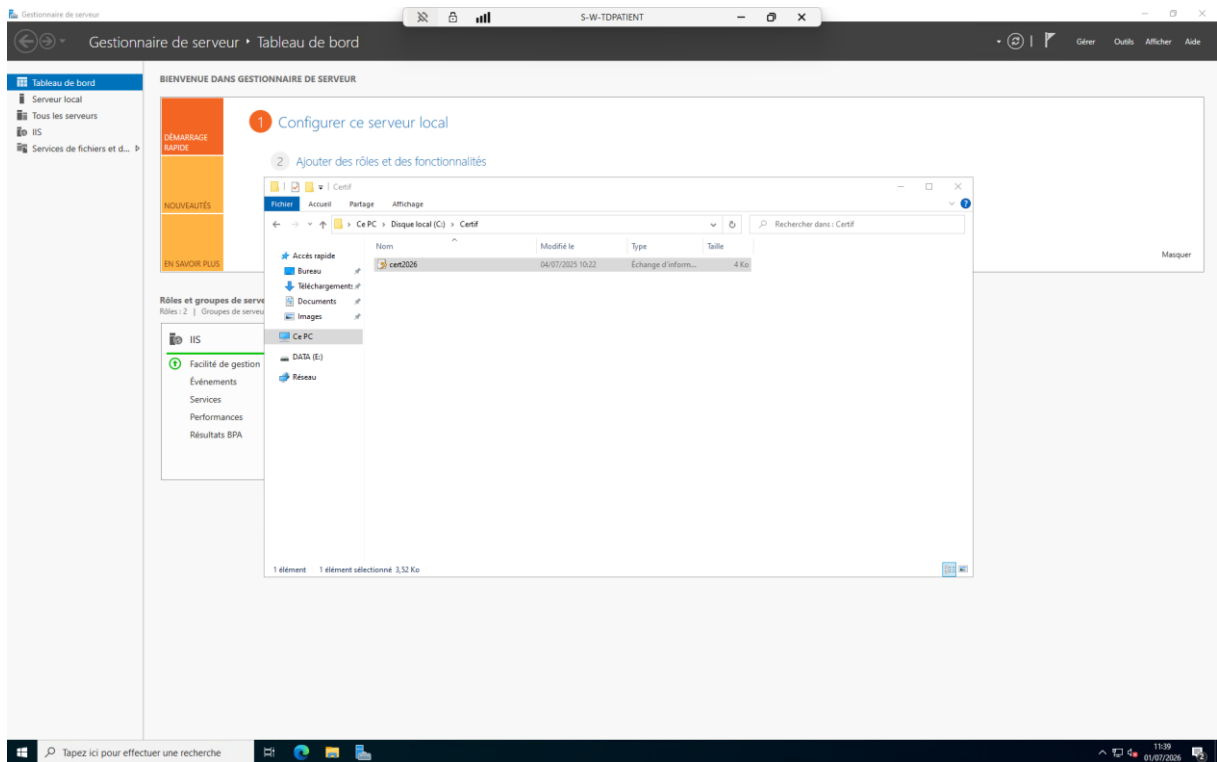

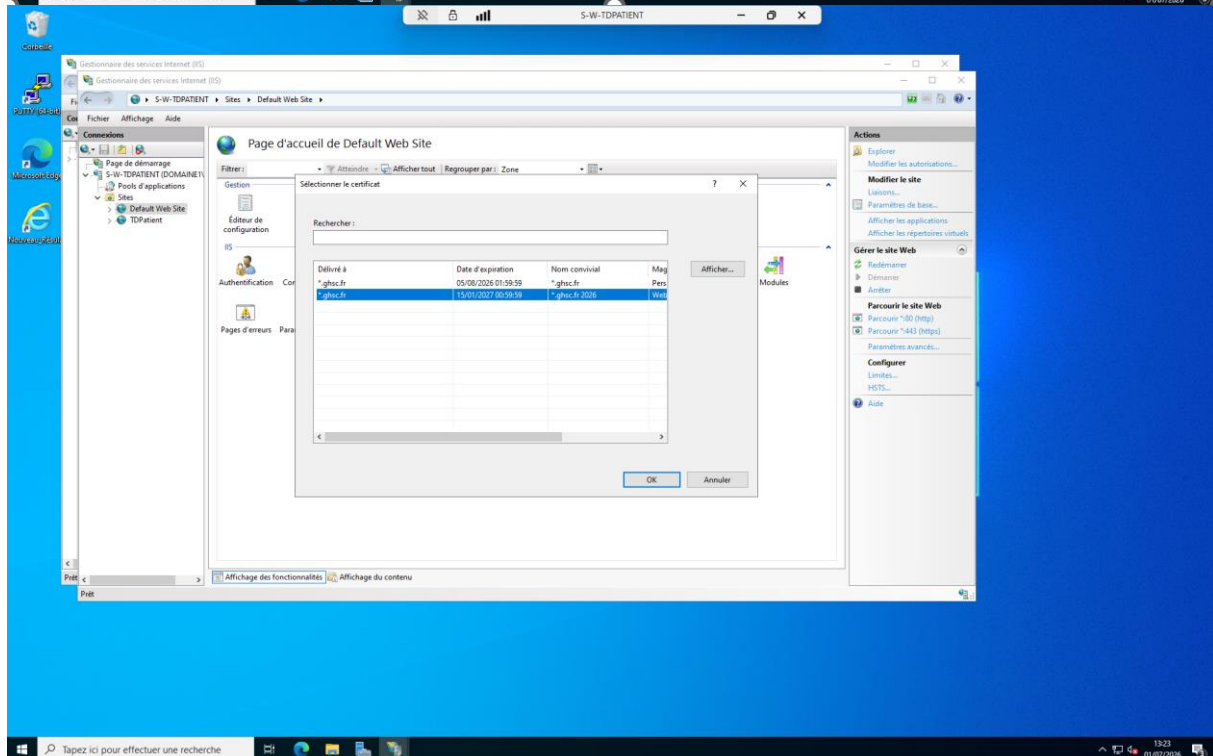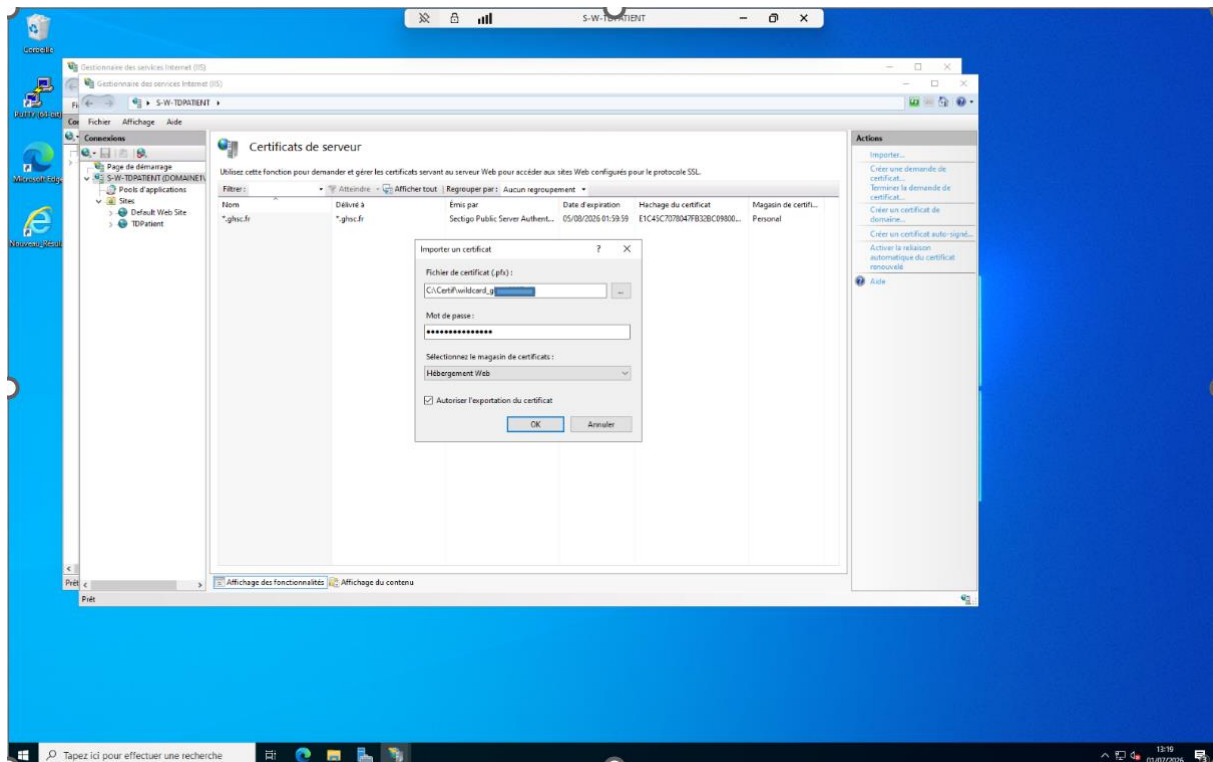

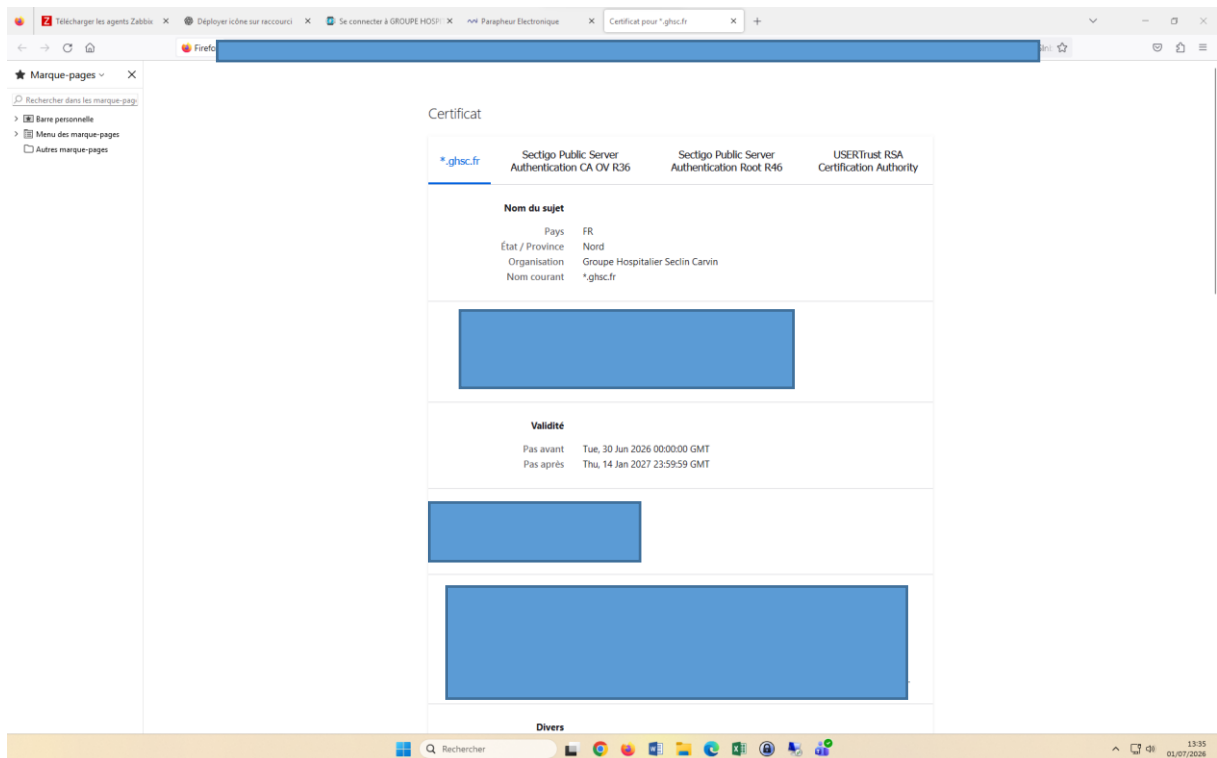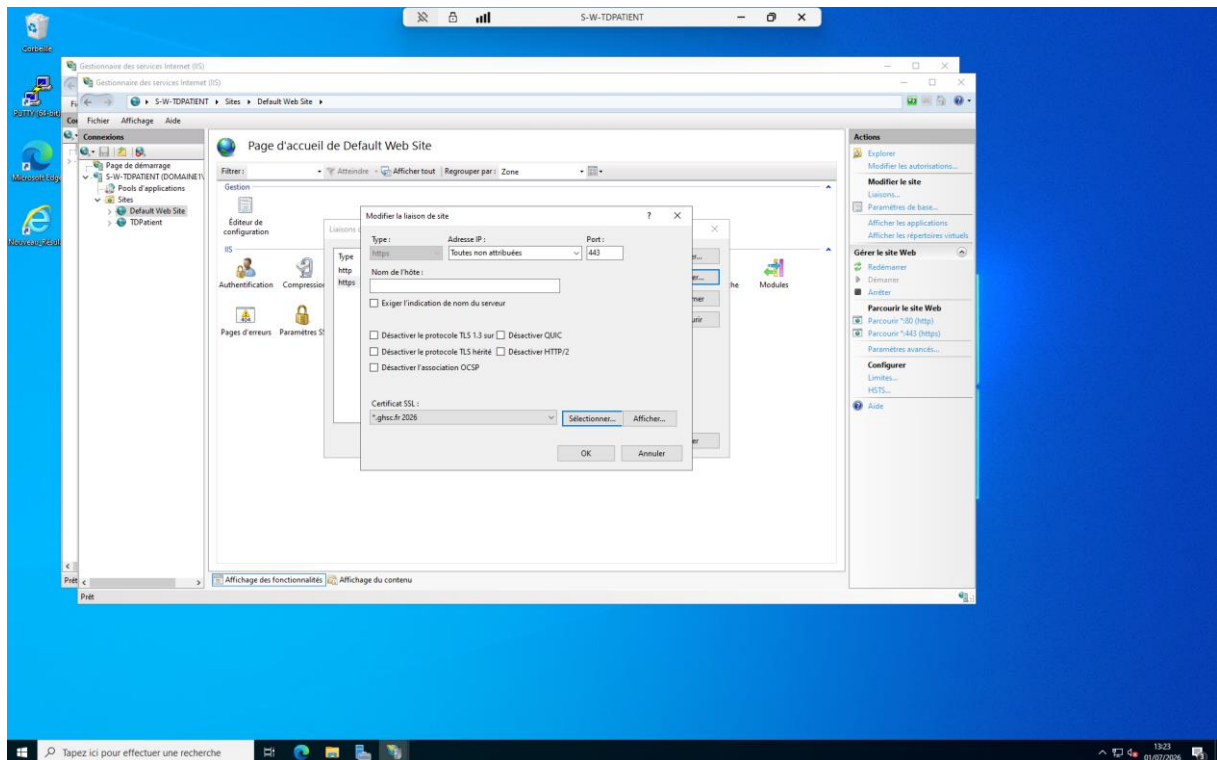

Sur un serveur linux :

Se connecter sur winscp , renommer les anciens certificats en old et les nouveaux en new puis enlever les new , redémarrer le service ou reboot le serveur . Et aussi donner tous les droits chown au certificats avec un user

```
root@[redacted]:~# cd /etc/keycloak/certs
root@[redacted]:/etc/keycloak/certs# ls
cert-key.pem cert.pem keycloak.jks keycloak.p12 old
root@[redacted]:/etc/keycloak/certs#
```

